


EXPERIMENT-1

R-CODE

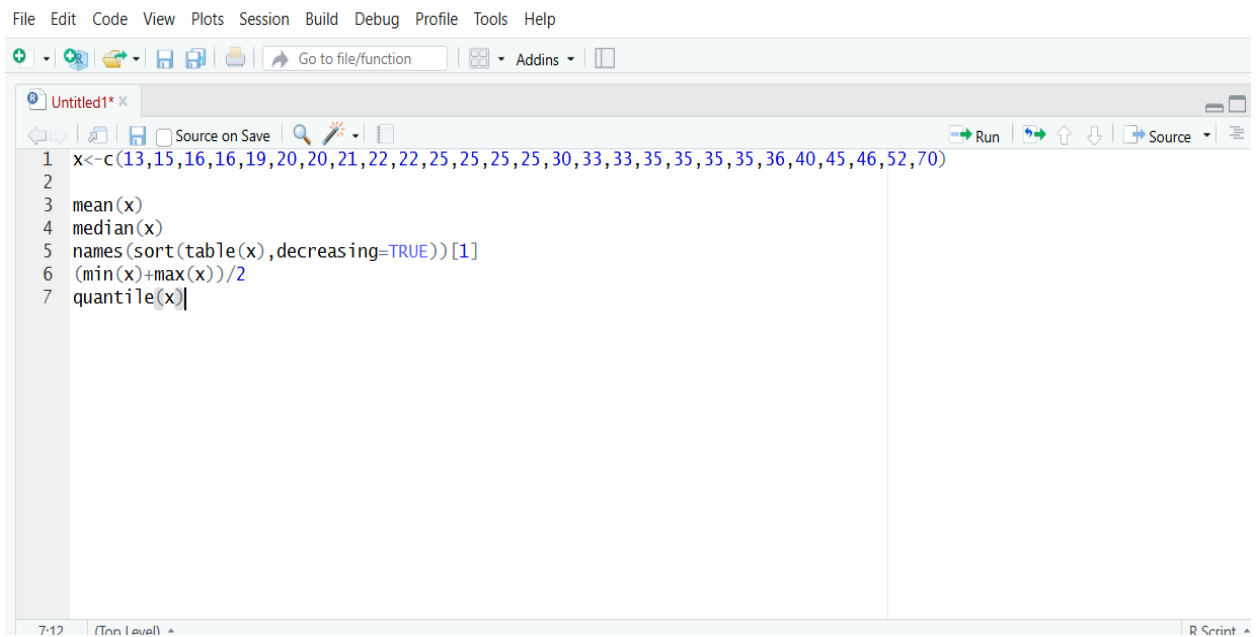

The screenshot shows the RStudio IDE interface. The menu bar at the top includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, and Help. Below the menu bar is a toolbar with icons for file operations and a search bar. The main editor window, titled 'Untitled1*', contains the following R code:

```
1 x<-c(13,15,16,16,19,20,20,21,22,22,25,25,25,25,30,33,33,35,35,35,35,36,40,45,46,52,70)
2
3 mean(x)
4 median(x)
5 names(sort(table(x),decreasing=TRUE))[1]
6 (min(x)+max(x))/2
7 quantile(x)
```

The status bar at the bottom indicates the cursor is at line 7, column 12, and the file is 'Untitled1.r'. The 'R Sprint' logo is visible in the bottom right corner.

OUTPUT

```
> x<-c(13,15,16,16,19,20,20,21,22,22,25,25,25,25,30,33,33,35,35,35,35,36,40,45,46,52,70)
>
> mean(x)
[1] 29.96296
> median(x)
[1] 25
> names(sort(table(x),decreasing=TRUE))[1]
[1] "25"
> (min(x)+max(x))/2
[1] 41.5
> quantile(x)
 0%  25%  50%  75% 100%
13.0 20.5 25.0 35.0 70.0
> |
```