

Selenium to Playwright Convertor

The screenshot shows the n8n workflow editor for a workflow titled "selenium to Playwright convertor". The workflow is composed of several steps: "Filter", "Filter1", "Switch", "Loop Over Items", "HTTP Request1", "AI Agent", "Convert to File", "Wait", and "Merge". The "AI Agent" step is highlighted, and its logs are visible. The logs show the input and output of the AI Agent, which is a Groq Chat Model. The input is a human prompt asking for a TypeScript class for LoginPage. The output is a TypeScript class for LoginPage.

INPUT

```
Human: [P - PERSONA]\n You are a Principal Test Automation Architect with 10+ years of expertise in migrating enterprise legacy Java Selenium frameworks into modern TypeScript Playwright architectures following exact framework patterns.\n [C - CONTEXT]\n You are converting legacy Java Selenium Page Objects into Playwright TypeScript classes for the SonicFramework repository.\n Framework rules to enforce:\n 1. Inheritance & Constructor:\n - Extend 'PlaywrightWrapper' imported from
```

OUTPUT

```
import { BrowserContext, Page } from\n"@playwright/test";\nimport { PlaywrightWrapper } from\n "../helpers/playwright";\n\nexport class LoginPage extends PlaywrightWrapper {\n  private readonly selectors = {
```

The screenshot shows the n8n workflow editor for the same workflow. The "Call 'TestCase_Conv..." step is highlighted, and its logs are visible. The logs show the output of the step, which is a JSON object containing file information.

OUTPUT

```
{\n  "data": {\n    "File Name":\n    ".txt",\n    "File Extension":\n    ".txt",\n    "Mime Type":\n    "text/plain"\n  }\n}
```

Merge

INPUT | Schema | Table | JSON | Binary | Parameters | Settings | Execute step

Loop Over Items | Run | 6 of 6 (5 Items)

Done Branch (5 Items) | Loop Branch

LogHomePage.txt
File Extension: txt
Mime Type: text/plain
File Size: 1.15 kB
View Download

5

data
File Name: WorkTypeGroupPage.txt
File Extension: txt
Mime Type: text/plain
File Size: 1.18 kB
View Download

Mode: Append
Number of Inputs: 2

OUTPUT | Schema | Table | JSON | Binary

6 Items
File Size: 3.85 kB
View Download

6

data
File Name: .txt
File Extension: txt
Mime Type: text/plain
File Size: 1.18 kB
View Download

I wish this node would...

Compression

INPUT | Schema | Table | JSON | Binary | Parameters | Settings | Execute step

Code In JavaScript | 1 Item

file1
File Name: CasePage.txt
File Extension: txt
Mime Type: text/plain
File Size: 6.31 kB
View Download

file2
File Name: HomePage.txt
File Extension: txt
Mime Type: text/plain
File Size: 3.68 kB
View

Operation: Compress
Input Binary Field(s): `{{ Object.keys($binary).join(",") }}`
file1,file2,file3,file4,file5,file6
Output Format: Zip
File Name: playwright_pages.zip
Put Output File In Field: data
The name of the output binary field to put the file in


I wish this node would...

Downloads

_pages.zip
Open file
Binary

See more

data
File Name: _pages.zip
Directory: playwright
File Extension: zip
Mime Type: application/zip
File Size: 5.49 kB
Download

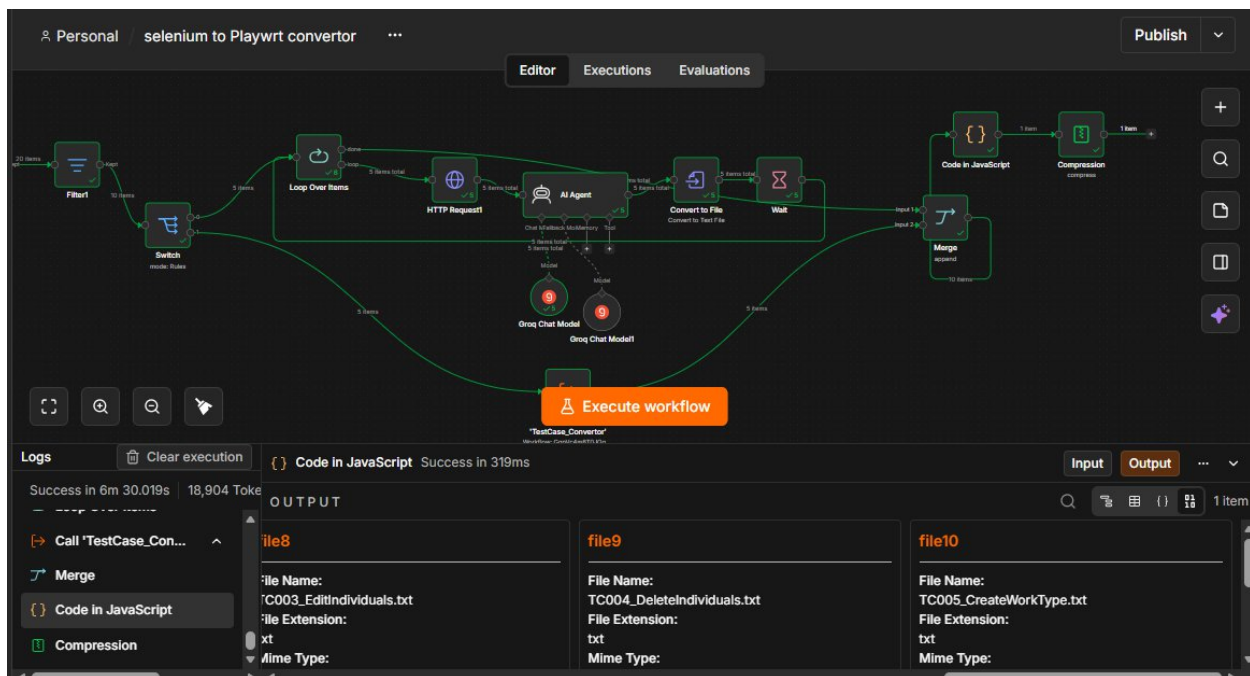

```


typescript
import { BrowserContext, Page } from "@playwright/test";
import { PlaywrightWrapper } from "../helpers/playwright";

export class CasePage extends PlaywrightWrapper {
  private readonly selectors = {
    newCaseButton: "//div[@title='New']",
    contactNameInput: "//label[text()='Contact Name']/following::input[1]",
    newContactButton: "//span[@title='New Contact']",
    salutationDropdown: "//label[text()='Salutation']/following::button[1]",
    salutationOption: (salutation: string) => `//span[@title='${salutation}']`,
    firstNameInput: "//label[text()='First Name']/following::input[1]",
    lastNameInput: "//label[text()='Last Name']/following::input[1]",
    saveContactButton: `//button[@name='SaveEdit']`,
    caseOriginDropdown: "//label[text()='Case Origin']/following::button[1]",
    caseOriginOption: (origin: string) => `//span[@title='${origin}']`,
    statusDropdown: "//label[text()='Status']/following::button[1]",
    statusOption: (status: string) =>
      `//label[text()='Status']/following::button[1]/following::span[@title='${status}']`,
    slaViolationDropdown: "//label[text()='SLA Violation']/following::button[1]",
    slaViolationOption: (value: string) =>
      `//label[text()='SLA Violation']/following::button[1]/following::span[text()='${value}']`
  };
}

```

Ln 1, Col 1 | 6,307 characters | Plain text | 100% | Unix (LF) | UTF-8

Subtask executions:

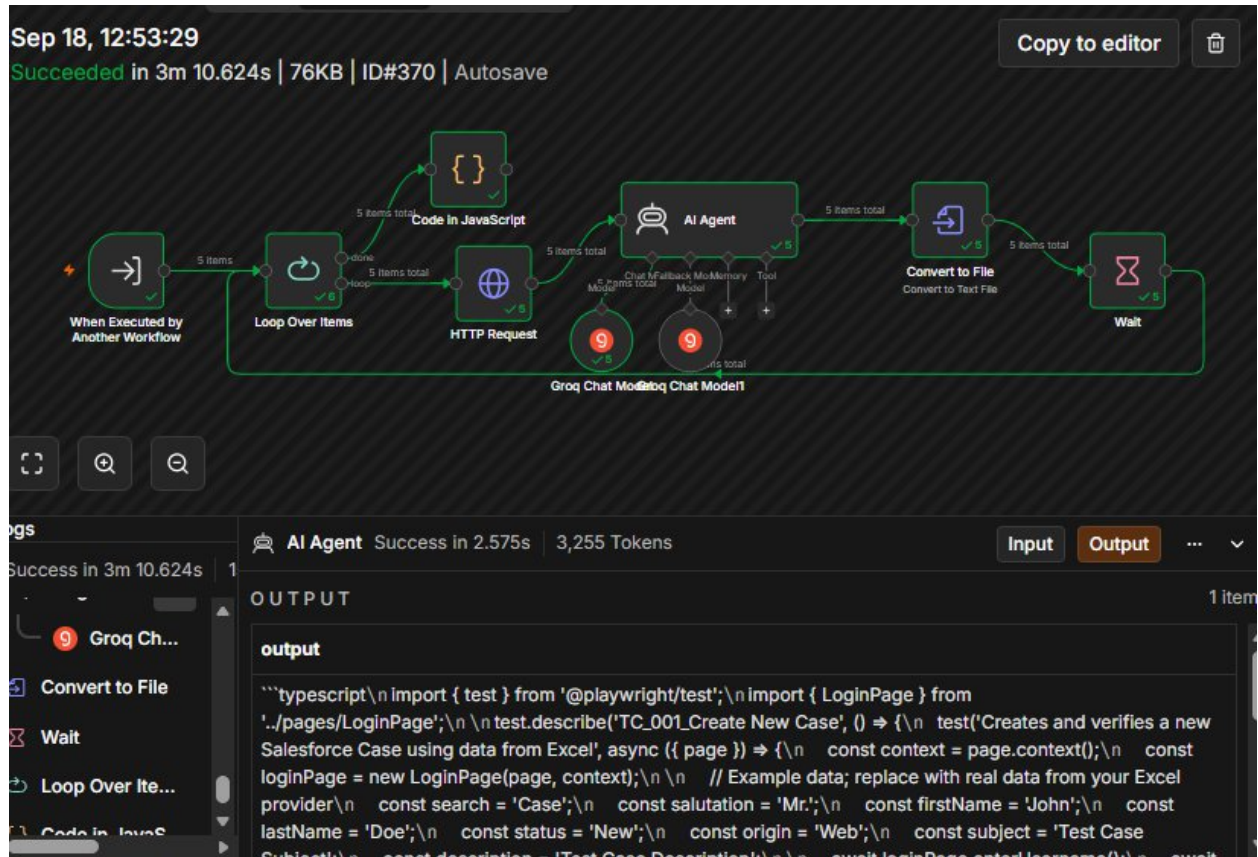

Downloads > _pages (2)		Search _page! 🔍	
   		Sort ▾	View ▾
		⋮	Details
Name	Type	Compressed size	Password
 CasePage	Text Document	2 KB	No
 HomePage	Text Document	1 KB	No
 IndividualsPage	Text Document	1 KB	No
 LoginPage	Text Document	1 KB	No
 TC001_CreateNewCase	Text Document	1 KB	No
 TC002_CreateIndividuals	Text Document	1 KB	No
 TC003_EditIndividuals	Text Document	1 KB	No
 TC004_DeleteIndividuals	Text Document	1 KB	No
 TC005_CreateWorkType	Text Document	1 KB	No
 WorkTypeGroupPage	Text Document	2 KB	No