EXPERIMENT-3

NAME:LAL SHIVAAN S L ROLL NO:240701285

1.COMMAND LINE INTERFACE:

PYTHON CODE:

```
import os
import sys


defrename_file(old_name, new_name):
    try:
        os.rename(old_name, new_name)
        print(f"File renamed from {old_name} to {new_name}")
    except FileNotFoundError:
        print(f"Error: {old_name} not found.")
    except Exception as e:
        print(f"An error occurred: {e}")


if__name__ == "__main__":
    iflen(sys.argv) != 3:
        print("Usage: python rename_file_cli.py <old_filename> <new_filename>")
    else:
        rename_file(sys.argv[1], sys.argv[2])
```

OUTPUT:

```
D:\230701304>python rename_file_cli.py demo.txt shal.txt
File renamed from demo.txt to shal.txt
```

2.GRAPHICAL USER INTERFACE:

PYTHON CODE:

```
import tkinter as tk
from tkinter import messagebox
import os

#Function to rename the file
defrename_file():
    old_name = old_filename_entry.get().strip()
    new_name = new_filename_entry.get().strip()

    #Check if input fields are empty
    ifnotold_name or not new_name:
        messagebox.showwarning("Warning", "Please enter both filenames!")
        return

    #Check if the old file exists
    ifnotos.path.exists(old_name):
        messagebox.showerror("Error", f"File '{old_name}' not found.")
        return

    #Check if the new file already exists
    ifos.path.exists(new_name):
        overwrite = messagebox.askyesno("Warning", f"'{new_name}' already exists. Overwrite?")
        ifnot overwrite:
            return

    try:
```

```
        os.rename(old_name, new_name)
        messagebox.showinfo("Success", f"File renamed from '{old_name}' to '{new_name}'")
    except Exception as e:
        messagebox.showerror("Error", f"An error occurred: {e}")

#Create main window
root= tk.Tk()
root.title("File Renamer")
root.geometry("400x150")
root.resizable(False, False) # Fixed window size

#Labels
tk.Label(root, text="      Old Filename:", font=("Arial", 10)).grid(row=0, column=0, padx=10, pady=5,
sticky="w")
tk.Label(root, text="      New Filename:", font=("Arial", 10)).grid(row=1, column=0, padx=10, pady=5,
sticky="w")

#Entry fields
old_filename_entry = tk.Entry(root, width=40)
old_filename_entry.grid(row=0, column=1, padx=10, pady=5)

new_filename_entry = tk.Entry(root, width=40)
new_filename_entry.grid(row=1, column=1, padx=10, pady=5)

#Styled Button
rename_button = tk.Button(root, text=" Rename File", bg="green", fg="white", font=("Arial", 10,
"bold"), command=rename_file)
rename_button.grid(row=2, column=0, columnspan=2, pady=10)

#Run the GUI event loop
root.mainloop()
```

OUTPUT:

```
D:\230701304>python rename_gui.py
```

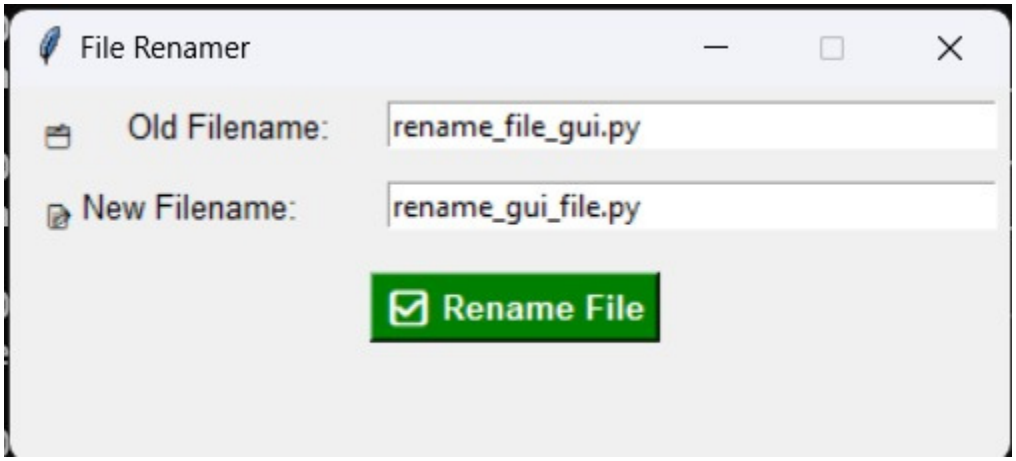

3.VOICE USER INTERFACE:

PYTHON CODE:

```
import speech_recognition as sr
import os


defrename_file_from_voice_command(command):
    try:
        words = command.lower().split(" ")
        if"rename" in words and "to" in words:
            rename_index = words.index("rename")
            to_index = words.index("to")

            #Extract old and new filenames
            old_name = words[rename_index + 1]
            new_name = words[to_index + 1]

            #Check if file exists
            ifnot os.path.exists(old_name):
                print(f"Error: File '{old_name}' not found.")
                return
```

```
            #Renamefile
            os.rename(old_name, new_name)
            print(f"      File renamed from '{old_name}' to '{new_name}'")

        else:
            print("Invalid command format. Say: 'Rename oldfile.txt to newfile.txt'")

    exceptException as e:
        print(f"Error:{e}")

deflisten_for_command():
    recognizer=sr.Recognizer()
    mic=sr.Microphone()

    print("      Listening for command to rename a file...")
    withmicassource:
        recognizer.adjust_for_ambient_noise(source)
        audio=recognizer.listen(source)

    try:
        command=recognizer.recognize_google(audio)
        print(f"     Command received: {command}")
        rename_file_from_voice_command(command)
    exceptsr.UnknownValueError:
        print("      Sorry, I couldn't understand the command.")
    exceptsr.RequestError as e:
        print(f"      Could not request results from Google Speech Recognition service; {e}")

if__name__=="__main__":
    listen_for_command()
```

```
D:\230701304>python rename_vui.py
🎤 Listening for command to rename a file...
🎙 Command received: rename
Invalid command format. Say: 'Rename oldfile.txt to newfile.txt'

D:\230701304>python rename_vui.py
🎤 Listening for command to rename a file...
❌ Sorry, I couldn't understand the command.
```

```
[Running] python -u "d:\230701304\vui.py"
Listening for command to rename a file...
Command received: rename sample to Shark Shal
File renamed from sample to Shark
```

4.USER SATISFACTION COMPARISON:

PYTHON CODE:

```
defsurvey():
    print("Rate your satisfaction with the following interfaces (1-5):")


    #Get user input for each interface
    try:
        cli_satisfaction = int(input("CLI (1-5): "))
        gui_satisfaction = int(input("GUI (1-5): "))
        vui_satisfaction = int(input("VUI (1-5): "))


        #Ensure valid ratings
        ifnot (1 <= cli_satisfaction <= 5 and 1 <= gui_satisfaction <= 5 and 1 <= vui_satisfaction <= 5):
            print("Please enter ratings between 1 and 5 only.")
            return


        #Display the ratings
        print("\nYour satisfaction ratings:")
        print(f"CLI: {cli_satisfaction}")
        print(f"GUI: {gui_satisfaction}")
```

```
        print(f"VUI: {vui_satisfaction}")


        # Calculate the average satisfaction
        avg_satisfaction = (cli_satisfaction + gui_satisfaction + vui_satisfaction) / 3
        print(f"\nAverage Satisfaction Score: {avg_satisfaction:.2f}")


    except ValueError:
        print("Invalid input! Please enter numbers between 1 and 5.")


#Run the survey function
if__name__ == "__main__":
    survey()
```

```
D:\230701304>python survey.py
Rate your satisfaction with the following interfaces (1-5):
CLI (1-5): 4
GUI (1-5): 5
VUI (1-5): 3

Your satisfaction ratings:
CLI: 4
GUI: 5
VUI: 3

Average Satisfaction Score: 4.00

D:\230701304>
```