

tensai – SecureAPI (Hexaversity)

API User Manual



Version: 1.0 | Date: 19-Sep-2024





Document History


Version	Date	Changes	Author
1.0	19-Sep-2024	Initial draft	Ayush Padhy



1 HOW TO USE SECURE API?

This document will guide you through the powerful features of the Hexaversity Secure API, detailing the procedures and responsibilities for API Users.

1. The API Users need to register themselves first on the Portal. They will need to provide their User ID, Current Project name and request reason mentioning why they need to access Secure API. On clicking submit they will be redirected to a page saying their request has been raised.

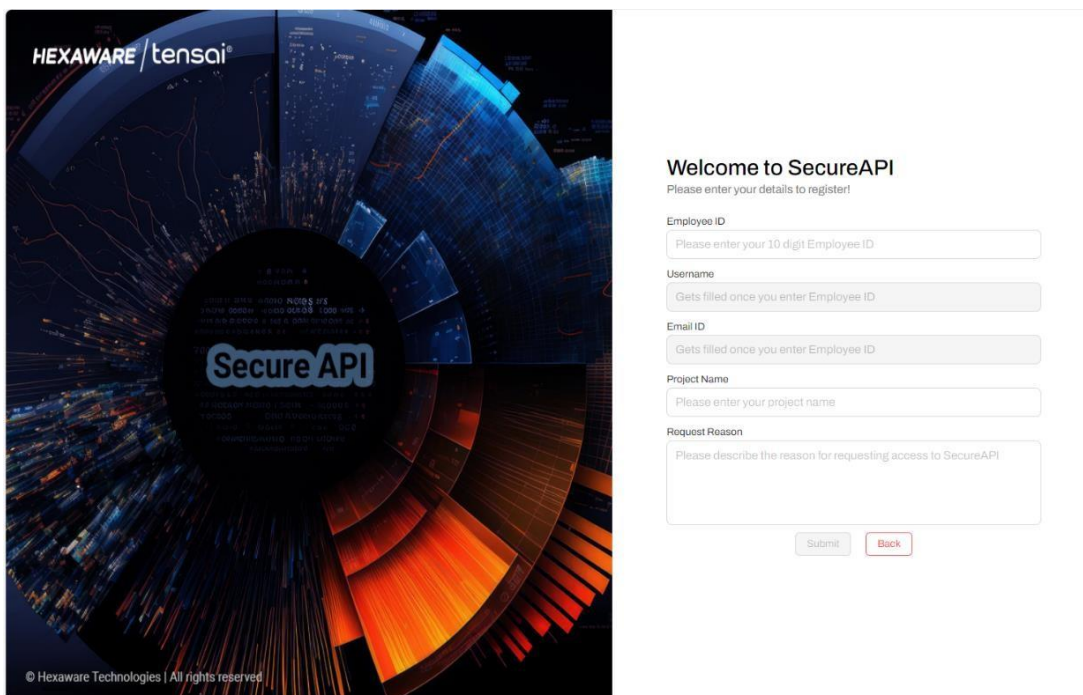

The image shows a registration form for the Secure API. On the left is a circular graphic with 'Secure API' in the center, surrounded by data visualizations and the 'HEXAWARE / tensai' logo. The form on the right is titled 'Welcome to SecureAPI' and asks for registration details. It includes fields for Employee ID, Username, Email ID, Project Name, and a text area for Request Reason. At the bottom are 'Submit' and 'Back' buttons.

HEXAWARE / tensai®

Welcome to SecureAPI
Please enter your details to register!

Employee ID
Please enter your 10 digit Employee ID

Username
Gets filled once you enter Employee ID

Email ID
Gets filled once you enter Employee ID

Project Name
Please enter your project name

Request Reason
Please describe the reason for requesting access to SecureAPI

Submit Back

© Hexaware Technologies | All rights reserved

2. Once the admin approves or rejects the access, they will receive an email from the admin about their request. If the request has been rejected, the user will need to contact the admin. If the request is rejected or in InProgress state or in inactive state, the user won't be able to raise another request. They will need to contact the administrator for access.

Once the user is approved by the admin, the API user then can click on 'Sign in using SSO' option and it will guide them through to the dashboard. Make sure before clicking on sign in, you must have clicked on accept terms and conditions page.



Click on Sign in SSO

Welcome to SecureAPI

Sign in using SSO

Please enter your credentials to sign in!

Employee ID
Please enter your 10 digit Employee ID

Password
Please enter your password

Sign in

☒ I agree to all the [Terms and Conditions](#)
[Register for SecureAPI](#)

Check the box

3. When the user signs in, they will see a dashboard as shown in the picture below. In the dashboard, they will be able to see their statistics of tokens, API calls made, and number of active keys. They will also be able to see their logs.

tensai / Secure API

DatabaseAPIUser
ApiUser

Dashboard

Key Config

API Help

Number of Keys
1
Keys

Number of Tokens
99.00
Tokens

Number of ApiCalls
1.00
ApiCalls

Filter logs by:
Log Secret Key

Search Input:

Search

Reset


S.No	User ID	Log Secret Key	Time	API Call Details	Tokens	Status Code
1						Success

© Hexaware Technologies | All rights reserved

HEXAWARE / tensai



4. In the Key Config tab, the API user will be able to manage their keys. They can create or delete their keys. They will be able to see what configurations they have created. Currently we are only supporting Azure Open AI services.

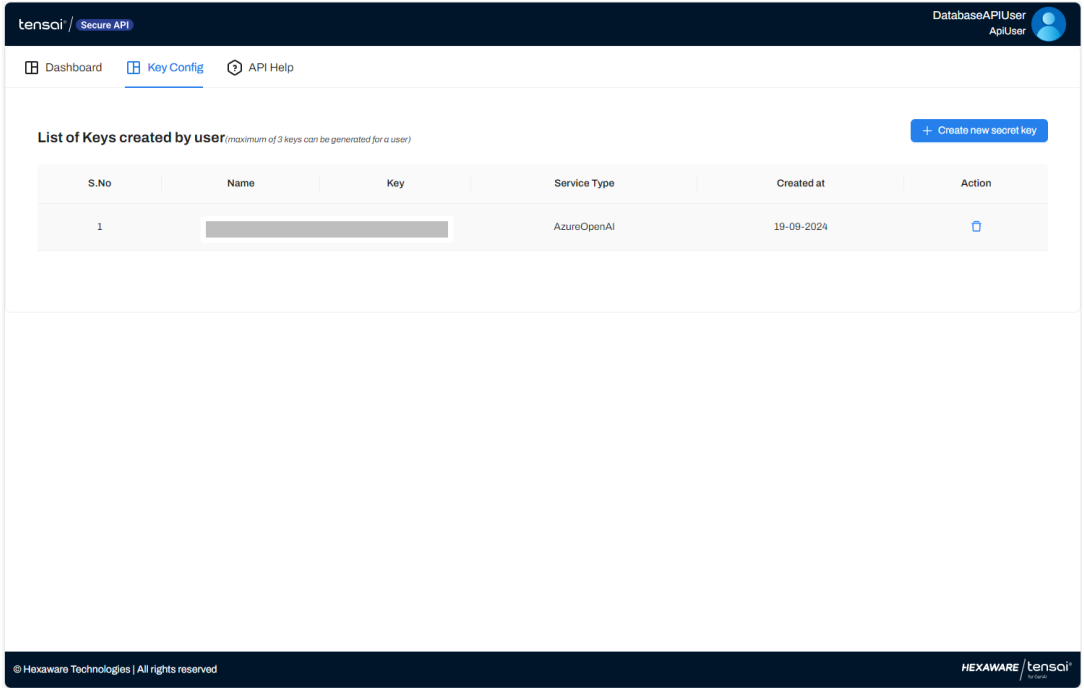

5. For creating a new key, click on the create new secret key. A pop-up will appear asking you for a few details. You can select the Service and provide a key name. Once you provide the key name, click on ‘Next’. A secret key will appear. Copy or click on the ‘Save’ button.

Please Note: -

The number of tokens here is the number of tokens they have used till date using Secure API keys. Currently every user can use a **maximum of 1 million tokens**. The token limit can only be set by the Admin.

* The 1 million tokens is **consolidated of all the tokens**.


* At one time, you cannot have more than 3 Active tokens.

* To get another key, you need to delete your key from the key config panel and then add another key. Please remember to give a different key name every time you create a key.

For your reference: - 1 million tokens equate to approximately **750,000 words**, 1 million tokens would be closer to **2,500–2,700 pages**.

The key name should be **Unique**.

Suggestion: - Use a key name that consists of your project name and specific use case. For example, **secureapi-chat**.

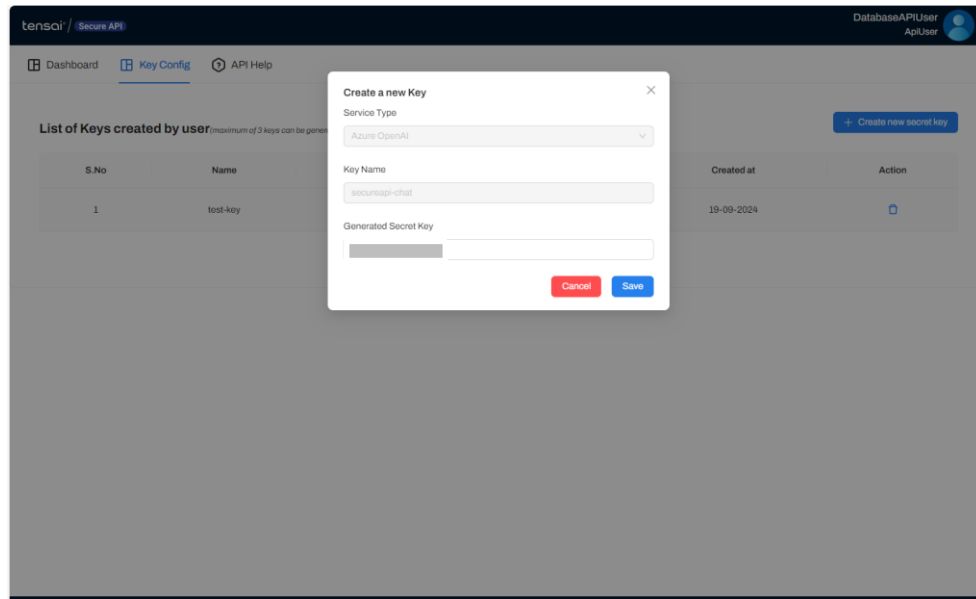

6. Final tab is the API Help tab. This tab is a documentation tab. Documentation is provided with codes on how to access the Open AI through Secure API.

Please Note: - For API Users, the open ai version should be '2024-02-01' or latest.

Create API Azure

Chat

Embeddings

Audio

Files

Fine-Tuning

Image

Chat

Create Chat Completion

- Creates a model response for the given chat conversation.

REQUEST BODY

- messages:** array (Required)
 - A list of messages comprising the conversation so far.
- model:** string (Required)
 - ID of the model to use. See the model endpoint compatibility table for details on which models work with the Chat API.
- frequency_penalty:** number or null (Optional)
 - Defaults to 0
 - Number between -2.0 and 2.0. Positive values penalize new tokens based on their existing frequency in the text so far, decreasing the model's likelihood to repeat the same line verbatim.
- function_call:** string or object (Optional)
 - Controls how the model calls functions. "none" means the model will not call a function and instead generates a message. "auto" means the model can pick between generating a message or calling a function. Specifying a particular function via {"name": "my_function"} forces the model to call that function. "none" is the default when no functions are present. "auto" is the default if functions are present.
- functions:** array (Optional)
 - A list of functions the model may generate JSON inputs for.
- logit_bias:** map (Optional)

Python

Copy

```
from openai import AzureOpenAI

from dotenv import load_dotenv

import os

load_dotenv()

OPENAI_API_VERSION = os.getenv("OPENAI_API_VERSION") #For app user: you need to pass the version configured by the admin

AZURE_OPENAI_ENDPOINT = os.getenv("AZURE_OPENAI_ENDPOINT") #Eg: {BASE_URL}/api/azureai

AZURE_OPENAI_API_KEY = os.getenv("AZURE_OPENAI_API_KEY") #For App User: use the app-registration key along with the app configuration unique key name eg. app123key-configName, For Api User: Substitute the key generated from Key Config Panel

client = AzureOpenAI()

res = client.chat.completions.create(
    model="gpt-4o-mini", #Allowed values for ApiUser: gpt-4o,gpt-4o-mini
    messages=[{"role":"system","content":"You are a helpful assistant"},
    ])
```



HOW TO HIT OPEN AI USING SECURE API FROM VS CODE?

In this section, you can see how you can use secure API to hit an open ai endpoint.

Please Note: - The .env file should contain all your secret information for security reasons.

```
chat.py x .env
aZURE > chat.py > ...
1 from openai import AzureOpenAI
2
3
4 from dotenv import load_dotenv
5
6 import os
7
8
9 load_dotenv()
10
11
12 OPENAI_API_VERSION = os.getenv("OPENAI_API_VERSION")
13
14 AZURE_OPENAI_ENDPOINT = os.getenv("AZURE_OPENAI_ENDPOINT")
15
16 AZURE_OPENAI_API_KEY = os.getenv("AZURE_OPENAI_API_KEY")
17
18
19 client = AzureOpenAI()
20
21
22 res = client.chat.completions.create(
23     model="gpt-4o",
24     messages = [ {"role": "system", "content": "You are an AI assistant."}, {"role": "user", "content": "What is LLM?."} ],
25     temperature= 0.7,
26     max_tokens= 256,
27     top_p= 0.6,
28     frequency_penalty= 0.7)
29
30 print(res)
31 print("-----")
32 print(res.choices[0].message.content)
```

OPENAI_API_VERSION=24-02-01

AZURE_OPENAI_ENDPOINT= <https://hexavarsity-secureapi.azurewebsites.net/api/azureai>

AZURE_OPENAI_API_KEY=YOUR_SECURE_API_KEY

```
OPENAI_API_VERSION=2024-02-01
AZURE_OPENAI_ENDPOINT=https://hexavarsity-secureapi.azurewebsites.net/api/azureai
AZURE_OPENAI_API_KEY=
```



AZURE OPENAI MODELS SUPPORTED BY SECUREAPI FOR API USERS

Chat:

- gpt-4o
- gpt-4o-mini

Image:

- dall-e-3

Audio:

- whisper

Fine Tuning:

- gpt-35-turbo-16k

Embeddings:

- text-embedding-ada-002