

# Description Logic Research in the Era of Agentic AI: The World’s First AI-Generated Description Logic Decidability Proof?

Michael Wessel<sup>1,\*</sup>, Claude (Anthropic)<sup>2</sup> and GPT-5.4 (OpenAI)<sup>3</sup>

<sup>1</sup>*LambdaMikel@Home*

<sup>2</sup>*Anthropic, San Francisco, CA, USA*

<sup>3</sup>*OpenAI, San Francisco, CA, USA*

## Abstract

This *extended abstract* reports on a human-and-AI collaboration that produced a candidate decidability proof for concept satisfiability in  $\mathcal{ALCI}_{RCC5}$ , which has been an open problem since my (Wessel’s) early PhD work at the University of Hamburg [14, 15]. If found correct by human experts, the proof would count as the world’s first AI-generated decidability proof to a long-standing open, non-trivial problem in Description Logics (DL) theory.

The main motivation for this extended abstract is to raise awareness in the DL community of the emerging impressive capabilities of agentic AI frontier models (OpenAI’s GPT 5.4 Pro, Anthropic’s Claude Opus 4.7) for DL research. We hence feel an obligation to share our observations with the DL community. A complete survey of the project, a proof sketch, implementation report, and the two-round adversarial review log are in the Appendix.

**We are fully transparent: The *Appendix* was written by Claude Opus 4.7, prompted and guided by Michael Wessel. The main *Extended Abstract* contribution was written by Michael Wessel (by hand).**

## Keywords

description logic,  $\mathcal{ALCI}_{RCC5}$ , decidability, agentic AI, human–AI collaboration, spatial reasoning

## 1. Introduction

In 1993, Cohn [1] proposed a qualitative spatioterminological multi-modal logic syntactically equivalent to multi-modal  $K_n$ , but with a pair of dedicated  $\Box_R$  and  $\Diamond_R$  operators for each qualitative spatial RCC8 relationships  $R$ : a formula such as  $Forest \wedge \Diamond_{NTPP} Lake$  represents a spatio-thematic concept such as “A Forest containing a Lake”. Cohn’s paper did not address decidability or complexity of the new logic.

In 2000, I started a systematic investigation of the Description Logic (DL) equivalent of Cohn’s logics and called it the  $\mathcal{ALCI}_{RCC}$  DL family, aiming for decidability results and practical prover implementations for geo-spatial applications such as ontology-based GIS [16]. The work took place in Bernd Neumann’s Cognitive Systems Group at the University of Hamburg; one of the group’s overarching research themes was logic-based image interpretation with DLs. My investigations continued in the tradition of previous work in the group on spatioterminological reasoning with DLs [2, 3, 4, 5, 8, 6, 7, 16].

From 2000 to 2002, I obtained several decidability and undecidability results for general (i.e., non-spatial) DLs with complex role inclusion axioms (“role boxes”) [10, 11, 12, 13], as well as some decidability results for smaller – but practically irrelevant –  $\mathcal{ALCI}_{RCC}$  family members [14, 15]. Unfortunately, I was neither able to show decidability nor undecidability of  $\mathcal{ALCI}_{RCC5}$  or  $\mathcal{ALCI}_{RCC8}$  [15].

Fast-forward 25 years, and we are witnessing impressive advances in *computer-assisted proof via Large Language Models (LLMs) and agentic AI* [19, 20]. In order to evaluate the current capabilities of agentic AI in mathematics and logics, I decided to re-start research on the  $\mathcal{ALCI}_{RCC}$  family in April 2026 aiming to close the gaps I left a quarter century ago. I formed a *virtual research team* consisting of a human (myself), OpenAI’s GPT 5.4 Pro [48], and Anthropic’s Claude Opus 4.7 [47] running in agentic mode (Claude Code with tool access for running Python,  $\text{\LaTeX}$  generation, Github access, etc.)

---

\*Corresponding author.

✉ [miacwessel@gmail.com](mailto:miacwessel@gmail.com) (M. Wessel)

🌐 <https://www.anthropic.com/claude> (C. (Anthropic)); <https://openai.com> (GPT-5.4 (OpenAI))



© 2026 Copyright for this paper by its authors. Use permitted under Creative Commons License Attribution 4.0 International (CC BY 4.0).

The human-and-AI team started by assessing the technical correctness of my original contributions. No major technical errors were found; the established results still stand unrefuted in April 2026. Next, the agents surveyed whether  $\mathcal{ALCI}_{RCC5}$  /  $\mathcal{ALCI}_{RCC8}$  (un)decidability was still open – the answer was *affirmative*, and we decided that it would make sense to continue the research in an attempt to answer these open questions. A three-week after-work side project started in which we explored 11 attempts to prove decidability, and 7 potential undecidability reductions.

Of the 11 attempts, one attempt to prove  $\mathcal{ALCI}_{RCC5}$  decidability seems to have succeeded! We believe that this proof can no longer be dismissed easily – it is based on a novel model-theoretic *split-tree forest* (for short: *split-forest*) characterization of  $\mathcal{ALCI}_{RCC5}$  models [22, 25]. If found correct by human experts, then this proof might represent *the world's first AI-generated DL decidability proof*.

We hereby claim:  $\mathcal{ALCI}_{RCC5}$  **is decidable**. We invite scrutiny and constructive feedback from the DL community to challenge this claim. For the sake of scientific progress and full transparency, we (the human-and-AI team) will evaluate and respond to all *constructive feedback and reviews* that we receive on our project Github repository [45].

We like to stress that the main motivation for this extended abstract is to raise *awareness of the emerging capabilities of agentic AI frontier models in the field of mathematics and logic (especially DL)*.

## 2. Background on $\mathcal{ALCI}_{RCC}$

The  $\mathcal{ALCI}_{RCCn}$  DL family [14, 15] (for  $n \in \{5, 8\}$ ) extends  $\mathcal{ALCI}$  [18] by fixing the role names to the jointly exhaustive and pairwise disjoint (JEPD) base relations of the region connection calculus  $RCCn$ : for  $n = 5$  we have  $\{DR, PO, EQ, PP, PPI\}$ , and for  $n = 8$   $\{DC, EC, PO, EQ, TPP, NTPP, TPPI, NTPPI\}$ . Concepts are  $\mathcal{ALCI}$  concepts  $C, D ::= A \mid \neg C \mid C \sqcap D \mid C \sqcup D \mid \exists R.C \mid \forall R.C$ , and  $R$  is an  $RCC$  base relation; moreover,  $\exists PP^-.C \equiv \exists PPI.C$  etc.

An interpretation  $\mathcal{I} = (\Delta^{\mathcal{I}}, \cdot^{\mathcal{I}})$  consists of a non-empty domain  $\Delta^{\mathcal{I}}$ ,  $C^{\mathcal{I}} \subseteq \Delta^{\mathcal{I}}$ , and  $R^{\mathcal{I}} \subseteq \Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}$  for each base relation, subject to the JEPD role axioms: the  $R^{\mathcal{I}}$  are pairwise disjoint and their union is the full square  $\Delta^{\mathcal{I}} \times \Delta^{\mathcal{I}}$ . Every pair  $(x, y)$  is labelled by *exactly one* base relation. Under *strong-EQ semantics* [15]  $EQ^{\mathcal{I}}$  is the identity on  $\Delta^{\mathcal{I}}$ . The inverse axiom  $PP^{\mathcal{I}} = (PPI^{\mathcal{I}})^{-1}$  (and its  $RCC8$  analogues  $TPP/TPPI$ ,  $NTPP/NTPPI$ ), together with the symmetry of  $DR, PO, EQ$  (respectively  $DC, EC, PO, EQ$ ), fixes the converse behaviour. Role composition is constrained by the  $RCCn$  composition table comp: for all  $x, y, z \in \Delta^{\mathcal{I}}$  with  $(x, y) \in R_1^{\mathcal{I}}$  and  $(y, z) \in R_2^{\mathcal{I}}$ , the label of  $(x, z)$  must lie in  $\text{comp}(R_1, R_2)$ . The semantics of concept constructors is the standard  $\mathcal{ALCI}$  semantics.

Because JEPD labels *every* pair, each model is a *complete directed graph* on  $\Delta^{\mathcal{I}}$  whose edges are coloured by the  $RCC5$   $\{DR, PO, PP, PPI\}$  relations (or the eight  $RCC8$  relations), with  $EQ$  realised as identity. The fundamental structural fact used throughout is the *patchwork property* of Renz and Nebel: any path-consistent atomic  $RCCn$  network is globally realisable [9].

$\mathcal{ALCI}_{RCC5}$  and  $\mathcal{ALCI}_{RCC8}$  do not have the tree- nor finite model property. From 2002 to 2003, I established the following:  $\mathcal{ALCI}_{RCC1}$ ,  $\mathcal{ALCI}_{RCC2}$ , and  $\mathcal{ALCI}_{RCC3}$  are decidable [14, 15], because their composition tables are deterministic or near-deterministic, admitting reduction to standard DL techniques. As coarse lower bounds, I showed that  $\mathcal{ALCI}_{RCC5}$  is PSPACE-hard, and  $\mathcal{ALCI}_{RCC8}$  is EXPTIME-hard (via a binary  $n$ -bit counter encoding using a  $TPPI/NTPPI$  construction).

The decidability of  $\mathcal{ALCI}_{RCC5}$  and  $\mathcal{ALCI}_{RCC8}$  was left open. However, I did identify the so-called *co-incidence construction* [15], Def. 6, Figures 10 and 11, that was later also used by Lutz and Wolter to prove undecidability of  $L_{RCC8}$  [17]. Moreover, I also observed that adding a hybrid modal logic binding operator ( $\downarrow$ ) to  $\mathcal{ALCI}_{RCC8}$  would make the logic immediately undecidable [15].

## 3. Attempts & Results

Lutz and Wolter's grid reduction in their  $L_{RCC8}$  Domino undecidability proof uses the same TBox construction as in [15], Def. 6, Figures 10 and 11: two  $TPP/NTPP$ -chains in orthogonal directions whose next-step composition forces a  $TPP$ -successor of a  $TPP$ -successor to coincide with another

NTPP-successor of the original node. I found this *co-incidence construction* computationally with an RCC8 network enumerator written in Lisp in 2002/2003, which was a non-trivial computation.

Lutz and Wolter’s reduction relies on two features that are not available in  $\mathcal{ALCI}_{RCC5}$ : a) the  $RCC8$  refinement TPP/NTPP allowing us to distinguish tangential from non-tangential containment ( $\mathcal{ALCI}_{RCC5}$ ’s coarser PP collapses the two), and b) the topological interpretation in  $\mathbb{R}^n$ . It is the additional structure in the topological models that enforces the co-incidence, not the TBox axioms, and this additional structure is not available in the *abstract* standard DL models of the  $\mathcal{ALCI}_{RCC}$  family.

Nevertheless, we continued evaluating potential avenues that would establish undecidability of  $\mathcal{ALCI}_{RCC5} / \mathcal{ALCI}_{RCC8}$  – but failed. Instead, evidence indicating  $\mathcal{ALCI}_{RCC5}$  decidability started to pile up! We thus attempted a series of standard tableau blocking (e.g., double blocking [18]) and extended tableau blocking (e.g., “RCC triangle type” blocking) ideas. Of the 11 investigated decidability approaches, 3 were partially successful, 2 suggested novel reductions and decidable fragments [29], and 6 (or 7) approaches failed (depending on what counts as partial success) [46], whereas the standard undecidability approaches all failed [45].

The investigated tableau blocking ideas all failed due to a fundamental tension between *soundness and termination in tableau calculi*. Standard double (pair) blocking, as used for  $\mathcal{ALCI}$  [18], terminates on any bounded type-space but is unsound for  $\mathcal{ALCI}_{RCC5}$ : the usual unravelling copies a blocked node’s subtree under its blocker, and composition of the copied RCC5 edges with the ambient network frequently produces atomic relations that violate the composition table or contradict the universals that were satisfied locally [46, 35].

Richer blocking conditions – triangle blocking [31, 34], sibling-interface blocking [22], rank- $d$  blocking [22, 25] – achieve soundness by forcing the blocker and blockee to agree on enough surrounding context, for example, *triples of RCC relations*, sibling descriptors, or full rank- $d$  states, enabling consistent composition-consistent unravelling. Unfortunately, each strengthening shrinks the equivalence classes, and strong enough variants then either fail to terminate or require an a priori bound on the context depth (the rank  $d$ ), and this is in itself what the decidability proof is trying to establish [30, 32, 33]. We were not able to overcome this tension, no matter how “sophisticated” the blocking condition [46, 35].

The breakthrough came on April 7th 2026 in the early morning hours, when I had the idea of a class of (possibly infinite) *PPI/PP* tree skeleton models for  $\mathcal{ALCI}_{RCC5}$ . I sketched my intuition on the whiteboard [21] and then tasked GPT 5.4 Pro to formalize it. After I corrected one critical error – GPT’s assumption that cross-tree edges can still *also* be *PPI/PP*, which defeated the purpose of the construction! – it then came to the conclusion that this would indeed establish decidability.

The new class of models was called *split-tree forest models* [22, 25]. A split-tree is a rooted tree  $T$  with a map  $orig : T \rightarrow \Delta^T$  into a DAG of *PPI/PP*-edges on the original domain: each tree node carries a Hintikka type, and whenever an element has several PP-predecessors in the DAG it is split into one tree copy per incoming path, so the tree unfolds the PPI-DAG while the witness relation is reconstructed from tree ancestry plus *sibling-interface descriptors for non-ancestor pairs*. The weak-EQ semantics [15] is used to make these split copies “EQ-mates”. The strong EQ semantics (i.e.,  $EQ^T$  is identity) is then later restored by collapsing them – Theorem 1.19 of the soundness proof in the split-forest paper [22, 25].

A crucial structural fact is that *PPI/PP* is a DAG rather than a tree (joins are allowed, cycles are not), so the split-tree presentation is always well-defined and finite-quotientable, while still recording exactly the inter-sibling interaction that the DAG joins would otherwise hide. Unraveling is established by replacing “two nodes have the same type” with “two subtrees present the same finite sibling-interface profile”. A tableau-like calculus was implemented – the cover-tree tableau/reasoner [24, 28].

The decidability claim is backed by three independent computational artifacts all agreeing at zero mismatches: a cross-validation suite running the cover-tree tableau [28] against an earlier (incomplete) quasimodel-based reasoner [37] on 911 randomly generated  $\mathcal{ALCI}_{RCC5}$  concepts, a cover-tree decomposition test checking rank- $d$  faithfulness on the 775 satisfiable concepts from that suite, and a Round-2 adversarial audit of 400+ additional concepts constructed by Opus 4.7. Moreover, the reasoner further reproduced all 21 subsumptions of the 18-concept GIS taxonomy from [15], Fig. 6 (and Appendix Fig.1).

## 4. On Agentic AI for Description Logic Research

The reported work was carried out with Claude Code running Opus 4.7 at maximum reasoning effort and full tool access. Opus handled  $\text{\LaTeX}$  compilation, GitHub operations, and Python execution in the loop. The agents [47, 48] are highly technically capable by now: *every technical artifact and aspect of this project was created and managed by them*, including proofs and their typesetting [22, 24, 25, 28, 29, 30, 31, 32, 33, 34, 35], Python reasoners [36, 37, 38, 39] and test suites [40, 41, 42, 43, 44], cross-validation scripts [41, 42], and the repo itself, see `README.md` and `CONVERSATION.md` files on [45, 46].

I (the human) contributed the research questions, the starting material [14, 15, 17], and, most importantly, high-level questions, scrutiny and intuition that would steer our search towards fertile ground: *one good idea – here, the split-tree forest class – was enough for the agents to eventually succeed*.

Occasionally, *high-level conceptual errors are made* – it is important to notice and correct these early. After I proposed the split-tree forest idea, GPT incorrectly assumed that  $PPI/PP$  cross-edges are possible, defeating the purpose of the construction. A follow-up question fixed this misconception.

A highly productive technique is *formal, constructive agent peer-review*: in the early stages of this project, a GPT-5.4 Pro and an Opus 4.7 session critiqued each other’s blocking conditions and tableau calculi by exchanging  $\text{\LaTeX}$  papers with *concrete counterexamples and recommendations* [30, 31, 32, 33, 34, 35]. Later, a fresh Opus 4.7 session was spawned specifically to adversarially review the entire team’s output with no prior conversation context to provide “an independent pair of eyes” on the work.

Eleven distinct approaches to decidability and seven blocked undecidability reductions were explored in three weeks. This would have been impossible without agents: they *traverse a large search space far faster than a human can*, descend more deeply into rabbit holes, and reorient quickly if required.

Hallucination is no longer the dominant failure mode. The *models kept themselves honest* by cross-validating claims, writing test suites, and running computational probes against their own proofs; after some failed attempts they settled (unprompted!) into a self-sceptical working style. DL tableau reasoning is also close enough to ordinary programming, at which current AI models excel, so the gap between a proof (sketch) and an executable artifact seems to be small enough for the models to bridge.

The models are a *treasure trove of deep knowledge* in math and logic – they explored a broader range of techniques and approaches than I could have familiarized myself with in many weeks of study.

I was not able to keep up with every detail of and in the agents’ work. Instead, I frequently asked them to explain their findings at a higher, but still somewhat formal technical level so that I was able to *qualitatively and intuitively vet the progress*. I frequently asked for extensive `README` documentations of our findings and results, as well as reorganizations, keeping our “knowledge base” streamlined, organized and most importantly, *human comprehensible*.

Agentic AI has the potential to *change scientific processes*; e.g., to soften network effects, not-invented-here bias, and dismissive reviewing. *Constructive feedback and concrete counterexamples* can now be generated swiftly and checked on demand. Papers can also be scanned for omitted citations and/or prior art. Agentic AI can *level access*: a researcher outside the core DL network can now benefit from tutor-quality mentorship, proof-formalisation support, and an always-on collaborator – the kind of access that previously required being the student of a particular advisor. One may reasonably ask: would S. Ramanujan have succeeded *and* been recognized without the support of G.H. Hardy?

By now, *agentic AI delivers results that should no longer be ignored* [19, 20], but human expert evaluation is still required. It is challenging for humans to keep up with the throughput of a capable agent team. Maybe a *reviewing hierarchy* can be established – first, peer-reviews by AI agents, then Lean-augmented teams of agents, and finally human experts. In this work we witnessed that agents are able to critically assess their own output, and *can self-correct*. An impressive number of computational probes and tests have been generated for this project [37, 44, 36, 38, 39, 40, 41, 42, 43].

Standards will be required to *ensure continued scientific integrity* in the era of agentic research. Requiring a full, authentic `CONVERSATION.md` log documenting the process and who – human or agent – contributed what to the research outcomes might be a first step. *Transparency is non-negotiable*.

*We demonstrated that the DL research potentials offered by agentic AI are real, and hope that the DL community will decide to benefit from these impressive emerging capabilities – for the sake of science.*



## Appendix: Full Survey Paper

“On the Decidability of  $\mathcal{ALCI}_{RCC5}$ : A Survey of the Problem, Its History, and a Proposed Solution”

*The remainder of this document reproduces the self-contained survey paper of the same authors (companion file `overview_ALCIRCC5.tex`) verbatim, renumbered as an appendix. Section numbers within the appendix begin at A.1. Cross-references in the body of the extended abstract (Sections 1–4) point into the appendix sections below. The appendix is the technical record underlying the extended abstract and has been published separately in the project repository<sup>1</sup>.*

### A.1. Introduction

The decidability of concept satisfiability in the spatially extended description logic  $\mathcal{ALCI}_{RCC5}$  has been an open problem for over twenty years. This paper provides a self-contained overview of the problem, its intellectual history, the obstacles that have resisted solution, and a proposed decision procedure that—if correct—would settle the question positively.

The paper is organized as follows. Section A.2 traces the history of  $\mathcal{ALCI}_{RCC5}$  from Cohn’s original 1993 proposal through Wessel’s systematic investigation and Lutz & Wolter’s topological undecidability results. Section A.3 explains why standard undecidability reductions fail, including a concrete domino-encoding attempt that we verify is blocked. Section A.4 discusses why naïve tableau approaches fail for complete-graph logics. Section A.5 presents the split-forest model decomposition. Section A.6 describes the cover-tree tableau and explains how it achieves blocking. Section A.7 concludes with an assessment of what has been achieved and what remains to be done.

**Disclaimer.** This paper was authored by AI assistants (Claude Opus 4.7/Anthropic [47] and GPT-5.4 Pro/OpenAI [48]), prompted by Michael Wessel. The results and proofs have **not been peer-reviewed or verified by human domain experts**. They are published as a discussion piece. The claims should not be taken as established results unless independently verified. We invite scrutiny, corrections, and feedback.

### A.2. History of $\mathcal{ALCI}_{RCC5}$

#### A.2.1. Cohn’s 1993 proposal

The idea of combining description logics with qualitative spatial reasoning via modal accessibility relations was first proposed by Cohn [1], who considered treating the RCC8 relations (or subsets thereof) as modalities in a multi-modal logic. The framework allowed spatial constraints to be expressed as modal formulas—e.g.,  $\langle PP \rangle C$  for “some proper part satisfies  $C$ ”—but Cohn left all decidability and complexity questions open.

#### A.2.2. Wessel’s $\mathcal{ALCI}_{RCC}$ family (2002/2003)

Wessel [14, 15, 12] gave the first rigorous treatment of the combination, introducing the  $\mathcal{ALCI}_{RCC}$  family: description logics  $\mathcal{ALCI}_{RCCk}$  ( $k = 1, 2, 3, 5, 8$ ) extending  $\mathcal{ALCI}$  with role boxes derived from the RCC composition tables. In an  $\mathcal{ALCI}_{RCCk}$  interpretation, every pair of domain elements is assigned exactly one RCC $k$  base relation, and the composition table is enforced globally (*strong EQ semantics*: EQ is identity). Models are complete graphs with RCC $k$  edge-colorings.

Wessel established the following:

- **Decidable cases:**  $\mathcal{ALCI}_{RCC1}$ ,  $\mathcal{ALCI}_{RCC2}$ , and  $\mathcal{ALCI}_{RCC3}$  are decidable, because their composition tables are deterministic or near-deterministic, admitting reduction to standard DL techniques.

---

<sup>1</sup><https://github.com/lambdamikel/alcircc5>

- **Lower bounds:**  $\mathcal{ALCI}_{RCC5}$  is PSPACE-hard;  $\mathcal{ALCI}_{RCC8}$  is EXPTIME-hard.
- **Open:** The decidability of  $\mathcal{ALCI}_{RCC5}$  and  $\mathcal{ALCI}_{RCC8}$  was left as the central open problem.

In a series of companion reports, Wessel also mapped out the decidability landscape for description logics with general composition-based role inclusion axioms:

- $\mathcal{ALC}_{\mathcal{RA}}$  (arbitrary role axioms) is **undecidable**, via reduction from the Post Correspondence Problem [13].
- $\mathcal{ALC}_{\mathcal{RA}}^{\ominus}$  (non-disjoint-roles variant) is also **undecidable**, via reduction from non-empty CFG intersection [10].
- $\mathcal{ALC}_{\mathcal{RASG}}$  (admissible role boxes: deterministic, functional, complete, and associative) is **decidable** (EXPTIME-complete, via reduction to  $\mathcal{ALC}$  with general TBoxes) [11]; adding unqualified number restrictions ( $\mathcal{ALCN}_{\mathcal{RASG}}$ ) makes it undecidable again.

$\mathcal{ALCI}_{RCC5}$  sits precisely in the gap: its role box is non-deterministic (unlike  $\mathcal{ALC}_{\mathcal{RASG}}$ ) but has the patchwork property (unlike  $\mathcal{ALC}_{\mathcal{RA}}/\mathcal{ALC}_{\mathcal{RA}}^{\ominus}$ ).

**Remark A.2.1** (Key difficulties).  $\mathcal{ALCI}_{RCC5}$  has none of the properties that standard DL decidability proofs rely on: (i) no tree model property (models are complete graphs), (ii) no finite model property (some satisfiable concepts require infinite models), (iii) a non-deterministic role box (multi-valued composition entries).

For reference, the full RCC5 composition table is given in Table 1. Reading: row =  $S(b, c)$ , column =  $R(a, b)$ , entry = possible relations for  $(a, c)$ .

**Table 1**

The RCC5 composition table (\* = all five relations).

| comp          | DR( $a, b$ ) | PO( $a, b$ ) | EQ( $a, b$ ) | PPI( $a, b$ )   | PP( $a, b$ ) |
|---------------|--------------|--------------|--------------|-----------------|--------------|
| DR( $b, c$ )  | *            | DR, PO, PPI  | DR           | DR, PO, PPI     | DR           |
| PO( $b, c$ )  | DR, PO, PP   | *            | PO           | PO, PPI         | DR, PO, PP   |
| EQ( $b, c$ )  | DR           | PO           | EQ           | PPI             | PP           |
| PP( $b, c$ )  | DR, PO, PP   | PO, PP       | PP           | PO, EQ, PP, PPI | PP           |
| PPI( $b, c$ ) | DR           | DR, PO, PPI  | PPI          | PPI             | *            |

Key composition facts exploited in the cover-tree theory (Sections A.5–A.6):  $\text{comp}(\text{PP}, \text{DR}) = \{\text{DR}\}$  and  $\text{comp}(\text{DR}, \text{PPI}) = \{\text{DR}\}$  (DR rigidity);  $\text{comp}(\text{PP}, \text{PP}) = \{\text{PP}\}$  and  $\text{comp}(\text{PPI}, \text{PPI}) = \{\text{PPI}\}$  (transitivity); and  $\text{comp}(\text{DR}, \text{PO}) = \{\text{DR}, \text{PO}, \text{PP}\}$  (PP can be *forced* by composition and universal filtering; see Example A.6.2).

### A.2.3. Wessel’s grid constructions and the coincidence obstruction

In his investigation of  $\mathcal{ALCI}_{RCC8}$  [15], Wessel made two important discoveries:

**1. Even-odd chains (Section 4.4.2).** The TPP/NTPP distinction in RCC8 allows the construction of *functional successor chains*: each node alternates between *even* and *odd*, and a node can distinguish its direct TPPI-successor from all indirect ones by parity. Wessel used this to encode a binary  $n$ -bit counter, proving  $\mathcal{ALCI}_{RCC8}$  is EXPTIME-hard.

**2. The grid coincidence obstruction (Section 4.4.3, Figure 11).** Wessel constructed explicit RCC8 networks isomorphic to  $n \times n$  grids, using TPP for horizontal and vertical successors. However, he identified a fundamental obstacle to encoding domino tilings: the *coincidence condition*  $R_X \circ R_Y = R_Y \circ R_X$  (east-of-north equals north-of-east) cannot be enforced by concept terms. The composition table allows  $\{PO, EQ, TPP, NTPP, TPPI, NTPPI\}$  at the coincidence point—too many options. Wessel concluded:

**Table 2**

Why standard undecidability reductions fail for  $\mathcal{ALCI}_{RCC5}$ .

| Source Problem                                | Technique                        | Missing in $\mathcal{ALCI}_{RCC5}$ |
|-----------------------------------------------|----------------------------------|------------------------------------|
| $\mathbb{N} \times \mathbb{N}$ domino         | Graded modalities + transitivity | Number restrictions                |
| $\mathcal{ALC}_{\mathcal{RA}}$ [13]           | Post Correspondence Problem      | Arbitrary role axioms              |
| $\mathcal{ALC}_{\mathcal{RA}}^{\ominus}$ [10] | Non-empty CFG intersection       | Non-disjoint roles                 |
| $\mathcal{ALCI}_{RCC8}$ (Wessel)              | Grid via TPP/NTPP                | TPP/NTPP distinction               |
| $L_{RCC8}$ (Lutz–Wolter)                      | Domino via topological TPP       | Grid coincidence                   |
| $L_{RCC5}(RS^{\exists})$                      | $S5^3$ via supremum regions      | Supremum closure                   |

“Even though these infinite models do exist, we have found no way to *enforce* the depicted model(s) by means of a concept term.”

Wessel further observed that adding a hybrid logic binding operator  $\downarrow$  (nominals) would immediately yield undecidability, confirming that the coincidence condition is the *precise boundary*.

These constructions—the even-odd chain, the grid encoding via TPP/NTPP, and the identification of the coincidence gap as the decisive obstacle—anticipated key technical ingredients of the later Lutz–Wolter proof by three to four years.

#### A.2.4. Lutz & Wolter (2006)

Lutz and Wolter [17] studied *modal logics of topological relations*, denoted  $L_{RCC8}$ ,  $L_{RCC5}$ , etc. These have the same *syntax* as  $\mathcal{ALCI}_{RCC}$  but are interpreted over *topological models*: the domain elements are regular closed subsets of a topological space (typically  $\mathbb{R}^n$ ). They proved:

- $L_{RCC8}$  is **undecidable** (domino tiling via functional TPP-chains, with the grid coincidence forced by the geometry of  $\mathbb{R}^2$ ).
- $L_{RCC5}(RS^{\exists})$  is **undecidable** (reduction from  $S5^3$  via supremum regions).
- $L_{RCC5}(RS)$  is **open**. Lutz and Wolter explicitly wrote (p. 31): “Perhaps the most interesting candidate is  $L_{RCC5}(RS)$  [...] to which the reduction exhibited in Section 8 does not apply.”

The logic  $\mathcal{ALCI}_{RCC5}$  is exactly  $L_{RCC5}(RS)$ : arbitrary complete-graph models with composition-table semantics. The problem has been recognized as open by leading researchers since 2006.

### A.3. Why Undecidability Reductions Fail

Undecidability proofs for description logics use a variety of techniques: grid encoding ( $\mathbb{N} \times \mathbb{N}$  domino tiling, requiring functional roles or number restrictions), reduction from the Post Correspondence Problem (PCP), reduction from context-free grammar (CFG) intersection, or simulation of  $S5^3$  via geometric constructions.  $\mathcal{ALCI}_{RCC5}$  lacks the features that each of these techniques exploits: it has no functional roles, no number restrictions, no arbitrary role box, and no geometric coincidence conditions.

#### A.3.1. Blocked reduction routes

Table 2 summarizes the blocked routes. The **patchwork property** of RCC5 (Renz & Nebel [9])—local (triple-wise) consistency implies global consistency for atomic networks—actively resists grid encoding, since tiling reductions require rigid global constraints that go beyond local consistency.

### A.3.2. A concrete domino attempt in $\mathcal{ALCI}_{RCC5}$

Can we encode a domino-like grid using PP/PPI chains in RCC5? Consider the concept:

$$\begin{aligned} X = & \exists \text{PPI}.\exists \text{PPI}.C \sqcap \exists \text{PPI}.\exists \text{PPI}.D \\ & \sqcap \forall \text{PPI}.\forall \text{PPI}.(\forall \text{PO}.(\neg C \sqcap \neg D) \sqcap \forall \text{DR}.(\neg C \sqcap \neg D)) \\ & \sqcap \forall \text{PPI}.(\neg C \sqcap \neg D) \sqcap \forall \text{PP}.(\neg C \sqcap \neg D)) \\ & \sqcap \forall \text{PPI}.\exists \text{PPI}.X \end{aligned}$$

The intent: each  $X$ -node has two PPI-grandchildren colored  $C$  and  $D$  (the “square”), and the universals isolate the colored nodes from all non-EQ neighbors. The recursive  $\forall \text{PPI}.\exists \text{PPI}.X$  forces infinite repetition.

**One level is satisfiable.** Without the recursive conjunct,  $X$  has a 3-element model:  $z \text{ PP } y \text{ PP } x$ , with  $z \in C \sqcap D$ . The two grandchildren are forced to be *the same element* (EQ collapse): if  $z_1 \neq z_2$ , they would be related by some  $R \in \{\text{DR}, \text{PO}, \text{PP}, \text{PPI}\}$ , and the universals would require  $z_2 \notin D$  (firing  $z_1$ 's  $\forall R.(\neg C \sqcap \neg D)$ ). So  $z_1 = z_2 \in C \sqcap D$ , and the universals are vacuously satisfied (the only neighbors of  $z$  are PP-predecessors, not PO/DR/PPI-neighbors).

**Two levels is unsatisfiable.** Adding  $\forall \text{PPI}.X$ : the PPI-child  $y$  must itself satisfy  $X$  (without recursion), producing a new  $C \sqcap D$ -labeled element  $w$  as a PPI-child of  $z$ . But  $z$  is a PPI-grandchild of  $x$ , and  $x$ 's universals fire:  $z$ 's PPI-neighbor  $w$  must satisfy  $\neg C \sqcap \neg D$ . Yet  $w \in C \sqcap D$ . **Contradiction.**

This was verified computationally: a simplified version  $X_1 = \exists \text{PPI}.\exists \text{PPI}.C \sqcap \forall \text{PPI}^3.(\neg C)$  is SAT;  $X_2 = X_1 \sqcap \forall \text{PPI}.X_1$  is UNSAT. The domino encoding collapses at depth 2 because the isolation constraints from the grandparent level kill the colored elements created by the recursive unfolding.

**Remark A.3.1.** The failure is not accidental. In  $\mathcal{ALCI}_{RCC5}$ , the only way to create “functional” successors is via PP/PPI chains, but  $\text{comp}(\text{PPI}, \text{PPI}) = \{\text{PPI}\}$  makes these chains *transitive*—grandparent universals automatically propagate to grandchildren, preventing the positional diversity needed for grid encoding. In  $\mathcal{ALCI}_{RCC8}$ , the TPP/NTPP distinction breaks this transitivity (a direct TPPI-child is distinguishable from indirect descendants), which is why Wessel's even-odd chain works there but has no RCC5 analogue.

### A.3.3. A concrete domino attempt in $\mathcal{ALCI}_{RCC8}$

The remark above suggests the TPPI/NTPPI distinction in  $\mathcal{ALCI}_{RCC8}$  might rescue the construction: a direct successor (TPPI) and an indirect one (NTPPI) are genuinely distinguishable, so perhaps the level-2 collapse can be avoided. We attempt the analogue and show that while it escapes the RCC5 failure mode, it fails for a different reason—Wessel's *coincidence obstruction* [15].

**The schema.** Let Corner be the concept that isolates a node from all non-EQ neighbors:

$$\text{Corner} = \bigwedge_{R \in \{\text{DC}, \text{EC}, \text{PO}, \text{TPP}, \text{NTPP}, \text{TPPI}, \text{NTPPI}\}} \forall R.(\neg C \sqcap \neg D).$$

The isolation is placed *locally on the colored grandchildren* rather than as an ancestral  $\forall \text{TPPI}.\forall \text{TPPI}$  universal, so it cannot propagate transitively through the recursion:

$$\begin{aligned} X = & \exists \text{TPPI}.\exists \text{TPPI}.(C \sqcap \text{Corner}) \sqcap \exists \text{TPPI}.\exists \text{TPPI}.(D \sqcap \text{Corner}) \\ & \sqcap \forall \text{TPPI}.(\neg C \sqcap \neg D) \sqcap \forall \text{TPPI}.X. \end{aligned}$$

The third conjunct  $\forall \text{TPPI}.(\neg C \sqcap \neg D)$  forces the corner relation  $x \rightarrow z$  to be NTPPI (not TPPI), using  $\text{comp}(\text{TPPI}, \text{TPPI}) = \{\text{TPPI}, \text{NTPPI}\}$ .

**Level 1 is satisfiable, with a real direct/indirect distinction.** Without recursion,  $x$  has TPPI-children  $y_1, y_2$  (the two “direct” positions) and a single corner  $z$  reached by TPPI-TPPI chains from both  $y_1$



and  $y_2$ . The EQ-collapse at level 2 works exactly as in RCC5:  $z_1 \in C \sqcap \text{Corner}$  and  $z_2 \in D \sqcap \text{Corner}$  are mutual non-EQ neighbors only if Corner is violated, so under strong-EQ semantics  $z_1 = z_2 = z$ . Crucially,  $z \neq y_1, y_2$  in general:  $z$  is NTPPI of  $x$  while  $y_1, y_2$  are TPPI—the direct/indirect distinction survives, which is a genuine RCC8 refinement over the RCC5 attempt of §A.3.2.

**Level 2 collapses via the coincidence obstruction.** Adding  $\forall \text{TPPI}.X$ : the TPPI-child  $y$  of  $x$  satisfies  $X$ , producing its own corner  $w \in C \sqcap D \sqcap \text{Corner}$  at NTPPI-distance from  $y$ , and hence at NTPPI-distance from  $x$  via  $\text{comp}(\text{TPPI}, \text{NTPPI}) = \{\text{NTPPI}\}$ . Now  $x$ ’s own corner  $z$  and  $y$ ’s corner  $w$  are distinct grid positions in the intended reading—but as elements of the model they are related by some RCC8 base relation. Since  $z$  carries Corner, every non-EQ neighbor of  $z$  lies in  $\neg C \sqcap \neg D$ . But  $w \in C \sqcap D$ . Therefore  $z = w$  under strong-EQ. **All corners across the grid coincide at a single point.**

**Why the TPPI/NTPPI trick fails.** In the RCC5 attempt the collapse is a *transitive-propagation* failure: the grandparent universal fires on great-grandchildren because  $\text{comp}(\text{PPI}, \text{PPI}) = \{\text{PPI}\}$ . Moving the isolation to a local Corner marker and using the non-transitive piece  $\text{comp}(\text{TPPI}, \text{TPPI}) = \{\text{TPPI}, \text{NTPPI}\}$  eliminates that specific pathway—the universal at the grandparent no longer reaches deeper nodes. But a *different* obstruction takes over: the composition table permits any of  $\{\text{PO}, \text{EQ}, \text{TPP}, \text{NTPP}, \text{TPPI}, \text{NTPPI}\}$  between two corners at different intended grid coordinates, and nothing in the concept language rules out EQ. The Corner markers themselves then force the EQ-merge. This is exactly the obstruction Wessel identified in report7.pdf, Figure 11 (cf. §A.2.3): the composition table does not carry the rigidity needed to keep distinct grid cells distinct.

**Remark A.3.2.** The failure mode is structurally different from the RCC5 one but traces back to the same root cause. Lutz–Wolter’s  $L_{\text{RCC8}}$  reduction resolves the coincidence obstruction using topological geometry of  $\mathbb{R}^2$ : east-of-north coincides with north-of-east as a geometric fact, and each grid cell is a 2D region whose boundary inclusions force distinct corners to be genuinely distinct [17]. No such rigidity is available in the abstract RCC8 semantics of  $\mathcal{ALCI}_{\text{RCC8}}$ : a pure composition table allows corner points to merge freely, and the TPPI/NTPPI distinction—while useful locally for a direct/indirect separation at level 2—cannot be chained to enforce an unbounded  $\mathbb{N} \times \mathbb{N}$  grid. This matches the open-problem status of  $\mathcal{ALCI}_{\text{RCC8}}$  decidability noted in [17] and further discussed in [15].

## A.4. Why Naïve Tableau Blocking Fails

Standard DL tableau calculi achieve termination through *blocking*: if a node  $x$  has the same label as an ancestor  $y$ , we can reuse  $y$ ’s subtree for  $x$ , cutting off infinite branches. The key requirement is that the “reuse” preserves all constraints—in tree-shaped models, a blocked node’s interactions are limited to its parent edge, so label equality suffices.

In  $\mathcal{ALCI}_{\text{RCC5}}$ , models are *complete graphs*: every pair of domain elements is related by an RCC5 base relation. A node interacts not just with its parent and children, but with *every other node in the model*. This creates a fundamental obstacle for blocking.

**Example A.4.1** (Blocking breaks with cross-edges). Consider  $C_0 = \exists \text{PPI}.A \sqcap \exists \text{DR}.\neg A \sqcap \exists \text{PO}.\top$ . A tableau might generate nodes:

- $x_0$ : root, satisfies  $C_0$
- $x_1$ : PPI-child of  $x_0$ , type contains  $A$
- $x_2$ : DR-witness for  $x_0$ , type contains  $\neg A$

Now  $x_1$  and  $x_2$  must be related by some RCC5 relation  $R$ , and  $R$  must be safe for their types. If  $x_1$  generates a descendant  $x_3$  with the same label as  $x_1$ , naïve blocking would declare  $x_3$  blocked. But  $x_3$ ’s relation to  $x_2$  may differ from  $x_1$ ’s relation to  $x_2$ : via composition,  $\text{comp}(\text{inv}(\text{PPI}), \text{DR}) = \text{comp}(\text{PP}, \text{DR}) = \{\text{DR}\}$  forces  $x_1$  to be DR-related to  $x_2$ , while  $x_3$  (deeper in the tree) may face a different forced relation. The blocked node’s cross-edge commitments differ from the blocking node’s.

Multiple sophisticated blocking strategies have been tried and failed for  $\mathcal{ALCI}_{\text{RCC5}}$  [46, 35, 34]:

1. **Profile-cached blocking** (GPT-5.4) [34]: Caches “coherent predecessor blocks” to compare global neighborhoods. Fails because the *color structure changes during unraveling*—when a blocked subtree is replayed, the edge-coloring to nodes outside the subtree is not preserved.
2. **Meet-semilattice replay** (GPT-5.4) [34]: Uses a meet-semilattice structure on labels to ensure robust normalization. Same unraveling gap.
3. **Tri-neighborhood blocking** (Claude) [31]: Matches not just node labels but entire *triangle neighborhoods* (the set of all types of 2-element subsets involving the node). **Termination disproved**: frontier nodes continuously acquire new triangle types as new neighbors are added, so  $\text{Tri}(x) \subsetneq \text{Tri}(y)$  for frontier  $x$  and interior  $y$ —blocking never triggers.
4. **Finite-witness / patchwork-augmentation probes** (Claude) [30, 32, 33]: Probes of a finite-witness conjecture and typed-patchwork augmentations for the contextual tableau, both refuted by explicit counterexamples.

The common obstacle is the **blocking dilemma**: making the blocking condition strong enough for soundness (matching all cross-edge interactions) prevents termination (the cross-edge context keeps growing), and vice versa. A full catalogue of retracted approaches is maintained in [46]; the overall project is summarised at the repository [45].

## A.5. Split-Forest Model Decomposition

The breakthrough insight, due to Wessel, is to decompose  $\mathcal{ALCI}_{RCC5}$  models into a *tree layer* and a *cross-edge layer*, where the cross-edge layer is simple enough to handle without full global blocking.

### A.5.1. Cover trees

In any  $\mathcal{ALCI}_{RCC5}$  model, the PP/PPI relation is a strict partial order (by composition:  $\text{comp}(\text{PP}, \text{PP}) = \{\text{PP}\}$ ). Orient this order downward (PPI = “has proper part”) to obtain a DAG. If the DAG has join nodes (elements with multiple PP-predecessors), split them into EQ-copies, one per parent path. The result is a rooted forest—the *cover tree*.

**Definition A.5.1** (Cover tree). A *cover-tree presentation* of an  $\mathcal{ALCI}_{RCC5}$  model  $\mathcal{I}$  is a rooted tree  $T$  with a surjection  $\text{orig} : T \rightarrow \Delta^{\mathcal{I}}$  such that: (i)  $u$  is the parent of  $v$  in  $T$  iff  $\text{orig}(u)$  PPI  $\text{orig}(v)$  (immediate containment), and (ii) tree nodes mapping to the same element are EQ-mates (weak-EQ semantics, convertible to strong-EQ by typed congruence quotient).

### A.5.2. The key observation: DR rigidity

In the cover tree, what relations can hold between nodes in different sibling subtrees? Consider sibling roots  $s$  and  $t$  (children of the same parent), and elements  $x$  below  $s$ ,  $y$  below  $t$  in the tree. An element  $x$  below  $s$  is in the Core of the sibling pair  $(s, t)$  if  $\text{orig}(x)$  is a common descendant of both  $\text{orig}(s)$  and  $\text{orig}(t)$  in the original model’s PP order—i.e.,  $\text{orig}(x)$  is a proper part of both. Core elements are handled by EQ-splitting; the interesting question concerns non-Core elements.

**Proposition A.5.2** (Wessel). *After EQ-splitting, only DR and PO are possible between non-Core elements of sibling subtrees.*

*Proof.* • EQ( $x, y$ ): In the original DAG (before splitting),  $x = y$  would mean a single element is a PP-descendant of both  $s$  and  $t$ —i.e., it is in the Core. After splitting, this element is duplicated into distinct tree nodes  $x'$  below  $s$  and  $y'$  below  $t$ , with  $\text{orig}(x') = \text{orig}(y')$  (EQ-mates in the weak-EQ presentation). Since  $x' \neq y'$  as tree nodes, EQ( $x', y'$ ) is impossible under strong EQ semantics.

- $PP(x, y)$ : would mean  $x$  lies below  $y$  in the part-of order, hence below  $t$ , making  $x$  a common descendant (Core).
- $PPI(x, y)$ : would place  $y$  below  $x$  below  $s$ , meaning  $t$  lies below  $s$ —contradicting sibling incomparability.

Only DR and PO remain. Furthermore, DR propagates rigidly:  $\text{comp}(PP, DR) = \{DR\}$  and  $\text{comp}(DR, PPI) = \{DR\}$ , so if  $s$  DR  $t$ , then *every* descendant of  $s$  is DR to  $t$  and all its descendants.  $\square$

### A.5.3. Trivial arc-consistency of $\{DR, PO\}$ networks

The consequence of Proposition A.5.2 is that the cross-edge constraint network uses only  $\{DR, PO\}$  as possible relations (plus  $\{DR\}$  for DR-rigid pairs).

**Proposition A.5.3.** *For all  $R, S \in \{DR, PO\}$ :  $\text{comp}(R, S) \cap \{DR, PO\} \neq \emptyset$ .*

This means a  $\{DR, PO\}$  disjunctive network is *trivially arc-consistent*: every domain is either  $\{DR\}$ ,  $\{PO\}$ , or  $\{DR, PO\}$ , and composing any two non-empty domains produces a non-empty result. By the patchwork property [9], the network therefore has a globally consistent atomic refinement whenever every domain is non-empty.

This is the central simplification: *checking that each type pair has a non-empty  $\{DR, PO\}$ -safe set suffices for cross-edge consistency*. No full path-consistency computation is needed.

## A.6. The Cover-Tree Tableau

### A.6.1. Algorithm overview

The cover-tree tableau searches for a *valid type set*: a finite set  $T \subseteq \text{Tp}(C_0)$  of Hintikka types that contains a root type realizing  $C_0$  and satisfies four conditions:

- (CT1) **Demand closure**: every existential demand  $\exists R.D$  in every  $\tau_i \in T$  has an  $R$ -safe witness  $\tau_j \in T$  with  $D \in \tau_j$ .
- (CT2) **Cross-edge consistency**: every pair  $\tau_i, \tau_j \in T$  has either  $\text{Safe}(\tau_i, \tau_j) \cap \{PP, PPI\} \neq \emptyset$  (tree-relatable) or  $\text{Safe}(\tau_i, \tau_j) \cap \{DR, PO\} \neq \emptyset$  (cross-relatable).
- (CT3) **Cover-tree sibling compatibility**: for each type  $\tau_i$  with multiple DR/PO demands, the witnesses can be jointly assigned such that every witness pair satisfies  $\text{comp}(\text{inv}(R_m), R_{m'}) \cap \{DR, PO\} \cap \text{Safe}_{DR/PO}(\tau_{j_m}, \tau_{j_{m'}}) \neq \emptyset$ .
- (CT4) **Composition propagation**: for each type with multiple demands of *any* role combination, witnesses  $\tau_{j_1}, \tau_{j_2}$  must satisfy  $\text{comp}(\text{inv}(R_1), R_2) \cap \text{Safe}(\tau_{j_1}, \tau_{j_2}) \neq \emptyset$ .

The algorithm terminates because  $|\text{Tp}(C_0)| \leq 2^{|\text{cl}(C_0)|}$  is finite, and the type set grows monotonically during the search.

### A.6.2. How blocking works

The crucial difference from naïve tableau approaches is the *separation of layers*:

- The **tree layer** (PP/PPI) handles ancestor/descendant demands. Since PP/PPI form a tree, standard tree-model arguments apply: blocking via *rank- $d$  signatures* (the type information visible within modal depth  $d = \text{md}(C_0)$ ) yields a finite representation.
- The **cross layer** (DR/PO) handles demands for disconnected or partially overlapping regions. Because the cross-edge network uses only  $\{DR, PO\}$ —which is trivially arc-consistent—the cross-layer check reduces to a simple pairwise non-emptiness condition (CT2), not a global consistency computation.

Naïve blocking fails because it tries to handle both layers simultaneously: the tree structure provides natural blocking, but the cross-edges to distant nodes keep changing, preventing a match. The cover-tree tableau sidesteps this by *not* blocking on cross-edge context—instead, it verifies cross-edge consistency as a separate, global check on the finite type set.

**Example A.6.1** (A concept that defeats naïve blocking but works with cover trees). Consider  $C_0 = \exists \text{PO}.A \sqcap \exists \text{PP}.\neg B \sqcap \forall \text{DR}.A$ . In a naïve tableau, the PP-child needs further expansion; blocking requires matching both the label *and* the triangle neighborhood (relations to the PO-witness and all other nodes). Since the PO-witness forces DR-relations to the PP-child’s subtree (via  $\text{comp}(\text{PO}, \text{PP}) = \{\text{DR}, \text{PO}, \text{PP}\}$ ), the cross-edge context keeps evolving.

In the cover-tree tableau: the PP-witness is an ancestor in the tree, the PO-witness is a cross-edge in a sibling subtree. The  $\forall \text{DR}.A$  fires only on DR-related nodes—the ancestor is PP-related (not DR), so no conflict. The type set  $T$  needs a type for the root (containing  $C_0$ ), one for the PO-witness (containing  $A$ ), and one for the PP-witness (containing  $\neg B$ ). Cross-edge consistency (CT2) checks that every pair has a non-empty safe set in  $\{\text{DR}, \text{PO}\}$ —a one-time pairwise check, not an evolving context.

**Example A.6.2** (Implicit PP via composition forcing). The concept

$$X = \exists \text{DR}.\exists \text{PO}.C \sqcap \forall \text{DR}.\neg C \sqcap \forall \text{PO}.\neg C \sqcap \forall \text{PP}.X$$

contains no  $\exists \text{PP}$  demand, yet it requires an infinite model with forced PP edges.

A node  $r$  satisfying  $X$  has a DR-neighbor  $a$  (with  $\exists \text{PO}.C$ ) and  $a$ ’s PO-neighbor  $b$  (with  $C$ ). By Table 1, the relation between  $r$  and  $b$  lies in  $\text{comp}(\text{DR}, \text{PO}) = \{\text{DR}, \text{PO}, \text{PP}\}$ . But  $r$  has  $\forall \text{DR}.\neg C$  and  $\forall \text{PO}.\neg C$ , and  $b \in C$ —so DR and PO are blocked, leaving *only* PP. The PP edge is **forced** by composition plus universal filtering, with no explicit  $\exists \text{PP}$  in the concept.

Since  $r \text{ PP } b$ , node  $b$  is an *ancestor* of  $r$  in the cover tree. The recursive  $\forall \text{PP}.X$  forces  $b$  to also satisfy  $X$ , creating its own  $\text{DR} \rightarrow \text{PO}$  chain and forcing yet another PP-ancestor above it:

$$r \text{ PP } b \text{ PP } b' \text{ PP } b'' \text{ PP } \dots$$

The model is necessarily infinite. The cover-tree tableau handles this finitely: the type for  $C$ -elements can serve as its own PP-ancestor (different domain elements, same abstract state), so a three-element type set  $\{\tau_0(C, X), \tau_1(\neg C, \exists \text{PO}.C), \tau_2(\neg C, \text{root})\}$  represents the infinite model.

This pattern—PP edges arising purely from composition and universal filtering—is a distinctive feature of  $\mathcal{ALCI}_{RCC5}$  and illustrates why the complete-graph semantics require careful handling of implicit spatial constraints.

**Example A.6.3** (The “PO-loop”: 2-element SAT via symmetric cycles). Naïve reasoning suggests

$$Y = C \sqcap \exists \text{PO}.\exists \text{PO}.C \sqcap \forall \text{PO}.\neg C \sqcap \forall \text{DR}.\neg C \sqcap \forall \text{PP}.\neg C \sqcap \forall \text{PPI}.\neg C$$

should be unsatisfiable: any witness chain  $d \text{ PO } a \text{ PO } b$  with  $b \in C$  needs  $\rho(d, b) \in \text{comp}(\text{PO}, \text{PO}) = \{\text{DR}, \text{PO}, \text{PP}, \text{PPI}, \text{EQ}\}$ , and the four universals  $\forall R.\neg C$  seem to block every non-EQ option (each forces  $b \in \neg C$ , yet  $b \in C$ ).

But  $Y$  is in fact **satisfiable**, via the two-element model  $\{d, a\}$  with  $C^{\mathcal{I}} = \{d\}$  and  $\rho(d, a) = \text{PO}$ . Because PO is symmetric ( $\text{PO}(d, a) \Rightarrow \text{PO}(a, d)$ ), the chain  $d \text{ PO } a \text{ PO } d$  loops back to the root itself: the “third node” of the  $\exists \text{PO}.\exists \text{PO}.C$  formula is  $d$ , under strong EQ identity. Two syntactic positions in the nested existential map to the same semantic element.

The universals  $\forall R.\neg C$  constrain  $d$ ’s *outgoing*  $R$ -neighbours (the sole PO-neighbour  $a \in \neg C$  satisfies them), but they do **not** prevent  $d$  from *being* a PO-neighbour of  $a$ : the witness for  $a$ ’s  $\exists \text{PO}.C$  is  $d$  itself, and  $a$  has no  $\forall \text{PO}$ -constraint forbidding  $C$ -neighbours. This asymmetry between “constraints on my neighbours” and “constraints on what I may be a neighbour of” is peculiar to symmetric roles (PO, DR). The cover-tree tableau correctly reports  $Y$  as satisfiable.

**Example A.6.4** (“Clash-out to EQ”: genuine UNSAT via strong EQ). The complementary pattern

$$Z = C \sqcap \exists \text{PO}.\exists \text{PO}.\neg C \sqcap \forall \text{PO}.C \sqcap \forall \text{DR}.C \sqcap \forall \text{PP}.C \sqcap \forall \text{PPI}.C$$

is unsatisfiable, and the reason is instructive. The chain  $d \text{ PO } a \text{ PO } c$  forces  $a \in C$  (via  $\forall \text{PO}.C$  at  $d$ ) and  $c \in \neg C$  (via  $\exists \text{PO}.\neg C$  at  $a$ ). The relation  $\rho(d, c)$  must lie in  $\text{comp}(\text{PO}, \text{PO}) = \{\text{DR}, \text{PO}, \text{PP}, \text{PPI}, \text{EQ}\}$ . The four universals  $\forall R.C$  at  $d$  (for  $R \in \{\text{DR}, \text{PO}, \text{PP}, \text{PPI}\}$ ) each require  $c \in C$ , contradicting  $c \in \neg C$ , hence *all four non-EQ options are blocked*. Only EQ remains.

Under **strong EQ semantics** (EQ = identity),  $\rho(d, c) = \text{EQ}$  forces  $d = c$ , yielding  $d \in C \wedge d \in \neg C$  and a clash. The PO-loop escape of Example A.6.3 does not apply here: the endpoint  $c$  requires  $\neg C$  while  $d$  has  $C$ , so  $d \neq c$  is forced semantically, and the universals then close every non-EQ composition entry.

This example illustrates why *strong* EQ semantics is essential for our undecidability- and decidability-proof machinery. Under weak EQ (equivalence-class) semantics, collapsing  $d$  and  $c$  would not immediately clash, and one would need additional machinery (equality propagation, congruence-closure) to derive the same conclusion. The strong reading is also the one built into the composition tables used in Renz & Nebel’s patchwork theorem.

**Remark A.6.5** (Reasoners and tools: a cross-validation suite). This paper references three Python tools used in the companion implementations; before the incompleteness below we fix their roles. The **cover-tree tableau** (`cover_tree_tableau.py`, Section A.6) is the main candidate decision procedure—the only tool whose soundness and completeness are claimed for  $\mathcal{ALCI}_{\text{RCC5}}$  satisfiability, resting on the patchwork property of RCC5 and the companion completeness-extraction argument. The **quasimodel reasoner** [37] (`alcircc5_reasoner.py`, with cycle-aware wrapper `alcircc5_reasoner_cyclic.py`) is a constructive bottom-up quasimodel search based on disjunctive path-consistency; it is used *only* as a cross-validation oracle for the cover-tree tableau, not as a step of any decidability argument. The **independent model verifier** (`model_verifier.py`) grounds SAT answers in concrete finite RCC5 models, separately checking inverse symmetry, composition consistency on all triples, type-safety, existential witnessing, and recursive concept truth. The three tools together form a cross-validation suite around the cover-tree tableau: cover-tree produces the candidate verdict, the quasimodel reasoner offers an independent opinion, and the model verifier anchors SAT answers in explicit models. The remark below describes a known incompleteness of the quasimodel reasoner that does *not* affect the cover-tree tableau or the decidability claim.

**Remark A.6.6** (Known incompleteness of the quasimodel reasoner — does *not* affect the decidability claim). The two examples above form a useful cross-validation pair, and revealed an incompleteness in the constructive quasimodel reasoner (`alcircc5_reasoner.py`). The reasoner *incorrectly* reports Example A.6.3 (Y) as UNSAT, while the cover-tree tableau correctly reports SAT. The root cause is the role-path compatibility check: for every chain  $g \rightarrow_R j \rightarrow_S w$  it requires  $\text{comp}(\text{inv}(S), \text{inv}(R)) \cap \text{Safe}(w, g) \neq \emptyset$ , treating  $w$  as a fresh node in a tree unfolding. When  $w$  may equal  $g$  itself (via symmetric roles, under strong-EQ identification), this check is too strict—the quasimodel implementation implicitly assumes tree models, whereas  $\mathcal{ALCI}_{\text{RCC5}}$  admits cyclic models that trees cannot represent. The cover-tree tableau handles such cases through back-edges. The concepts wrongly rejected are exactly those whose satisfiability requires a cycle through a symmetric relation.

*Scope.* The reasoner is used as a cross-validation oracle, not as a step of the decidability proof. The decidability argument goes through the cover-tree tableau together with the split-forest semantics and the completeness-extraction paper, and does *not* reference `alcircc5_reasoner.py`. SAT answers from the baseline reasoner remain sound; UNSAT answers are sound only for concepts whose satisfiability can be witnessed by a tree model.

*Fix and re-validation.* A surgical patch admits the cycle-close case  $w = g$  whenever  $(\text{inv}(S), \text{inv}(R)) \in \{(\text{DR}, \text{DR}), (\text{PO}, \text{PO}), (\text{PP}, \text{PPI}), (\text{PPI}, \text{PP})\}$ —exactly the four composition pairs in the full RCC5 table that admit EQ, equivalently  $S = \text{inv}(R)$ . Algebraic soundness: a cycle  $g \rightarrow_R j \rightarrow_S g$  closes iff  $\text{EQ} \in \text{comp}(R, S)$ . The patch is available as an opt-in `cycle_close=True` flag on



the baseline, with `alcircc5_reasoner_cyclic.py` as a thin wrapper that enables it; the baseline’s default behaviour is preserved for cross-validation throughput. A 7-case adversarial suite (`test_cyclic_reasoner.py`) covering PO-loop, DR-loop, PP/PPI and PPI/PP cycles, the PP-PP non-cycle, clash-to-EQ, and a PO-loop variant with distinguishing universal confirms that the cycle-aware reasoner matches the cover-tree tableau on every case. Re-running the original 911-concept cross-validation (`stress_test_cyclic.py`) with the cycle-aware reasoner as the quasimodel oracle yields 911/911 matches, zero mismatches, in approximately 46 seconds—recovering the earlier cross-validation claim with a reasoner that is known-complete on cyclic-via-symmetric-role SAT patterns.

**Remark A.6.7 (Previously-undetected cover-tree unsoundness on PP/PPI-transitive universals** — fixed April 18, 2026). On April 18, 2026, Opus 4.7 (Anthropic) pointed out that the cover-tree tableau implementation (`cover_tree_tableau.py`) wrongly reported SAT for the concept  $\forall PP.\neg C \sqcap \exists PP.\exists PP.C$ , which is genuinely UNSAT. The reason is transitivity of PP: since  $\text{comp}(PP, PP) = \{PP\}$ , the chain  $d \rightarrow_{PP} a \rightarrow_{PP} b$  forces  $d \rightarrow_{PP} b$ , so  $\forall PP.\neg C$  at  $d$  forces  $\neg C(b)$ , clashing with  $C(b)$  at the end of the existential chain. The quasimodel baseline reasoner handled this correctly via its disjunctive path-consistency loop; the cover-tree tableau did not, because it treats PP/PPI as tree edges and skips path-consistency for them.

*Root cause.* The shared helper `compute_safe( $\tau, \sigma$ )` propagated the *body*  $D$  of every  $\forall R.D \in \tau$  into  $\sigma$ , but did not propagate the universal  $\forall R.D$  itself. For the two transitive base relations ( $R \in \{PP, PPI\}$ , where  $\text{comp}(R, R) = \{R\}$ ), failing to propagate the universal means grandchildren escape the constraint. This is a calculus-level gap, not a narrow coding slip: the tableau statement silently relied on a stronger `safe` relation than the one it articulated.

*Fix.* Standard transitive-role trick (as in  $\mathcal{ALCH}_{tr}$ ): when  $R \in \{PP, PPI\}$ , `safe( $\tau, \sigma$ )` now requires  $\forall R.D \in \sigma$  (not just  $D \in \sigma$ ) for every  $\forall R.D \in \tau$ . Because `compute_safe` is shared, both the cover-tree tableau and both quasimodel reasoners benefit from the fix; the quasimodel reasoners already produced the right answers on these cases (via path-consistency), so the tightened `safe` does not change their observed behaviour, only makes the closure of the underlying type relation strictly correct. Soundness of the propagation is immediate: if  $\forall PP.D$  holds at  $x$  and  $PP(x, y)$ , then by PP-transitivity every PP-successor of  $y$  is a PP-successor of  $x$ , hence satisfies  $D$ ; so  $\forall PP.D$  holds at  $y$ .

*Scope and tests.* The decidability argument as a mathematical statement is unaffected; the completeness direction (model  $\Rightarrow$  valid quotient) inherits the propagation for free from the semantics (a valid RCC5 model respects PP-transitivity by definition). The soundness direction (valid quotient  $\Rightarrow$  model) is where the gap lived, and is repaired by the fix. The upstream split-forest calculus paper already handles this correctly via its  $All^\uparrow/All^\downarrow$  slots and the rules ( $\forall PP\text{-prop}$ ), ( $\forall PPI\text{-prop}$ ), which copy the bodies of  $\forall PP$  and  $\forall PPI$  universals across every tree step and carry the obligation to all strict ancestors/descendants. The companion implementation paper (`cover_tree_tableau_ALCIRCC5.tex`) uses a simpler direct-Safe formulation and has been amended to include the transitive-universal propagation in Definition 3.2 explicitly. The 911-concept cross-validation continues to match 911/911 before and after the fix—the  $\forall R.(\dots) \sqcap \exists R.\exists R.(\text{conflict})$  pattern for  $R \in \{PP, PPI\}$  simply was not exercised by the existing generators. Three regression cases (`pp-transitivity-depth-2`, `pp-transitivity-depth-3`, `ppi-transitivity-depth-2`) have been added to `test_cyclic_reasoner.py`; all three resolve UNSAT under every reasoner after the fix.

**Remark A.6.8 (Broader cover-tree unsoundness: the  $4 \times 4$  grid of three-type chains** — fixed April 18, 2026). Shortly after the PP/PPI transitivity fix, Opus 4.7 produced an adversarial review paper (`review_paper/`) revealing a *systematic family* of twelve counterexamples not addressed by the narrow `compute_safe` patch alone. For each pair  $(R_1, R_2)$  of RCC5 base relations with  $R_2 \neq \text{inv}(R_1)$ , the concept

$$C_{R_1, R_2} \equiv \exists R_1.\exists R_2.A \sqcap \bigwedge_{R \in \text{comp}(R_1, R_2)} \forall R.\neg A$$

is unsatisfiable: a chain  $g \xrightarrow{R_1} j \xrightarrow{R_2} w$  with  $A \in w$  forces  $g$  to relate to  $w$  by some relation in  $\text{comp}(R_1, R_2)$ , and every such relation is barred at  $g$ . The PP/PPI fix handles only the two transitive self-

compositions  $(R_1, R_2) = (PP, PP)$  and  $(PPI, PPI)$ ; ten other cells (e.g.  $(PP, DR)$ :  $\text{comp}(PP, DR) = \{DR\}$ ,  $(DR, PPI)$ :  $\text{comp}(DR, PPI) = \{DR\}$ ,  $(PO, PP)$ :  $\text{comp}(PO, PP) = \{PO, PP\}$ , ...) remained unsound.

*Root cause.* The cover-tree’s tree-cross interaction check (Phase 4 of `cover_tree_tableau_ALCIRCC5.tex`) performs a pairwise check at a *single* source type, but does nothing for chains that thread through three distinct types where every intermediate type carries a single demand. The `check_tree_cross_interaction` routine literally short-circuits via `if len(all_dems) <= 1: continue`, so the grandchild constraint is never propagated upward. The baseline quasimodel reasoner avoids this because its `check_role_path_compatibility` routine iterates a fixpoint over all three-type chains, pruning witness candidates whose grandchildren have no valid return path.

*Fix.* We ported `check_role_path_compatibility` into `cover_tree_tableau.py` (with the strong-EQ cycle-close clause for the four EQ-admitting composition pairs, which preserves the three cyclic-SAT concepts `po-loop-depth-2`, `dr-loop-depth-2`, `pp-ppi-cycle`). This is documented in the companion paper as Phase 5 / condition (CT5). After the fix, the full  $4 \times 4$  grid reports UNSAT on exactly the twelve predicted cells and SAT on the four EQ-admitting cells, matching the cycle-aware quasimodel reasoner. The 911-concept cross-validation and the 775-concept decomposition test continue to match. The pre-existing 35 built-in tests and 10-case adversarial cyclic suite all pass unchanged.

*Why the decidability argument is unaffected.* As in the transitive-universal fix, the mathematical decidability argument (split-forest extraction, König’s-lemma unfolding, Henkin model construction) is unaffected: a valid RCC5 model respects  $\text{comp}(R_1, R_2)$  by definition, so the completeness direction (model  $\Rightarrow$  valid type set) inherits the check for free. The soundness direction is where the gap lived; Phase 5 closes it explicitly. The upstream split-forest calculus paper (`papers/trees/`) already handles three-type chains via its disjunctive-network path-consistency, so no change is needed there.

*Round-2 reassessment.* Opus 4.7 subsequently re-audited the post-fix repository in a second conversation and constructed a fresh adversarial suite: 12 Round-1 counterexamples (all now UNSAT in cover-tree), 25+ targeted families (L/M/N/O/Q/F plus EQ-admitting boundary cases), and 300 pseudo-random depth-3/4 concepts across two seeds, for 400+ tests total, cross-validated against the cycle-aware quasimodel reasoner. 0 mismatches. The reviewer *withdrew* the Round-1 soundness-failure claim with respect to the current repository state (see `review_paper/review_cover_tree_tableau.tex`, §10 and the harness in `review_paper/test/`). The decidability statement itself was never in question since the Round-1 defects were localised to the cover-tree implementation code, not the split-forest / completeness-extraction argument that underpins the decidability theorem.

### A.6.3. What makes this “non-standard”

The cover-tree tableau differs from a standard DL tableau calculus in several fundamental ways:

1. **No completion graph.** Standard tableaux build a completion graph node by node, applying expansion rules until saturation or clash. The cover-tree tableau searches over *sets of types* (abstract states), not concrete graph structures. It is closer to a type-elimination or automata-theoretic approach.
2. **No explicit blocking rule.** Standard tableaux have an explicit blocking condition that compares nodes during expansion. The cover-tree tableau achieves finiteness *structurally*: the search space is the powerset of  $\text{Tp}(C_0)$ , which is already finite.
3. **Global side-checker.** The cross-edge constraints (CT2–CT4) are checked globally over the entire type set, not locally during node expansion. This is what avoids the blocking dilemma: cross-edge consistency is a property of the type set as a whole, not of individual nodes.
4. **Existential demands go to ALL existing types.** In a standard tableau,  $\exists R.D$  generates one new  $R$ -neighbor. In the cover-tree tableau, the witness can be *any* type already in  $T$ —including

the root type itself. This reflects the complete-graph semantics: every domain element is related to every other.

#### A.6.4. Soundness and completeness

**Soundness** (valid type set  $\Rightarrow$  satisfiable concept): Given a valid type set  $T$ , a model is constructed as follows. First, build a tree of type instances satisfying all PP/PPI demands (tree layer). Then, assign DR/PO relations between sibling-subtree nodes to satisfy all cross-edge demands. The patchwork property of RCC5 [9] guarantees that the resulting disjunctive  $\{\text{DR}, \text{PO}\}$  network has a globally consistent atomic refinement (since it is trivially arc-consistent by Proposition A.5.3). The full construction was formalized by GPT-5.4 [22].

**Completeness** (satisfiable concept  $\Rightarrow$  valid type set): Given a model  $\mathcal{I} \models C_0$ , construct a cover-tree presentation and extract rank- $d$  states. A first attempt at writing this out as *completeness extraction v1* [26] (April 2026) was reviewed in May 2026 by GPT-5.5 and found to contain two structural defects: a Hasse construction that fails on infinite PP-chains (e.g.  $C_{\uparrow} \equiv \exists \text{PP}.\top \sqcap \forall \text{PP}.\exists \text{PP}.\top$ ), and a witness conflation in the  $C5$  triple-coherence proof. The same review found that adjacent material in the v1 sibling-interface paper [22] carries the same defects: Def 1.5 (split-tree presentation) requires an ambient root, Def 1.7 ( $\text{Wit}_k$ ) puts PP/PPI existentials in the witness menu, and the Thm 1.20 proof sketch asserts but does not construct support-closed tables. These adjacent defects are addressed by the *sibling-interface delta paper v2* [23] (May 2026, 10 pages). This is explicitly a *delta* paper: it does not re-prove Thms 1.17–1.19 (those proofs continue to live only in v1 [22]); it instead replaces v1 Def 1.5 (parent self-loops, no ambient root, generated witness-cover edges), v1 Def 1.7 (PP/PPI existentials by reachability discharge over the parent graph, not witness-menu slots), drops the v1 Thm 1.20 proof sketch (delegating model-to-quotient to the completeness-extraction v2 paper below), and shows by two preservation lemmas that v1’s proofs of Thms 1.17–1.19 carry over verbatim under the new definitions. Both files are therefore active in the chain: v1 supplies the soundness proofs, v2 sibling acts as a delta over the surrounding definitions. *Completeness extraction v2* [25] (May 2026, 17 pages) repairs both v1 defects via seven concrete fixes: pass to a witness-generated submodel (no density / no ambient-root dependence); use generated cover edges (selected witness-cover edges) rather than semantic Hasse covers; permit self-loops on the parent function of the finite quotient (so ultimately periodic ancestor trunks are first-class); make containment orientation explicit (parent = proper superpart); replace raw pair-tables by support-closed mosaics (joint atomic networks over triples, fixing the  $C5$  conflation); add an explicit typed-EQ congruence axiom; and discharge transitive PP/PPI eventualities by *finite-graph reachability* on the finite quotient—no Büchi acceptance and no  $\omega$ -language machinery. The crucial observation behind (R7) is that GPT-5.5’s cycle-realization condition reduces to ordinary reachability over the finite quotient:  $\exists \text{PP}.D \in \lambda(\sigma)$  requires  $D \in \lambda(\sigma')$  for some  $\sigma'$  reachable from  $\sigma$  along parent edges (including self-loops). Combined with the soundness chain above, this yields a valid finite quotient, hence a valid type set.


**A note on scope.** The soundness and completeness statements above are theorems about the *split-forest semantics*, not about the implementation in §A.6. The cover-tree tableau described in §A.6 is an algorithmic *realization* of this theory—a concrete check set (CT1–CT5) arrived at by simplification and, in the case of CT5, by empirical counterexample analysis from Opus 4.7’s adversarial review—not a formal translation of the valid-quotient conditions into code. Formal equivalence between the implementation and the split-forest semantics is a separate claim, empirically supported but not yet proved. The companion implementation paper [28] discusses this theory-vs-implementation split in detail.

#### A.6.5. Computational evidence


The algorithm is implemented in approximately 350 lines of Python [28, 36]. Cross-validation against an independent quasimodel-based reasoner [37, 38] on **911 test concepts** (50 known SAT, 13 known UNSAT, 36 adversarial, 512 systematic triples, 200 random depth-2, 100 random depth-3) yields **zero**

**mismatches** [41, 42, 43]. A decomposition test [40] confirms that **775/775 SAT concepts (100%)** have finite cover-tree models, with 12.2 M total models enumerated and **zero genuine counterexamples**. Models produced by the tableau are independently replayed by a standalone verifier [39].

Additionally, a GIS taxonomy computation [44] applies the cover-tree tableau to a realistic  $\mathcal{ALCI}_{RCC5}$  ontology from Wessel’s original report [15]: 18 spatio-thematic concepts (countries, cities, rivers, lakes) connected by RCC5 spatial relations. The tableau reproduces **all 21/21 expected subsumptions**, including non-trivial inferences like  $\text{Hamburg} \sqsubseteq \text{GermanCity}$  that require RCC5 composition reasoning through spatial role chains. Figure 1 shows the original computed taxonomy from Wessel’s report [15].

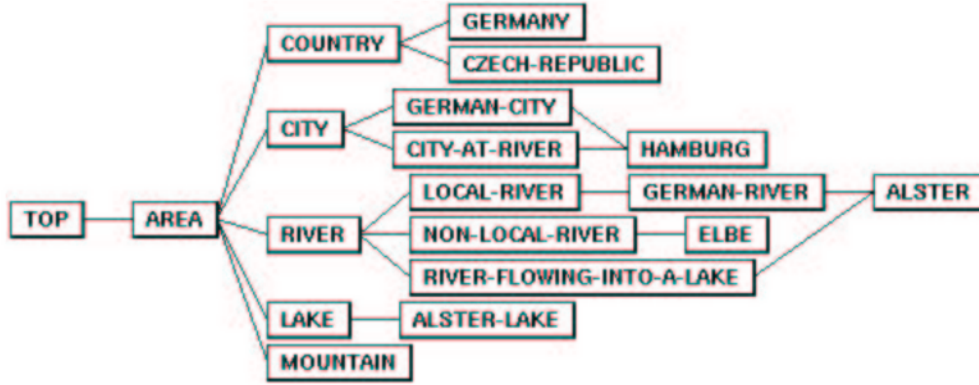

**Figure 1:** Computed taxonomy of the GIS example TBox from Wessel [15], Figure 6. The cover-tree tableau reproduces all 21 subsumption edges, including non-trivial spatial inferences such as  $\text{Hamburg} \sqsubseteq \text{GermanCity}$  (requiring RCC5 composition propagation through the PO-chain Hamburg–Alster–AlsterLake).

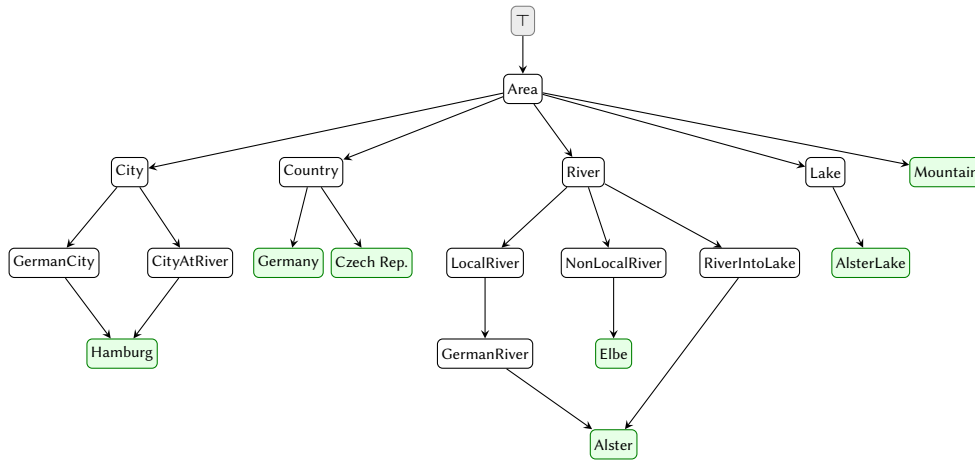

**Figure 2:** Taxonomy of the GIS example TBox, computed by the cover-tree tableau [44]. Green nodes are leaf concepts (most specific). Note the DAG structure: *Alster* has two parents (*GermanRiver* and *RiverIntoLake*) and *Hamburg* has two parents (*GermanCity* and *CityAtRiver*). All 21 subsumption edges match Figure 1.

## A.7. Outlook and Conclusion

### A.7.1. What has been achieved

If the cover-tree tableau is correct—and the extensive computational evidence supports this—then concept satisfiability in  $\mathcal{ALCI}_{RCC5}$  is decidable. This would settle a problem that has been open since Wessel’s doctoral work in 2002/2003 and was explicitly flagged by Lutz & Wolter in 2006 as “perhaps the most interesting” open problem suggested by their work.

The decidability argument rests on four papers, which fall into two distinct layers:

**Theoretical layer (establishes decidability).**

1. The *split-forest semantics* [22] (GPT-5.4): defines the cover-tree decomposition, proves the finite-index lemma, and constructs models from valid quotients (soundness direction).
2. The *completeness extraction v2* [25] (Claude, May 2026; supersedes v1 [26] after a GPT-5.5 review found two structural defects): closes the model-to-quotient gap, proving that every satisfiable concept admits a valid finite quotient. The repair uses witness-generated submodels, generated cover edges, support-closed mosaics, and finite-graph reachability discharge—no Büchi acceptance is needed.

Together, (1) and (2) establish:  $C_0$  is satisfiable iff it admits a valid finite rank- $d$  quotient. The space of such quotients is finite and effectively searchable, so  $\mathcal{ALCI}_{RCC5}$  concept satisfiability is decidable.

**Operational layer (algorithmic realization, empirically validated).**

3. The *cover-tree tableau* [24] (GPT-5.4): packages the split-forest approach as an operational calculus with rank- $d$  blocking.
4. The *implementation paper* [28] (Claude): documents a concrete five-check algorithm (CT1–CT5), cross-validated against an independent quasimodel reasoner on 911 original tests plus 400+ Round-2 adversarial tests with zero mismatches.

**The gap between the two layers.** The decidability claim for  $\mathcal{ALCI}_{RCC5}$  rests on (1) and (2) alone. Papers (3) and (4) describe a *plausible and empirically validated* algorithmic realization, but a formal derivation showing that CT1–CT5 exactly capture the valid-quotient conditions has not been written. CT5 in particular was added as a patch after Opus 4.7’s adversarial review—not derived from the split-forest semantics—and while empirical agreement between two independently designed reasoners is strong evidence that such a derivation should be possible, it is not itself a proof. See [28, §7] for a detailed breakdown.

### A.7.2. What remains open

- **Exact complexity.** The PO-coherent fragment has a doubly exponential quotient bound (2-EXPTIME) [29]. An EXPTIME upper bound matching the lower bound is not established.
- $\mathcal{ALCI}_{RCC8}$ . RCC8 also has the patchwork property, so the cover-tree approach should extend. The key difference is the TPP/NTPP distinction, which may require a finer status partition. This has not been worked out.
- **Human verification.** *None of the proofs in this project have been verified by human domain experts.* The AI-generated results should be treated as conjectures supported by computational evidence, not as established theorems.

### A.7.3. A note on the process

To our knowledge, this is the first time that AI systems have produced a complete decidability proof (proposed) for an open problem in description logic theory. The division of labor was:

- **Human (Wessel):** Posed the problem in 2002/2003. Provided the key intuitions (PPI-tree orientation, EQ-splitting, DR-rigidity observation). Guided the AI search process, identified errors, and corrected conceptual mistakes (e.g., that PP is not an open cross-edge).
- **AI (GPT-5.4):** Formalized the split-forest semantics and tableau calculus in two papers.



- **AI (Claude):** Implemented the algorithm, ran extensive cross-validation, closed the completeness gap, and wrote companion papers including this overview.

If the results withstand expert scrutiny, this work demonstrates that AI can contribute meaningfully to open problems in mathematical logic—not by replacing human insight, but by amplifying it with formalization capacity, implementation speed, and exhaustive computational testing. The human provided the direction; the machines did the heavy lifting.

We invite the description logic community to review, challenge, and—if warranted—confirm or refute these results.

#### A.7.4. A note on citation verification

Because AI systems are known to hallucinate bibliographic references, all external citations in this paper and its companion papers were verified via web search against journal landing pages, CEUR-WS/LIPICs/arXiv metadata, and indexed proceedings. The audit caught one fully hallucinated reference (the non-existent “Rybina–Zakharyashev 2001”—the genuine paper at that venue is Reynolds and Zakharyashev, *On the products of linear modal logics*, JLC 11(6), 2001) and several transcription errors (incorrect coauthors, page ranges, venues, and journal names). All fixes are documented in the project’s CONVERSATION.md log with commit hashes. Citations in this paper have been checked, but readers should still verify any reference before citing it.

## Declaration on Generative AI

During the preparation of this work, the authors used Claude (Anthropic, Opus 4) and GPT-5.4 Pro (OpenAI) in order to: formalize mathematical proofs, implement decision procedures, generate LaTeX manuscripts, and conduct computational experiments. Michael Wessel reviewed and edited the content as needed and takes full responsibility for the publication’s content. The entire research project—problem formulation, key intuitions, error identification, and direction of the investigation—was conducted by Wessel; the AI systems performed the detailed formalization, implementation, and writing.

## References

- [1] A. G. Cohn. Modal and non modal qualitative spatial logics. In F. D. Anger, H. W. Guesgen, and J. van Benthem, editors, *Proceedings of the Workshop on Spatial and Temporal Reasoning*, IJCAI, 1993.
- [2] V. Haarslev, R. Möller, and C. Schröder. Combining spatial and terminological reasoning. In B. Nebel and L. S. Dreschler-Fischer, editors, *KI-94: Advances in Artificial Intelligence, 18th Annual German Conference on Artificial Intelligence*, Lecture Notes in Computer Science, pages 142–153. Springer, 1994. [https://doi.org/10.1007/3-540-58467-6\\_13](https://doi.org/10.1007/3-540-58467-6_13)
- [3] C. Schröder and B. Neumann. On the logics of image interpretation: model-construction in a formal knowledge-representation framework. In *Proc. 1996 International Conference on Image Processing (ICIP 1996)*, pages 785–788. IEEE Computer Society, 1996. <https://doi.org/10.1109/ICIP.1996.561022>
- [4] V. Haarslev and M. Wessel. GenEd: An editor with generic semantics for formal reasoning about visual notations. In *Proc. 12th IEEE Symposium on Visual Languages (VL ’96)*. IEEE Press, 1996.
- [5] V. Haarslev and R. Möller. SBox: A qualitative spatial reasoner — progress report. In L. Ironi, editor, *Proc. 11th International Workshop on Qualitative Reasoning (QR’97)*, Cortona, Tuscany, Italy, June 3–6, 1997.
- [6] V. Haarslev, C. Lutz, and R. Möller. Foundations of spatioterminological reasoning with description logics. In *Proc. 6th International Conference on Principles of Knowledge Representation and Reasoning (KR’98)*, pages 112–123, 1998.
- [7] V. Haarslev, C. Lutz, and R. Möller. A description logic with concrete domains and a role-forming predicate operator. *Journal of Logic and Computation*, 9(3):351–384, 1999.

- [8] R. Möller and M. Wessel. Terminological default reasoning about spatial information: A first step. In *Proc. 1999 International Conference on Spatial Information Theory (COSIT 1999)*. Springer-Verlag, 1999.
- [9] J. Renz and B. Nebel. On the complexity of qualitative spatial reasoning: A maximal tractable fragment of the Region Connection Calculus. *Artificial Intelligence*, 108(1–2):69–123, 1999.
- [10] M. Wessel. Obstacles on the way to spatial reasoning with description logics: Undecidability of  $\mathcal{ALC}_{\mathcal{RA}}^{\ominus}$ . Technical Report FBI-HH-M-297/00, Fachbereich Informatik, Universität Hamburg, 2000. <https://github.com/lambdamikel/alcircc5/blob/master/papers/report4.pdf>
- [11] M. Wessel. Decidable and undecidable extensions of  $\mathcal{ALC}$  with composition-based role inclusion axioms. Technical Report FBI-HH-M-301/01, Fachbereich Informatik, Universität Hamburg, 2000. <https://github.com/lambdamikel/alcircc5/blob/master/papers/report5.pdf>
- [12] M. Wessel. Obstacles on the way to qualitative spatial reasoning with description logics: some undecidability results. In *Proceedings of the 2001 Description Logic Workshop (DL 2001)*, CEUR Workshop Proceedings, vol. 49, 2001.
- [13] M. Wessel. Undecidability of  $\mathcal{ALC}_{\mathcal{RA}}$ . Technical Report FBI-HH-M-302/01, Fachbereich Informatik, Universität Hamburg, 2001. <https://github.com/lambdamikel/alcircc5/blob/master/papers/report6.pdf>
- [14] M. Wessel. On spatial reasoning with description logics — position paper. In *Proceedings of the 2002 International Workshop on Description Logics (DL 2002)*, CEUR Workshop Proceedings, 2002.
- [15] M. Wessel. Qualitative spatial reasoning with the  $\mathcal{ALCI}_{RCC}$  family — first results and unanswered questions. Technical Report FBI-HH-M-324/03, Fachbereich Informatik, Universität Hamburg, 2002/2003. <https://github.com/lambdamikel/alcircc5/blob/master/papers/report7.pdf>
- [16] M. Wessel. Some practical issues in building a hybrid deductive geographic information system with a DL component. In *Proc. 10th International Workshop on Knowledge Representation Meets Databases (KRDB 2003)*, CEUR Workshop Proceedings, vol. 79, 2003.
- [17] C. Lutz and F. Wolter. Modal logics of topological relations. *Logical Methods in Computer Science*, 2(2):1–41, 2006.
- [18] F. Baader, D. Calvanese, D. McGuinness, D. Nardi, and P. Patel-Schneider, editors. *The Description Logic Handbook: Theory, Implementation, and Applications*. Cambridge University Press, 2nd edition, 2007.
- [19] T. Tao and T. Klowden. Mathematical methods and human thought in the age of AI. arXiv:2603.26524, March 2026.
- [20] D. E. Knuth. Claude’s cycles. Stanford Computer Science Department, 28 February 2026 (revised 14 April 2026). <https://www-cs-faculty.stanford.edu/~knuth/papers/claude-cycles.pdf>
- [21] M. Wessel. Split-tree forest model intuition for  $\mathcal{ALCI}_{RCC5}$ : PPI chains as trees, DR/PO as sibling cross-edges, DR propagating rigidly downward. Whiteboard sketch, photograph taken 7 April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/20260407\\_062616.jpg](https://github.com/lambdamikel/alcircc5/blob/master/20260407_062616.jpg)
- [22] GPT-5.4 (OpenAI), prompted by M. Wessel. Split-forest models and sibling-interface descriptors for  $\mathcal{ALCI}_{RCC5}$  (v1; soundness Thms 1.17–1.19 preserved by v2; Def 1.5 / Def 1.7 / Thm 1.20-sketch superseded by v2). Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/trees/sibling\\_interface\\_descriptors\\_ALCIRCC5\\_completed\\_eqsync\\_canonical\\_needpatched.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/trees/sibling_interface_descriptors_ALCIRCC5_completed_eqsync_canonical_needpatched.pdf)
- [23] Claude (Anthropic), prompted by M. Wessel. Sibling-interface descriptors for  $\mathcal{ALCI}_{RCC5}$  (v2, repaired): preserves the v1 soundness chain (Thms 1.17–1.19) verbatim and reinterprets v1 Def 1.5 (parent self-loops, generated witness-cover edges), v1 Def 1.7 (PP/PPI existentials by reachability discharge), and v1 Thm 1.20-sketch (model-to-quotient delegated to v2 completeness extraction). Technical report, May 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/trees/sibling\\_interface\\_descriptors\\_ALCIRCC5\\_v2.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/trees/sibling_interface_descriptors_ALCIRCC5_v2.pdf)
- [24] GPT-5.4 (OpenAI), prompted by M. Wessel. A cover-tree tableau calculus for  $\mathcal{ALCI}_{RCC5}$ . Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/trees/alcircc5\\_cover\\_tree\\_tableau\\_needall\\_patched.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/trees/alcircc5_cover_tree_tableau_needall_patched.pdf)
- [25] Claude (Anthropic), prompted by M. Wessel. Completeness extraction for  $\mathcal{ALCI}_{RCC5}$  (v2, re-

- paired): closing the model-to-quotient gap via witness-generated submodels, generated covers, and reachability discharge. Technical report, May 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/completeness\\_extraction\\_ALCIRCC5\\_v2.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/completeness_extraction_ALCIRCC5_v2.pdf)
- [26] Claude (Anthropic), prompted by M. Wessel. Completeness extraction for the  $\mathcal{ALCI}_{RCC5}$  split-forest quotient (v1, superseded; defects identified by GPT-5.5 review). Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/completeness\\_extraction\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/completeness_extraction_ALCIRCC5.pdf)
  - [27] GPT-5.5 (OpenAI), prompted by M. Wessel. A coherent generated split-forest decidability argument for  $\mathcal{ALCI}_{RCC5}$  (Büchi-automaton route). Technical report, May 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/gpt5.5/ALCIRCC5\\_coherent\\_generated\\_split\\_forest\\_decidability.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/gpt5.5/ALCIRCC5_coherent_generated_split_forest_decidability.pdf)
  - [28] Claude (Anthropic), prompted by M. Wessel. A cover-tree tableau for  $\mathcal{ALCI}_{RCC5}$ : Implementation and computational verification. Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/cover\\_tree\\_tableau\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/cover_tree_tableau_ALCIRCC5.pdf)
  - [29] Claude (Anthropic), prompted by M. Wessel. A two-tier quotient construction for the PO-coherent fragment of  $\mathcal{ALCI}_{RCC5}$ : decidability and a 2-EXPTIME bound. Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/two\\_tier\\_quotient\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/two_tier_quotient_ALCIRCC5.pdf)
  - [30] Claude (Anthropic), prompted by M. Wessel. A negative result on the finite-witness conjecture for the contextual tableau for  $\mathcal{ALCI}_{RCC5}$ . Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/FW\\_proof\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/FW_proof_ALCIRCC5.pdf)
  - [31] GPT-5.4 (OpenAI), prompted by M. Wessel. Triangle-blocking analysis for  $\mathcal{ALCI}_{RCC5}$ : failed undecidability route via three-region coincidence. Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/triangle\\_blocking\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/triangle_blocking_ALCIRCC5.pdf)
  - [32] Claude (Anthropic), prompted by M. Wessel. Patchwork-augmentation probe: a negative result on an undecidability route for  $\mathcal{ALCI}_{RCC5}$ . Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/patchwork\\_augmentation\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/patchwork_augmentation_ALCIRCC5.pdf)
  - [33] Claude (Anthropic), prompted by M. Wessel. A typed-patchwork counterexample for  $\mathcal{ALCI}_{RCC5}$ : refutation of a proposed blocking mechanism. Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/typed\\_patchwork\\_counterexample\\_ALCIRCC5.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/typed_patchwork_counterexample_ALCIRCC5.pdf)
  - [34] Claude (Anthropic), prompted by M. Wessel. Response to GPT-5.4's blocking-based undecidability attempts for  $\mathcal{ALCI}_{RCC5}$ . Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/response\\_to\\_gpt\\_blocking.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/response_to_gpt_blocking.pdf)
  - [35] Claude (Anthropic), prompted by M. Wessel. Status of the  $\mathcal{ALCI}_{RCC5}$  decidability argument after the FW negative result. Technical report, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/papers/ALCI\\_RCC5\\_status\\_after\\_FW.pdf](https://github.com/lambdamikel/alcircc5/blob/master/papers/ALCI_RCC5_status_after_FW.pdf)
  - [36] Claude (Anthropic), prompted by M. Wessel. Cover-tree tableau reasoner for  $\mathcal{ALCI}_{RCC5}$ . Python implementation, April 2026. The main candidate decision procedure; cross-validated against the quasimodel oracle on 911 concepts and on the 775-case decomposition suite. [https://github.com/lambdamikel/alcircc5/blob/master/src/cover\\_tree\\_tableau.py](https://github.com/lambdamikel/alcircc5/blob/master/src/cover_tree_tableau.py)
  - [37] Claude (Anthropic), prompted by M. Wessel. A quasimodel-based reasoner for  $\mathcal{ALCI}_{RCC5}$ . Python implementation, April 2026. Retained as a cross-validation oracle only: SAT answers are trustworthy; UNSAT answers are known-incomplete on cyclic-via-symmetric-role concepts (e.g. the PO-loop pattern). [https://github.com/lambdamikel/alcircc5/blob/master/src/alcircc5\\_reasoner.py](https://github.com/lambdamikel/alcircc5/blob/master/src/alcircc5_reasoner.py)
  - [38] Claude (Anthropic), prompted by M. Wessel. Cycle-aware wrapper for the  $\mathcal{ALCI}_{RCC5}$  quasimodel reasoner. Python implementation, April 2026. Thin wrapper that detects cyclic-via-symmetric-role patterns and delegates to a direct model search; restores the 911/911 cross-validation match rate. [https://github.com/lambdamikel/alcircc5/blob/master/src/alcircc5\\_reasoner\\_cyclic.py](https://github.com/lambdamikel/alcircc5/blob/master/src/alcircc5_reasoner_cyclic.py)
  - [39] Claude (Anthropic), prompted by M. Wessel. Independent model verifier for  $\mathcal{ALCI}_{RCC5}$  SAT answers. Python implementation, April 2026. Checks inverse symmetry, composition-consistency on all triples, type-safety, existential witnessing, and recursive concept truth against explicit finite RCC5 models. [https://github.com/lambdamikel/alcircc5/blob/master/src/model\\_verifier.py](https://github.com/lambdamikel/alcircc5/blob/master/src/model_verifier.py)

- [40] Claude (Anthropic), prompted by M. Wessel. Cover-tree decomposition test for  $\mathcal{ALCI}_{RCC5}$  (775/775). Python test suite, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/src/decomposition\\_test.py](https://github.com/lambdamikel/alcircc5/blob/master/src/decomposition_test.py)
- [41] Claude (Anthropic), prompted by M. Wessel. Cross-validation stress test for the  $\mathcal{ALCI}_{RCC5}$  cover-tree tableau against the baseline quasimodel reasoner (911 concepts). Python test suite, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/src/stress\\_test\\_cover\\_tree.py](https://github.com/lambdamikel/alcircc5/blob/master/src/stress_test_cover_tree.py)
- [42] Claude (Anthropic), prompted by M. Wessel. Cross-validation stress test against the cycle-aware quasimodel reasoner (911 concepts; zero mismatches). Python test suite, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/src/stress\\_test\\_cyclic.py](https://github.com/lambdamikel/alcircc5/blob/master/src/stress_test_cyclic.py)
- [43] Claude (Anthropic), prompted by M. Wessel. Seven-case adversarial suite for the cycle-aware  $\mathcal{ALCI}_{RCC5}$  reasoner (PO-loop, DR-loop, mixed-loop, clash-to-EQ, and distinguishing-universal variants). Python test suite, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/src/test\\_cyclic\\_reasoner.py](https://github.com/lambdamikel/alcircc5/blob/master/src/test_cyclic_reasoner.py)
- [44] Claude (Anthropic), prompted by M. Wessel. GIS taxonomy computation for  $\mathcal{ALCI}_{RCC5}$ . Python implementation, April 2026. [https://github.com/lambdamikel/alcircc5/blob/master/src/gis\\_taxonomy.py](https://github.com/lambdamikel/alcircc5/blob/master/src/gis_taxonomy.py)
- [45] M. Wessel (with Claude Opus 4.7 and GPT-5.4 Pro).  $\mathcal{ALCI}_{RCC5}$  decidability project repository. GitHub, 2026. <https://github.com/lambdamikel/alcircc5> (See README.md for the overall argument, the blocked-reduction landscape, and the summary of failed undecidability attempts.)
- [46] M. Wessel (with Claude Opus 4.7 and GPT-5.4 Pro). Outdated and superseded material: failed blocking attempts and retracted approaches for  $\mathcal{ALCI}_{RCC5}$ . GitHub, 2026. <https://github.com/lambdamikel/alcircc5/blob/master/OUTDATED.md>
- [47] Anthropic. Claude Opus 4.7. Large language model, 2026. <https://www.anthropic.com/claude>
- [48] OpenAI. GPT-5.4 Pro. Large language model, 2026. <https://openai.com>