

Appendix

A RegEx Pattern for URL Extraction

The URL extraction pipeline relies on a comprehensive regular expression designed to capture a wide range of URL formats encountered in scholarly documents, including standard web URLs, protocol-specific resources, domain-only references, authenticated URLs, IP-based addresses, Unicode domain names, ports, and resource paths.

URL Extraction RegEx Pattern

```
url_pattern = re.compile(r'''(?xi)
\b(?:
  (?:https?|ftp|file|data|javascript|mailto|tel|git|ssh|magnet)://
  | www\d{0,3}[.]
  | [a-z0-9.-]+\.[a-z]{2,4}/
)
(?:\S+(?:\S*)?@)?
(?:
  (?!(?:10|127)(?:\.\d{1,3}){3})
  (?!(?:169\.254|192\.168)(?:\.\d{1,3}){2})
  (?!(?:172\.(?:1[6-9]|2\d|3[0-1])(?:\.\d{1,3}){2})
  (?!(?:[1-9]\d?|1\d\d|2[01]\d|22[0-3])
  (?:\.(?:1?\d{1,2}|2[0-4]\d|25[0-5])){2}
  (?:\.(?:[1-9]\d?|1\d\d|2[0-4]\d|25[0-4]))
)
|
(?:
  (?:
    [a-z0-9\u00a1-\uffff]
    [a-z0-9\u00a1-\uffff_]{0,62}
  )?
  [a-z0-9\u00a1-\uffff]\.
)*
(?:[a-z\u00a1-\uffff]{2,}\.?)
)
(?:\:\d{2,5})?
(?:[/\?#][^s]*)?
\b
''')
```

The pattern supports multiple URL schemes (e.g., HTTP(S), FTP, SSH, Git, Mailto, and Magnet links), domain-only references, IPv4 addresses, Unicode hostnames, optional authentication credentials, port numbers, and arbitrary resource paths. Private and local network ranges are excluded to reduce false positives arising from non-public addresses embedded in documents.

B Three-Dimensional URL Complexity Taxonomy

To support the fine-grained diagnosis of extraction failures discussed in the main text, this appendix details our three-dimensional taxonomy for characterizing URL complexities. The extraction and annotation of URLs in scholarly PDFs must account for a wide range of structural, physical, and representational challenges. Consequently, we categorize these challenges into three distinct dimensions—Lexicographical, Spatial, and Representational—providing a standardized framework for evaluating extraction performance.

B.1 Lexicographical Complexity

This dimension refers to the structural complexity of the URL based on its inherent components.

- **URLs with schemes:** URLs containing standard protocol identifiers.

<http://www.pardus.at>
<https://github.com/ghif/drcn>

- **URLs with subdomains:** URLs structured with additional domain prefixes.

<http://infoscience.epfl.ch/record/204670>

- **URLs with port numbers:** URLs explicitly defining a network port.

<http://intranet.corp.com:1080>

- **URLs with Unicode characters:** URLs containing non-ASCII characters.

es.wikipedia.org/wiki/Lincoln_Díaz-Balart

- **URLs with paths, query strings, and fragments:** Complex URLs pointing to specific resources or tracking parameters.

<http://cdsweb.cern.ch/search?p=LHCb-PUB...>

- **URLs with escape characters:** URLs utilizing percent-encoding for spaces or special characters.

<http://www.cse.ust.hk/%7Eyinz/htl4ic.zip>

- **URLs without scheme:** Bare domains without HTTP/HTTPS/FTP prefixes.

thelawdictionary.org | aaai.org

- **URLs with trailing slashes:** URLs terminating with a forward slash.

<http://webhome.cs.uvic.ca/~dmaslov/>

B.2 Spatial Complexity

This dimension refers to how the URL is physically represented and positioned within the layout of the document.

- **Split across lines or pages:** URLs broken across multiple lines or spanning two pages due to document formatting.

<https://sencanada.ca/content/sen/Committee/402/popu/rep/rephealthjun09-e.pdf>

- **Embedded in layout elements:** URLs situated in specific document regions such as footnotes, figure/table captions, or references.

Caption Example: "...An animated evolution of this network can be seen at <http://www.youtube.com/user/complexsystemsvienna>"

B.3 Representational Complexity

This dimension addresses how the URL is technically stored, displayed, or obfuscated within the document’s structure.

- **Hidden in annotation layers or metadata:** URLs stored in the PDF’s clickable annotation layer or document metadata, but not necessarily visible as plain text.

Clickable text "arXiv: 1605.01082" linking to:
<http://arxiv.org/abs/1605.01082>

- **Embedded in visual media:** URLs that exist entirely as part of an image or encoded within a QR code.

<https://www.nutrient.io/blog/barcode-ocr/>

- **Shortened URLs that redirect:** URLs utilizing external shortening services that mask the true destination.

<http://ow.ly/BqCf30jqffN> | <https://goo.gl/sX2Apb>

C VLM and LLM Prompt Specifications

This section details the exact prompt configurations utilized for the Vision-Language Model (VLM) and Large Language Model (LLM) extraction workflows.

C.1 Vision-Language Model (VLM) Prompt Design

For page-image extraction across open-source VLMs, models were evaluated using a zero-shot prompt template.

VLM Page-Image Extraction Prompt

You are an expert URL extractor. Your task is to identify all URLs in the provided page image.

Rules:

1. Only output URLs. Do NOT include any extra text or commentary.
2. Each URL must be on a separate line.
3. Include URLs in headers, footers, tables, or broken across multiple lines.
4. Reconstruct any URLs broken across lines.
5. Ignore all other text on the page.
6. Do not summarize or explain anything.

Output example:

<https://example.com/page>
<http://domain.org/path?query>
<www.site.net/index.html>

C.2 Large Language Model (LLM) Prompt Design

Text-based URL extraction from the compiled TEXTWAL content was processed via structured API calls configured at temperature zero.

LLM TEXTWAL Extraction Prompt

You are an expert data extraction assistant. Your goal is to analyze the provided academic paper content and extract every unique URL and DOI link found within the text.

Extraction Rules

1. ****Scope**:** Extract URLs from the main body, footnotes, references, metadata, and tables.
2. ****Reconstruction**:** If a URL is split across two lines or contains a hyphen due to text wrapping (e.g., ``https://example.com/sub-`` on one line and ``directory`` on the next), reconstruct it into a single, continuous string.
3. ****DOIs**:** Include Digital Object Identifiers. If a DOI is provided as a raw string (e.g., ``10.1038/s41586-020-2012-7``), format it as a full URL: ``https://doi.org/[DOI]``.
4. ****Validation**:** Ensure the links are complete. Remove trailing punctuation (like periods or closing parentheses) that are not part of the actual web address.
5. ****De-duplication**:** Provide only unique URLs.

Output Format

Return ONLY a valid JSON array of strings. Do not include introductory text, explanations, or Markdown code blocks.

Format: `[`https://url1.com`, `https://url2.org`]`

Content to Analyze

`{content}`

D OADS URL Categorization Taxonomy

To support the fine-grained distribution metrics presented in the main text (Section ??), this appendix details the definitions and contextual examples for the six-class Open Access Data and Software (OADS) taxonomy adapted from Salsabil et al. This taxonomy classifies ground-truth URLs based on their provenance, ownership, and functional role within scholarly work.

- **1. Third-Party Dataset (TPD):** This category includes URLs linking to datasets that are generated, managed, and distributed by entities independent of the data users or authors of the publications. In these scenarios, *authors have used already available data*.

Contextual Example: “The NPI dataset was downloaded from <https://openpsychometrics.org/>.”

- **2. Third-Party Software (TPS):** URLs in this category link to software, programming scripts, source code, or computational tools developed, maintained, and distributed by entities separate from the software users or authors of the publications.

Contextual Example: “Venn diagrams were created using VENNY 2.0.2 (<http://bioinfogp.cnb.icsc.es/tools/venny/index.html>).”

- **3. Author-Provided Dataset (APD):** This category contains links to datasets featured, generated, or cited in the academic

publication that are directly provided and hosted by the authors of those specific publications. In these cases, *authors have prepared their own data*.

Contextual Example: “Our dataset of C projects is publicly available at <https://utexas.box.com/icsme2014-practice>.”

- **4. Author-Provided Software (APS):** URLs in this category point directly to source code, specialized implementations, libraries, or operational tools developed and shared explicitly by the authors of the target publication.

Contextual Example: “Our implementation is free software and can be found online (<https://github.com/SnippyHollow/OpeningTech/>).”

- **5. Project:** This unified category encompasses complex repositories or landing hubs containing an integrated mix of both datasets and software, or supporting experimental frameworks.

Contextual Example: “The source codes, datasets, and documents are released in our github repository (<http://github.com/graphbig/graphBIG>).”

- **6. General URL (GenURL):** A non-OADS baseline category capturing all administrative, informational, contextual, or baseline URLs that link to resources other than specialized research datasets, software frameworks, or digital project repositories.

Contextual Example: “The study was approved by the french national bodies responsible for ethics and privacy, the “commission nationale de l’informatique et des libertés” (cnil, <http://www.cnil.fr>) and the “comit de protection des personnes” (<http://www.cppsudest2.com/>) of the hospital.”

Table 8: Prevalance of OADS URL categories in the annotated URLs.

OADS URL Category	# URLs	%
Third Party Dataset (TPD)	146	6.24%
Third Party Software (TPS)	207	8.85%
Author Provided Dataset (APD)	19	0.81%
Author Provided Software (APS)	16	0.68%
Project	100	4.28%
General URL (GenURL, non-OADS)	1,850	79.13%
Total	2,338	100.00%

E Statistical Testing

Since labeled ground truth was available for only 200 papers, all reported performance metrics are accompanied by statistical uncertainty estimates. We apply a three-tier inference framework to support principled comparison across format variants and combinations.

E.1 Statistical Unit and Paired Design

The statistical unit for all tests is the individual paper (`arxiv_id`). For each paper we compute per-document precision, recall, and F1 scores for every format variant and combination. Sampling is conducted at the document level to preserve pairing across file formats, ensuring that each format is evaluated on an identical set of documents.

E.2 Bootstrap Confidence Intervals

We estimate 95% confidence intervals for precision, recall, and F1 via paired bootstrap resampling. For each method, we resample the 200-paper document set with replacement for $B = 10,000$ iterations, recomputing the corpus-level metric in each iteration. The 2.5th and 97.5th percentiles of the bootstrap distribution form the reported 95% CI. Bootstrap CIs are reported for all entries in the main combination table (Table ??) in the compact form metric [lower, upper]. Paired bootstrap resampling preserves within-paper correlations across formats, yielding valid CIs for union-combination methods.

E.3 Friedman Test for Global Format Comparison

To test whether any statistically significant difference exists in Recall performance across the six single-format variants simultaneously, we apply a Friedman test (non-parametric repeated-measures ANOVA). The Friedman test treats per-paper Recall scores as the response variable and format variant as the within-subject factor, and the test is applied independently to two metrics: All-URL Recall and OADS Recall. A significant result ($p < 0.05$) confirms that at least one format variant systematically differs from the others, providing statistical justification for the pairwise comparisons that follow.

We prefer the Friedman test over a parametric Repeated Measures ANOVA (RM-ANOVA) for two reasons specific to our experimental structure. First, RM-ANOVA assumes that the outcome variable is approximately normally distributed within each condition, whereas per-paper recall values are strictly bounded in $[0, 1]$ and typically exhibit bimodal skew, with mass concentrated near 0 and 1 rather than a symmetric distribution. Second, because scores are compressed against the $[0, 1]$ ceiling and floor, arithmetic means and standard deviations become systematically distorted by boundary effects; by ranking scores within each paper rather than using raw values, the Friedman test is robust to both distributional violations and boundary constraints.

E.4 Wilcoxon Signed-Rank Tests for Pairwise Comparisons

Following a significant Friedman result, we perform pairwise Wilcoxon signed-rank tests on per-paper Recall scores, comparing each of the 62 remaining format combinations to the best-performing single-format baseline for that metric. This ensures that significance reflects improvement beyond the strongest single-format result, rather than a weaker or arbitrary reference. The Wilcoxon signed-rank test is preferred over a paired t -test because per-paper recall distributions are non-normal, violating the normality assumption on which the t -test’s validity depends. The signed-rank test is

further preferred over an unpaired alternative such as the Mann-Whitney U test because per-paper scores are inherently paired by document: each paper is evaluated under both the baseline format and the candidate combination, and exploiting this within-paper pairing yields substantially greater statistical power than treating the two score sets as independent samples, an advantage that is meaningful at $n = 200$. Beyond these distributional considerations, the Wilcoxon signed-rank test assesses the sign and relative magnitude of per-paper differences rather than their raw arithmetic values, preventing individual papers with unusually large performance gaps from disproportionately driving significance decisions.

We control the family-wise error rate (FWER) using the Holm-Bonferroni step-down correction across all 62 pairwise comparisons per metric. Unlike the more conservative Bonferroni correction, which applies a uniform penalty of α/m to every one of the m comparisons simultaneously, Holm-Bonferroni ranks all p -values from smallest to largest and applies sequentially decreasing corrections, halting once a comparison fails to reach the adjusted threshold. This step-down approach maintains strict FWER control at $\alpha = 0.05$ while preserving markedly greater statistical power for the most significant comparisons, a meaningful difference when evaluating 62 format combinations against a single baseline. Holm-corrected p -values and effect sizes (matched-pairs rank-biserial correlation r) for all comparisons are reported in Table ?? and Appendix F; results are summarized using significance markers (* $p < 0.05$, ** $p < 0.01$, *** $p < 0.001$, ns = not significant).

F Comprehensive Format-Combination Evaluation Results

This appendix provides the exhaustive evaluation results for all 63 possible format combinations utilized in our URL extraction pipeline, expanding upon the representative subsets highlighted in the main text.

F.1 Evaluation Parameters and Metrics

Performance is benchmarked against the full ground-truth corpus consisting of 2,338 valid total URLs (#V) and a specialized subset of 488 Open Access Data and Software (OADS) URLs (#VO). For every format combination, we report three core performance metrics: Precision (P), Recall (R), and the F_1 -Score (F_1). To ensure statistical rigor and account for document-level variances, variability is reported via bootstrap 95% confidence intervals [95% CI] enclosed in brackets. These intervals are computed using paired document-level resampling over $B = 10,000$ iterations.

F.2 Reading the Table

The comprehensive results are organized by format grouping, with the highest-performing configuration within each operational group highlighted in **bold**. For comparative baselines, combinations mirroring previous-study configurations (e.g., LaTeX + HTML + XML combinations) are designated with a dagger symbol (†).

Statistical significance testing is performed against the highest-performing single-format baseline using a two-sided Wilcoxon signed-rank test. To counteract the risk of Type I errors resulting from multiple pairwise evaluations, p -values are adjusted using the Holm-Bonferroni correction framework, annotated as follows:

- *** $p < 0.001$ (Highly significant performance variance)
- ** $p < 0.01$ (Statistically significant)
- * $p < 0.05$ (Marginally significant)
- ns = not significant ($p \geq 0.05$)

G Error Analysis: Format-Specific Failure Modes

Table 9 consolidates the characteristic failure modes across formats. The most practically consequential finding is the *complementarity* of failure modes: plain text and TEXTWAL fail predominantly on spatial and representational complexity; XML on document location (body text vs. references); LaTeX on macro convention; Markdown on layout edge cases; VLMs on content they cannot visually resolve. This complementarity is precisely the mechanism by which multi-format combinations (Section ??) achieve recall substantially above any single format. Practitioners should audit their target corpus for the failure modes most likely to be present—complex layouts, annotation-heavy workflows, or scanned content—and select format combinations to specifically address those failure modes.

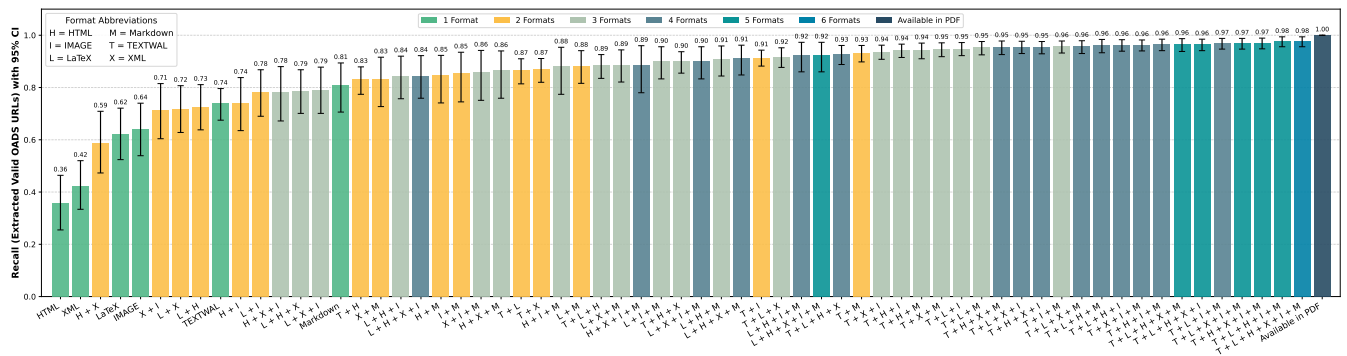


Figure 8: URL extraction performance across all 63 format combinations for all valid OADS URLs, ordered by recall. The X-axis represents the format combinations, where single-format scenarios are labeled by their full name (e.g., XML, HTML, IMAGE for Qwen2-VL), and multi-format combinations are abbreviated. The "Available in PDF" category serves as the ground truth. Error bars represent 95% confidence intervals.

Table 9: Characteristic failure modes by format. Values are reported as *misses/ground truth* (percentage). Ground-truth counts are: References (1781), Title & Authors (185), Methodology (171), Results & Discussion (72), Introduction (40), Related Work (24), Header (21), Abstract (14), Footer (12); embedded references (1727), embedded footnotes (275), split across lines (419), embedded captions (12), split across pages (8); hidden annotations (1295), metadata (79); scheme URLs (2285), path/query URLs (2080).

Format	Spatial & Representational Failure	Lexicographical Highlights	Regional Distribution
TEXTWAL	Embedded references: 241/1727 (14.0%); embedded footnotes: 116/275 (42.2%); hidden annotations: 168/1295 (13.0%).	Scheme URLs: 433/2285 (18.9%); path/-query URLs: 278/2080 (13.4%).	References: 252/1781 (14.1%); Title & Authors: 81/185 (43.8%); Methodology: 39/171 (22.8%).
HTML	Hidden annotations: 817/1295 (63.1%); embedded references: 1052/1727 (60.9%); split lines: 231/419 (55.1%).	Scheme URLs: 1466/2285 (64.2%); path/-query URLs: 1351/2080 (65.0%).	References: 1077/1781 (60.5%); Title & Authors: 169/185 (91.4%); Methodology: 121/171 (70.8%).
XML	Hidden annotations: 1266/1295 (97.8%); embedded references: 1152/1727 (66.7%); embedded footnotes: 251/275 (91.3%).	Scheme URLs: 1620/2285 (70.9%); path/-query URLs: 1475/2080 (70.9%).	References: 1188/1781 (66.7%); Title & Authors: 185/185 (100%); Methodology: 141/171 (82.5%).
LaTeX	Hidden annotations: 868/1295 (67.0%); embedded references: 785/1727 (45.5%); embedded footnotes: 109/275 (39.6%).	Scheme URLs: 1131/2285 (49.5%); path/-query URLs: 1010/2080 (48.6%).	References: 818/1781 (45.9%); Title & Authors: 181/185 (97.8%); Methodology: 51/171 (29.8%).
Markdown	Hidden annotations: 718/1295 (55.4%); embedded references: 583/1727 (33.8%); embedded footnotes: 77/275 (28.0%).	Scheme URLs: 843/2285 (36.9%); path/-query URLs: 738/2080 (35.5%).	References: 600/1781 (33.7%); Title & Authors: 173/185 (93.5%); Methodology: 24/171 (14.0%).
VLM (Qwen)	Hidden annotations: 1250/1295 (96.5%); embedded references: 1224/1727 (70.9%); split lines: 223/419 (53.2%).	Scheme URLs: 1507/2285 (66.0%); path/-query URLs: 1405/2080 (67.5%).	References: 1257/1781 (70.6%); Title & Authors: 181/185 (97.8%); Methodology: 48/171 (28.1%).

Table 10: URL extraction performance across all 63 format combinations. #V = valid URLs extracted; P [95% CI] = Precision with bootstrap 95% confidence interval; R [95% CI] = Recall with bootstrap 95% confidence interval ($B = 10,000$, paired document-level resampling); F1 [95% CI] = F1-Score with bootstrap 95% confidence interval. Best F1 and OADS Recall per group in bold; Sig. vs. best single-format (Wilcoxon, Holm–Bonferroni corrected): *** $p < 0.001$, ** $p < 0.01$, * $p < 0.05$, *ns*.

Format Combination	Valid URLs (All)						OADS URLs			
	#V	P [95% CI]	R [95% CI]	F1 [95% CI]	<i>p</i> -value	Sig.	#V	R [95% CI]	<i>p</i> -value	Sig.
TEXTWAL	1,887	0.60 [0.51,0.66]	0.81 [0.75,0.85]	0.69 [0.61,0.74]	-	<i>ns</i>	361	0.74 [0.68,0.80]	< 0.001	***
Markdown	1,474	0.69 [0.64,0.73]	0.63 [0.53,0.73]	0.66 [0.60,0.71]	0.309	<i>ns</i>	396	0.81 [0.71,0.89]	-	<i>ns</i>
LaTeX	1,174	0.74 [0.67,0.80]	0.50 [0.38,0.63]	0.60 [0.49,0.69]	< 0.001	***	304	0.62 [0.52,0.72]	< 0.001	***
HTML	827	0.49 [0.33,0.64]	0.35 [0.23,0.49]	0.41 [0.27,0.55]	< 0.001	***	174	0.36 [0.26,0.46]	< 0.001	***
IMAGE	789	0.11 [0.08,0.15]	0.34 [0.26,0.44]	0.17 [0.13,0.21]	< 0.001	***	313	0.64 [0.54,0.74]	0.010	**
XML	670	0.69 [0.63,0.74]	0.29 [0.22,0.38]	0.41 [0.33,0.50]	< 0.001	***	206	0.42 [0.33,0.52]	< 0.001	***
T + M	2,098	0.55 [0.48,0.62]	0.90 [0.86,0.92]	0.68 [0.62,0.74]	< 0.001	***	455	0.93 [0.90,0.96]	0.005	**
T + L	2,059	0.57 [0.50,0.63]	0.88 [0.84,0.91]	0.69 [0.63,0.75]	< 0.001	***	423	0.87 [0.81,0.91]	1.000	<i>ns</i>
T + I	2,059	0.21 [0.16,0.27]	0.88 [0.85,0.91]	0.34 [0.27,0.42]	< 0.001	***	446	0.91 [0.88,0.94]	0.330	<i>ns</i>
T + H	2,049	0.49 [0.42,0.55]	0.88 [0.84,0.91]	0.63 [0.57,0.68]	< 0.001	***	406	0.83 [0.77,0.88]	0.025	*
T + X	2,035	0.57 [0.49,0.63]	0.87 [0.83,0.90]	0.69 [0.62,0.74]	< 0.001	***	424	0.87 [0.82,0.91]	1.000	<i>ns</i>
H + M	1,767	0.54 [0.47,0.61]	0.76 [0.66,0.84]	0.63 [0.56,0.69]	1.000	<i>ns</i>	413	0.85 [0.74,0.92]	0.126	<i>ns</i>
L + M	1,741	0.66 [0.60,0.70]	0.74 [0.67,0.82]	0.70 [0.65,0.74]	1.000	<i>ns</i>	431	0.88 [0.82,0.94]	0.007	**
I + M	1,541	0.18 [0.14,0.23]	0.66 [0.56,0.77]	0.28 [0.23,0.35]	1.000	<i>ns</i>	417	0.85 [0.74,0.94]	0.005	**
X + M	1,523	0.62 [0.57,0.66]	0.65 [0.55,0.76]	0.63 [0.58,0.69]	1.000	<i>ns</i>	407	0.83 [0.73,0.92]	0.126	<i>ns</i>
L + H	1,471	0.54 [0.45,0.62]	0.63 [0.51,0.74]	0.58 [0.48,0.67]	< 0.001	***	355	0.73 [0.64,0.81]	0.003	**
L + I	1,369	0.17 [0.12,0.23]	0.59 [0.47,0.70]	0.26 [0.20,0.33]	0.071	<i>ns</i>	381	0.78 [0.69,0.87]	1.000	<i>ns</i>
H + I	1,348	0.16 [0.11,0.21]	0.58 [0.45,0.71]	0.25 [0.19,0.32]	0.075	<i>ns</i>	362	0.74 [0.64,0.84]	0.983	<i>ns</i>
L + X	1,312	0.66 [0.58,0.72]	0.56 [0.44,0.68]	0.61 [0.51,0.69]	< 0.001	***	350	0.72 [0.63,0.81]	0.069	<i>ns</i>
H + X	1,244	0.52 [0.41,0.62]	0.53 [0.40,0.67]	0.52 [0.41,0.64]	< 0.001	***	287	0.59 [0.47,0.71]	< 0.001	***
X + I	955	0.13 [0.10,0.16]	0.41 [0.32,0.53]	0.19 [0.15,0.24]	0.008	**	348	0.71 [0.60,0.81]	0.974	<i>ns</i>
T + H + M	2,174	0.46 [0.40,0.52]	0.93 [0.90,0.95]	0.62 [0.56,0.67]	< 0.001	***	460	0.94 [0.91,0.97]	0.003	**
T + H + I	2,157	0.20 [0.16,0.25]	0.92 [0.89,0.94]	0.33 [0.27,0.40]	< 0.001	***	460	0.94 [0.92,0.97]	0.069	<i>ns</i>
T + L + M	2,143	0.53 [0.46,0.59]	0.92 [0.89,0.94]	0.67 [0.61,0.72]	< 0.001	***	465	0.95 [0.93,0.98]	< 0.001	***
T + H + X	2,132	0.47 [0.41,0.53]	0.91 [0.88,0.94]	0.62 [0.56,0.67]	< 0.001	***	439	0.90 [0.85,0.94]	1.000	<i>ns</i>
T + I + M	2,130	0.21 [0.16,0.27]	0.91 [0.88,0.93]	0.34 [0.27,0.41]	< 0.001	***	467	0.96 [0.93,0.98]	< 0.001	***
T + X + M	2,129	0.52 [0.45,0.58]	0.91 [0.88,0.93]	0.66 [0.60,0.72]	< 0.001	***	462	0.95 [0.92,0.97]	0.001	**
T + L + I	2,128	0.21 [0.16,0.27]	0.91 [0.88,0.94]	0.35 [0.27,0.42]	< 0.001	***	463	0.95 [0.92,0.97]	0.002	**
T + L + H	2,125	0.47 [0.41,0.53]	0.91 [0.87,0.94]	0.62 [0.56,0.67]	< 0.001	***	432	0.89 [0.83,0.93]	1.000	<i>ns</i>
T + L + X	2,107	0.54 [0.47,0.60]	0.90 [0.86,0.93]	0.68 [0.61,0.73]	< 0.001	***	448	0.92 [0.88,0.95]	0.837	<i>ns</i>
T + X + I	2,099	0.21 [0.16,0.27]	0.90 [0.87,0.92]	0.34 [0.27,0.41]	< 0.001	***	457	0.94 [0.91,0.96]	0.015	*
L + H + M	1,867	0.52 [0.45,0.58]	0.80 [0.72,0.86]	0.63 [0.57,0.68]	1.000	<i>ns</i>	443	0.91 [0.84,0.96]	0.003	**
H + I + M	1,827	0.19 [0.14,0.24]	0.78 [0.68,0.86]	0.30 [0.24,0.37]	1.000	<i>ns</i>	430	0.88 [0.77,0.95]	0.001	**
H + X + M	1,809	0.50 [0.44,0.57]	0.77 [0.67,0.86]	0.61 [0.54,0.67]	1.000	<i>ns</i>	422	0.86 [0.76,0.94]	0.010	**
L + I + M	1,779	0.20 [0.15,0.25]	0.76 [0.69,0.83]	0.31 [0.25,0.38]	1.000	<i>ns</i>	439	0.90 [0.83,0.96]	0.001	**
L + X + M	1,757	0.60 [0.54,0.65]	0.75 [0.68,0.82]	0.67 [0.61,0.71]	1.000	<i>ns</i>	433	0.89 [0.82,0.94]	0.005	**
L + H + I	1,626	0.18 [0.13,0.23]	0.70 [0.58,0.81]	0.28 [0.22,0.35]	1.000	<i>ns</i>	411	0.84 [0.76,0.92]	1.000	<i>ns</i>
L + H + X	1,576	0.51 [0.43,0.58]	0.67 [0.55,0.78]	0.58 [0.49,0.66]	0.572	<i>ns</i>	384	0.79 [0.70,0.87]	1.000	<i>ns</i>
X + I + M	1,561	0.18 [0.14,0.23]	0.67 [0.56,0.78]	0.28 [0.22,0.34]	1.000	<i>ns</i>	420	0.86 [0.75,0.94]	0.004	**
H + X + I	1,446	0.16 [0.12,0.21]	0.62 [0.49,0.75]	0.26 [0.20,0.32]	1.000	<i>ns</i>	382	0.78 [0.67,0.88]	1.000	<i>ns</i>
L + X + I	1,399	0.17 [0.12,0.22]	0.60 [0.48,0.72]	0.26 [0.20,0.33]	0.514	<i>ns</i>	386	0.79 [0.70,0.88]	1.000	<i>ns</i>
T + H + I + M	2,204	0.20 [0.15,0.25]	0.94 [0.92,0.96]	0.33 [0.26,0.39]	< 0.001	***	471	0.96 [0.94,0.98]	< 0.001	***
T + L + H + M	2,202	0.44 [0.39,0.50]	0.94 [0.92,0.96]	0.60 [0.55,0.65]	< 0.001	***	469	0.96 [0.93,0.98]	< 0.001	***
T + H + X + M	2,202	0.44 [0.38,0.49]	0.94 [0.92,0.96]	0.60 [0.54,0.65]	< 0.001	***	466	0.95 [0.93,0.98]	< 0.001	***
T + L + H + I	2,191	0.20 [0.16,0.25]	0.94 [0.91,0.96]	0.33 [0.27,0.40]	< 0.001	***	470	0.96 [0.94,0.98]	0.001	**
T + H + X + I	2,184	0.20 [0.15,0.25]	0.93 [0.91,0.95]	0.33 [0.26,0.39]	< 0.001	***	466	0.95 [0.93,0.98]	0.008	**
T + L + H + X	2,169	0.45 [0.39,0.51]	0.93 [0.90,0.95]	0.61 [0.55,0.66]	< 0.001	***	453	0.93 [0.89,0.96]	0.692	<i>ns</i>
T + L + I + M	2,163	0.21 [0.16,0.26]	0.93 [0.90,0.95]	0.34 [0.27,0.41]	< 0.001	***	473	0.97 [0.95,0.99]	< 0.001	***
T + L + X + M	2,154	0.50 [0.43,0.56]	0.92 [0.89,0.94]	0.65 [0.58,0.70]	< 0.001	***	467	0.96 [0.93,0.98]	< 0.001	***
T + X + I + M	2,143	0.21 [0.16,0.26]	0.92 [0.89,0.94]	0.34 [0.27,0.41]	< 0.001	***	470	0.96 [0.94,0.98]	< 0.001	***
T + L + X + I	2,140	0.21 [0.16,0.26]	0.92 [0.88,0.94]	0.34 [0.27,0.41]	< 0.001	***	466	0.95 [0.93,0.98]	< 0.001	***
L + H + I + M	1,905	0.19 [0.15,0.24]	0.81 [0.74,0.88]	0.31 [0.25,0.37]	0.760	<i>ns</i>	451	0.92 [0.86,0.97]	< 0.001	***
L + H + X + M	1,883	0.48 [0.42,0.54]	0.81 [0.73,0.87]	0.60 [0.55,0.66]	1.000	<i>ns</i>	445	0.91 [0.85,0.96]	0.002	**
H + X + I + M	1,844	0.19 [0.14,0.23]	0.79 [0.69,0.87]	0.30 [0.24,0.36]	0.670	<i>ns</i>	433	0.89 [0.78,0.96]	< 0.001	***
L + X + I + M	1,784	0.19 [0.15,0.24]	0.76 [0.69,0.84]	0.31 [0.24,0.37]	1.000	<i>ns</i>	439	0.90 [0.83,0.96]	0.001	**
L + H + X + I	1,649	0.17 [0.13,0.22]	0.71 [0.59,0.81]	0.28 [0.22,0.35]	1.000	<i>ns</i>	412	0.84 [0.76,0.92]	1.000	<i>ns</i>
T + L + H + I + M	2,222	0.20 [0.15,0.24]	0.95 [0.93,0.97]	0.33 [0.26,0.39]	< 0.001	***	477	0.98 [0.96,0.99]	< 0.001	***
T + H + X + I + M	2,216	0.20 [0.15,0.24]	0.95 [0.93,0.96]	0.32 [0.26,0.39]	< 0.001	***	474	0.97 [0.95,0.99]	< 0.001	***
T + L + H + X + M	2,213	0.42 [0.37,0.47]	0.95 [0.93,0.96]	0.58 [0.53,0.63]	< 0.001	***	471	0.96 [0.94,0.99]	< 0.001	***
T + L + H + X + I	2,201	0.20 [0.15,0.24]	0.94 [0.92,0.96]	0.33 [0.26,0.39]	< 0.001	***	471	0.96 [0.94,0.98]	< 0.001	***
T + L + X + I + M	2,165	0.20 [0.15,0.26]	0.93 [0.90,0.95]	0.33 [0.26,0.40]	< 0.001	***	473	0.97 [0.95,0.99]	< 0.001	***
L + H + X + I + M	1,910	0.19 [0.14,0.23]	0.82 [0.74,0.88]	0.30 [0.24,0.37]	0.514	<i>ns</i>	451	0.92 [0.86,0.97]	< 0.001	***
T + L + H + X + I + M	2,224	0.19 [0.15,0.24]	0.95 [0.93,0.97]	0.32 [0.26,0.38]	< 0.001	***	477	0.98 [0.96,0.99]	< 0.001	***