
STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE APP 125.5 135.7
GIMHAE TWR 118.1 118.45

Note : Arrival under ICAO Flight Procedures.

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
RNAV APARU 1P RNAV KALEK 1P
RNAV INVOK 1P RNAV APELA 1P
RNAV PSN 1P

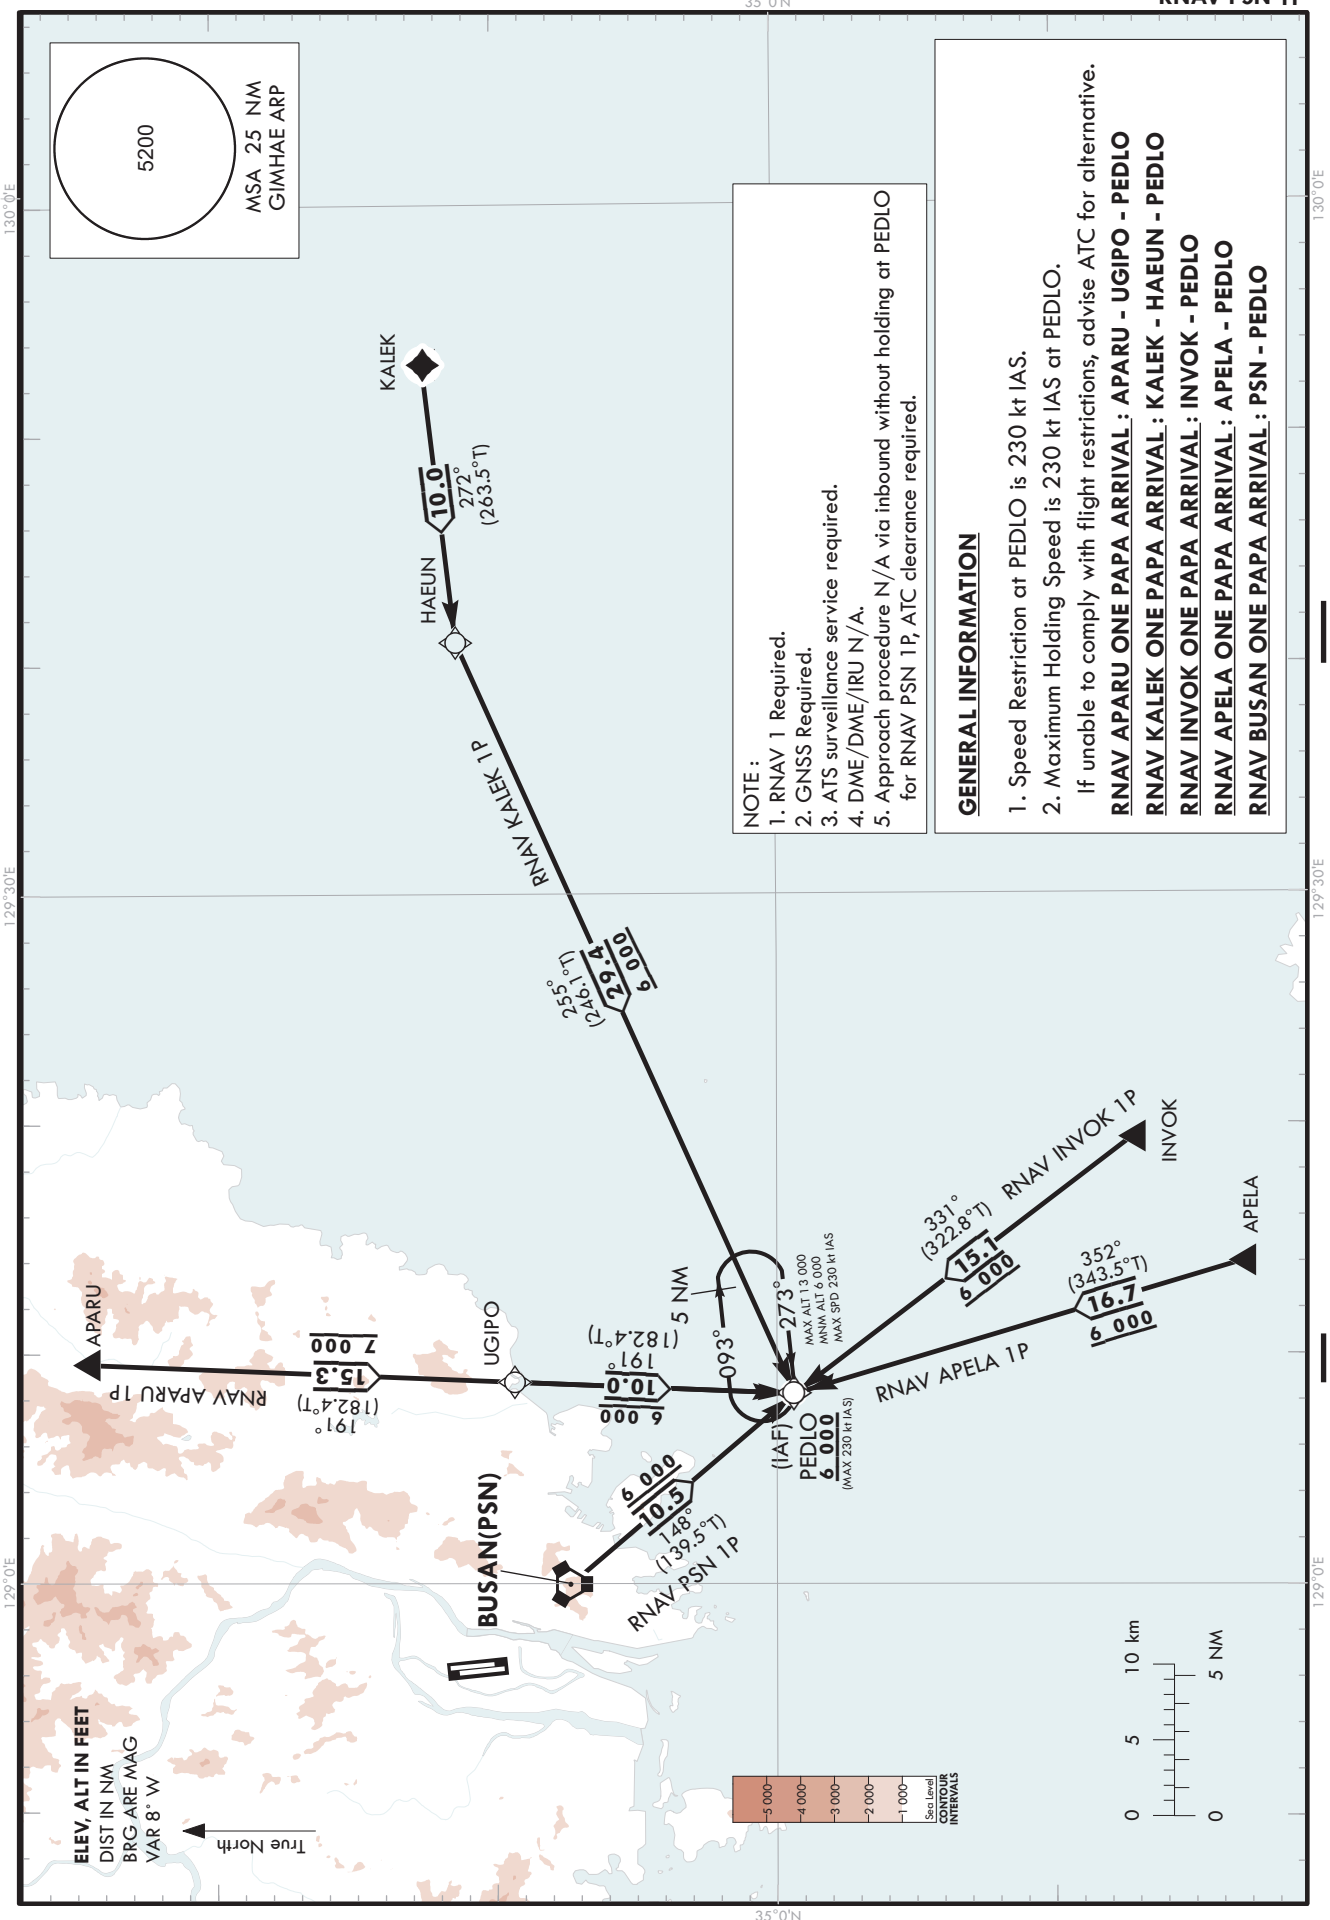

Change : Information of holding procedure(092° → 093°) and Amended phrase.

Standard Instrument Arrival Procedure Coding Tables

RNAV APARU 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APARU	-	-	-	-	-	-	35°24'42.1"N 129°09'32.1"E	-	RNAV 1	-
002	TF	UGIPO	-	191(182.4)	15.3	-	+7 000	-	35°09'23.8"N 129°08'45.6"E	-	RNAV 1	-
003	TF	PEDLO	-	191(182.4)	10.0	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV KALEK 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALEK	-	-	-	-	-	-	35°12'32.0"N 129°53'05.0"E	-	RNAV 1	-
002	TF	HAEUN	-	272(263.5)	10.0	-	-	-	35°11'23.8"N 129°40'57.4"E	-	RNAV 1	-
003	TF	PEDLO	-	255(246.1)	29.4	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV INVOK 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	INVOK	-	-	-	-	-	-	34°47'19.0"N 129°19'23.0"E	-	RNAV 1	-
002	TF	PEDLO	-	331(322.8)	15.1	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV APELA 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APELA	-	-	-	-	-	-	34°43'23.0"N 129°14'00.0"E	-	RNAV 1	-
002	TF	PEDLO	-	352(343.5)	16.7	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV PSN 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	PSN	-	-	-	-	-	-	35°07'21.5"N 128°59'58.5"E	-	RNAV 1	-
002	TF	PEDLO	-	148(139.5)	10.5	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV APARU 1P RNAV KALEK 1P RNAV INVOK 1P RNAV APELA 1P RNAV PSN 1P	HM	PEDLO	Y	273(264.2)	5.0	R	-13 000 +6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	-


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE	APP	125.5 364.0	
GIMHAE	TWR	118.1 233.3	118.45 236.6

BUSAN/Gimhae Intl(RKPK)
RWY 36L/R
RNAV MASTA 1K RNAV KALOD 1K
RNAV SARAM 1K RNAV ANROD 1K

Note : Arrival under ICAO Flight Procedures.

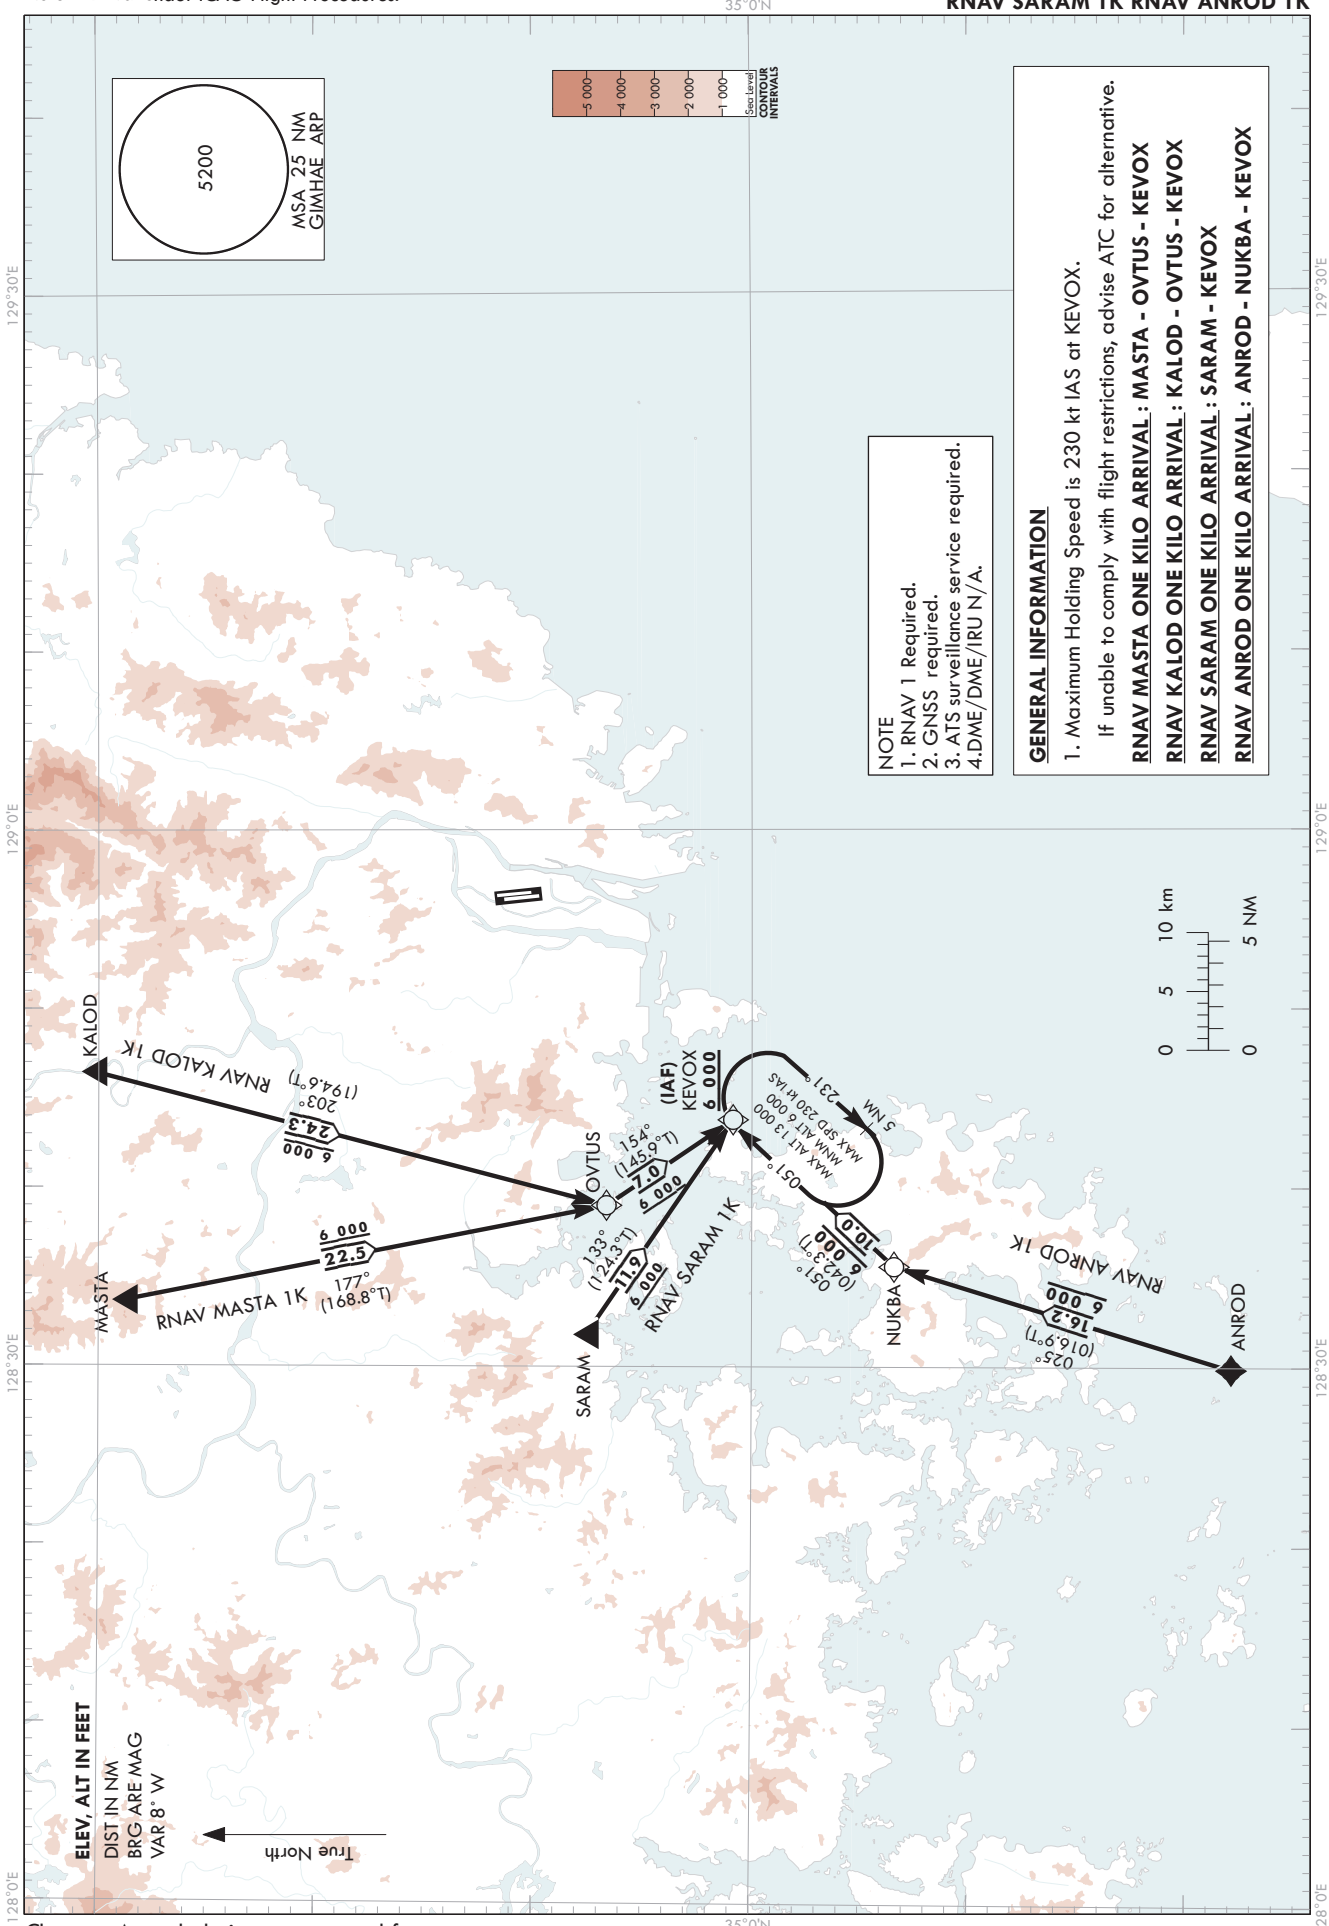

Change : Amended airport name and frequency.

Standard Instrument Arrival Procedure Coding Tables

RNAV MASTA 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MASTA	-	-	-	-	-	-	35°28'47.0"N 128°33'40.0"E	-	RNAV 1	-
002	TF	OVTUS	-	177(168.8)	22.5	-	+6 000	-	35°06'40.3"N 128°39'00.0"E	-	RNAV 1	-
003	TF	KEVOX	-	154(145.9)	7.0	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

RNAV KALOD 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALOD	-	-	-	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-
002	TF	OVTUS	-	203(194.6)	24.3	-	+6 000	-	35°06'40.3"N 128°39'00.0"E	-	RNAV 1	-
003	TF	KEVOX	-	154(145.9)	7.0	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

RNAV SARAM 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	SARAM	-	-	-	-	-	-	35°07'36.3"N 128°31'46.7"E	-	RNAV 1	-
002	TF	KEVOX	-	133(124.3)	11.9	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

RNAV ANROD 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	ANROD	-	-	-	-	-	-	34°37'57.7"N 128°29'51.7"E	-	RNAV 1	-
002	TF	NUKBA	-	025(016.9)	16.2	-	+6 000	-	34°53'27.6"N 128°35'35.0"E	-	RNAV 1	-
003	TF	KEVOX	-	051(042.3)	10.0	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV MASTA 1K RNAV KALOD 1K RNAV SARAM 1K RNAV ANROD 1K	HM	KEVOX	Y	051.1(042.5)	5.0	R	-13 000 +6 000	-230	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	-


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE APP 125.5 135.7
GIMHAE TWR 118.1 118.45

Note : Arrival under ICAO Flight Procedures.

BUSAN/Gimhae Intl(RKPK)
RWY 18L/R
RNAV MASTA 1G RNAV KALOD 1G
RNAV APARU 1G RNAV PSN 1G
RNAV ANROD 1G

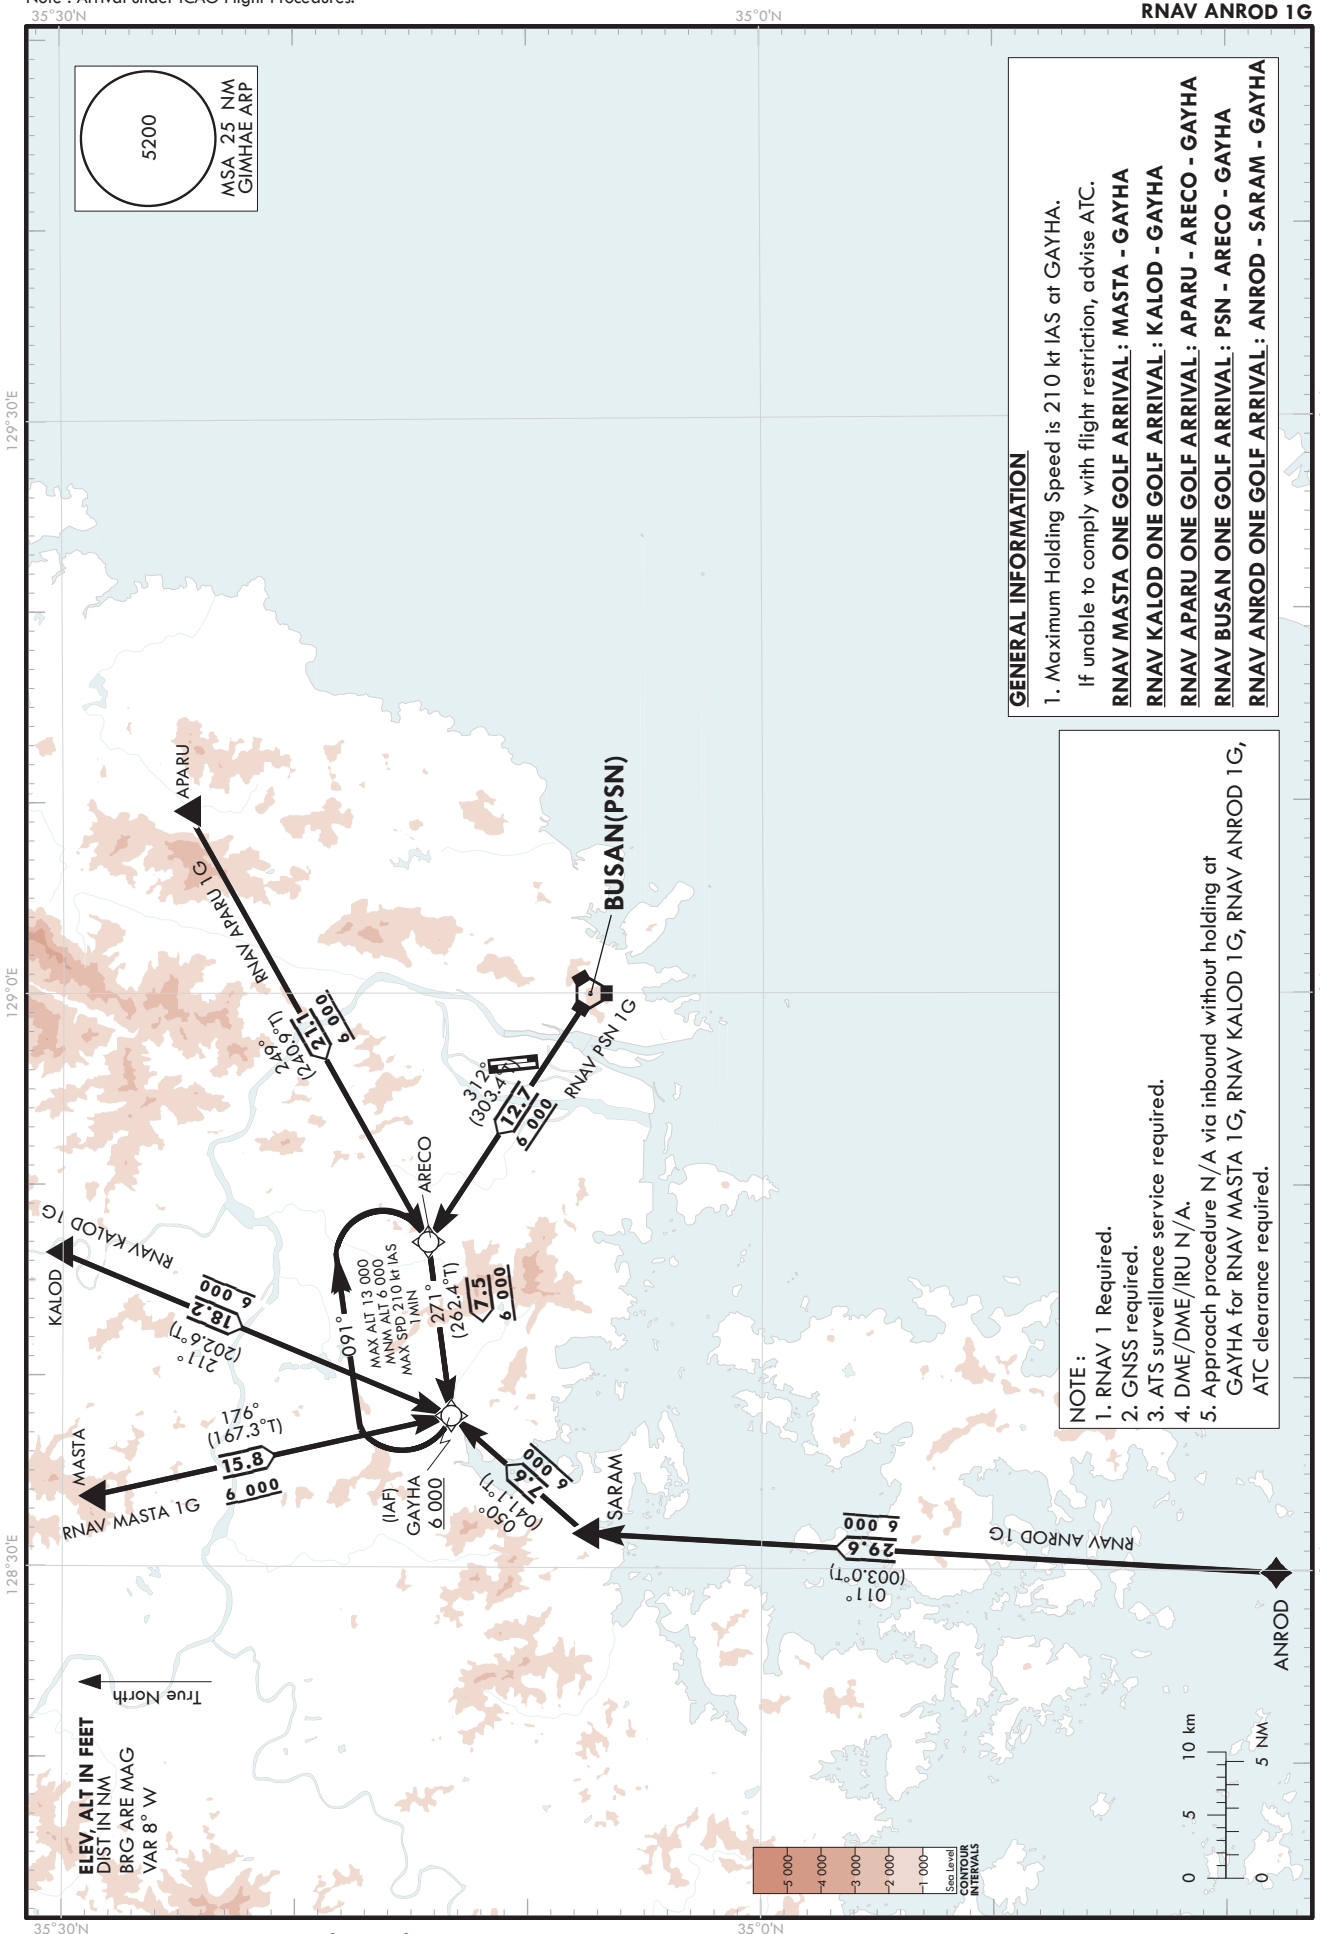

Change : Amended phrase(270°→271°).

Standard Instrument Arrival Procedure Coding Tables

RNAV MASTA 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MASTA	-	-	-	-	-	-	35°28'47.0"N 128°33'40.0"E	-	RNAV 1	-
002	TF	GAYHA	-	176(167.3)	15.8	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV KALOD 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALOD	-	-	-	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-
002	TF	GAYHA	-	211(202.6)	18.2	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV APARU 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APARU	-	-	-	-	-	-	35°24'42.1"N 129°09'32.1"E	-	RNAV 1	-
002	TF	ARECO	-	249(240.9)	21.1	-	+6 000	-	35°14'22.1"N 128°46'59.1"E	-	RNAV 1	-
003	TF	GAYHA	-	271(262.4)	7.5	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV PSN 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	PSN	-	-	-	-	-	-	35°07'21.5"N 128°59'58.5"E	-	RNAV 1	-
002	TF	ARECO	-	312(303.4)	12.7	-	+6 000	-	35°14'22.1"N 128°46'59.1"E	-	RNAV 1	-
003	TF	GAYHA	-	271(262.4)	7.5	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV ANROD 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	ANROD	-	-	-	-	-	-	34°37'57.7"N 128°29'51.7"E	-	RNAV 1	-
002	TF	SARAM	-	011(003.0)	29.6	-	+6 000	-	35°07'36.3"N 128°31'46.7"E	-	RNAV 1	-
002	TF	GAYHA	-	050(041.1)	7.6	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track °M(°T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV MASTA 1G RNAV KALOD 1G RNAV APARU 1G RNAV PSN 1G RNAV ANROD 1G	HM	GAYHA	Y	271(262.4)	1	R	-13 000 +6 000	-210	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	-