

STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO


TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE APP 125.5 135.7
GIMHAE TWR 118.1 118.45

BUSAN/Gimhae Intl(RKPK)

RWY 36L/R
RNAV APARU 1P RNAV KALEK 1P
RNAV INVOK 1P RNAV APELA 1P
RNAV PSN 1P

Note : Arrival under ICAO Flight Procedures.

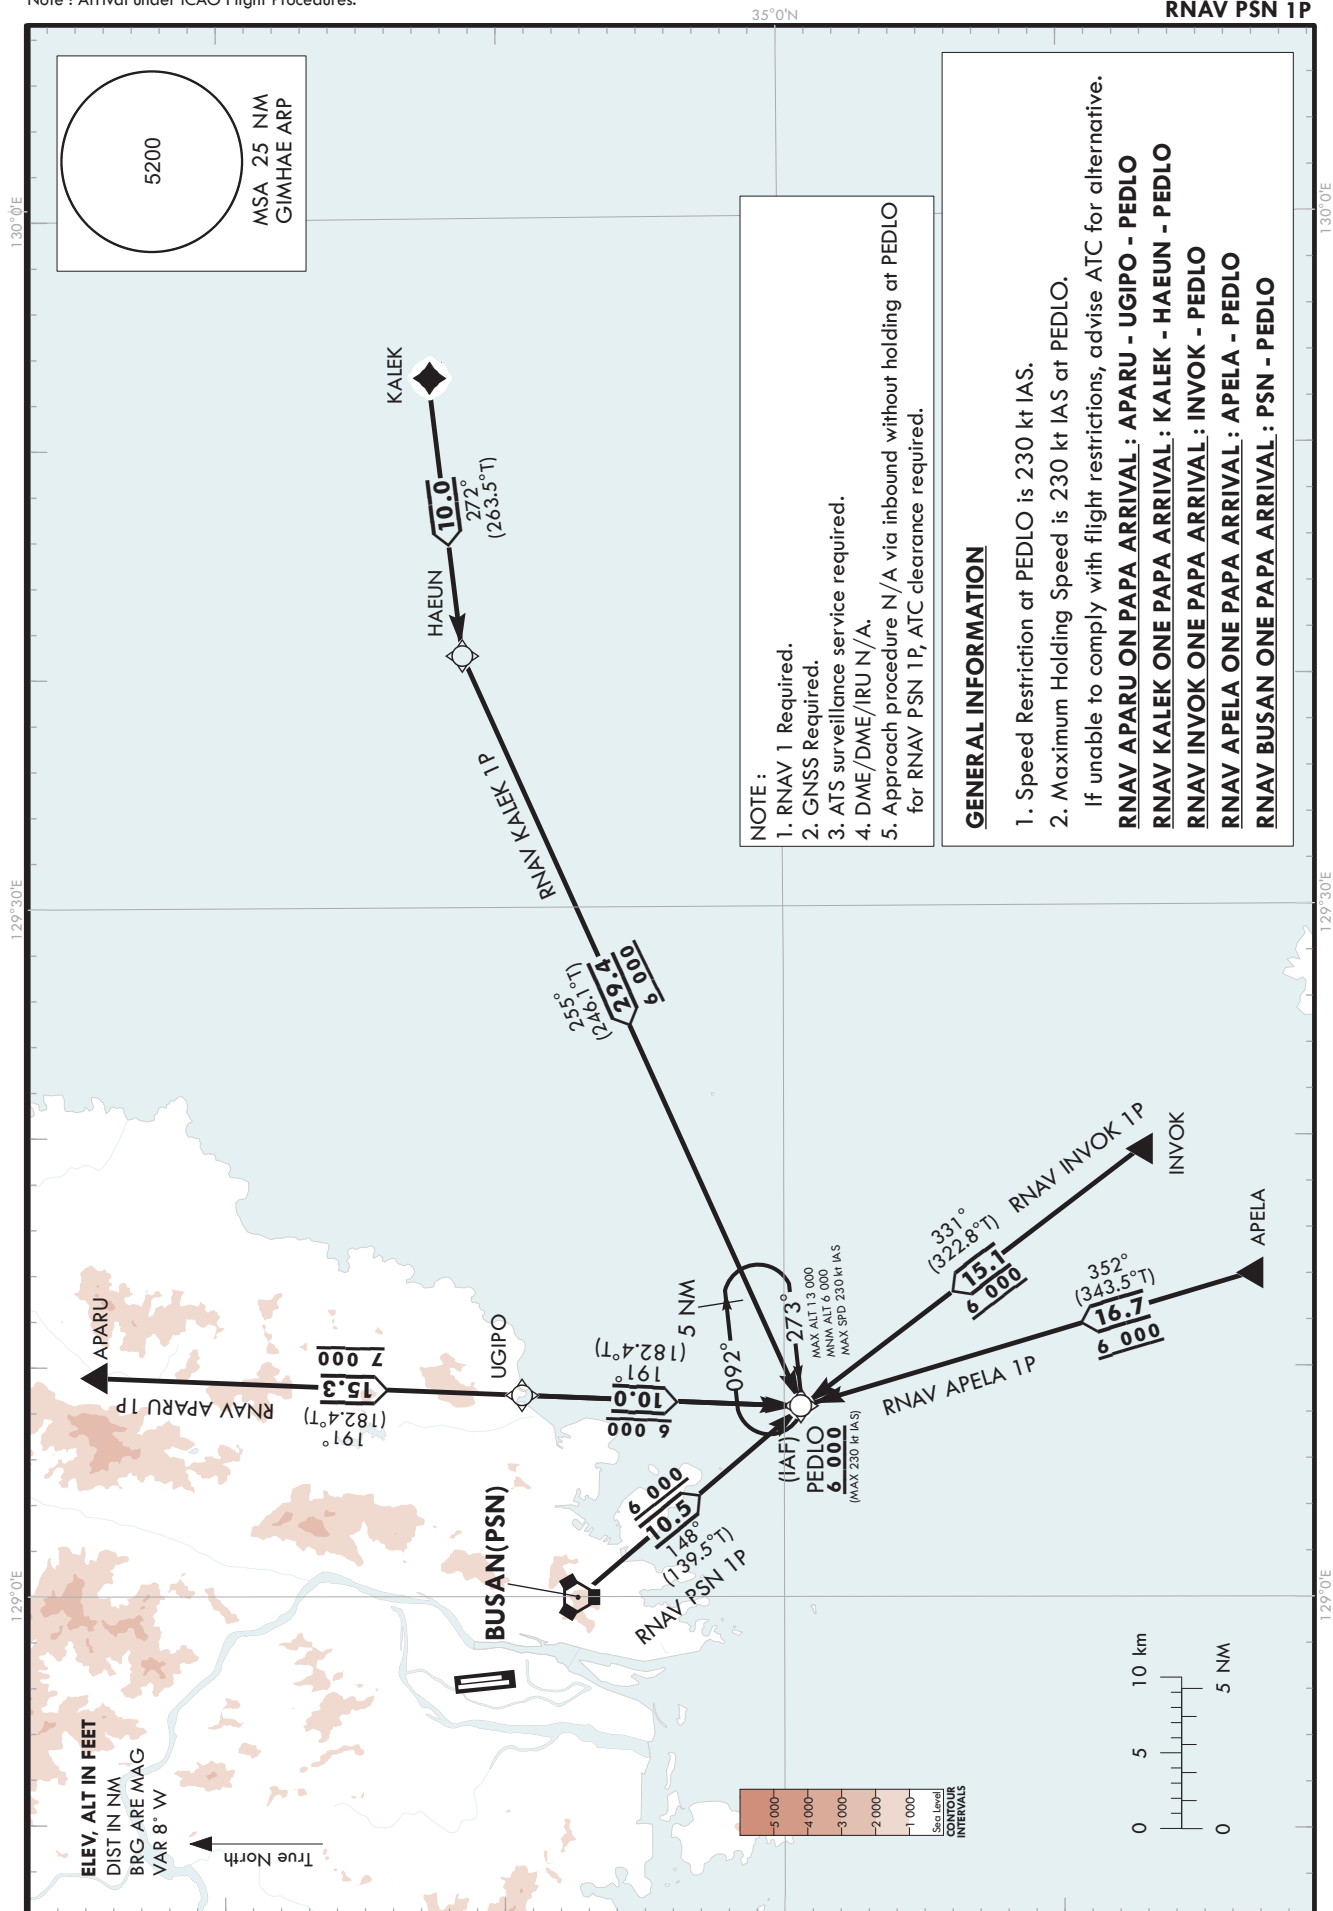

Change : Information of standard instrument arrival procedure for RWY 36L/R.

BUSAN/Gimhae INTL(RKPK)
RWY 36L/R
RNAV APARU 1P RNAV KALEK 1P
RNAV INVOK 1P RNAV APELA 1P
RNAV PSN 1P

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV APARU 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APARU	-	-	-	-	-	-	35°24'42.1"N 129°09'32.1"E	-	RNAV 1	-
002	TF	UGIPO	-	191(182.4)	15.3	-	+7 000	-	35°09'23.8"N 129°08'45.6"E	-	RNAV 1	-
003	TF	PEDLO	-	191(182.4)	10.0	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV KALEK 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALEK	-	-	-	-	-	-	35°12'32.0"N 129°53'05.0"E	-	RNAV 1	-
002	TF	HAEUN	-	272(263.5)	10.0	-	-	-	35°11'23.8"N 129°40'57.4"E	-	RNAV 1	-
003	TF	PEDLO	-	255(246.1)	29.4	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV INVOK 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	INVOK	-	-	-	-	-	-	34°47'19.0"N 129°19'23.0"E	-	RNAV 1	-
002	TF	PEDLO	-	331(322.8)	15.1	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV APELA 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	APELA	-	-	-	-	-	-	34°43'23.0"N 129°14'00.0"E	-	RNAV 1	-
002	TF	PEDLO	-	352(343.5)	16.7	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

RNAV PSN 1P

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	PSN	-	-	-	-	-	-	35°07'21.5"N 128°59'58.5"E	-	RNAV 1	-
002	TF	PEDLO	-	148(139.5)	10.5	-	+6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV APARU 1P RNAV KALEK 1P RNAV INVOK 1P RNAV APELA 1P RNAV PSN 1P	HM	PEDLO	Y	273(264.2)	5.0	R	-13 000 +6 000	-230	34°59'23.1"N 129°08'15.3"E	-	RNAV 1	-

Change : Information of standard instrument arrival procedure for RWY 36L/R.

**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

TRANSITION ALT 14 000
TRANSITION LVL FL 140


JUNGWON DEP 125.5 135.7
CHEONGJU TWR 118.1 118.45

CHEONGJU/Cheongju INTL(RKTU)

RWY 36L/R

**RNAV MASTA 1K RNAV KALOD 1K
RNAV SARAM 1K RNAV ANROD 1K**

Note : Arrival under ICAO Flight Procedures.

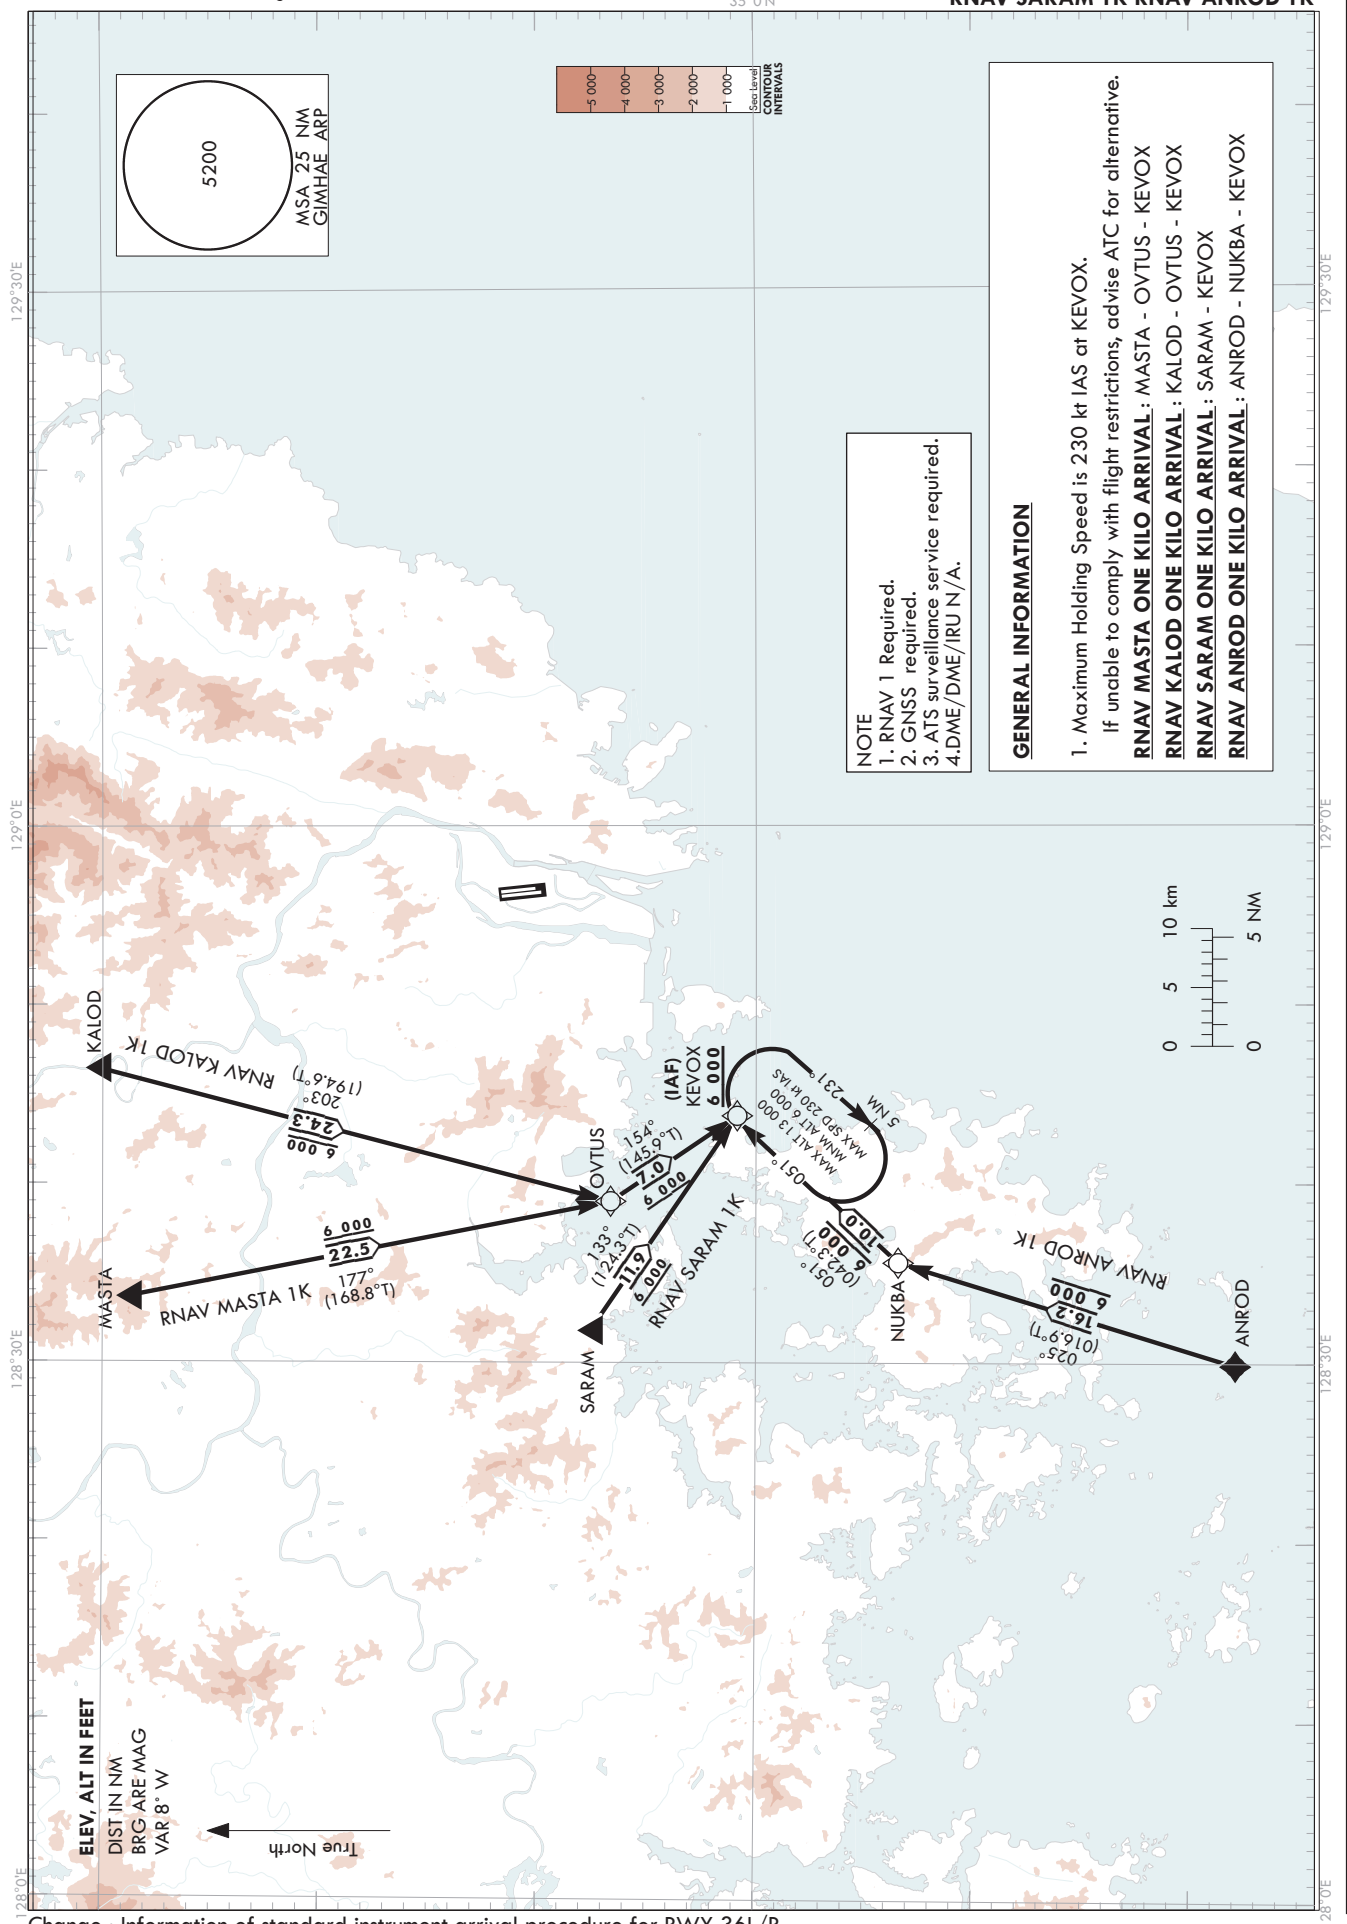

Change : Information of standard instrument arrival procedure for RWY 36L/R.

BUSAN/Gimhae INTL(RKPK)
RWY 36L/R
RNAV MASTA 1K RNAV KALOD 1K
RNAV SARAM 1K RNAV ANROD 1K

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV MASTA 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	MASTA	-	-	-	-	-	-	35°28'47.0"N 128°33'40.0"E	-	RNAV 1	-
002	TF	OVTUS	-	177(168.8)	22.5	-	+6 000	-	35°06'40.3"N 128°39'00.0"E	-	RNAV 1	-
003	TF	KEVOX	-	154(145.9)	7.0	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

RNAV KALOD 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	KALOD	-	-	-	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-
002	TF	OVTUS	-	203(194.6)	24.3	-	+6 000	-	35°06'40.3"N 128°39'00.0"E	-	RNAV 1	-
003	TF	KEVOX	-	154(145.9)	7.0	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

RNAV SARAM 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	SARAM	-	-	-	-	-	-	35°07'36.3"N 128°31'46.7"E	-	RNAV 1	-
002	TF	KEVOX	-	133(124.3)	11.9	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

RNAV ANROD 1K

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
001	IF	ANROD	-	-	-	-	-	-	34°37'57.7"N 128°29'51.7"E	-	RNAV 1	-
002	TF	NUKBA	-	025(016.9)	16.2	-	+6 000	-	34°53'27.6"N 128°35'35.0"E	-	RNAV 1	-
003	TF	KEVOX	-	051(042.3)	10.0	-	+6 000	-	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(°T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/ RDH	Navigation specification	Remarks
RNAV MASTA 1K RNAV KALOD 1K RNAV SARAM 1K RNAV ANROD 1K	HM	KEVOX	Y	051.1(042.5)	5.0	R	-13 000 +6 000	-230	35°00'51.7"N 128°43'47.2"E	-	RNAV 1	-

Change : Information of standard instrument arrival procedure for RWY 36L/R.


STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO

TRANSITION ALT 14 000
TRANSITION LVL FL 140

GIMHAE APP 125.5 135.7
GIMHAE TWR 118.1 118.45

Note : Arrival under ICAO Flight Procedures.
35°30'N

BUSAN/Gimhae Intl(RKPK)
RWY 18L/R
RNAV MASTA 1G RNAV KALOD 1G
RNAV APARU 1G RNAV PSN 1G
RNAV ANROD 1G

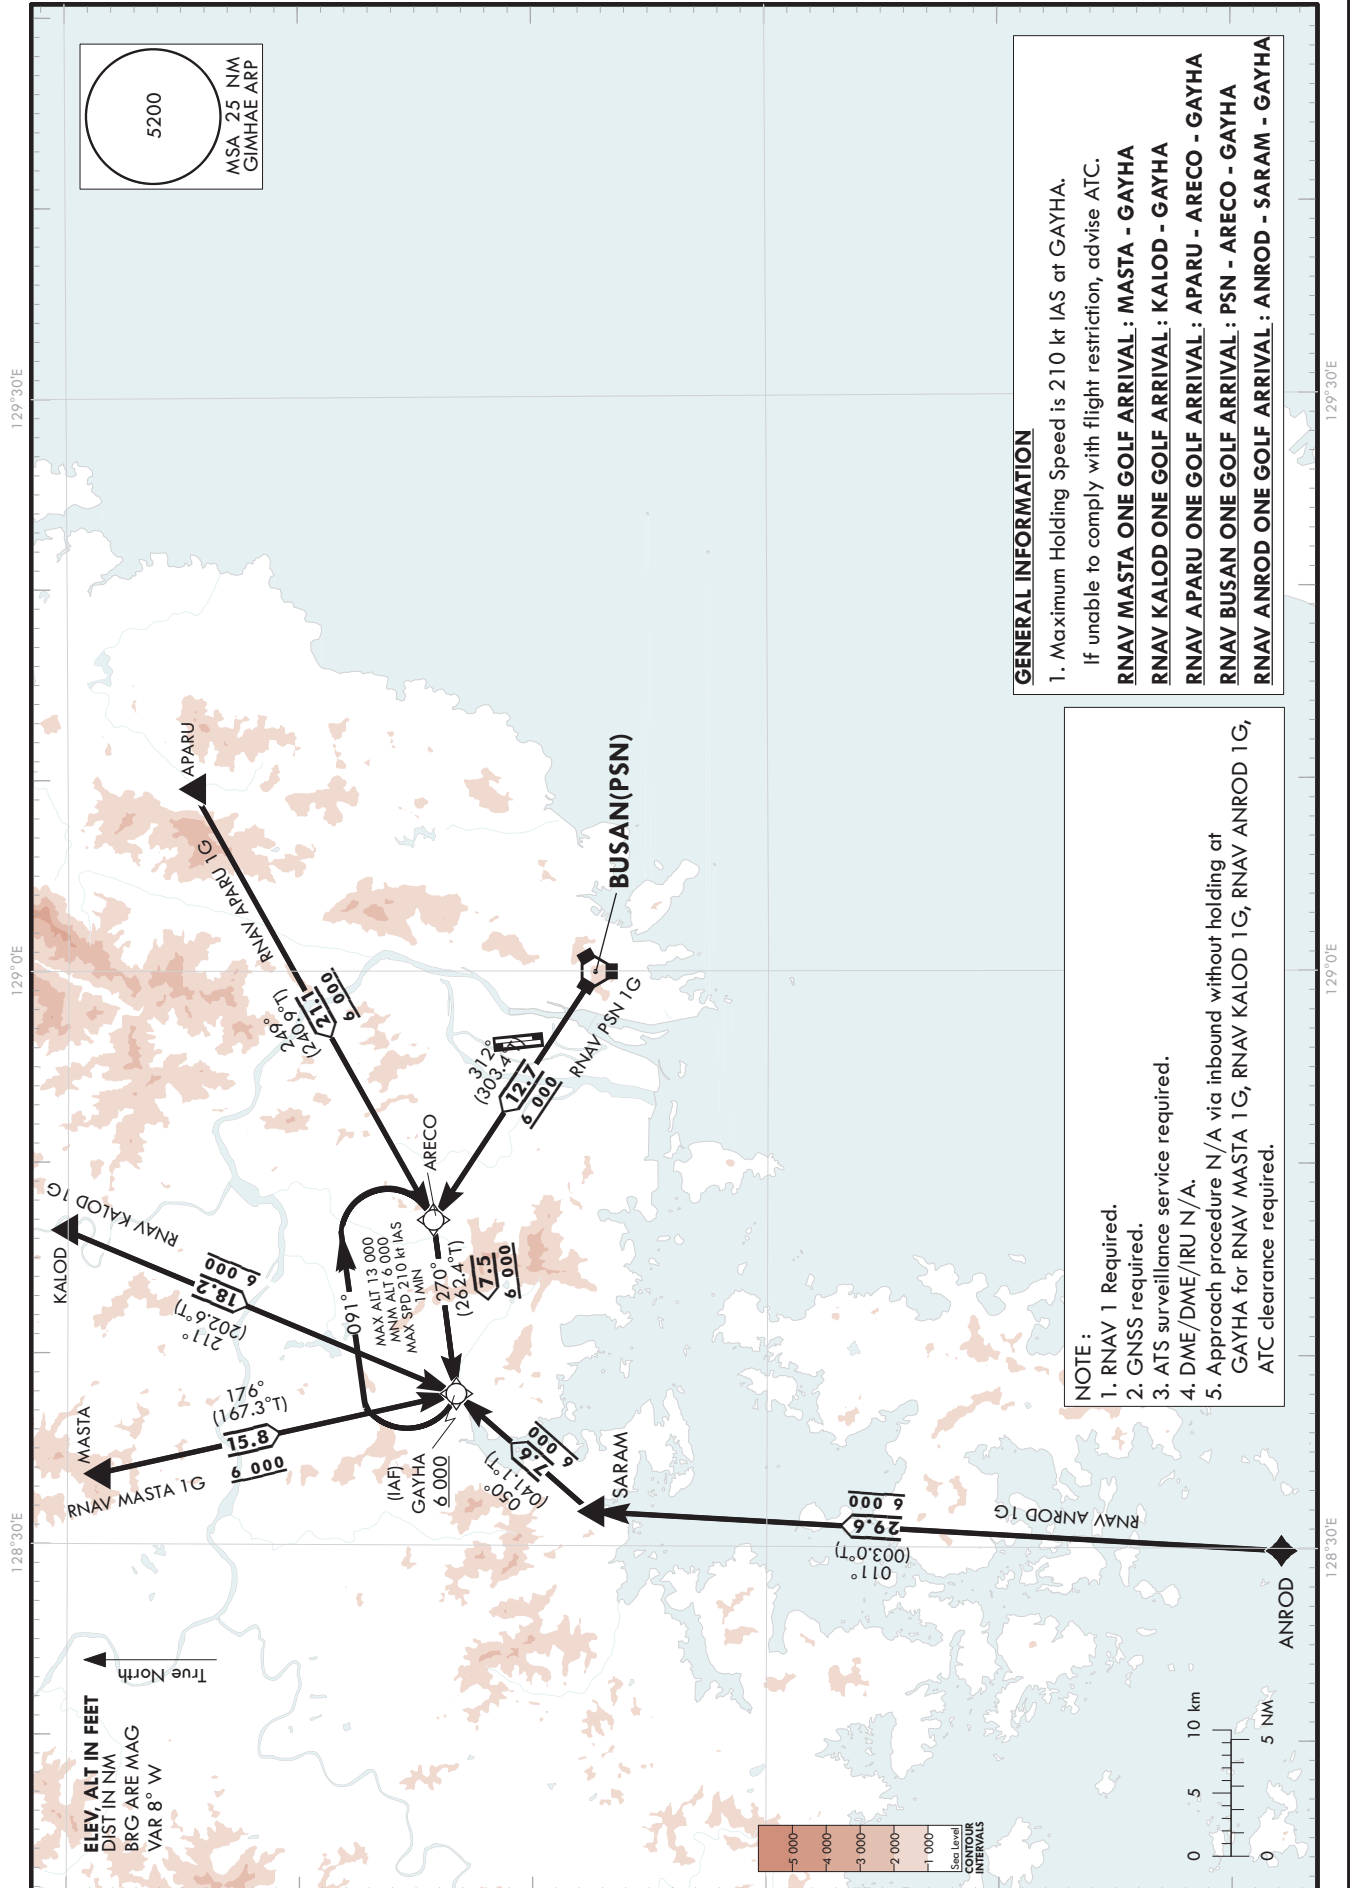

Change : Information of standard instrument arrival procedure for RWY 18L/R.

OFFICE OF CIVIL AVIATION

AIRAC AIP AMDT 8/26
Effective : 1600UTC 2 SEP 2026

BUSAN/Gimhae INTL(RKPK)
RWY 18L/R
RNAV MASTA 1G RNAV KALOD 1G
RNAV APARU 1G RNAV PSN 1G
RNAV ANROD 1G

AERONAUTICAL DATA TABULATION

Standard Instrument Arrival Procedure Coding Tables

RNAV MASTA 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	MASTA	-	-	-	-	-	-	35°28'47.0"N 128°33'40.0"E	-	RNAV 1	-
002	TF	GAYHA	-	176(167.3)	15.8	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV KALOD 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	KALOD	-	-	-	-	-	-	35°30'12.1"N 128°46'26.5"E	-	RNAV 1	-
002	TF	GAYHA	-	211(202.6)	18.2	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV APARU 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	APARU	-	-	-	-	-	-	35°24'42.1"N 129°09'32.1"E	-	RNAV 1	-
002	TF	ARECO	-	249(240.9)	21.1	-	+6 000	-	35°14'22.1"N 128°46'59.1"E	-	RNAV 1	-
003	TF	GAYHA	-	271(262.4)	7.5	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV PSN 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	PSN	-	-	-	-	-	-	35°07'21.5"N 128°59'58.5"E	-	RNAV 1	-
002	TF	ARECO	-	312(303.4)	12.7	-	+6 000	-	35°14'22.1"N 128°46'59.1"E	-	RNAV 1	-
003	TF	GAYHA	-	271(262.4)	7.5	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

RNAV ANROD 1G

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
001	IF	ANROD	-	-	-	-	-	-	34°37'57.7"N 128°29'51.7"E	-	RNAV 1	-
002	TF	SARAM	-	011(003.0)	29.6	-	+6 000	-	35°07'36.3"N 128°31'46.7"E	-	RNAV 1	-
002	TF	GAYHA	-	050(041.1)	7.6	-	+6 000	-	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	IAF

HOLDING PROCEDURE

Holding Identification	Path Descriptor	Waypoint Identifier	Fly-over	Course/Track M(T)	Time (min)	Turn direction	Altitude (ft)	Speed (kt)	Coordinates	VPA/RDH	Navigation specification	Remarks
RNAV MASTA 1G RNAV KALOD 1G RNAV APARU 1G RNAV PSN 1G RNAV ANROD 1G	HM	GAYHA	Y	271(262.4)	1	R	-13 000 +6 000	-210	35°13'22.4"N 128°37'54.4"E	-	RNAV 1	-

Change : Information of standard instrument arrival procedure for RWY 18L/R.