



**SUPER CHARGE**




**SUPERSAFE**  
Reg No. 5904374

# User Manual

## 4250A | 160PSI

Jump Starter | Air Compressor

### X7

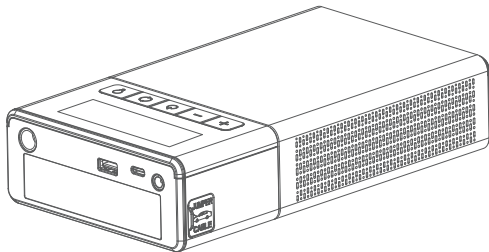

**SUPERSAFE**  
Reg No. 5904374

SUPERSAFE is a safety protection technology by GOOLOO



# Contents

---

English	3~27
Deutsch	28~52
Français	53~77
Español	78~102
Italiano	103~128

---


Thank you for choosing GOOLOO jump starter. To ensure a good user experience, personal safety, and property security, please read **all** of the instructions carefully before using this product, please keep this manual for reference.

## **Warning**



The warning section is introduced by a red triangle icon containing a white exclamation mark, followed by the word 'Warning' in a bold, dark grey font.

This unit is for vehicle (equipment) with 12V batteries. It may be dangerous if it is used with other types of batteries. Read and understand the safety information before using the jump starter. Failure to follow the safety information may cause damage to the jump starter, and may also result in electric shock, explosions, fire, property damage, and personal injury.

## Product Parts and Functions Description

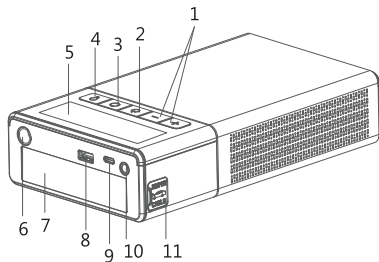

1. Pressure adjustment
2. Power switch / Inflating pump starting button
3. Settings
4. Lamp switch
5. LCD display screen
6. Air inflating port
7. LED flashlight (distress signal light)
8. 5V/9V/12V output port
9. USB-C 9V/2A input port
10. 15V/10A output port
11. 12V Automobile starting port



## Product Highlights

**More than just a jump starter:** X7 jump starter, an upgraded edition renewed in 2022, is poised to lead future market trends, combining a total of six major functions of emergency vehicle restarting, tire inflation, lighting, SOS warning, mobile device charging and starting 12V on-board equipment.

**Powerful starting performance:** X7 jump starter boasts a peak electricity of 4250A that enables it to immediately start 12V automobiles (with 10.0L gas engines or 10.0L diesel engines). It can start a car for over 70 times even in extreme temperatures with an extended service life of more than 1000 charge cycles.

**Digital cordless air compressor:** The jump starter is equipped with built-in LCD digital meters that can read data directly from the jump pack and air compressor. You can preset a preferred value, and the starter will automatically turn off when the pressure reaches that value. The jumper starter battery pack provides 3 optional units (PSI, BAR, and KPA). The 160 PSI air compressor needs about 2 minutes to inflate a normal car tire to 20 PSI. It is applicable on bicycles, cars, balls and other inflatable products. It can also automatically measure the tire pressure so that you do not have to perform the test yourself while saving costs.

**Upgraded heat dissipation design:** The unique cellular-structured hear dissipation design gives the X7 starter stronger radiating capacity that improves using safety by 30% and the service life by 50%.

**Safety first:** X7 features a special design that enables you to start your car rapidly even in extreme environments (-4~140°F), with a total of 10 safety technologies including that for preventing overcharging, overcurrent, short circuit, reversed polarity, low/high temperatures, excessive pressure, overloading, sparks and reverse charging. With these functions, GOOLOO air compressor starter can provide you with the strongest possible protection.

**Emergency lights and portable power supply:** The LED lights of the lithium battery supercharger feature three modes (common, stroboflash, and SOS), which can be used for different emergency situations. It is also a portable power supply. You can charge your USB devices (such as iPhone, Kindle or iPad) through the USB port, and it supports 72 hours of strong lighting.

## Operation Instructions

### Battery Power:

Press the power button to check the battery power:


Battery Icon	0 Bar	1 Bar	2 Bars	3 Bars	4 Bars
Battery Power	0%	25%	50%	75%	100%

The battery icon will blink one by one during the period of charging. Different bars of battery icon show different battery power, the battery icon becomes 4 bars when the charging process was finished.

### How to Charge the X7


This unit can be charged with the type-c cable and wall charger(wall charger Not Included).



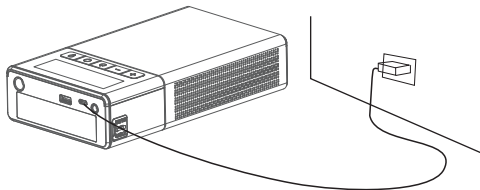

## How to Start a 12V Vehicle (Make sure the battery power $\geq 2$ bars)

**Note: Do not press the "BOOST" button on the jumper cable before connecting the vehicle battery correctly.**




1. Connect the vehicle battery
2. Green LED illuminates (solid)
3. Start the vehicle engine

**Check the LED indicator on the jumper cable and follow the instructions as below:**

<b>LED Indicator</b>	<b>Operation</b>
Green LED (solid)	The connection is correct, you can start the vehicle directly.
Red LED	Reverse connection, please correct the polarity of battery clamps.
Green LED (blinks)	The vehicle battery voltage is too low, try to press "BOOST" button on the jumper cable, when Green LED illuminates (solid), then start the vehicle within 30s.
No Light, No Beeping	The vehicle battery may be damaged, first of all, make sure the correct connection, try to press "BOOST" button on the jumper cable, when Green LED illuminates (solid), then start the vehicle within 30s.

If any problem persists, stop using the jump starter and contact our service team directly at **Support.eu@gooloo.com/fiona@gooloo.com(US Recommend)**, we will do our best to solve the problem within 24 hours.

## BUTTONS AND DISPLAY SCREEN

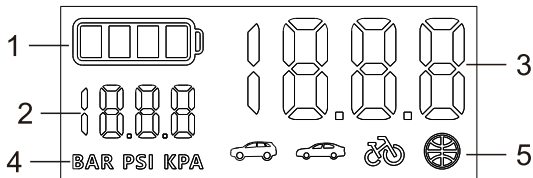

1. Long press the switch button for 2 seconds so that the starter displays information on the electrical configuration (1), preset tire pressure value (2), static air pressure value (3), BAR, PSI & KPA (4), or icons of cars, SUVs, basketballs, bicycles or other inflatable items (5), The electric quantity will be displayed on the bar (see the illustration on the right), and the charger will enter the to-be-inflated mode.

2. Short press the lighting button to turn on the LED light, and the white light will remain on. Press the switch button again, and the LED will enter the red flashing mode. Press again to turn off the light.

3. After the load is removed, the product automatically enters the dormant mode 30 seconds later.

4. When the product is in the standby mode or working normally, press the "Set" key to enter the inflating pump editing mode, after which the SUV icon will display; at the same time, preset the tire pressure value (unit: BAR), where you can short press the "+" "-" key to adjust the pressure value, or long press the "Set" key to alter the unit (KPA, BAR or PSI); short press the "Set" key to switch the item to be inflated until the car icon displays, and preset the pressure value (unit: BAR), before short pressing the "+" "-" key to adjust the pressure value or long pressing the "Set" key to switch the unit (KPA, BAR or PSI). Then short press the "Set" button until the bicycle icon and the preset air pressure value (unit: PSI) are displayed; press the "Set" button again to adjust the air pressure value, and long press the "Set" button to switch the unit (KPA, BAR or PSI). Press the "Set" button again to display the basketball icon and the preset air pressure value (unit: PSI); short press the "+" and "-" button again to adjust the air pressure value. Long press the "Set" key to switch units between KPA, BAR and PSI under the free mode.

5. While choosing the mode for the inflating pump for SUVs, cars, bicycles or basketballs, icon 4 will display the preset tire pressure value. Note that the preset value serves as reference only, and please adjust in accordance with the actual situation.

The preset values for different inflatable items are:

SUVs: 2.5 BAR

Cars: 2.4 BAR

Bicycles: 45 PSI

Basketballs: 8PSI

Please switch the unit accordingly on the left. Only one unit can be displayed for each item.

6. While charging, the bars at the battery icon will flash in accordance with the actual level of remaining battery life.

7. When a product 's remaining battery life falls below 10%, the corresponding indicator will flash.

## How to Turn On/Off the LED Flashlight

Simply press the button once to turn on the LED light function, each time you press the button to switch the light mode, there are three light modes for you to choose. (Normal, Strobe, SOS)

## How to Turn this unit on and off

Press and hold the power button for two seconds to turn on the device, and press and hold the power button again for two seconds to turn off the device. Also, when the device is not in use, it will automatically shut down in 30 seconds.

## Toxic and Harmful Substances

Composition and amount of toxic or harmful substance in this product					
Pb	Hg	Cd	Cr(Vi)	PBB	PBDE
0	0	0	0	0	0

0: Indicate that the content of harmful substances in all homogeneous materials is all lower than the prescribed limit of MCV (the standard 2002/95/EC/RoHs)

## Package Content

#	Part Name	Quantity
1	Host	1
2	Smart Jumper Cable	1
3	USB-A to USB-C Cable	1
4	Carrying Bag	1
5	Pump Tube	5
6	Multifunctional air cock	1
7	User Manual	1

## Technical Specification

Capacity	88.8Wh
Starting Current	800A (3s)
Peak Current	4250A
Input	9V/2A
Output	5V/3A, 9V/2A, 12V/1.5A
DC Out	15V/10A
Operating Temp	-20°C ~ 60°C /-4°F ~140°F
Life time	> 1000 Cycles
Full Charge Time	Around 7 hours

## FAQ

### **Q1: What is the operating temperature of this unit and how to store it?**

A: This unit is lithium polymer battery, operating temp is -20-60 °C/ -4-140°F. If the ambient temperature is higher than 60°C/140°F, the internal construction of the battery cells may be damaged, it may swell and become unsafe. So don't store the device in vehicle which parked in hot weather for long periods of time.

### **Q2: How to start a vehicle with this unit?**

A: Please refer to the instructions about "How to Start a 12V Vehicle".

### **Q3: How do you know if this unit is connected to the vehicle correctly?**

A: With the battery clamps connected to the vehicle battery, when the LED indicator on the jumper cable shines a steady green light, it means it's connected correctly. If red light illuminates (solid) , it means it's reverse connection.



**Q4: What should I do if this unit can't start a vehicle?**

A: Recharge this unit fully, and try to press the "BOOST" button on the jumper cable after connecting the vehicle battery correctly, the LED indicator illuminates steady green light , then start the vehicle within 30s. If it still does not work, contact us at: [Support.eu@gooloo.com](mailto:Support.eu@gooloo.com)(EU Recommend)/[fiona@gooloo.com](mailto:fiona@gooloo.com)(US Recommend) ( Attach your order ID).

**Q5: What should I do if this unit can't charge up?**

A: Charge it with a usb-c cable and wall charger for a full overnight period. If it still does not work, contact us at: [Support.eu@gooloo.com](mailto:Support.eu@gooloo.com)(EU Recommend)/[fiona@gooloo.com](mailto:fiona@gooloo.com) (US Recommend) ( Attach your order ID).

**Q6: What should I do if this unit can't charge other devices?**

A: Try to charge the device with another charging cable, If it works, which means the charging cable we provided is defective, we will provide you a new one; If it still does not work, please email us at:[Support.eu@gooloo.com](mailto:Support.eu@gooloo.com)(EU Recommend)/[fiona@gooloo.com](mailto:fiona@gooloo.com)(US Recommend) ( Attach your order ID).

**Q7: Can this unit charge other devices while it is being charged?**

A: Yes.

**Q8: Can this product charge other devices while starting a vehicle?**

A: No.

**Q9: How often does this unit need to be recharged?**

A: It would be best to recharge it every 3 months.

**Q10: Why it shuts off in 30s when charging other devices?**

A. This unit may shut off automatically when charging for the devices that need light charging current, such as headphone, smart watch, etc since there is minimum load current limitation (200mA) on this unit, it will be automatically off after 30s if the load current is less than 200mA.

## **Warning**

1. Please read this user manual carefully before using this machine.
2. Please be careful when using this machine. If you do not follow the instructions, you may injure yourself or damage the equipment or vehicle battery.
3. Do Not allow people who do not have proper knowledge or ability to operate the device without supervision.
4. Do Not use this unit as a toy. Keep it away from children to avoid accident.
5. This unit work for vehicles (equipment) with 12V battery, doesn't for vehicles with non-12V battery. It is forbidden to be used in other machines, such as airplanes and ships.
6. Do Not use this unit when any cable, clamp, or cord was damaged or when this unit was overheated, swelled or leaking fluid.
7. Do Not use it as a vehicle battery or a battery charger.
8. Do not use the unit to start a vehicle while charging the internal battery.
9. Only use the battery clamps provided to start vehicle and the qualified charger to charge this unit.

10. Don't over-discharge the unit (don't let the battery run out), charge it regularly, it would be best to recharge it every 3 months.
11. Make sure the blue plug of the jumper cable is plugged fully into the battery clamps output port, otherwise, the blue plug could be melt.
12. Make sure the battery terminals are clean before starting up, and make sure the battery clamps are well connected. If the battery terminals on the vehicle are dirty or corroded, the output power of the unit will decrease.
13. Please do not start the product for more than three consecutive times, as this may cause it to overheat and damage the product. If you need to start the product multiple times, please make sure to wait for two minutes between each start-up.
14. Do Not connect the jump starter's clamps to the battery reversely after pressing the "BOOST" button to avoid accident.
15. Use this unit to start the vehicle when the battery power is more than 2 bars.
16. Do Not recharge this product immediately after starting the vehicle, please let it cool for 30 minutes before recharging it.

17. Do Not let the product be immersed in water
18. Do not operate this product in an explosive environment, such as a place where flammable liquid, gas or dust exists.
19. Do not modify or disassemble this machine. Only service technicians can repair this equipment.
20. Do not expose the product to extreme heat or fire.
21. Do not drop or squeeze the device. If the device is hit hard or damaged in any other way, it should be inspected by a qualified battery technician.
22. Do not store in places where the temperature may exceed 60°C/140°F.
23. Only charge at ambient temperature of -10~45°C/14~113°F.
24. Under extreme conditions, the battery may leak. If there is a liquid leak from the device, do not handle it with bare hands. If there is skin contact, wash immediately with soap and water. If the liquid accidentally touches the eyes, immediately rinse the eyes with water for at least 10 minutes and seek medical help.
25. The device contains a lithium battery. At the end of the product's service life, or if the device leaks liquid, dispose of the device according to local regulations.

## Your Warranty Includes

- **18 Months Online After- Sales Service**

Within 18 months, we will provide timely and effective online after- sales service after your purchase.

- **30 Days Money Back Guarantee**

Within the first 30 days after your purchase, you can apply return for it through Amazon when you have any product issue.

- **30 Days to 18 Months**

We will replace the defective unit due to manufacturing issues with a new one within 18 months.

## Disclaimer

A. When the product needs to be repaired or replaced, the original purchaser should show the original receipt (order ID), and the warranty will take effect.

- B. The warranty does not cover damage or product failures caused by normal wear and tear, physical abuse, improper installation, misuse, modification, or unauthorized third-party repairs.
- C. We are not responsible for any accidental or indirect damage caused by incorrect use or misuse of this product.
- D. All warranty claims are limited to repair or replacement of the defective product and at the sole discretion of GOOLOO.

## **Attention**



Do Not Submerge In Water



Do Not Disassemble



Do Not Drop



Avoid Extreme Temperatures



Do Not Place Near or Into Fire



Overcharge/discharge  
Protection



Fuse Protection



Against-reverse  
Plug



## Customer Service



18 Months Limited Warranty Service



Lifetime Technical Service



Feel Free to Contact Us

**Support.eu@gooloo.com(EU Recommend)**

**fiona@gooloo.com(US Recommend)**



For FAQ and More Information

**Support.eu@gooloo.com(EU Recommend)**

**fiona@gooloo.com(US Recommend)**

Thank You  
for Choosing Us



Made in China

<b>Manufacturer</b>	Shenzhen Carku Technology Co.,Ltd		
<b>Address</b>	No.103, block A, Qixing Creative factory, GaoFeng community, Dalang street, LongHua, Shenzhen, Guangdong, China		
<b>Importer</b>	shen zhen shi lan de wo ke ji you xian gong si		
<b>Address</b>	Guangdong, Shenzhen, Longgang, 2nd Floor, Building 12, Shenao Cultural Industry Park, Dafapu Community, Bantian Street		
<b>Tel</b>	+442921680945		
<b>UK Representative Name and contact</b>	<div> <div> <div>UK</div> <div>REP</div> </div> <div> <b>EVATOST CONSULTING LTD</b>  Office 101 32 Threadneedle Street, London,  United Kingdom, EC2R 8AY  <b>contact@evatost.com</b> </div> </div> <p>OST_UK_20220608000011</p> <p>We simply act as UK representative for cross-border sellers, and are not manufacturers/ importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/ importer/seller shall be solely held responsible.</p>		