

Appendix 2

Last updated: 2025-12-15

Contents

NEED SOME SORT OF INTRO HERE.	2
Part 1: 01-flexiSDM.R	2
Load model specifications	2
Define model specifications	4
Step 1: Define the region	6
Step 2: Designate training and testing data	7
Step 3: Load species data	8
Step 4: Plot species data	11
Step 5: Load covariate data	14
Step 6: Plot covariates	16
Step 7: NIMBLE	20
Step 8: Clean up and save	25
Part 2: 02-flexiSDM.R	25
Fit NIMBLE model	26
Part 3: 03-flexiSDM.R	26
High performance computing	34

So you wanna fit an integrated species distribution model? You've come to the right place!

NEED SOME SORT OF INTRO HERE.

Our workflow is separated into three parts.

- The first part of this sets up the range, imports species and covariate data, scales covariates, and sets everything up for NIMBLE.
- The second part fits the NIMBLE model.
- The third part summarizes the NIMBLE output and creates output figures.

Let's first load the libraries we'll need to set up, visualize, fit, and summarize our data.

```
# Load libraries ----
library(tidyverse)
library(sf)
library(nimble)

## To install SpPut.flexiSDM or check for updates, use the commented code below:
# remotes::install_github("rileymummah/SpPut.flexiSDM", build_vignettes = T)
library(SpPut.flexiSDM)
library(SpPut.covariates)

## There are two custom functions that are needed to fit the data in NIMBLE
source("code/FXN-nimbleParallel.R")
```

Part 1: 01-flexiSDM.R

Load model specifications

Each model requires a variety of specifications. Rather than enter them manually in the code, we find it easier to manage multiple models by storing all specifications in a .csv file that is read in to provide input values. We call ours `model-specs.csv`. Each row represents a model, so you can easily see and edit the parameters used for each model. Let's load the .csv and take a look at how we structured it.

```
mods <- read.csv("code/model-specs.csv")

head(mods)

##   number sp.code    model mem.nim mem.sum year.start year.end buffer sp.auto
## 1       1     RACA     iSDM   30000   40000      1994      2025  50000   TRUE
## 2       2     GPOR     iSDM   30000   60000      1994      2025  50000   TRUE
## 3       3     RACA  subrange   30000   40000      1994      2025  50000   TRUE
##   zero_mean tau coarse.grid cont.grid    covs.PO covs.inat
## 1      TRUE   1      FALSE      FALSE travelttime      <NA>
## 2      TRUE   1      TRUE      FALSE travelttime        ORM
## 3      TRUE   1      FALSE      FALSE travelttime      <NA>
##                                         covs.lin covs.quad check.covs      Bprior
## 1 sqrtarea_small, sqrtarea_medium, footprint TRI, tmin      FALSE dnorm(0,1)
```

```

## 2           streamLength.km, prec, forest elevation      FALSE dnorm(0,1)
## 3 sqrtarea_small, sqrtarea_medium, footprint TRI, tmin      FALSE dnorm(0,1)
## filter.region spat.bal coordunc coordunc_na.rm block.rows block.cols
## 1      TRUE    TRUE    1000      TRUE      5      5
## 2      TRUE    TRUE    1000      TRUE      5      5
## 3      TRUE    TRUE    1000      TRUE      5      5
##   block.folds   iter thin region.sub lon.hi lon.lo lat.hi lat.lo project
## 1          3 100000  5    FALSE     NA     NA     NA     NA     NA
## 2          3 100000  5    FALSE     NA     NA     NA     NA     NA
## 3          3 10000  5     TRUE     NA     NA     NA     NA     NA
##   exclude.dataset
## 1            NA
## 2            NA
## 3            NA

```

The following table describes the column names, data type, and description found in `model-specs.csv`. Not all columns are required depending how you intend to fit the model (i.e., local computer vs. high performance computing cluster).

Column Name	Type	Description
number	numeric	Model number
sp.code	character	Species code, must match the species code used in the species data
model	character	Model name
mem.nim	numeric	Memory allocation (in MB) for NIMBLE. Could be omitted if not using an HPC.
mem.sum	numeric	Memory allocation (in MB) for parallelized summarization. Could be omitted if not using an HPC.
year.start	numeric	Starting year of data to include
year.end	numeric	Ending year of data to include
buffer	numeric	Size of buffer around range edge (in m)
sp.auto	logical	Should a spatial model be included?
zero_mean	logical	Should a zero mean assumption be included in the spatial model?
tau	numeric/character	Assign a fixed value or a prior distribution in BUGS language for precision (τ ; e.g., <code>dgamma(5,5)</code>)
coarse.grid	logical	Should a coarse grid be used for the spatial model? Usually desired for large-range species
cont.grid	logical	Should the grid be restricted to continuous cells? (This will remove any groups of non-contiguous cells)
covs.PO	character	A comma-separated list of covariates for modeling non-iNaturalist PO sampling effort. These must match the covariate names in the data.
covs.inat	character	A comma-separated list of covariates for modeling iNaturalist sampling effort. These must match the covariate names in the data.
covs.lin	character	A comma-separated list of linear covariates for modeling species relative abundance. These must match the covariate names in the data.
covs.quad	character	A comma-separated list of quadratic covariates for modeling species relative abundance. These must match the covariate names in the data.
check.covs	logical	Should covariate selection remove multicollinearity?

Column Name	Type	Description
Bprior	character	Assign a prior distribution in BUGS language for the β coefficients in the state model (e.g., dnorm(1,0))
filter.region	logical	Should data outside of the region be removed? Note that this is only for mapping purposes; data that are outside of the region are never used to fit the model
spat.bal	logical	Should the PO data be spatially balanced?
coordunc	numeric	The level of acceptable coordinate uncertainty (for PO datasets that record coordinate uncertainty)
coordunc_na.rm	logical	Should PO data with coordinate uncertainty = NA be removed? (for PO datasets that record coordinate uncertainty)
block.rows	numeric	The number of rows for cross-validation blocks
block.cols	numeric	The number of columns for cross-validation blocks
block.folds	numeric	The number of folds to group cross-validation blocks into
iter	numeric	The number of iterations to run an MCMC chain (the first 75% will be discarded as a burn-in)
thin	numeric	Thin the MCMC chains by this parameter
region.sub	logical	Only use the centroid of the region with a radius equal to the buffer size?
lon.hi	numeric	High longitude value to restrict the range
lon.lo	numeric	Low longitude value to restrict the range
lat.hi	numeric	High latitude value to restrict the range
lat.lo	numeric	Low latitude value to restrict the range
project	numeric	The number of future projections (otherwise, NA)
exclude.dataset	character	A comma-separated list of datasets to exclude from analysis

We have set up the scripts in the flexiSDM workflow so that a minimum number of parameters needs to be changed among them. To run this script in full (using our file arrangement), you only need to edit the following parameters:

```
nums.do <- 3 # model number to run
block <- 'none' # CV fold to exclude ('none', 1, 2, or 3)
local <- 1 # are you running the code locally (1) or on an HPC (0)?
```

For the purposes of this demonstration, we're going to fit model 3, which uses a centroid of the Cascades frog (RACA) range with a 50,000km buffer. This will allow us to easily visualize the datasets and spatial grid, while maintaining local computational capabilities. You can see all of the specifications for this model in the third row of `mods`.

Define model specifications

Now that we have loaded our model specifications, we can use them to define a series of inputs for the setup script (found in `01-flexiSDM.R`).

```
## Set up model variables
mods <- filter(mods, number %in% nums.do)

## Get variables for model from model-specs.csv
number <- mods$number[1] # model number
sp.code <- mods$sp.code[1] # species code
```

```

model <- mods$model[1] # model name
sp.auto <- mods$sp.auto[1] # include spatial autocorrelation?
coarse.grid <- mods$coarse.grid[1] # use a coarse grid?
cont.grid <- mods$cont.grid[1] # restrict to only a continuous grid?
year.start <- mods$year.start[1] # start year for data
year.end <- mods$year.end[1] # end year for data
buffer <- mods$buffer[1] # buffer size (m)
filter.region <- mods$filter.region[1] # filter data to the region?
spat.bal <- mods$spat.bal[1] # include spatial balancing for PO data?
coordunc <- mods$coordunc[1] # level of coordinate uncertainty to include (m)
coordunc_na.rm <- mods$coordunc_na.rm[1] # include coordinate uncertainty = NA?
block.folds <- mods$block.folds[1] # how many groups of blocks?
block.rows <- mods$block.rows[1] # how many rows of blocks?
block.cols <- mods$block.cols[1] # how many columns of blocks?
block.out <- block # define the fold to setup

if (block.out == "none") {
  blockname <- "full" # rename the block to 'full' if not doing cross-validation
} else {blockname <- block.out} # otherwise, keep the block number

# names of datasets to exclude (e.g., iNaturalist) - must match file.label column in allfiles
exclude.dataset <- unlist(str_split(mods$exclude.dataset[1], pattern = ", "))

## ICAR parameters
zero_mean <- mods$zero_mean[1] # zero mean assumption?
tau <- mods$tau[1] # precision (tau) can be a fixed value or a prior

## MCMC parameters
iter <- mods$iter[1] # number of MCMC iterations
thin <- mods$thin[1] # number to thin by
burnin <- floor(iter*0.75) # burnin to discard

## Change of region
region.sub <- mods$region.sub[1] # only use the centroid + buffer?
lat.hi <- mods$lat.hi[1] # high value of latitude range
lat.lo <- mods$lat.lo[1] # low value of latitude range
lon.hi <- mods$lon.hi[1] # high value of longitude range
lon.lo <- mods$lon.lo[1] # low value of longitude range

## Future projections
project <- mods$project[1] # how many projections?
if (block.out != "none") {
  project <- 0 # no projections for cross-validation models
}

## Covariates
# list of non-iNaturalist PO covariates
covs.PO <- unlist(str_split(mods$covs.PO[1], pattern = ", "))
# list of iNaturalist covariates
covs.inat <- unlist(str_split(mods$covs.inat[1], pattern = ", "))
# list of linear covariates for state model
covs.lin <- unlist(str_split(mods$covs.lin[1], pattern = ", "))
# list of quadratic covariates for state model

```

```

covs.quad <- unlist(str_split(mods$covs.quad[1], pattern = ", "))
check.covs <- mods$check.covs[1] # covariate selection to remove multicollinearity?

## Define the prior for the state model coefficients
Bprior <- mods$Bprior[1]

## Combine linear and quadratic distribution covariates into covs.z
covs.z <- c(covs.lin, covs.quad)
if ("%" %in% covs.z) {
  covs.z <- covs.z[-which(covs.z == "%")]
}
if (NA %in% covs.z) {
  covs.z <- covs.z[-which(is.na(covs.z))]
}

```

We're almost ready to set up the region and load data. Let's first ensure that we have output and data folders specific to the model we are fitting to store some of these objects.

```

## Make output folder
out.dir <- paste0("outputs/", number, "_", sp.code, "_", model, "/")
if (dir.exists(out.dir) == F) {
  dir.create(out.dir)
}

## Make data folder
data.dir <- paste0("data/", number, "_", sp.code, "_", model, "/")
if (dir.exists(data.dir) == F) {
  dir.create(data.dir)
}

```

Step 1: Define the region

We define the region of inference using the GAP and IUCN ranges. Other boundaries could be used to create the limits of the range. We saved the IUCN and GAP range boundaries in folders in `data/sp.code`, so that they can be called by the `get_range` function. We have also downloaded the US Census state boundary shapefile (`cb_2018_us_state_500k.shp`) to dictate the national and state borders. We have already overlaid a continental US hexbin grid (`conus.grid`). Unfortunately, this file is too large to upload to GitHub, so we demonstrate how we create the region and provide the file in `data.dir/region.rds` to bypass this step.

```

## Generating the region requires files that are too big for GitHub just read it in
if (file.exists(paste0(data.dir, "region.rds"))) {
  region <- read_rds(file = paste0(data.dir, "region.rds"))
} else {
  ## Load ranges
  range.path <- c(paste0("data/", sp.code, "/GAP/"),
                  paste0("data/", sp.code, "/IUCN/"))
  range.name <- c("GAP", "IUCN")
  rangelist <- get_range(range.path,
                         range.name,
                         crs = 4326)
  # We use GAP and IUCN ranges, but you can use any polygons. Just enter the path to where you store th

```

```

## USA boundary
exclude <- c("Alaska", "Hawaii", "Commonwealth of the Northern Mariana Islands",
           "American Samoa", "United States Virgin Islands", "Guam", "Puerto Rico")
usa <- st_read("../species-futures/data/USA/maps/cb_2018_us_state_500k/cb_2018_us_state_500k.shp") %>%
      filter((NAME %in% exclude) == F) %>%
      st_union()
## CONUS grid
load("../species-futures/data/USA/grid-covar.rdata") # Too big for GitHub

## Region
region <- make_region(rangelist,
                       buffer = buffer,
                       crs = 3857,
                       sub = region.sub,
                       boundary = usa,
                       grid = conus.grid, # You can use any grid to delineate spatial units
                       rm.clumps = T,
                       clump.size = 50,
                       continuous = cont.grid)

write_rds(region, file = paste0(data.dir, "region.rds"))
}

```

There is one additional step here if you intend to use a coarse spatial grid for the spatial model. Using a coarse grid improves computation time, which may be of concern for large-range species. We must redefine the spatial grid by grouping neighboring hexbins together in sets of seven via the `make_spatkey` function. Otherwise, `spatRegion` is set to NULL.

```

## If using the coarse spatial grid, redefine the grid and plot the resulting grid.
if (coarse.grid == T) {
  spatRegion <- suppressWarnings(make_spatkey(region$sp.grid))

  # Print spatial grid
  if (block.out == 'none') {
    pl <- ggplot(spatRegion$spat.grid) + geom_sf() + theme_bw()
    ggsave(pl, file = paste0(out.dir, "2_inputmap-e_spatGrid.jpg"), height = 8, width = 10)
  }
} else {
  spatRegion <- NULL
}

```

Step 2: Designate training and testing data

We have set up the code so that this section needs to be run even if you do not intend to exclude data for cross-validation. If you do are not excluding any blocks, all of the data are considered “train” data. Otherwise, the data are split into “train” and “test” data depending on the cross-validation fold (1, 2, or 3) that is excluded.

```

if (block.out == "none") {
  # If fitting the full model, then there are no test data
  test.i <- c()
  train.i <- region$sp.grid$conus.grid.id
}

```

```

} else {

  ## Set up cross validation blocks
  spatblocks <- make_CV_blocks(region, rows = block.rows, cols = block.cols, k = block.folds)

  block1 <- spatblocks %>% filter(folds == block.out)

  ## Find grid.ids for test block, everything else is in the training block
  test.i <- st_intersection(region$sp.grid, block1) %>%
    pull(conus.grid.id) %>%
    unique()
  train.i <- filter(region$sp.grid, conus.grid.id %in% test.i == F) %>%
    pull(conus.grid.id)
}

```

After the cross-validation blocks are assembled, the cells are assigned to “train” and “test” groups in a gridkey. This gridkey also contains `grid.id`, which allows us to index the data in NIMBLE.

```

# Make gridkey ----
gridkey <- select(region$sp.grid, conus.grid.id) %>%
  st_drop_geometry() %>%
  mutate(grid.id = 1:nrow(.),
        group = case_when(conus.grid.id %in% train.i ~ "train",
                           conus.grid.id %in% test.i ~ "test"))

```

Step 3: Load species data

We’re now ready to load the species data. We have assembled a full amphibian species list (`model-specieslist.csv`) from which we pull out the common name, any species code that could refer to the species of interest, and the scientific name. We demonstrate how we do this with our list, but these values could be set manually or pulled from a different list. We additionally define the species type (e.g., Frog/Toad or Salamander) based off the genus name. This delineation is used later in the covariate data section.

```

## Define species codes
codeKey <- read.csv("data/model-specieslist.csv")

## Common name
common <- codeKey %>%
  filter(DS.code == sp.code) %>%
  pull(SSAR.common)
common

## [1] "Cascades Frog"

## All species codes used (some species are complexes or have subspecies so multiple codes exist)
sp.code.all <- codeKey %>%
  filter(DS.code == sp.code) %>%
  pull(all.codes)
sp.code.all

```

```

## [1] "RACA"

## Scientific name
sciname <- codeKey %>%
  filter(DS.code == sp.code) %>%
  pull(SSAR.scientific)
sciname

## [1] "Rana cascadae"

## Save genus name to assign Frog/Toad or Salamander
gen <- stringr::word(sciname, 1)

if (gen %in% c("Acris", "Anaxyrus", "Aquarana", "Ascaphus",
  "Craugastor", "Dendrobates", "Dryophytes", "Eleutherodactylus",
  "Gastrophryne", "Glandirana", "Hyla", "Hypopachus", "Incilius",
  "Leptodactylus", "Lithobates", "Osteopilus",
  "Pseudacris", "Rana", "Rhinella", "Rhinophrynus",
  "Scaphiopus", "Smilisca", "Spea", "Xenopus")) spp.type <- "Frog/Toad"
if (gen %in% c("Ambystoma", "Amphiuma", "Aneides", "Batrachoseps",
  "Cryptobranchus", "Desmognathus", "Dicamptodon",
  "Ensatina", "Eurycea", "Gyrinophilus", "Hemidactylum",
  "Hydromantes", "Necturus", "Notophthalmus",
  "Phaeognathus", "Plethodon", "Pseudobranchus",
  "Pseudotriton", "Rhyacotriton", "Siren",
  "Stereochilus", "Taricha", "Ursperlerpes")) spp.type <- "Salamander"

gen; spp.type

## [1] "Rana"

## [1] "Frog/Toad"

```

Next we will load a dataframe with the names of data sources (`00-data-summary-flexiSDM.csv`). We define ours in a CSV file because we have hundreds of datasets to filter through for different species. This process could also be done by manually creating a dataframe with the same column names. The necessary columns are: `file.name` (how the file is named in the source folder), `file.label` (the label for the data source), `data.type` (Count, DND, or PO), `PO.extent` (does the presence-only span the continent or a particular state), `covar.mean` (detection covariates that should be averaged across passes), `covar.sum` (detection covariates that should be summed across passes). For additional clarification, sometimes it is more appropriate to summarize detection covariates by averaging than summing and vice versa. For example, the number of survey minutes should be summed but the temperature during the survey should be averaged. Note that the dataset names(s) included in `exclude.datasets` must match the `file.label` column.

```

# get all files that have data for that species
allfiles <- read.csv("data/00-data-summary-flexiSDM.csv") %>%
  filter(Species == sp.code) %>%
  rename(file.name = Data.Swamp.file.name,
    file.label = Name,
    covar.mean = Covar.mean,
    covar.sum = Covar.sum,
    data.type = Type.true) %>%

```

```

    select(file.name, file.label, covar.mean, covar.sum,
           data.type, P0.extent)

head(allfiles)

##               file.name   file.label covar.mean      covar.sum
## 1 RACA_ARMIOSF_count_2010_2023  ARMI Count      duration, area_sqm
## 2          RACA_BLM_PO_1992_2021 BLM Surveys
## 3          RACA_iNat_PO iNaturalist
## 4          RACA_museum_PO   Museum
## 5          RACA_NCCN_PO_1984_2005   NCCN
## 6          RACA_NRIS_PO_1901_2022   FS NRIS
##   data.type P0.extent
## 1     Count      <NA>
## 2       PO        OR
## 3       PO      CONUS
## 4       PO      CONUS
## 5       PO        WA
## 6       PO      CONUS

```

We can now use `allfiles` to load all of the species data sources. We have developed a function called `load_species_data` which takes the species code, `allfiles`, the region, and information about filtering, start/end dates, and spatial uncertainty to load and filter the data appropriately. The number of observations removed from each data source and the reasons for removal are provided as console output to the user.

```

species.data <- load_species_data(sp.code,
                                    sp.code.all,
                                    file.info = allfiles,
                                    file.path = "data/data-ready/",
                                    region = region,
                                    filter.region = filter.region,
                                    year.start = year.start,
                                    year.end = year.end,
                                    coordunc = coordunc,
                                    coordunc_na.rm = coordunc_na.rm,
                                    spat.thin = spat.bal,
                                    keep.conus.grid.id = gridkey$conus.grid.id[which(gridkey$group == "tra
                                   
## 
## File 1: ARMI Count....Loading file
## Removing 4000 observations that are outside of the study region
## No data for this analysis
##
## File 2: BLM Surveys....Loading file
## Removing 148 observations that are outside of the study region
## Removing 493 observations before 1994 or after 2025
## Removing 237 observations for spatial thinning
##
## File 3: iNaturalist....Loading file
## Removing 1674 observations that are outside of the study region
## Removing 79 observations whose coordinate uncertainty is above the threshold of 1000
## No data for this analysis

```

```

## 
## File 4: Museum....Loading file
## Removing 16 observations that are outside of the study region
## No data for this analysis
##
## File 5: NCCN....Loading file
## Removing 52680 observations that are outside of the study region
## No data for this analysis
##
## File 6: FS NRIS....Loading file
## Removing 54500 observations that are outside of the study region
## Removing 168 observations before 1994 or after 2025
## Removing 118 observations for spatial thinning
##
## File 7: ORBIC....Loading file
## Removing 112 observations that are outside of the study region
## Removing 2 observations before 1994 or after 2025
## Removing 0 observations for spatial thinning
##
## File 8: USGS RACA assessment - current....Loading file
## Removing 390 observations that are outside of the study region
## Using effort as covariate(s)
##
## File 9: USGS RACA assessment - historic....Loading file
## Removing 91 observations that are outside of the study region
## Using yday as covariate(s)
##
## File 10: PNW Salamanders....Loading file
## Removing 177 observations that are outside of the study region
## Using distance as covariate(s)
##
## File 11: WDWF....Loading file
## Removing 1195 observations that are outside of the study region
## No data for this analysis

```

Step 4: Plot species data

Next let's plot the species data to visualize where the data occur in the subrange.

```

## Quick title to be used across figures
if (block == "none") {
  title <- ", full model"
} else {
  title <- paste0(", excluding block ", block)
}

## Plot data samples
pl <- map_species_data(region = region,
                        species.data = species.data,
                        year.start = year.start,
                        year.end = year.end,
                        plot = "samples",
                        plot.region = T,

```

```

    details = F,
    title = paste0(common, " (", sp.code, ")", title))

## Reading 'ne_10m_lakes.zip' from naturalearth...
## Save plot
ggsave(pl, file = paste0(out.dir, "2_inputmap-a_data-", blockname, ".jpg"),
       height = 8, width = 10)

```

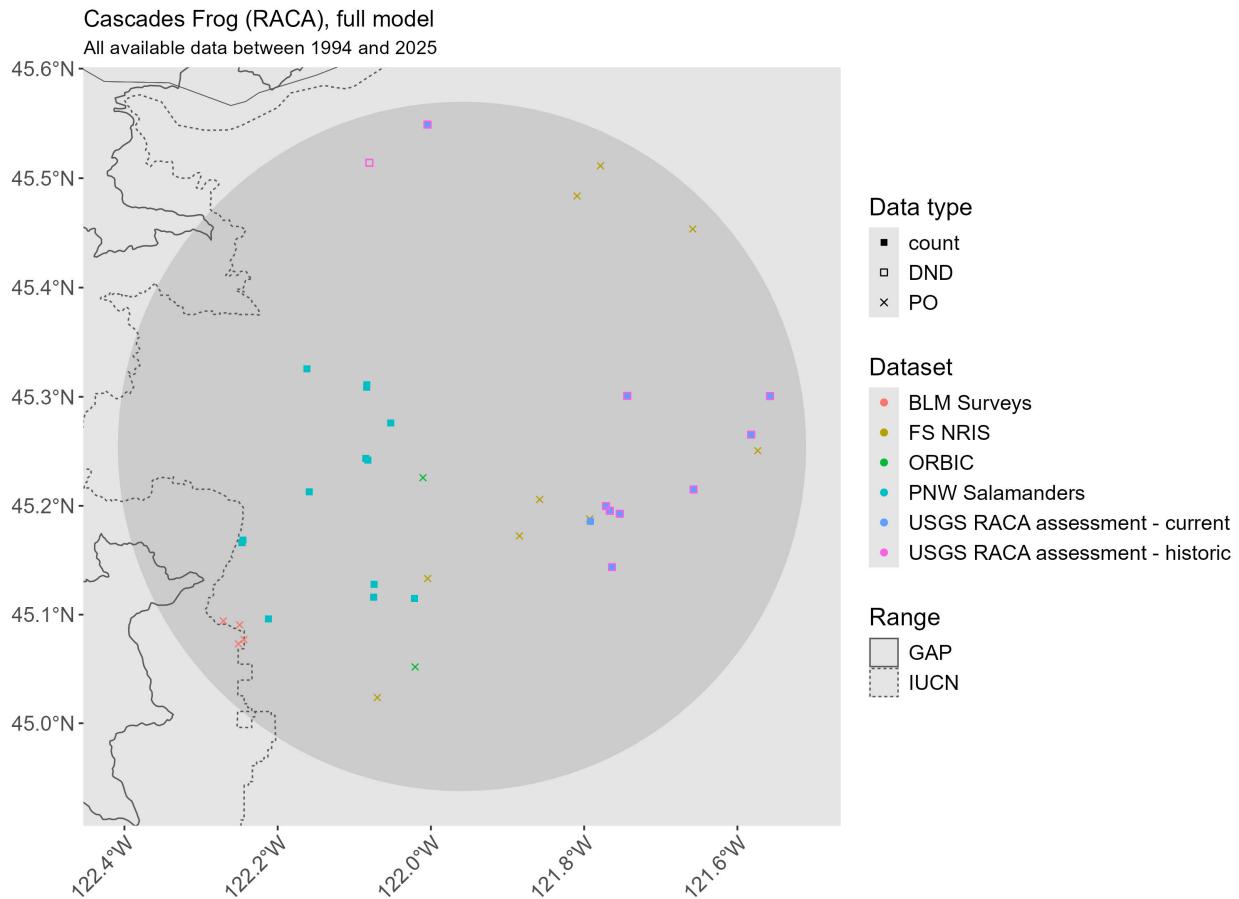


Figure 1: Distribution of species data across the subrange

We can also take a look at the distribution of data across the cross-validation folds.

```

## Cross-validation block-specific plots
if (block.out != "none") {

  pl <- map_species_data(region = region,
                         species.data = species.data,
                         year.start = year.start,

```

```

        year.end = year.end,
        plot = "samples",
        plot.blocks = T,
        blocks = spatblocks[which(spatblocks$folds == block),],
        plot.region = T,
        details = F,
        title = paste0(common, " (", sp.code, ")", title))
ggsave(pl, file = paste0(out.dir, "2_inputmap-c_blocks-", blockname, ".jpg"),
       height = 8, width = 10)
} else {
  # Plot
  pl <- map_species_data(region = region,
                         species.data = species.data,
                         year.start = year.start,
                         year.end = year.end,
                         plot = "samples",
                         plot.blocks = T,
                         blocks = spatblocks,
                         plot.region = T,
                         details = F,
                         title = paste0(common, " (", sp.code, ")", title))
  ggsave(pl, file = paste0(out.dir, "2_inputmap-c_blocks-", blockname, ".jpg"),
         height = 8, width = 10)
}

```

Reading 'ne_10m_lakes.zip' from naturalearth...

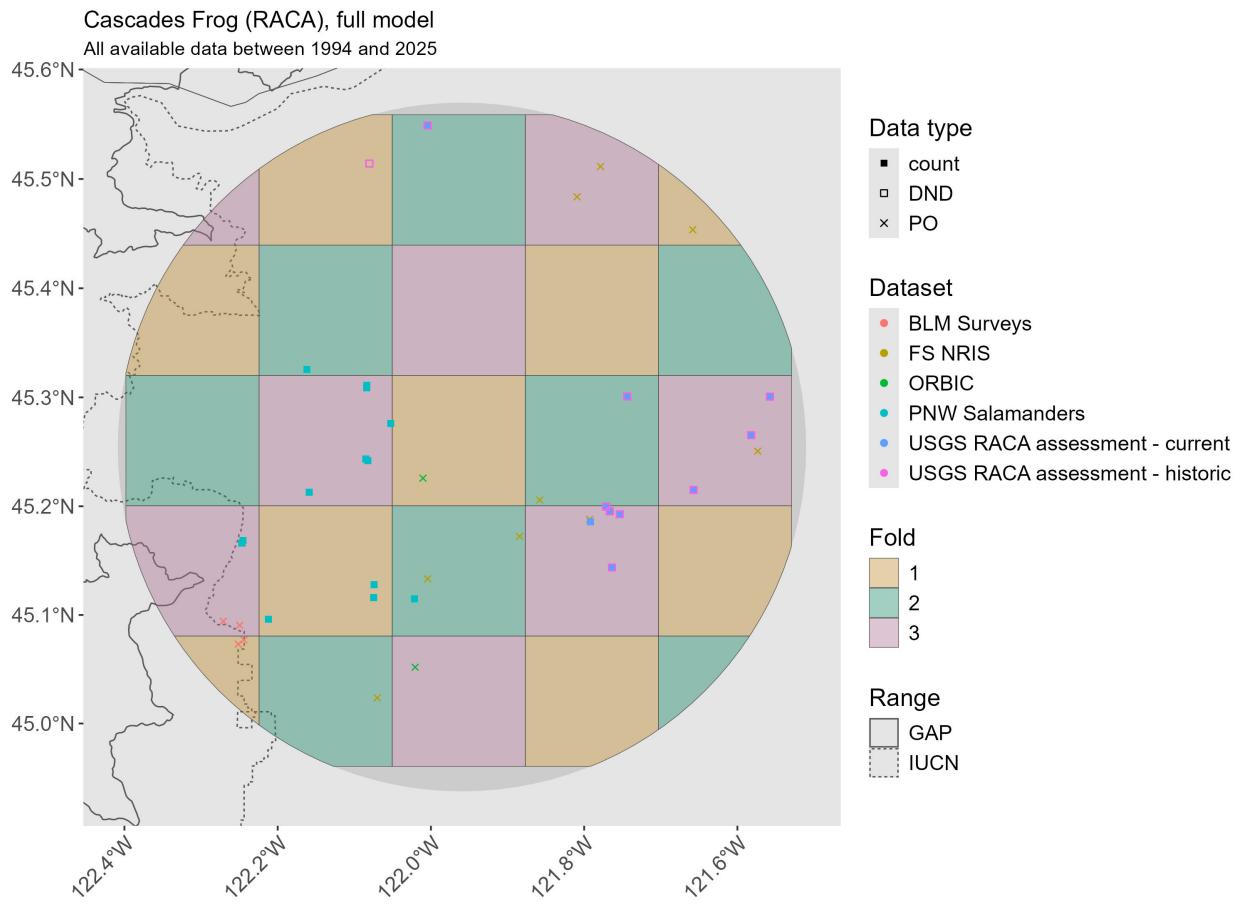


Figure 2: Distribution of data with overlaid cross-validation blocks

Step 5: Load covariate data

We're now ready to download covariate data for the subrange. We use functions from the `SpFut.covariates` package. These functions consist of wrappers for other data sources (e.g., National Hydrologic Database IS THAT WHAT IT'S CALLED? and the `geodata` R package) that download and format the data for our purposes. See the documentation for the `SpFut.covariates` package for more information on how to use the functions properly.

The `covar` object needs to contain all covariates needed for the distribution model (`covs.z`), as well as all covariates needed for the PO effort models (`covs.PO` and `covs.inat`). These covariates will vary across species. Any method can be used to derive the covariates, as long as it is aggregated to the spatial unit and included in `covar`.

DO WE WANT TO INCLUDE A DEMONSTRATION OF “OTHER INAT SPECIES” AS A COVARIATE OR SKIP IT IN THIS APPENDIX? - CLS says skip it. I added some text about other covariates being needed for other species

Just a note: Downloading and assembling the covariate data can take significant time depending on the size of the range and your internet connection. We demonstrate how we downloaded the data below but provide the `covariates.rds` file to proceed to the next step.

```

if (sp.code == "RACA") {

  if (file.exists(paste0(data.dir, "covariates.rds"))) {
    covar <- read_rds(paste0(data.dir, "covariates.rds"))
  } else {

    # Note that elevation data must be downloaded before running get_elevation()
    # We have downloaded the elevation and waterbody data outside of this repo
    # See documentation for details.
    tri <- get_elevation(locs = region$sp.grid, path = "../species-futures/data/USA/",
                         id.label = "conus.grid.id")
    waterbody <- get_waterbodies(locs = region$sp.grid, path = "../species-futures/data/USA/",
                                 id.label = "conus.grid.id")

    footprint <- get_footprint(locs = region$sp.grid, id.label = "conus.grid.id")
    climate <- get_climate(locs = region$sp.grid, id.label = "conus.grid.id")
    traveltimes <- get_traveltimes(locs = region$sp.grid, id.label = "conus.grid.id")

    covar <- full_join(tri, footprint, by = "conus.grid.id") %>%
      full_join(climate, by = "conus.grid.id") %>%
      full_join(waterbody, by = "conus.grid.id") %>%
      full_join(traveltimes, by = "conus.grid.id") %>%
      mutate(sqrtarea_small = sqrt(area_small),
             sqrtarea_medium = sqrt(area_medium)) %>%
      select(conus.grid.id, sqrtarea_small, sqrtarea_medium,
             footprint, TRI, tmin, traveltimes)

    covar <- covar[order(match(covar$conus.grid.id, region$sp.grid$conus.grid.id)),]
    write_rds(covar, file = paste0(data.dir, "covariates.rds"))

  }
}

}

```

Next we remove grid cells that do not have complete covariates.

```

## Remove incomplete cases
rm <- which(complete.cases(covar[,cvs.z]) == F)
if (length(rm) > 0) {
  covar <- covar[-rm,]
  region$sp.grid <- region$sp.grid[-rm,]
}

```

Then we scale all covariates to have a mean of 1 and a standard deviation of 0.

```

## Scale covariates
covar_unscaled <- covar
numcols <- sapply(covar, is.numeric)
numcols <- which(numcols)
covar[,numcols] <- sapply(covar[,numcols], scale_this)

```

Finally we create the quadratic covariates (as defined in `model-specs.csv`).

```

if (length(covs.quad) > 0 & paste0(covs.quad, collapse = "") != "") {
  for (c in 1:length(covs.quad)) {
    covar[,paste0(covs.quad[c], "2")] <- covar[,covs.quad[c]] * covar[,covs.quad[c]]
    covs.z <- c(covs.z, paste0(covs.quad[c], "2"))
  }
}

```

There's one additional step that could be done here. If removing multicollinearity is desired, the following piece of code would check and remove covariates that violate a 0.4 correlation threshold. If there are fewer than 3 covariates remaining after the procedure, then a message will alert you.

```

# remove covariates that are correlated > 0.4
if (check.covs == T){

  threshold <- 0.4
  if (sp.code == "PJOR") threshold <- 0.45

  covs.rm <- select_covar(covs.z, threshold = threshold)
  covs.lin <- covs.lin[-which(covs.lin %in% covs.rm)]
  covs.quad <- covs.quad[-which(covs.quad %in% covs.rm)]

  covs.z <- c(covs.lin, covs.quad)
}

if (length(covs.z) < 3) {
  stop("There are fewer than 3 covariates remaining! This probably isn't a good model")
}

```

Step 6: Plot covariates

Now that we've downloaded covariate data, let's take a look at the distribution of each covariate and the correlations between them.

```

if (block.out == "none") {

  ## Distribution covariates

  ## Define covariate labels
  covlabs <- read.csv("data/covariate-labels.csv") %>% filter(covariate %in% covs.z)

  plot_covar(covar,
             region,
             cov.names = covlabs$covariate,
             cov.labels = covlabs$Label,
             out.path = out.dir,
             out.name = "1_covariates-a_process-map")

  cor_covar(covar,
             cov.names = covlabs$covariate,
             cov.labels = covlabs$Label,
             out.path = out.dir,
             out.name = "1_covariates-a_process-correlations",
}

```

```

    color.threshold = 0.25)

## iNat covariates
if ("iNaturalist" %in% names(species.data$obs)) {
  ## Define covariate labels
  covlabs <- read.csv("data/covariate-labels.csv") %>%
    filter(covariate %in% covs.inat)

  plot_covar(covar,
             region,
             cov.names = covlabs$covariate,
             cov.labels = covlabs$Label,
             out.path = out.dir,
             out.name = "1_covariates-b_iNat-map")

  if (length(covs.inat) > 1) {
    cor_covar(covar,
              cov.names = covlabs$covariate,
              cov.labels = covlabs$Label,
              out.path = out.dir,
              out.name = "1_covariates-b_iNat-correlations",
              color.threshold = 0.25)
  }
}

## PO covs

## Define covariate labels
covlabs <- read.csv("data/covariate-labels.csv") %>%
  filter(covariate %in% covs.PO)

plot_covar(covar,
           region,
           cov.names = covlabs$covariate,
           cov.labels = covlabs$Label,
           out.path = out.dir,
           out.name = "1_covariates-c_PO-map")

if (length(covs.PO) > 1) {
  cor_covar(covar,
            cov.names = covlabs$covariate,
            cov.labels = covlabs$Label,
            out.path = out.dir,
            out.name = "1_covariates-c_PO-correlations",
            color.threshold = 0.25)
}
}

## Ignoring unknown labels:
## * colour : "Correlation coefficient"

```

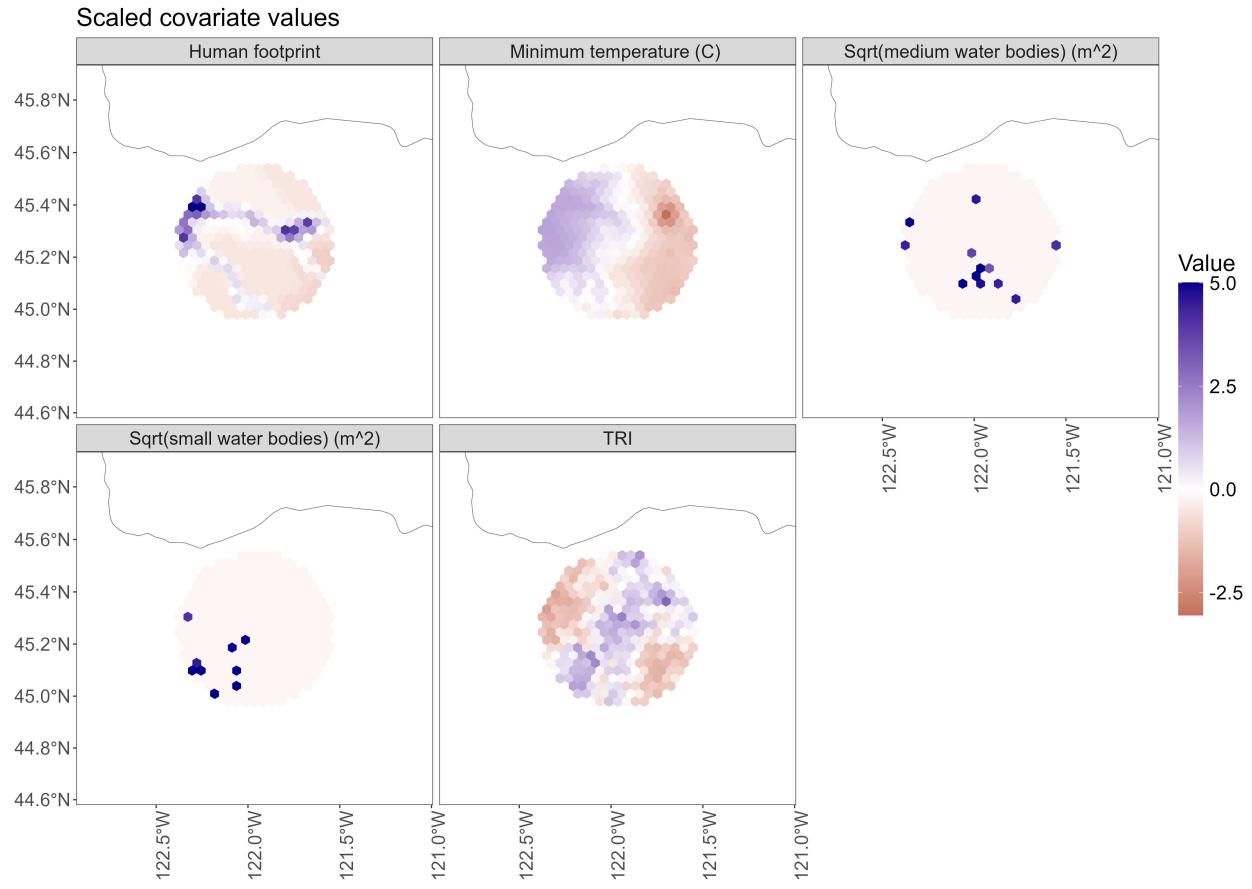


Figure 3: Distribution of distribution-level covariates across the subrange

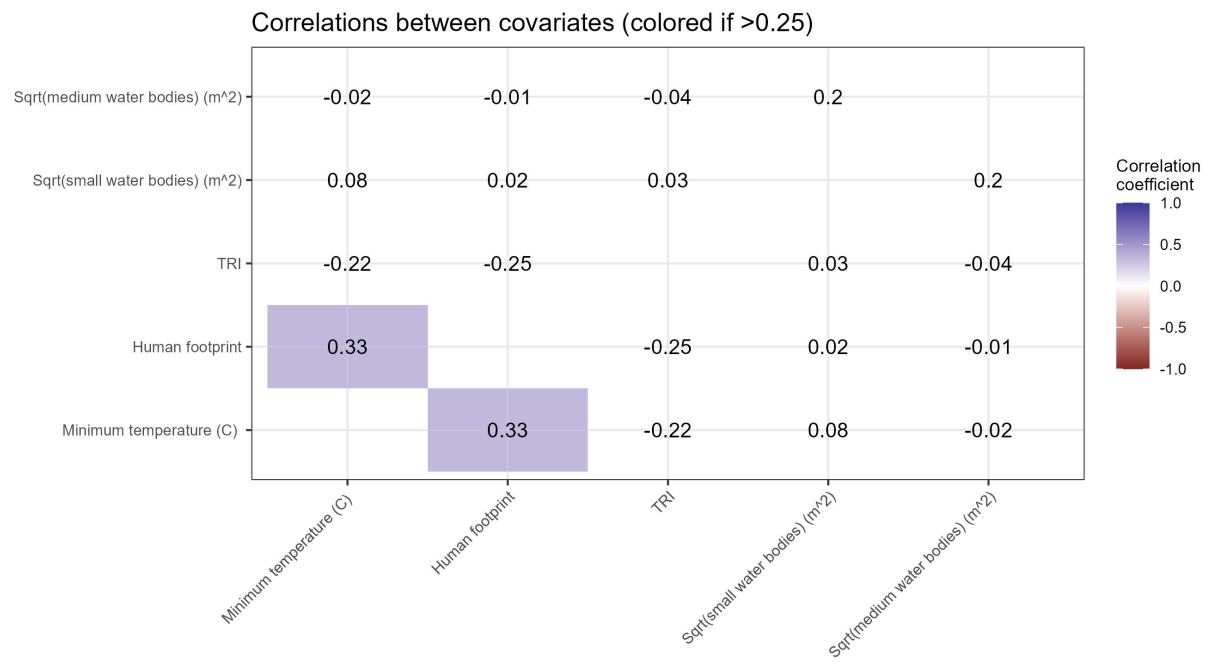


Figure 4: Correlation between distribution-level covariates

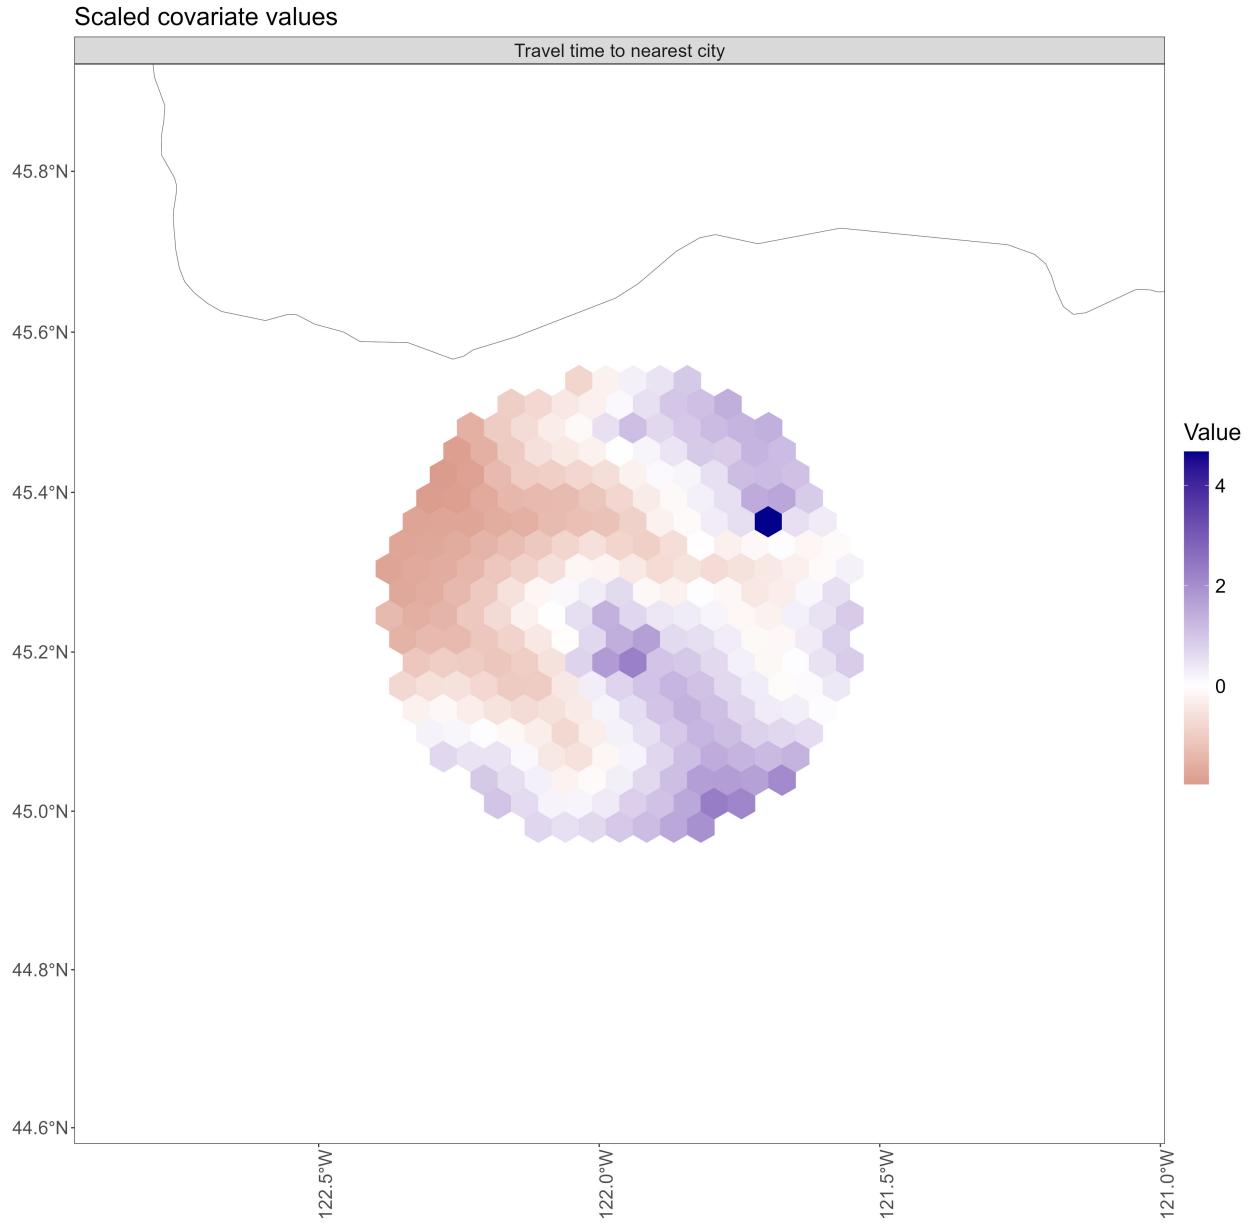


Figure 5: Distribution of presence-only (PO) effort covariates

Step 7: NIMBLE

To load the data into NIMBLE, the data must be formatted in a specific way. We have wrapped this process in a function that combines and formats species datasets (`allfiles`) and their associated covariates (contained in `allfiles`, `covs.inat`, and `covs.PO`)

```
sp.data <- sppdata_for_nimble(species.data,
                                region,
                                file.info = allfiles,
                                covar = covar,
                                covs.inat = covs.inat,
```

```

covs.PO = covs.PO,
DND.maybe = 1, # treat "maybe" detections as 1 or 0?
# Only keep PO cells that training grid cells
keep.conus.grid.id = gridkey$conus.grid.id[which(gridkey$group == "train")]

## No iNaturalist data for this species
##
## Loading PO
## Loading PO
## Loading DND
## Loading count
## Loading count

```

Next, the distribution-level covariates (`covar`) are combined with the formatted species data. All of this is then broken into `data` and `constants` which are the inputs for the model.

```

tmp <- data_for_nimble(sp.data, covar = covar, covs.z,
                        sp.auto = sp.auto, coarse.grid = coarse.grid, region = region,
                        process.intercept = F,
                        gridkey = gridkey, spatRegion = spatRegion)

data <- tmp$data
constants <- tmp$constants

```

The model structure allows for an indicator variable to indicate whether a cell is in a state with effort or not. There are generally two cases where this is useful:

- If a state agency has collected PO only from within its state, by definition there is effort within that state but not outside of it. This information is already stored in `constants`, which pulled it from `allfiles$POextent`
- In iNaturalist data, if a species has taxon geoprivacy (i.e., obscured locations due to listing status) within a state, all records from that state will be removed by `load_species_data()` due to high coordinate uncertainty. The effort in that state is therefore effectively 0.

The following code adds the state indicator variable to `constants`.

```

# GPOR has taxon geoprivacy in four states
if (sp.code == "GPOR") obsc.state <- c("CT", "MS", "NJ", "RI")

# RACA has no iNat data
if (sp.code == "RACA") obsc.state <- NA

constants <- add_state_ind(species.data,
                            region,
                            gridkey,
                            constants,
                            covs.inat = covs.inat,
                            obsc.state = obsc.state,
                            keep.conus.grid.id = gridkey$conus.grid.id[which(gridkey$group == "train")])

```

Once `data` and `constants` are set up for NIMBLE, the function `nimble_code()` writes the NIMBLE code using the information contained in those objects as well several other specifications defined earlier in the code. The NIMBLE code is saved as a .R file in the location defined by the `path` argument, and in the object `code`.

```
code <- nimble_code(data,
                     constants,
                     path = out.dir,
                     sp.auto = sp.auto,
                     coarse.grid = coarse.grid,
                     Bprior = Bprior,
                     block.out = block.out,
                     min.visits.incl = 3,
                     zero_mean = zero_mean,
                     rm.state = F,
                     tau = tau)

##
## # Process Model
##
## # 279 cells
## for (i in 1:nCell) {
##
##     # log intensity
##     XB0[i] <- inprod(B[1:nCovZ], Xz[i,1:nCovZ])
##     log(lambda0[i]) <- XB0[i] + spat[i] # residual spatial effect
##
## }
##
##
## # -----
##
## # Observation Model 1: PO, FS NRIS
## # 279 cells
## for (j in 1:nW1) {
##
##     # Make dataset-specific lambda (and N and Z if needed)
##     lambdaD1[j] <- lambda0[Wcells1[j]] * alpha[1]
##
##     # Observation model
##     W1[j] ~ dpois(lambdaD1[j] * E1[j]) # Poisson
##
##     # Effort
##     log(E1[j]) <- A1[1] * Xw1[j,1]
##
##     # Prior for X imputation
##     Xw1[j, 1] ~ dnorm(0, 1)
## }
##
##
## # Observation Model 2: PO, BLM Surveys, ORBIC
## # 279 cells
## for (j in 1:nW2) {
```

```

## 
## # Make dataset-specific lambda (and N and Z if needed)
## lambdaD2[j] <- lambda0[Wcells2[j]] * alpha[2]
##
## # Observation model
## W2[j] ~ dpois(lambdaD2[j] * E2[j]) # Poisson
##
## # Effort
## log(E2[j]) <- A2[1] * Xw2[j,1]
##
## # Prior for X imputation
## Xw2[j, 1] ~ dnorm(0, 1)
## }
##
##
## # Observation Model 3: DND, USGS RACA assessment - historic
## # 24 observations, 2.5 median visits per site
## for (j in 1:nV3) {
##
## # Make dataset-specific lambda (and N and Z if needed)
## lambdaD3[j] <- lambda0[Vcells3[j]] * alpha[3]
##
## # Observation model
## V3[j] ~ dbern(1-exp(-lambdaD3[j] * p3[j])) # Bernoulli
##
## # Detection
## log(p3[j]) <- inprod(D3[1:nCovV3], Xv3[j,1:nCovV3])
##
## # Prior for X imputation
## for (c in 1:nCovV3) {
##   Xv3[j,c] ~ dnorm(0, 1)
## }
## }
##
##
## # Observation Model 4: count, USGS RACA assessment - current
## # 16 observations, 2 median visits per site
## for (j in 1:nY4) {
##
## # Make dataset-specific lambda (and N and Z if needed)
## lambdaD4[j] <- lambda0[Ycells4[j]] * alpha[4]
##
## # Observation model
## Y4[j] ~ dpois(lambdaD4[j] * p4[j]) # Poisson
##
## # Detection
## log(p4[j]) <- C4[1] * Xy4[j,1]
##
## # Prior for X imputation
## Xy4[j, 1] ~ dnorm(0, 1)
## }
##

```

```

##  

## # Observation Model 5: count, PNW Salamanders  

## # 19 observations, 1 median visits per site  

## for (j in 1:nY5) {  

##  

##   # Make dataset-specific lambda (and N and Z if needed)  

##   lambdaD5[j] <- lambda0[Ycells5[j]] * alpha[5]  

##  

##   # Observation model  

##   Y5[j] ~ dpois(lambdaD5[j] * p5[j]) # Poisson  

##  

##   # Detection  

##   log(p5[j]) <- C5[1] * Xy5[j,1]  

##  

##   # Prior for X imputation  

##   Xy5[j, 1] ~ dnorm(0, 1)  

## }  

##  

##  

## # -----  

## # Process priors  

## for (a in 1:nCovZ) {  

##   B[a] ~ dnorm(0,1)  

## }  

##  

## # Dataset intercepts  

## for (a in 1:nD) {  

##   alpha[a] <- exp(w[a])  

##   w[a] ~ dnorm(0,1)  

## }  

##  

## # Observation priors, P0 1: FS NRIS  

## for (b in 1:nCovW1) {  

##   A1[b] ~ dnorm(0,1)  

## }  

##  

## # Observation priors, P0 2: BLM Surveys, ORBIC  

## for (b in 1:nCovW2) {  

##   A2[b] ~ dnorm(0,1)  

## }  

##  

## # Observation priors, DND 3: USGS RACA assessment - historic  

## for (b in 1:nCovV3) {  

##   D3[b] ~ dnorm(0,1)  

## }  

##  

## # Observation priors, count 4: USGS RACA assessment - current  

## for (b in 1:nCovY4) {  

##   C4[b] ~ dnorm(0,1)  

## }  

##  

## # Observation priors, count 5: PNW Salamanders  

## for (b in 1:nCovY5) {

```

```

##   C5[b] ~ dnorm(0,1)
## }
##
## tau <- 1
## spat[1:nCell] ~ dcar_normal(adj[1:L], weights[1:L], num[1:nCell], tau, zero_mean = 1)

```

Next, set up the initial values, also based on the information in `data` and `constants`.

```

inits <- function(x){nimble_inits(data,
                                      constants,
                                      sp.auto = sp.auto,
                                      seed = x)}

```

Finally, identify which parameters the model should save chains for. By default, distribution model parameters (B) and dataset intercepts (A) are saved. Parameters that are estimated for each hexbin (λ , XB , effort) require more storage, so there are options to disable them. If `sp.auto = T`, then the spatial random effect and τ are also saved.

```

params <- nimble_params(data,
                         constants,
                         lambda = T,
                         XB = T,
                         effort = T,
                         sp.auto = sp.auto)

```

Step 8: Clean up and save

Remove objects that are large and are not required for further steps, then save the workspace.

```

# Remove local and block in case the setup is run locally but the model is fit on the HPC.
# Remove other unnecessary files to reduce the size of setup_BLOCK.Rdata
rm(list=c('local','block','args','conus.covar.grid','conus.grid','usa','conus',
         'pl','centroid'))

# Save environment and full set up
save.image(paste0(out.dir, "setup_",block.out,".Rdata"))

```

Part 2: 02-flexiSDM.R

```

num <- 3
block <- "none"
sp.code <- "RACA"
model <- "subrange"
chain <- 1
local <- 1

```

```

# Load functions and packages
source("functions/FXN-nimbleParallel.R") # HOW DO YOU RUN THIS IN ISDM-FRAMEWORK?
library(SpFut.flexiSDM)

# Set output directory and load setup file
out.dir = paste0('outputs/', num, '_', sp.code, '_', model, '/')
load(paste0(out.dir, 'setup_', block, '.Rdata'))

```

Fit NIMBLE model

```

if (local == 1) {
  start.nim <- Sys.time()
  samples <- nimbleParallel(code = code,
                             data = data,
                             constants = constants,
                             inits = inits,
                             param = params,
                             iter = iter,
                             burnin = burnin,
                             thin = thin)

  end.nim <- Sys.time() - start.nim
  print(end.nim)

  saveRDS(samples, paste0(out.dir, 'samples_', block, '.rds'))
} else {

  info <- list(seed = chain,
               inits = inits(chain))

  start.nim <- Sys.time()
  samples <- run_nimbleMCMC(info = info,
                            code = code,
                            constants = constants,
                            data = data,
                            param = params,
                            iter = iter,
                            burnin = burnin,
                            thin = thin)

  end.nim <- Sys.time() - start.nim
  print(end.nim)

  saveRDS(samples, paste0(out.dir, 'samples_', block, '_', chain, '.rds'))
}

```

Part 3: 03-flexiSDM.R

-> -> -> -> -> -> -> -> -> ->

```

## load packages ----
library(tidyverse, quietly = T)
library(magrittr, quietly = T)
library(sf, quietly = T)
library(SpFut.flexiSDM)

num <- 3
block <- "none"
sp.code <- "RACA"
model <- "subrange"
maxchain <- 3
local <- 1

# load output directory, setup, and functions
out.dir = paste0('outputs/', num, '_', sp.code, '_', model, '/')
load(paste0(out.dir, 'setup_', block, '.Rdata'))

# Load chains (samples) ----
samples <- readRDS(paste0(out.dir, 'samples_', block, '.rds'))

## Calculate derived quantities ----
# This takes longer with the coarse grid.
samples <- lapply(samples, get_derived, data = data, project = project,
                   coarse.grid = coarse.grid, spatRegion = spatRegion,
                   pathToProj = 'code/03-species-models/setup-projections.R')

## Summarize chains ----
out <- summarize_samples(samples,
                         data,
                         constants,
                         project = project,
                         coarse.grid = coarse.grid,
                         block.out = block.out,
                         gridkey = gridkey,
                         spatkey = spatRegion$spatkey,
                         effort = T,
                         SLURM = ifelse(local == 1, F, T))

save(out, file = paste0(out.dir, "data", blockname, ".rdata"))

# Plot output ----

# Convergence
ggsave(plot_convergence(out),
       file = paste0(out.dir, "3_parameters-0_convergence-", block, ".jpg"),
       height = 5, width = 12)

if (block.out == "none") {
  cov.labs <- read.csv("data/covariate-labels.csv")

### Chains ----

```

```

ggsave(plot_chains(samples, data = data, cov.labs = cov.labs,
                    plot = "B", cutoff = 0),
       file = paste0(out.dir, "3_parameters-a1_chains-B.jpg"),
       height = 6, width = 8)
ggsave(plot_chains(samples, data = data, cov.labs = cov.labs,
                    plot = "alpha", cutoff = 0),
       file = paste0(out.dir, "3_parameters-b1_chains-alpha.jpg"),
       height = 6, width = 8)
ggsave(plot_chains(samples, data = data, cov.labs = cov.labs,
                    plot = "tau", cutoff = 0),
       file = paste0(out.dir, "3_parameters-b1_chains-tau-",block,".jpg"),
       height = 6, width = 8)

# Posteriors ----
ggsave(plot_posteriors(samples, data = data, cov.labs = cov.labs,
                        plot = "B", cutoff = 0),
       file = paste0(out.dir, "3_parameters-a2_posteriors-B.jpg"),
       height = 6, width = 8)
ggsave(plot_posteriors(samples, data = data, cov.labs = cov.labs,
                        plot = "alpha", cutoff = 0),
       file = paste0(out.dir, "3_parameters-b2_posteriors-alpha.jpg"),
       height = 6, width = 8)

### Parameter estimates ----
ggsave(plot_pars(out,
                  plot.type = "full",
                  plot.group = "process",
                  title = "Process parameter estimates",
                  cov.labs = cov.labs),
       file = paste0(out.dir, "3_parameters-a3_B.jpg"),
       height = 6, width = 10)

ggsave(plot_pars(out,
                  plot.type = "full",
                  plot.group = "dataset",
                  title = "Dataset parameter estimates"),
       file = paste0(out.dir, "3_parameters-b3_alpha.jpg"),
       height = 6, width = 10)

ggsave(plot_pars(out,
                  plot.type = "full",
                  plot.group = "observation",
                  title = "Observation intercept estimates",
                  cov.labs = cov.labs),
       file = paste0(out.dir, "3_parameters-c3_observation.jpg"),
       height = 6, width = 10)

ggsave(plot_pars(out,
                  plot.type = "full",
                  plot.group = "tau",
                  title = "Tau estimate"),
       file = paste0(out.dir, "3_parameters-d1_tau.jpg"),
       height = 6, width = 10)

```

```

file = paste0(out.dir, "3_parameters-c3_tau.jpg"),
height = 6, width = 10)

### Marginal effects ----
ggsave(plot_effects(data, out, breaks = 0.001),
       file = paste0(out.dir, "/3_parameters-a4-effects.jpg"),
       height = 7, width = 10)

### Maps ----
# Current
pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "lambda",
                        out = out)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-a_lambda.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "lambda",
                        out = out,
                        plot.uncertainty = "unc.range")
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-a_lambda-uncabs.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "lambda",
                        out = out,
                        plot.uncertainty = "unc.rel")
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-a_lambda-uncrel.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "psi",
                        out = out)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-b_psi.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "psi",
                        out = out,
                        plot.uncertainty = "unc.range")
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-b_psi-uncabs.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "psi",
                        out = out,

```

```

        plot.uncertainty = "unc.rel")
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-b_psi-uncrel.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "boundary",
                        out = out,
                        threshold = 0.25)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-c1_boundary-0.25.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "boundary",
                        out = out,
                        threshold = 0.5)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-c2_boundary-0.5.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "boundary",
                        out = out,
                        threshold = 0.75)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-c3_boundary-0.75.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "spat",
                        out = out,
                        coarse.grid = coarse.grid,
                        spatRegion = spatRegion)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-d_spat.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "XB",
                        out = out,
                        plot.exp = T)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-d_expXB.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "effort",
                        out = out)
ggsave(pl, file = paste0(out.dir, "4_mapcurrent-e_effort.jpg"),
       height = 7, width = 9)

```

```

### Future projections ----
if (project > 0) {
  pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                         region,
                         plot = "lambda",
                         out = out,
                         plot.current = F,
                         plot.change = F,
                         proj.names = proj.names)
  ggsave(pl, file = paste0(out.dir, "5_mapfuture-a_lambda.jpg"),
         height = 7, width = 9)

  pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                         region,
                         plot = "lambda",
                         out = out,
                         plot.current = F,
                         plot.change = F,
                         plot.uncertainty = "unc.range",
                         proj.names = proj.names)
  ggsave(pl, file = paste0(out.dir, "5_mapfuture-a_lambda-uncabs.jpg"),
         height = 7, width = 9)

  pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                         region,
                         plot = "lambda",
                         out = out,
                         plot.current = F,
                         plot.change = F,
                         plot.uncertainty = "unc.rel",
                         proj.names = proj.names)
  ggsave(pl, file = paste0(out.dir, "5_mapfuture-a_lambda-uncrel.jpg"),
         height = 7, width = 9)

  pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                         region,
                         plot = "psi",
                         out = out,
                         plot.current = F,
                         plot.change = F,
                         proj.names = proj.names)
  ggsave(pl, file = paste0(out.dir, "5_mapfuture-b_psi.jpg"),
         height = 7, width = 9)

  pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                         region,
                         plot = "psi",
                         out = out,
                         plot.current = F,
                         plot.change = F,
                         plot.uncertainty = "unc.range",
                         proj.names = proj.names)
  ggsave(pl, file = paste0(out.dir, "5_mapfuture-b_psi-uncabs.jpg"),
         height = 7, width = 9)
}

```

```

height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                       region,
                       plot = "psi",
                       out = out,
                       plot.current = F,
                       plot.change = F,
                       plot.uncertainty = "unc.rel",
                       proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "5_mapfuture-b_psi-uncrel.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                       region,
                       plot = "boundary",
                       out = out,
                       plot.current = F,
                       plot.change = F,
                       threshold = 0.25,
                       proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "5_mapfuture-c1_boundary-0.25.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                       region,
                       plot = "boundary",
                       out = out,
                       plot.current = F,
                       plot.change = F,
                       threshold = 0.5,
                       proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "5_mapfuture-c2_boundary-0.5.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                       region,
                       plot = "boundary",
                       out = out,
                       plot.current = F,
                       plot.change = F,
                       threshold = 0.75,
                       proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "5_mapfuture-c3_boundary-0.75.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                       region,
                       plot = "XB",
                       out = out,
                       plot.exp = T,
                       plot.current = F,
                       proj.names = proj.names)

```

```

ggsave(pl, file = paste0(out.dir, "5_mapfuture-d_expXB-future.jpg"),
       height = 7, width = 9)

### Future absolute change ----
pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "lambda",
                        out = out,
                        plot.current = F,
                        plot.change = "absolute",
                        proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-a1_lambda-abs.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "psi",
                        out = out,
                        plot.current = F,
                        plot.change = "absolute",
                        proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-b1_psi-abs.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "boundary",
                        out = out,
                        plot.current = F,
                        plot.change = "absolute",
                        threshold = 0.25,
                        proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-c1_boundary-abs-0.25.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "boundary",
                        out = out,
                        plot.current = F,
                        plot.change = "absolute",
                        threshold = 0.5,
                        proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-c2_boundary-abs-0.5.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "boundary",
                        out = out,
                        plot.current = F,
                        plot.change = "absolute",
                        threshold = 0.75,

```

```

            proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-c3_boundary-abs-0.75.jpg"),
       height = 7, width = 9)

### Future relative change ----
pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "lambda",
                        out = out,
                        plot.current = F,
                        plot.change = "relative",
                        proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-a2_lambda-rel.jpg"),
       height = 7, width = 9)

pl <- map_species_data(title = paste0(common, " (", sp.code, ")"),
                        region,
                        plot = "psi",
                        out = out,
                        plot.current = F,
                        plot.change = "relative",
                        proj.names = proj.names)
ggsave(pl, file = paste0(out.dir, "6_mapchange-b2_psi-rel.jpg"),
       height = 7, width = 9)
}
}

```

High performance computing

We almost exclusively run these models on a high performance computing (HPC) cluster. We clone our repository directly to the HPC to ensure we have the same file structure and no version conflicts. We've set up the code so we can seamlessly move between running the workflow locally and on our HPC.

To run the first steps of the workflow via `01-flexiSDM.R`, we call the script `01-flexiSDM.sh`, which takes 3 inputs:

- Model number
- Block (defined by an array in the script)
- Local (1/0)

We have simplified this further by writing a wrapper called `01-HPC.sh`, which only takes one input: model number. Within the script, `local` is set to 0, indicating a run on an HPC.

The inputs provided to the `.sh` scripts are converted to inputs to the `01-flexiSDM.R` script and are interpreted below:

```

# Converts command arguments to something interpretable by R
args = commandArgs(trailingOnly = TRUE)

if (length(args) > 0) {

  # Model number to run

```

```

nums.do = as.numeric(args[1])

# Blocks can be run as single jobs or as arrays
block = as.numeric(args[2])

# The block input is numeric only. Convert 4 = 'none'
if (block == 4) {
  block <- 'none'
}

# Running locally? Yes = 1
local = as.numeric(args[3])

# If running on an HPC, set the working directory to the project home directory
if (local == 0) {
  setwd('/home/directory/')
}
}

```