

Salesforce Scheduler Developer Guide

Version 67.0, Summer '26



Summer '26

CONTENTS

Chapter 1: Introduction to Salesforce Scheduler	1
Chapter 2: Set Up Salesforce Scheduler	2
Chapter 3: Salesforce Scheduler Data Model Overview	3
Chapter 4: Salesforce Scheduler Standard Objects	4
AppointmentAssignmentPolicy	5
AppointmentCategory	7
AppointmentInvitation	9
AppointmentInvitee	13
AppointmentScheduleAggr	16
AppointmentScheduleLog	18
AppointmentSchedulingPolicy	21
AssignedResource	25
Holiday	28
OperatingHours	29
OperatingHoursHoliday	31
ResourcePreference	33
ResourceAbsence	35
ServiceAppointment	37
ServiceAppointmentAttendee	49
ServiceResource	53
ServiceResourceSkill	55
ServiceTerritory	58
ServiceTerritoryMember	62
Shift	65
Skill	73
SkillRequirement	74
TimeSlot	76
Waitlist	79
WaitlistParticipant	82
WorkType	86
WorkTypeGroup	93
WorkTypeGroupDataTranslation	95
Chapter 5: Salesforce Scheduler Custom Objects	98
ActionableListMbrInvitation	99
AppointmentTopicTimeSlot	101
EngagementChannelType	103

Contents

EngagementChannelWorkType	106
ServiceTerritoryWorkType	108
ShiftEngagementChannel	110
ShiftWorkTopic	112
WaitlistServiceResource	115
WaitlistWorkType	118
WorkTypeGroupMember	120
Chapter 6: Salesforce Scheduler Platform Events	122
ServiceAppointmentEvent	123
Chapter 7: Salesforce Scheduler Metadata API Types	125
IndustriesSettings	126
Chapter 8: Authenticate Salesforce Scheduler APIs	129
Chapter 9: Translate SOQL Query Results	130
Chapter 10: Salesforce Scheduler Business APIs	133
REST APIs	134
Resources	134
Request Bodies	143
Response Bodies	144
Connect APIs	145
Resources	146
Connect REST API Request Bodies	168
Connect REST API Response Bodies	188
Error Codes and Responses	211
Appointment Candidates (GET)	212
Appointment Slots (GET)	212
Available Territory Slots (POST)	213
Estimated Wait Time (POST)	214
Service Appointments (PATCH)	215
Service Appointments (POST)	215
Service Territories (GET)	216
Waitlist Participants (PATCH)	216
Chapter 11: Salesforce Scheduler Apex Classes	217
ConnectApi Namespace	218
LightningScheduler Class	218
ConnectApi Input Classes	223
ConnectApi Output Classes	226
LxScheduler Namespace	227
GetAppointmentCandidatesInput Class	227
GetAppointmentCandidatesInputBuilder Class	230
GetAppointmentSlotsInput Class	236

GetAppointmentSlotsInputBuilder Class	238
SchedulerResources Class	244
SkillRequirement Class	249
SkillRequirementBuilder Class	249
WorkType Class	251
WorkTypeBuilder Class	251
Chapter 12: Build Custom Appointment Booking Experiences Using Salesforce	
Scheduler APIs	255
Schedule an Anonymous Appointment	256
Authenticate with a Connected App	256
Get Work Type Groups	257
Get Engagement Channels	258
Get Service Territories	259
Get Available Territory Slots	261
Create Service Appointments	270
Schedule Anonymous Appointments with Appointment Distribution	273
Create a Service Territory	274
Assign Service Territory to Work Types	274
Assign Service Resources	275
Enable Appointment Distribution	275
Authenticate API Calls with Salesforce Scheduler APIs	275
Get Appointment Time Slots	275
Create Service Appointments	279
Schedule Appointments by Selecting Location First	282
Enable Maps and Location Services	282
Get Service Territories	282
Get Work Type Groups	285
Get Work Type	288
Get Service Resources	289
Create Service Appointments	296
Modify an Anonymous Appointment	299
Authenticate with a Connected App	300
Get Service Appointments	300
Get Service Appointment Details	301
Get Available Resources	302
Update Service Appointments	303
Create a Single-Resource Appointment	304
Authenticate with a Connected App	305
Get Work Type Groups	305
Get Engagement Channels	306
Get Service Territories	307
Get Service Resources	308
Create Service Appointments	310

Contents

Modify a Service Appointment	312
Authenticate with a Connected App	313
Get Service Appointments	313
Get Service Appointment Details	314
Change Appointment Details	316
Update Service Appointments	321
Create a Multi-Resource Appointment	323
Considerations for Multi-Resource Scheduling	324
Enable Multi-Resource Scheduling	324
Update Field Level Security for Multi-Resource Scheduling	325
Authenticate with a Connected App	325
Get Work Type Groups	325
Get Engagement Channels	326
Get Service Territories	327
Get Appointment Candidates	329
Get Appointment Time Slots	334
Create Service Appointments	338
Modify a Multi-Resource Service Appointment	341
Authenticate with Salesforce Scheduler APIs	343
Get Service Appointments	343
Get Service Appointment Details	345
Change Appointment Details	345
Update Service Appointments	350
Create a Concurrent Appointment	351
Enable and Configure Concurrent Scheduling	352
Assign Concurrent Operating Hours to Service Territory Members	352
Authenticate with a Connected App	352
Get Work Type Groups	353
Get Service Territories	355
Get Work Types	356
Get Appointment Candidates	358
Create Service Appointments	362
Schedule Appointments by Using Sharing Availability	365
Configure Invitation URLs to Open on External Websites	366
Generate an Appointment Invitation URL	367
Retrieve the Invitation Key	367
Get the Appointment Invitation Details	367
Get the Appointment Invitee Details	368
Show Calendar Availability	369
Book Service Appointments	372
Schedule Appointments with a Dummy Resource and Reassign to Actual Resources	375
Set Up Salesforce Scheduler	375
Book Concurrent Appointments with Dummy Resource	378
Modify Appointments to Reassign to Actual Resources	392

- Chapter 13: Integrate Salesforce Scheduler with External Calendars 400**
 - Apex Classes for External Calendars 401
 - ServiceResourceScheduleHandler Interface 401
 - ServiceAppointmentRequestInfo Class 404
 - ServiceResourceInfo Class 408
 - ServiceResourceSchedule Class 411
 - UnavailableTimeslot Class 413
 - Platform Events for External Calendars 414
 - AppointmentSchedulingEvent 414
- Index 426**

CHAPTER 1 Introduction to Salesforce Scheduler

Salesforce Scheduler (formerly known as Lightning Scheduler) gives you the tools and developer resources you need to simplify appointment scheduling in Salesforce. Create a personalized experience by scheduling customer appointments—in person, or by phone or video—with the right person at the right place and time.

With Salesforce Scheduler developer resources, it's easy to build seamless appointment scheduling applications. These resources include REST APIs, Connect REST APIs, Salesforce Platform Events, and Apex classes. Appointment scheduling involves numerous resources such as appointment attendees, appointment locations, appointment topics, appointment timings, appointment duration, and so on. With Salesforce Scheduler, you get the tools that you can use to manage these resources.

Before using the Scheduler resources, you must configure Scheduler with the following items:

- Create service resources that represent your appointment attendees, and add details about their areas of expertise (skills), location, and availability.
- Set up service territories that represent the branch or office locations where your appointment attendees operate from or meet customers.
- Create work type groups that represent appointment topics such as home loan or investment.
- Create work types that represent appointment templates that link appointment topics with particular locations and define key parameters such as appointment duration, preparation and wrap-up buffers, and availability timings.
- Schedule customer appointments with defined topics, attendees, duration, and location.

SEE ALSO:

[Salesforce Scheduler: Set Up Salesforce Scheduler](#)

CHAPTER 2 Set Up Salesforce Scheduler

Set up Salesforce Scheduler for your organization. Assign permissions and object access for users. Update related lists and tab visibility. Configure Salesforce Scheduler settings for multi-resource scheduling, concurrent scheduling, multiple time zone selection, and map and location services. Optionally, set up Asset Scheduling for Salesforce Scheduler.

Before you can use the scheduler developer resources, you need to set up Salesforce Scheduler. Here are some of the things you must do:

- Assign permissions and object access for users.
- Configure Salesforce Scheduler settings for multi-resource scheduling, concurrent scheduling, multiple time zone selection, and map and location services.
- Configure service resources, service territory members, work type groups, work types, time slots, work type group members, and service territory work types.
- Set up Asset Scheduling for Salesforce Scheduler.
- Create and manage records representing operating hours, employee attendees (service resources), location (service territories), skills, and appointment templates (work types).


SEE ALSO:

[Salesforce Help: Set Up Salesforce Scheduler](#)

CHAPTER 3 Salesforce Scheduler Data Model Overview

Learn about the objects and relationships within the Salesforce Scheduler data model that represent appointments and employees who can be scheduled to attend appointments.

 **Note:** Not all fields are specified in this data model.

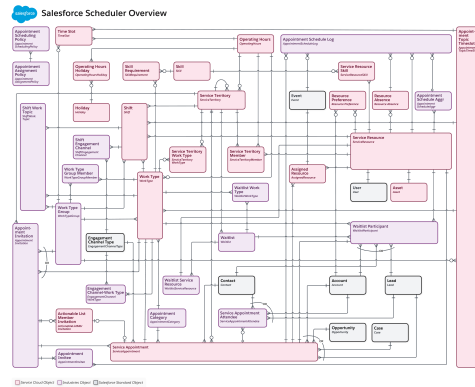

View the [Salesforce Scheduler data model](#) in the Salesforce Developer documentation.

CHAPTER 4 Salesforce Scheduler Standard Objects

In this chapter ...

- [AppointmentAssignmentPolicy](#)
- [AppointmentCategory](#)
- [AppointmentInvitation](#)
- [AppointmentInvitee](#)
- [AppointmentScheduleAggr](#)
- [AppointmentScheduleLog](#)
- [AppointmentSchedulingPolicy](#)
- [AssignedResource](#)
- [Holiday](#)
- [OperatingHours](#)
- [OperatingHoursHoliday](#)
- [ResourcePreference](#)
- [ResourceAbsence](#)
- [ServiceAppointment](#)
- [ServiceAppointmentAttendee](#)
- [ServiceResource](#)
- [ServiceResourceSkill](#)
- [ServiceTerritory](#)
- [ServiceTerritoryMember](#)
- [Shift](#)
- [Skill](#)
- [SkillRequirement](#)
- [TimeSlot](#)
- [Waitlist](#)
- [WaitlistParticipant](#)
- [WorkType](#)
- [WorkTypeGroup](#)
- [WorkTypeGroupDeduction](#)

Salesforce Scheduler gives you access to a suite of standard objects that you can find in Setup and as tabs in Salesforce. Salesforce Scheduler shares these objects with Field Service. These objects make up the core Salesforce Scheduler features, including appointments.

Salesforce Scheduler is available for an extra cost in Lightning Experience.

Available in: Enterprise, Unlimited, Performance, and Developer editions.

The following is a list of standard objects currently available within the Salesforce Scheduler platform.

AppointmentAssignmentPolicy

Stores information about resource assignment rules. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
FullName	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the AppointmentAssignmentPolicy object.  Note: Only users with View DeveloperName OR View Setup and Configuration permission can view, group, sort, and filter this field.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the appointment assignment policy. Possible values are: • Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish - Mexican) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch) • no (Norwegian)

Field	Details
	- pt_BR (Portuguese - Brazilian) - ru (Russian) - sv (Swedish) - th (Thai) - zh_CN (Chinese - Simplified) - zh_TW (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for the appointment assignment policy.
PolicyApplicableDuration	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The frequency at which the utilization of service resources is calculated. This field is available in API version 53.0 and later. Possible values are: - Parameter-Based - Monthly - Weekly The default value is Parameter-Based.
PolicyType	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The type of appointment assignment policy. Possible values are: loadBalancing
UtilizationFactor	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field	Details
	Description Specifies the count type for the resource utilization. This field is available in API version 53.0 and later. Possible values are: • <code>NumberOfAppointments</code> • <code>TotalAppointmentDuration</code> The default value is <code>TotalAppointmentDuration</code> .

AppointmentCategory

Represents the category of work types and shifts. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
<code>IsDropIn</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the appointment mode is drop-in (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
<code>IsGroup</code>	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the appointment mode is group (<code>true</code>) or not (<code>false</code>). It also indicates whether work types and shifts support the group category.

Field	Details
	The default value is <code>false</code> . Available in API version 61.0 and later.
IsScheduled	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort Description Indicates whether the appointment mode is regular (<code>true</code>) or not (<code>false</code>). It also indicates whether work types and shifts support the group category. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the appointment category record was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the appointment category record was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description Name of the appointment category.

Usage

Use appointment categories to differentiate between various types of appointments, such as drop in, regular, and group. To define the work types and shifts available for these categories, assign appointment categories to work types and shifts.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AppointmentCategoryFeed

Feed tracking is available for the object.

AppointmentCategoryHistory

History is available for tracked fields of the object.

AppointmentInvitation

Represents information about an appointment invitation that's created for customers who can use it for booking appointments. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AppointmentTopicId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Appointment topic that's associated with this invitation. This field is a polymorphic relationship field. Relationship Name AppointmentTopic Relationship Type Lookup Refers To WorkType, WorkTypeGroup
AppointmentTopicType	Type string Properties Filter, Group, Nillable, Sort

Field	Details
	Description Type of appointment topic that's related to this invitation. For example, work type or work type group.
AppointmentType	Type picklist Properties Create, Filter, Group, Nillable, Sort Description Appointment type for the appointment invitation. This field is available in API version 57.0 and later. Recommended values are: - groups—Group - resource_territory—In Person - phone_portrait—Phone - video—Video call Salesforce Scheduler verifies whether the API name of a picklist value matches the name of a utility icon that Lightning Design System provides. If the names match, Salesforce Scheduler uses the icon with the same name. If the names don't match, Salesforce Scheduler uses the default groups icon.
BookingEndDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date until which an appointment can be booked by using the appointment invitation URL.
BookingStartDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Date from which an appointment can be booked by using the appointment invitation URL. Default value: current date.
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort

Field	Details
	Description Engagement channel type for the appointment invitation. For example, users can choose video call as the engagement channel type when they create an appointment invitation. This field is available in API version 57.0 and later. This field is a relationship field. Relationship Name EngagementChannelType Relationship Type Lookup Refers To EngagementChannelType
InvitationIdentifier	Type string Properties Filter, Group, Nillable, Sort Description Invitation URL identifier that's used to book an appointment in a flow.
InvitationNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-assigned number that identifies the appointment invitation.
InvitationUrl	Type url Properties Create, Filter, Group, Nillable, Sort Description Appointment invitation URL that's shared with users to book appointments.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the invitation URL is available for a customer to book an appointment. The default value is <code>true</code>.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description Date on which the appointment invitation was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date on which the appointment invitation was last viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Owner of the appointment invitation. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort Description Service territory that's associated with the appointment invitation. This field is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup

Field	Details
	Refers To ServiceTerritory
UrlExpiryDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description Expiration date of the appointment invitation URL.

Usage

An appointment invitation can show the availability of one or more resources represented in the Appointment Invitee object.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AppointmentInvitationChangeEvent

Change events are available for the object.

AppointmentInvitationFeed

Feed tracking is available for the object.

AppointmentInvitationHistory

History is available for tracked fields of the object.

AppointmentInvitationOwnerSharingRule

Sharing rules are available for the object.

AppointmentInvitationShare

Sharing is available for the object.

AppointmentInvitee

Represents information about the participant and resources required for creating an appointment invitation URL. This object is available in API version 55.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AppointmentInvitationId	Type reference Properties Create, Filter, Group, Sort Description ID of the appointment invitation. This field is a relationship field. Relationship Name AppointmentInvitation Relationship Type Lookup Refers To AppointmentInvitation
IsPrimaryResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a service resource that's used to book an appointment is a primary resource. The default value is <code>false</code>.
IsRequiredResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a service resource is required to book an appointment. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description Date on which the appointment invitee record was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description Date on which the appointment invitee record was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-assigned number that identifies the appointment invitee.
ParticipantServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Service resource who's assigned to the appointment invitation. This field is a relationship field. Relationship Name ParticipantServiceResource Relationship Type Lookup Refers To ServiceResource

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AppointmentInviteeChangeEvent](#)

Change events are available for the object.

[AppointmentInviteeFeed](#)

Feed tracking is available for the object.

AppointmentInviteeHistory

History is available for tracked fields of the object.

AppointmentInviteeOwnerSharingRule

Sharing rules are available for the object.

AppointmentInviteeShare

Sharing is available for the object.

AppointmentScheduleAggr

Records the utilization of a service resource, by date, for the Load Balancing appointment assignment policy. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppointmentDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date of the appointment.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name or ID of the AppointmentScheduleAggr object.
ResourceUtilizationCount	Type integer Properties Filter, Group, Nillable, Sort Description The number of appointments scheduled for a service resource. Available in API version 53.0 and later. This is a calculated field.

Field	Details
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service resource associated with the appointment scheduling aggregate. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
TotalResourceUtilization	Type double Properties Filter, Nillable, Sort Description The number of minutes for which the service resource has scheduled appointments. This is a calculated field.
UsageType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specify the usage type of the AppointmentScheduleAggr object. Possible values are: • FSL_Daily • FSL_Monthly • FSL_Weekly • LightningScheduler The default value is 'LightningScheduler'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AppointmentScheduleAggrOwnerSharingRule

Sharing rules are available for the object.

AppointmentScheduleAggrShare

Sharing is available for the object.

AppointmentScheduleLog

Stores service appointments of each service Resource. This object is used to calculate the utilization of a service resource for the AppointmentScheduleAggr object. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppointmentDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description The date of the appointment.
AppointmentScheduleAggrId	Type reference Properties Create, Filter, Group, Sort Description The appointment scheduling aggregate associated with the appointment scheduling log. This is a relationship field. Relationship Name AppointmentScheduleAggr Relationship Type Lookup Refers To AppointmentScheduleAggr
IsUsedForResourceUtilization	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the appointment scheduling log is used for deriving the appointment scheduling aggregate. The default value is 'false'.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name or ID of the AppointmentScheduleLog object.
RelatedRecordId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service appointment, resource absence, event, or any other related record associated with the appointment scheduling log. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Event, ServiceAppointment
ResourceUtilization	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of minutes the service resource already has scheduled appointments for.
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The service resource associated with the appointment scheduling log. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
UsageType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Specify the product associated with the AppointmentScheduleLog object. Possible values are: • FSL_Daily—FSL - Daily • FSL_Monthly—FSL - Monthly • FSL_Weekly—FSL - Weekly • LightningScheduler—Lightning Scheduler The default value is 'LightningScheduler'.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AppointmentScheduleLogChangeEvent

Change events are available for the object.

AppointmentScheduleLogFeed

Feed tracking is available for the object.

AppointmentScheduleLogHistory

History is available for tracked fields of the object.

AppointmentScheduleLogOwnerSharingRule

Sharing rules are available for the object.

AppointmentScheduleLogShare

Sharing is available for the object.

AppointmentSchedulingPolicy

Represents a set of rules for scheduling appointments using Salesforce Scheduler. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
<code>AppointmentAssignmentPolicyId</code>	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The name or ID of the appointment assignment policy. This is a relationship field, available in version 52.0 and later. Relationship Name AppointmentAssignmentPolicy Relationship Type Lookup Refers To AppointmentAssignmentPolicy
<code>AppointmentStartTimeInterval</code>	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The proposed time interval in minutes between appointment start times. For example, set the interval to 15. Appointments can then begin at the top of the hour and at 15-minute intervals thereafter (10:00 AM, 10:15 AM, 10:30 AM, and so on). Possible values are: • 5 • 10 • 15 • 20 • 30 • 45 • 60 • 90

Field	Details
	• 120 • 150 • 180 • 240 • 300 • 360 • 420 • 480
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The API name of the AppointmentSchedulingPolicy object.
ExtCalEventHandlerId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The API name of the custom Apex class that checks service resources' external calendar events and returns the time slots where service resources are already booked. Available in API version 50.0 and later. This is a relationship field. Relationship Name ExtCalEventHandler Relationship Type Lookup Refers To ApexClass
IsOrgDefault	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether this scheduling policy is the default appointment scheduling policy for Lightning Scheduler appointments in this org.

Field	Details
IsSvcTerrOpHoursWithShiftsUsed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this scheduling policy considers the intersection of shifts and service territory operating hours when determining the availability of service resources for appointments (true). The default value is false. Available in API version 56.0 and later.
IsSvcTerritoryMemberShiftUsed	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this scheduling policy considers shifts of service territory members when determining the availability of service resources for appointments (true). The default value is false. Available in API version 56.0 and later.
Language	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The language of the appointment scheduling policy. Possible values are: • Possible values are: • da (Danish) • de (German) • en_US (English) • es (Spanish) • es_MX (Spanish - Mexican) • fi (Finnish) • fr (French) • it (Italian) • ja (Japanese) • ko (Korean) • nl_NL (Dutch) • no (Norwegian) • pt_BR (Portuguese - Brazilian) • ru (Russian)

Field	Details
	- sv (Swedish) - th (Thai) - zh_CN (Chinese - Simplified) - zh_TW (Chinese - Traditional)
MasterLabel	Type string Properties Create, Filter, Group, Sort, Update Description The label for the appointment scheduling policy.
ShouldConsiderCalendarEvents	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this policy checks the Salesforce calendar for resource availability. The default value is 'false'.
ShouldEnforceExcludedResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy prevents excluded service resources from being assigned to appointments.
ShouldEnforceRequiredResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows only required service resources to be assigned to appointments.
ShouldMatchSkill	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field	Details
	Description Indicates whether this appointment scheduling policy allows only required service resources who have certain skills to be assigned to appointments.
ShouldMatchSkillLevel	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows only required service resources who have certain skills and skill levels to be assigned to appointments.
ShouldRespectVisitingHours	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy prevents users from scheduling appointments outside of an account's visiting hours.
ShouldUsePrimaryMembers	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows only service resources who are primary members of a service territory to be assigned to appointments.
ShouldUseSecondaryMembers	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether this appointment scheduling policy allows service resources who are secondary members of a service territory to be assigned to appointments.

AssignedResource

Represents a service resource who is assigned to a service appointment in Salesforce Scheduler. Assigned resources appear in the Assigned Resources related list on service appointments. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field Name	Details
AssignedResourceNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the resource assignment.
EventId	Type reference Properties Filter, Group, Nillable, Sort Description The ID of the event that is added to the assigned resources calendar when the service appointment is created. This is a relationship field. Relationship Name Event Relationship Type Lookup Refers To Event
IsPrimaryResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the service resource is a primary resource or not. The default value is false. Available in API version 47.0 and later.
IsRequiredResource	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description Indicates whether the service resource is a required resource or not. The default value is 'false'. If this field is set to false, Salesforce Scheduler considers the resource as available for other appointments.
ServiceAppointmentId	Type reference Properties Create, Filter, Group, Sort Description The service appointment that the resource is assigned to. This is a relationship field. Relationship Name ServiceAppointment Relationship Type Lookup Refers To ServiceAppointment
ServiceResourceId	Type reference Properties Create, Update, Filter, Group, Sort Description The resource who is assigned to the service appointment. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource

Usage

You can assign multiple service resources to a service appointment. Service resources who are assigned to service appointments can't be deactivated until they're removed from the appointments.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[AssignedResourceChangeEvent](#) (API version 48.0)

Change events are available for the object.

[AssignedResourceFeed](#)

Feed tracking is available for the object.

Holiday

Represents the fields in the Holiday object that are used by Salesforce Scheduler. A holiday is a period during which your service resource is unavailable for appointment scheduling.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field	Details
ActivityDate	Type date Properties Create, Filter, Group, Nillable, Sort, Update Description If the Holiday <code>IsAllDay</code> flag is set to <code>true</code> (indicating that it is an all-day holiday), then the holiday due date information is contained in the <code>ActivityDate</code> field. This field is a date field with a timestamp that is always set to midnight in the Coordinated Universal Time (UTC) time zone. The timestamp is not relevant, and you must not attempt to alter it to account for any time zone differences.
Description	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Text description of the holiday.
EndTimeInMinutes	Type int

Field	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The end time of the holiday in minutes.
IsAllDay	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the duration of the holiday is all day (<code>true</code>) or not (<code>false</code>).
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the holiday.
StartTimeInMinutes	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description The start time of the holiday in minutes.

OperatingHours

Represents the hours in which a service territory, service resource, or account is available for work in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the operating hours. Add any details that aren't included in the name.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the operating hours record was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the operating hours record was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the operating hours. For example, <i>Summer Hours</i>, <i>Winter Hours</i>, or <i>Peak Season Hours</i>.
TimeZone	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort, Update Description The time zone that the operating hours fall within.

Usage

By default, only System Administrators can view, create, and assign operating hours.

Service territory members—which are service resources who can work in the territory—automatically use their service territory's operating hours. If a resource needs different operating hours than their territory, create separate operating hours for them from the Operating Hours tab. Then, select the desired hours in the `Operating Hours` lookup field on the service territory member detail page.

To view a service resource's operating hours for a particular territory, navigate to their Service Territories related list and click the Member Number for the territory. This takes you to the service territory member detail page, which lists the member's operating hours and dates during which they belong to the territory.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[OperatingHoursFeed](#)

Feed tracking is available for the object.

OperatingHoursHoliday

Represents the day or hours for which a service territory and service resources exclusive to the service territory are unavailable in Salesforce Scheduler. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
<code>DateAndTime</code>	Type string Properties Filter, Group, Nillable, Sort Description (Read-Only) The date or time for the holiday.
<code>HolidayId</code>	Type reference

Field	Details
	Properties Create, Filter, Group, Sort, Update Description The ID of the holiday that's related to the operating hours indicated in the OperatingHoursId field. This is a relationship field. Relationship Name Holiday Relationship Type Lookup Refers To Holiday
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
OperatingHoursHolidayNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description (Read-Only) An auto-generated number identifying the operating hours holiday.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort Description The ID of the operating hours that's related to the holiday indicated in the HolidayId field. This is a relationship field.

Field	Details
	Relationship Name OperatingHours
	Relationship Type Lookup
	Refers To OperatingHours

ResourcePreference

Represents an account's preference for a specified service resource.

Resource preferences indicate which service resources should be assigned to a service appointment. You can designate service resources as preferred, required, or excluded on accounts.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
LastReferencedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The date when the resource preference was last modified.
LastViewedDate	Type dateTime
	Properties Filter, Nillable, Sort
	Description The date when the resource preference was last viewed.
PreferenceType	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update

Field Name	Details
	Description Resource preference type. Values include: • Preferred— Indicates that the user would like their appointment assigned to the resource. • Required— Indicates that the resource must be assigned to the appointment. • Excluded— Indicates that the resource must not be assigned to the appointment. Resource preferences serve more as a suggestion than a requirement. You can still assign a service appointment to any resource regardless of the related account's resource preferences.
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort Description The account with the resource preference. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To Account
ResourcePreferenceNumber	Type string Properties Autonumber, Defaulted on create, Filter, Sort Description An auto-generated number identifying the resource preference.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The service resource that is preferred, required, or excluded. This is a relationship field.

Field Name	Details
	Relationship Name ServiceResource
	Relationship Type Lookup
	Refers To ServiceResource

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ResourcePreferenceFeed

Feed tracking is available for the object.

ResourcePreferenceHistory

History is available for tracked fields of the object.

ResourceAbsence

Represents a time period in which a service resource is unavailable to work in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
AbsenceNumber	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description (Read only) An auto-generated number identifying the absence.

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the absence.
End	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the absence ends.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource absence was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource absence was last viewed.
ResourceId	Type reference Properties Create, Filter, Group, Sort Description The absent service resource. This is a relationship field. Relationship Name Resource Relationship Type Lookup

Field Name	Details
	Refers To ServiceResource
Start	Type dateTime Properties Create, Filter, Sort, Update Description The date and time when the absence begins.

Usage

Resource absences you define periods of time when a service resource is unavailable to work.



Tip: Create a trigger that sends an approval request to a supervisor when a service resource creates an absence.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ResourceAbsenceChangeEvent (API version 48.0)

Change events are available for the object.

ResourceAbsenceFeed

Feed tracking is available for the object.

ResourceAbsenceHistory

History is available for tracked fields of the object.

ServiceAppointment

Represents an appointment booked through Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
AccountId	Type reference Properties Filter, Group, Nillable, Sort Description (Read only) The account associated with the appointment. This is a relationship field. Relationship Name Account Relationship Type Lookup Refers To Account
ActualDuration	Type double Properties Create, Filter, Nillable, Sort, Update Description The number of minutes that it took the resource to complete the appointment. When values are first added to the <code>Actual Start</code> and <code>Actual End</code> fields, the <code>Actual Duration</code> is automatically populated to list the difference between the <code>Actual Start</code> and <code>Actual End</code>. If the <code>Actual Start</code> and <code>Actual End</code> fields are subsequently updated, the <code>Actual Duration</code> field doesn't re-update, but you can manually update it.
ActualEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The actual date and time the appointment ended.
ActualStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The actual date and time the appointment started.

Field Name	Details
AdditionalInformation	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Represents additional information about the service appointment,
Address	Type address Properties Filter Description The address where the appointment is taking place.
AppointmentCategoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the appointment category related to the service appointment. For example, for customers who visit the branch without an appointment, the drop in category is applicable. For pre-booked appointments, the scheduled category is applicable. This field is available in API version 58.0 and later. This is a relationship field. Relationship Name AppointmentCategory Relationship Type Lookup Refers To AppointmentCategory
AppointmentInvitationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the appointment invitation related to the appointment. This field is available in API version 55.0 and later. This field is a relationship field. Relationship Name AppointmentInvitation

Field Name	Details
	Relationship Type Lookup
	Refers To AppointmentInvitation
AppointmentMode	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort
	Description The mode of the service appointment.. This field is available in API version 60.0 and later. Possible values are: - Group - Regular The default value is Regular.
AppointmentNumber	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description An auto-assigned number that identifies the appointment.
AppointmentType	Type picklist
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The type of appointment. Possible values are: - call—Phone - company—At a branch - video—Video call
ApptBookingInfoUrl	Type textarea
	Properties Create, Nillable, Update

Field Name	Details
	Description The appointment booking URL related to the appointment. This field is available in API version 57.0 and later. For Amazon Chime, this field has an encrypted appointment ID.
ArrivalWindowEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The end of the window of time in which the technician is scheduled to arrive at the site. This window is typically larger than the Scheduled Start and End window to allow time for delays and scheduling changes. You can choose to share the Arrival Window Start and End with the customer, but keep the Scheduled Start and End internal-only.
ArrivalWindowStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The beginning of the window of time in which the technician is scheduled to arrive at the site. This window is typically larger than the Scheduled Start and End window to allow time for delays and scheduling changes. You can choose to share the Arrival Window Start and End with the customer, but keep the Scheduled Start and End internal-only.
AttendeeCount	Type int Properties Filter, Group, Nillable, Sort Description The number of attendees associated with the service appointment. This field is available in API version 60.0 and later.
AttendeeLimit	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The maximum number of customers allowed to attend the service appointment. This field is considered when the appointment mode is <code>Group</code>. This field is available in API version 60.0 and later.

Field Name	Details
CancellationReason	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The reason for the service appointment cancellation.
CheckedInTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time when the service appointment status changed to <code>CheckedIn</code>. This field is available in API version 60.0 and later.
City	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The city where the appointment is completed. The maximum length is 40 characters.
Comments	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The comments for the service appointment.
ContactId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The contact associated with the parent record. If needed, you can manually update the service appointment contact. This is a relationship field. Relationship Name Contact

Field Name	Details
	Relationship Type Lookup
	Refers To Contact
Country	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The country where the appointment is completed. The maximum length is 80 characters.
Description	Type textarea
	Properties Create, Nillable, Update
	Description The description of the appointment.
DueDate	Type dateTime
	Properties Create, Filter, Sort, Update
	Description The date by which the appointment must be completed. Earliest Start Permitted and Due Date typically reflect terms in the customer's service-level agreement.
Duration	Type double
	Properties Create, Nillable, Filter, Sort, Update
	Description The estimated length of the appointment. The duration is in minutes or hours based on the value selected in the <code>Duration Type</code> field.
DurationType	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The unit of duration.

Field Name	Details
	Possible values are: - Hours - Minutes The default value is Hours.
EarliestStartTime	Type dateTime Properties Create, Filter, Sort, Update Description The date after which the appointment must be completed. Earliest Start Permitted and Due Date typically reflect terms in the customer's service-level agreement.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email address.
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The engagement channel type that's associated with the service appointment. This field is available in API version 56.0 and later. This field is a relationship field. Relationship Name EngagementChannelType Relationship Type Lookup Refers To EngagementChannelType
GroupAppointmentAccessType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The users who can access the group service appointment. Valid values are:

Field Name	Details
	- AddedAndExperienceSiteAndInvitedUsers—Added, Experience Site, and Invited Users - AddedAndExperienceSiteUsers—Added and Experience Site Users - AddedUsers—Added Users The default value is <code>AddedUsers</code>. Available in API version 61.0 and later.
IsAnonymousBooking	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether a service resource was automatically assigned to the appointment (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. This field is available in API version 49.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service appointment was last modified. Its label in the user interface is <code>LastModifiedDate</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service appointment was last viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the service appointment. This is a polymorphic relationship field. Relationship Name Owner

Field Name	Details
	Relationship Type Lookup
	Refers To Group, User
ParentRecordId	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The parent record associated with the appointment. The parent record can't be updated after the service appointment is created. This is a polymorphic relationship field.
	Relationship Name ParentRecord
	Relationship Type Lookup
	Refers To Account, Case, Lead, Opportunity
ParentRecordType	Type string
	Properties Filter, Group, Nillable, Sort
	Description (Read only) The type of parent record: Account.
Phone	Type phone
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The phone number.
PostalCode	Type string
	Properties Create, Filter, Group, Nillable, Sort, Update
	Description The postal code where the appointment is completed. The maximum length is 20 characters.

Field Name	Details
SchedEndTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time at which the appointment is scheduled to end. <code>ScheduledEnd - ScheduledStart = EstimatedDuration</code>.
SchedStartTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The time at which the appointment is scheduled to start.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The service territory associated with the appointment. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state where the service appointment is completed. The maximum length is 80 characters.
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The status of the appointment. The picklist includes the following values, which can be customized: • <code>None</code>—Default value. • <code>CheckedIn</code>—Checked In • <code>Scheduled</code>—Appointment has been assigned to a service resource. • <code>Dispatched</code>—Assigned service resource has been notified about their assignment. • <code>In Progress</code>—Work has begun. • <code>Completed</code>—Work is complete. • <code>Cannot Complete</code>—Work couldn't be completed. • <code>Canceled</code>—Work is canceled, typically before any work began The values of the Status picklist appear in the org's default language.
StatusCategory	Type picklist Properties Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort Description The category that each <code>Status</code> value falls into. The <code>StatusCategory</code> field's values are identical to the default <code>Status</code> values except <code>CheckedIn</code>. Use the <code>CheckedIn</code> value for drop-in customers. If you create custom <code>Status</code> values, you must indicate which category it belongs to. For example, if you create a <code>Customer Absent</code> value, you can decide that it belongs in the <code>Cannot Complete</code> category. To learn which processes reference <code>StatusCategory</code>, see How are Status Categories Used?
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street number and name where the service appointment is completed.
Subject	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description A short phrase describing the appointment.

Field Name	Details
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type associated with the service appointment. This is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Usage

Service appointments always have a parent record, which can be an account. Service appointments on *accounts* represent work being performed for the account.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceAppointmentChangeEvent](#) (API version 48.0)

Change events are available for the object.

[ServiceAppointmentFeed](#)

Feed tracking is available for the object.

[ServiceAppointmentHistory](#)

History is available for tracked fields of the object.

[ServiceAppointmentOwnerSharingRule](#)

Sharing rules are available for the object.

[ServiceAppointmentShare](#)

Sharing is available for the object.

ServiceAppointmentAttendee

Represents a Lead, Contact, or Person Account who is associated with the Service Appointment of type Group. This object is available in API version 60.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AttendeeId	Type reference Properties Create, Filter, Group, Sort Description The customer who is attending the associated service appointment. This field is a polymorphic relationship field. Relationship Name Attendee Relationship Type Lookup Refers To Person Account, Contact, Lead
AttendeeIdentifier	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The alphanumeric unique identifier of the appointment attendee. For example, D101, E63, A5015.
AttendeeType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specifies the role of an appointment attendee. Possible values are: • Guest

Field	Details
	• <code>Patient</code> The default value is <code>Patient</code>.
Email	Type email Properties Create, Filter, Group, Nillable, Sort, Update Description The email of the attendee.
HasAttended	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the attendee has attended the associated service appointment (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>. Available in API version 61.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service appointment attendee record was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service appointment attendee record was last viewed.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the service appointment attendee record. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ServiceAppointmentId	Type reference
	Properties Create, Filter, Group, Sort
	Description The service appointment associated with the appointment attendee. This field is a relationship field.
	Relationship Name ServiceAppointment
	Relationship Type Lookup
	Refers To ServiceAppointment
Status	Type picklist
	Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description The status of the service appointment attendee. Valid value are: - Enrolled - Unenrolled The default value is <code>Enrolled</code> . These values are available in API version 61.0 and later.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceAppointmentAttendeeFeed](#)

Feed tracking is available for the object.

[ServiceAppointmentAttendeeHistory](#)

History is available for tracked fields of the object.

ServiceAppointmentAttendeeOwnerSharingRule

Sharing rules are available for the object.

ServiceAppointmentAttendeeShare

Sharing is available for the object.

ServiceResource

Represents a technician or an asset. This object is available in API version 38.0 and later.

A technician represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients. An asset represents an item of commercial value, such as a product sold by your company or a competitor, that a customer has purchased and installed.

Supported Calls

`create()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
AssetId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description ID of the Asset. This is a relationship field. Relationship Name Asset Relationship Type Lookup Refers To Asset
Description	Type textarea Properties Create, Nillable, Update

Field Name	Details
	Description The description of the resource.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description When selected, this option means that the resource can be assigned to appointments. For service tracking purposes, resources can't be deleted, so deactivating a resource is the best way to send them into retirement. Deactivating a user doesn't deactivate the related service resource. You can't create a service resource that is linked to an inactive user.
IsPrimary	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicate whether Salesforce Scheduler must consider the service resource record for scheduling appointments (true) or not (false).  Note: This field is applicable only if the Main Service Resource setting is enabled in your Salesforce org. This field is available in API version 57.0 and later. The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service resource was last modified. Its label in the user interface is <code>Last Modified Date</code> .
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the service resource was last viewed.

Field Name	Details
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort, Nillable, Update Description The associated user. Its label in the UI is <code>User</code>. If the service resource represents a service crew rather than a user, leave the <code>User</code> field blank and select the related crew in the <code>ServiceCrewId</code> field.
ResourceType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Indicates whether the resource is a Technician (T) or Asset (S). The default value is Technician (T). You can't add additional resource types.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceResourceChangeEvent](#) (API version 48.0)

Change events are available for the object.

[ServiceResourceFeed](#)

Feed tracking is available for the object.

[ServiceResourceHistory](#)

History is available for tracked fields of the object.

[ServiceResourceOwnerSharingRule](#)

Sharing rules are available for the object.

[ServiceResourceShare](#)

Sharing is available for the object.

ServiceResourceSkill

Represents a skill that a service resource possesses in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
EffectiveEndDate	Type datetime Properties Create, Filter, Nillable, Sort, Update Description The date when the skill expires. For example, if a service resource must be recertified after six months, the end date would be the date their certification expires.
EffectiveStartDate	Type datetime Properties Create, Filter, Sort, Update Description The date when the service resource gains the skill. For example, if the skill represents a certification, the start date would be the date of certification.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource skill was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the resource skill was last viewed.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The service resource who possesses the skill. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
SkillId	Type reference Properties Create, Filter, Group, Sort, Update Description The skill the service resource possesses. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill
SkillLevel	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The service resource's skill level. Skill level can range from zero to 99.99.
SkillNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description An auto-generated number identifying the resource skill assignment.

Usage

You can assign skills to all service resources in your org to indicate their certifications and areas of expertise, and specify each resource's skill level from 0 to 99.99. For example, you can assign Maria the "Welding" skill, level 50.

If you intend to use the skills feature, determine which skills you want to track and how skill level must be determined. For example, you can want the skill level to reflect years of experience, certification levels, or license classes.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[ServiceResourceSkillFeed](#)

Feed tracking is available for the object.

[ServiceResourceSkillHistory](#)

History is available for tracked fields of the object.

ServiceTerritory

Represents a geographic or functional region in which work can be performed in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
Address	Type address Properties Filter Description An address to associate with the territory. You can want to list the address of the territory's headquarters.
City	Type string

Field Name	Details
	Properties Create, Filter, Group, Nillable, Sort, Update Description The city of the associated address. Maximum length is 40 characters.
Country	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The country to associate with the territory. Maximum length is 80 characters.
Description	Type textarea Properties Create, Nillable, Update Description The description of the territory.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the service territory is meant to be used. If a territory is inactive, you can't add members to it or link it to service appointments.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory was last viewed.

Field Name	Details
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the territory.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort, Update Description The territory's operating hours, which indicate when service appointments within the territory can occur. Service resources who are members of a territory automatically inherit the territory's operating hours unless different hours are specified on the resource record. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
PostalCode	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The postal code of the address associated with the territory. Maximum length is 20 characters.
PricebookId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field creates a foreign key relationship with the PriceBook record, storing data related to pricing. This is a relationship field.

Field Name	Details
	Relationship Name PriceBook Relationship Type Lookup Refers To PriceBook2
State	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The state of the address associated with the territory. Maximum length is 80 characters.
Street	Type textarea Properties Create, Filter, Group, Nillable, Sort, Update Description The street number and name of the address associated with the territory.

Usage

If you want to use service territories, determine which territories you must create. Depending on how your business works, you can decide to create territories based on cities or counties, or on functional categories such as sales versus service. If you plan to build out a hierarchy of service territories, create the highest-level territories first.

For example, you can create a hierarchy of territories to represent the areas where your team works in California. Include a top-level territory named *California*, three child territories named *Northern California*, *Central California*, and *Southern California*, and a series of third-level territories corresponding to California counties. Assign service resources to each county territory to indicate who is available to work in that county.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ServiceTerritoryChangeEvent](#) (API version 48.0)

Change events are available for the object.

[ServiceTerritoryFeed](#)

Feed tracking is available for the object.

ServiceTerritoryHistory

History is available for tracked fields of the object.

ServiceTerritoryOwnerSharingRule

Sharing rules are available for the object.

ServiceTerritoryShare

Sharing is available for the object.

ServiceTerritoryMember

Represents a service resource who can be assigned to service appointments in a service territory in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
Address	Type address Properties Filter Description The member's address. You can want to list the related service resource's address in this field.
EffectiveEndDate	Type datetime Properties Create, Filter, Nillable, Sort, Update Description The date when the service resource is no longer a member of the territory. If the resource will be working in the territory for the foreseeable future, leave this field blank. This field is useful for indicating when a temporary relocation ends.
EffectiveStartDate	Type datetime

Field Name	Details
	Properties Create, Filter, Sort, Update Description The date when the service resource becomes a member of the service territory.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory member was last modified. Its label in the user interface is <code>Last Modified Date</code> .
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the territory member was last viewed.
OperatingHoursId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The operating hours assigned to the service territory member. If no operating hours are specified, the member is assumed to use their parent service territory's operating hours. If a member needs special operating hours, create them in Setup and select them in the <code>Operating Hours</code> lookup field on the member's detail page. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
Role	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The role associated with the service resource.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort, Update Description The service resource assigned to the service territory. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Sort Description The service territory that the service resource is assigned to. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
TerritoryType	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Primary, Secondary, or Relocation. The primary territory is typically the territory where the resource works most often—for example, near their home base. Service resources can only have one primary territory.

Field Name	Details
	- Secondary territories are territories where the resource can be assigned to appointments, if needed. Service resources can have multiple secondary territories. - Relocation territories represent temporary moves for service resources. For example, a service resource can have the following territories: - Primary territory: <i>West Chicago</i> - Secondary territories: <i>East Chicago</i> <i>South Chicago</i> - Relocation territory: <i>Manhattan</i>, for a three-month period

Usage

If you delete a service territory with members, the service resources who were members no longer have any connection to the territory.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ServiceTerritoryMemberChangeEvent (API version 48.0)

Change events are available for the object.

ServiceTerritoryMemberFeed

Feed tracking is available for the object.

ServiceTerritoryMemberHistory

History is available for tracked fields of the object.

Shift

Represents a shift for service resource scheduling. This object is available in API version 46.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler is enabled. Users have Shift permission.

Fields

Field	Details
AppointmentCategoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is a relationship field. Available in API version 61.0 and later. Relationship Name ShiftAppointmentCategory Relationship Type Lookup Refers To AppointmentCategory
BackgroundColor	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description Sets a background color for shifts shown in the UI. Use a 3- or 6-digit hexadecimal format. For example, #FF00FF. Available in API version 55.0 and later.
EndTime	Type dateTime Properties Create, Filter, Sort, Update Description The date and time that the shift ends.
Label	Type string Properties Create, Filter, Group, Nillable, Sort, Update Description The label that a shift is given.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort

Field	Details
	Description The date and time when the current user last viewed a related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the shift. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
RecurrenceEndDate	Type date Properties Create, Group, Nillable, Sort, Update Description The date when the recurrence period ends. The date must be after the Recurrence Start Date. The value for this field is retrieved from the pattern defined in the RecurrencePattern field. You can define the end date by using the COUNT or UNTIL parameter in the RecurrencePattern field. If you specify a value in this field and define a recurrence pattern, Salesforce Scheduler overrides the value with the end date in the recurrence pattern. The recurrence period is limited to 180 days. This field is available in API version 56.0 and later.
RecurrencePattern	Type string Properties Create, Group, Nillable, Sort, Update

Field	Details
	Description The RRULE that describes the recurrence pattern for recurring shifts. Supports a subset of the RFC 5545 standard for internet calendaring and scheduling. See the Salesforce Scheduler Recurring Shifts section in this topic for usage examples. The period for the recurrence pattern is limited to 180 days. This field is available in API version 56.0 and later.
RecurrenceStartDate	Type date Properties Create, Group, Nillable, Sort, Update Description The date when the recurrence period begins. The date must be before the Recurrence End Date. The value for this field is retrieved from the StartTime field. Don't modify the value for this field. This field is available in API version 56.0 and later.
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service resource the shift belongs to. Available in API versions 47.0 and later. This is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service territory the shift belongs to. Available in API versions 47.0 and later. This is a relationship field. Relationship Name ServiceTerritory

Field	Details
	Relationship Type Lookup
	Refers To ServiceTerritory
ShiftNumber	Type string
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort
	Description The number automatically given to the shift upon creation.
StartTime	Type dateTime
	Properties Create, Filter, Sort, Update
	Description The date and time that the shift starts.
Status	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Describes the status of the shift. Users can create custom values. Possible values are: - Confirmed - Fixed - Published - Tentative The default value is 'Tentative'.
StatusCategory	Type picklist
	Properties Filter, Group, Nillable, Restricted picklist, Sort
	Description Describes the status of the shift using static values. This field is derived from <code>Status</code> using the mapping defined in setup. Possible values are:

Field	Details
	- Confirmed - Published - Tentative
TimeSlotType	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description Type of time slot for the shift. The same setup values as the <code>TimeSlot</code> field in the <code>OperatingHours</code> object. Possible values are: - Extended - Normal (default value) The default value is 'Normal'.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Type of shift. Possible values are: - Recurring - Regular The default value is <code>Regular</code>. This field is available in API version 56.0 and later.
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the work type group the shift belongs to. Available in API versions 54.0 and later. This is a relationship field. Relationship Name WorkTypeGroup Relationship Type Lookup

Field	Details
	Refers To WorkTypeGroup

Usage

Salesforce Scheduler Recurring Shifts

Use the `RecurrencePattern` field to specify the recurrence pattern for recurring shifts. These recurrence patterns, called reference rules or "RRULES", support a subset of the RFC 5545 standards. This table includes common RRULE examples.

Recurrence Pattern	RRULE Example
Every day for five days	<code>RRULE:FREQ=DAILY;INTERVAL=1;COUNT=5</code>
Every two weeks on Monday and Friday for 10 occurrences	<code>RRULE:FREQ=WEEKLY;INTERVAL=2;BYDAY=MO,FR;COUNT=10</code>
Monthly on the first day of the month until August 1, 2022	<code>RRULE:FREQ=MONTHLY;INTERVAL=1;BYMONTHDAY=1;UNTIL=20220801T100000Z</code>

The RRULE defined by `RecurrencePattern` supports a subset of the RFC 5545 standard for internet calendaring and scheduling. Supported RRULE parts include FREQ, BYMONTH, BYMONTHDAY, BYDAY, BYSETPOS, INTERVAL, UNTIL, and COUNT.

When the event record is saved, the RRULE might be modified to follow the required format:

- The RRULE parts are placed in the following order: FREQ, BYMONTH, BYMONTHDAY, BYDAY, BYSETPOS, INTERVAL, UNTIL, and COUNT.
- Any missing default values are inserted. For example, if the RRULE doesn't include INTERVAL, then `INTERVAL=1` is added.
- The RRULE is prefaced with `RRULE:` if that preface is missing.

RRULE Part	Supported RFC 5545 Implementation
FREQ	Required. Indicates the type of recurrence rule. Allowed values are: • DAILY—supported parts include FREQ, INTERVAL, UNTIL, and COUNT. • WEEKLY—supported parts include INTERVAL, UNTIL, COUNT, and BYDAY. BYDAY is required, but can't be preceded by a number. For example, to indicate weekly on Tuesday and Thursday until September 1 2022, use <code>RRULE:FREQ=WEEKLY;UNTIL=20220901T000000Z;BYDAY=TU,TH</code> • MONTHLY—supported patterns include: – BYMONTHDAY For example, to indicate monthly on the third day of the month use: <code>RRULE:FREQ=MONTHLY;BYMONTHDAY=3</code> – BYDAY and BYSETPOS For example, to indicate the last weekday of the month, use <code>RRULE:FREQ=MONTHLY;BYDAY=MO,TU,WE,TH,FR;BYSETPOS=-1</code>

RRULE Part	Supported RFC 5545 Implementation
	BYDAY, where the BYDAY values are specified with a numeric value For example, to indicate monthly on the first Friday for 10 occurrences, use <code>RRULE:FREQ=MONTHLY;COUNT=10;BYDAY=1FR</code>
BYMONTH	The month. Valid values are 1 to 12.
BYMONTHDAY	The day of the month. Valid values are 1 to 31. If BYMONTHDAY is 31 and the month has fewer than 31 days, the event is created on the last day of the month.
BYDAY	A comma-separated list of days of the week. Valid values are SU, MO, TU, WE, TH, FR, SA. For RRULES with monthly frequency, BYDAY must be one of: - a single day - weekend days - week days - every day of the week Each BYDAY value can be preceded by an integer that indicates the nth occurrence of a specific day within the monthly RRULE. Allowed values are -1, 1, 2, 3, and 4. You can't use different numbers in the BYDAY values. For example, this RRULE isn't supported: <code>RRULE:FREQ=MONTHLY;INTERVAL=2;COUNT=10;BYDAY=1SU,-1SU</code> If BYDAY values are prefaced with a number, the RRULE can't include BYSETPOS.
BYSETPOS	A comma-separated list of values that correspond to the nth occurrence within the set of recurrence instances specified by the rule. Valid values are -1, 1, 2, 3, or 4. Default value is 1. For example, to indicate the last weekday of the month, use: <code>RRULE:FREQ=MONTHLY;BYDAY=MO,TU,WE,TH,FR;BYSETPOS=-1</code>
INTERVAL	The repetition interval. Valid values are: - an integer between 1 and 31 if FREQ=DAILY - an integer between 1 and 26 if FREQ=WEEKLY - an integer between 1 and 12 if FREQ=MONTHLY Default value is 1.
UNTIL	Specifies the datetime in UTC format when the recurrence rule stops. The supported format is yyyyMMddTHH:mm:ssZ, for example: 20210419T083000Z. An RRULE can't contain both UNTIL and COUNT. A recurring event without either UNTIL or COUNT leads to an error.
COUNT	The number of occurrences. Allowed values are 1–120. An RRULE can't contain both UNTIL and COUNT. A recurring event without either UNTIL or COUNT leads to an error.

Skill

Represents a skill that service resources have. This object is available in API version 24.0 and later.



Note: For information about WDC skills on a user's profile, see the ProfileSkill topic.

Supported Calls

`create()`, `describeSObjects()`, `query()`, `retrieve()`, `update()`, `upsert()`

Fields

Field Name	Details
Description	Type textarea Properties Create, Nillable, Update Description The description of the skill.
DeveloperName	Type string Properties Create, Filter, Group, Sort, Update Description The unique name of the object in the API. This name can contain only underscores and alphanumeric characters, and must be unique in your org. It must begin with a letter, not include spaces, not end with an underscore, and not contain two consecutive underscores. In managed packages, this field prevents naming conflicts on package installations. With this field, a developer can change the object's name in a managed package and the changes are reflected in a subscriber's organization. When creating large sets of data, always specify a unique <code>DeveloperName</code> for each record. If no <code>DeveloperName</code> is specified, performance slows down while Salesforce generates one for each record.
LastViewedDate	Type datetime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed the skill.

Field Name	Details
MasterLabel	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the skill.

SkillRequirement

Represents a skill that is required to complete a particular task in Salesforce Scheduler. Skill requirements can be added to work types in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record can only have been referenced (<code>LastReferencedDate</code>) and not viewed.

Field Name	Details
RelatedRecordId	Type reference Properties Create, Filter, Group, Sort Description The record that the skill is required for. The related record can be a work type. This is a polymorphic relationship field. Relationship Name RelatedRecord Relationship Type Lookup Refers To PendingServiceRouting, WorkOrder, WorkOrderLineItem, WorkType
SkillId	Type reference Properties Create, Filter, Group, Sort, Update Description The skill that is required. This is a relationship field. Relationship Name Skill Relationship Type Lookup Refers To Skill
SkillLevel	Type double Properties Create, Defaulted on create, Filter, Nillable, Sort, Update Description The level of the skill required. Skill levels can range from zero to 99.99. Depending on your business needs, you can want the skill level to reflect years of experience, certification levels, or license classes.
SkillNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field Name	Details
	Description An auto-generated number identifying the skill requirement.

Usage

Skill requirements help dispatchers assign work to service resources with the proper expertise. You can still assign a service appointment to a service resource that *doesn't* possess the specified skills, so skill requirements serve more as a suggestion than a rule.

Add skill requirements to work types to save time and keep your processes consistent. When you add a skill requirement to a work type that use that type automatically inherits the skill requirement. For example, if all annual maintenance visits for your Classic Refrigerator product require a Refrigerator Maintenance skill level of at least 50, add that skill requirement to the Annual Maintenance Visit work type. When you create a service appointment for a customer's annual fridge maintenance, applying that work type adds the skill requirement as well.

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[ServiceRequirementFeed](#)

Feed tracking is available for the object.

[ServiceRequirementHistory](#)

History is available for tracked fields of the object.

TimeSlot

Represents a period of time on a specified day of the week during which work can be performed in Salesforce Scheduler. Operating hours consist of one or more time slots. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
DayOfWeek	Type picklist

Field Name	Details
	Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The day of the week when the time slot takes place.
EndTime	Type time Properties Create, Filter, Sort, Update Description The time when the time slot ends.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, this record can only have been referenced (LastReferencedDate) and not viewed.
MaxAppointments	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description Maximum number of appointments for a single time slot. Available in API version 47.0 and later.
OperatingHoursId	Type reference Properties Create, Filter, Group, Sort

Field Name	Details
	Description The operating hours that the time slot belongs to. An operating hours' time slots appear in the Operating Hours related list. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
StartTime	Type time Properties Create, Filter, Sort, Update Description The time when the time slot starts.
TimeSlotNumber	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of the time slot. The name is auto-populated to a day and time format—for example, <code>Monday 9:00 AM - 10:00 PM</code>—but you can manually update it.
Type	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The type of time slot. Possible values are <i>Normal</i> and <i>Extended</i>. Default value must be <i>Normal</i>. You can choose to use <i>Extended</i> to represent overtime shifts.
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Work type group assigned to the time slot. Available in API version 47.0 and later.

Field Name	Details
	This is a relationship field.
	Relationship Name WorkTypeGroup
	Relationship Type Lookup
	Refers To WorkTypeGroup

Usage

Operating hours are composed of time slots, which indicate the hours of operation for a particular day. After you create operating hours, create time slots for each day. For example, if the operating hours must be 8 AM to 5 PM Monday through Friday, create five time slots, one per day. To reflect breaks such as lunch hours, create multiple time slots in a day: for example, *Monday 8:00 AM – 12:00 PM* and *Monday 1:00 PM – 5:00 PM*.



Tip: Time slots don't come with any built-in rules, but you can create Apex triggers that limit time slot settings in your org. For example, you can want to restrict the start and end times on time slots to half-hour increments, or to prohibit end times later than 8 PM.

Waitlist

Represents a queue to which drop in customers who visit the branch without an already scheduled appointment are added. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
Description	Type textarea
	Properties Create, Nillable, Update

Field	Details
	Description The description of the waitlist.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the waitlist is available to add drop in customers (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist was last viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the waitlist.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The owner of the waitlist. This field is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User
ServiceTerritoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort
	Description The ID of the service territory to which the waitlist belongs. This field is a relationship field.
	Relationship Name ServiceTerritory
	Relationship Type Lookup
	Refers To ServiceTerritory
Type	Type picklist
	Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update
	Description Specifies the appointment type. Possible values are: - DropIn - Queued The default value is DropIn.

Usage

Use waitlists to manage drop in customers. You can create multiple waitlists for a service territory. Depending on your business set up, assign work type groups and service resources to a waitlist. When customers visit the branch, the greeter can check them in to a specific waitlist based on the reason they're visiting the branch. Depending on the availability of service resources on a particular day, you can choose to enable or disable a waitlist.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WaitlistFeed

Feed tracking is available for the object.

WaitlistHistory

History is available for tracked fields of the object.

WaitlistOwnerSharingRule

Sharing rules are available for the object.

WaitlistShare

Sharing is available for the object.

WaitlistParticipant

Represents a customer who is added to a waitlist. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AcceptanceTime	Type dateTime Properties Create, Filter, Nillable, Sort, Update Description The date and time the service resource accepts the appointment request of the waitlist participant. This field is available in API version 59.0 and later.
Description	Type textarea Properties Create, Filter, Nillable, Sort, Update Description The description of the waitlist participant.

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist participant record was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist participant record was last viewed.
ParticipantId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the participant that's associated as a parent for the service appointment. This field is a polymorphic relationship field. Relationship Name Participant Relationship Type Lookup Refers To Account, Contact, Lead
RelatedRequestId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description This field is a relationship field. Relationship Name RelatedRequest Refers To ClinicalServiceRequest

Field	Details
ParticipantIdentifier	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The alphanumeric unique identifier of the participant in a waitlist. For example, D101, E63, A5015
ServiceAppointmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service appointment that's related to the waitlist participant. This field is a relationship field. Relationship Name ServiceAppointment Relationship Type Lookup Refers To ServiceAppointment
ServiceResourceId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service resource that's related to the service appointment for the waitlist participant. This field is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description This field is a relationship field. Relationship Name ServiceTerritory Refers To ServiceTerritory
Status	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The status of waitlist participant. Possible values are: - Assigned - Assigned to a service resource. - Unassigned - Waiting to be assigned. The default value is Unassigned.
WaitlistId	Type reference Properties Create, Filter, Group, Sort Description The ID of the Waitlist that's related to the participant. This field is a relationship field. Relationship Name Waitlist Relationship Type Lookup Refers To Waitlist
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the work type that's associated with the service appointment. This field is a relationship field.

Field	Details
	Relationship Name WorkType
	Relationship Type Lookup
	Refers To WorkType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WaitlistParticipantFeed](#)

Feed tracking is available for the object.

[WaitlistParticipantHistory](#)

History is available for tracked fields of the object.

WorkType

Represents a type of work to be performed in Salesforce Scheduler. This object is available in API version 38.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Work types are templates representing an appointment topic (work type group) with an appointment location (service territory). Defines key appointment parameters such as appointment duration, prep and wrap-up buffers, and availability timings.

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field Name	Details
AppointmentCategoryId	Type reference
	Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The ID of the appointment category that's assigned to the work type. This field is available in API version 58.0 and later. This field is a relationship field. Relationship Name AppointmentCategory Relationship Type Lookup Refers To AppointmentCategory
ApptStartTimeIntvlInMin	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the time interval in minutes between appointment start times. For example, if you set the interval as 15, appointments can then begin at the top of the hour and at 15-minute intervals thereafter (10:00 AM, 10:15 AM, 10:30 AM). Valid values can be between 5 through 720.  Note: If you don't specify a value for this field, Salesforce Scheduler considers the value specified in the default scheduling policy. This field is available in API version 57.0 and later.
AttendeeLimit	Type int Properties Create, Filter, Group, Sort, Update Description The maximum number of attendees for a group service appointment in a shift. This field is considered when the appointment mode is Group. Available in API version 61.0 and later.
BlockTimeAfterAppointment	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the after buffer time for the service appointment.

Field Name	Details
	 Note: In Salesforce Scheduler, during appointment scheduling, the number of available time slots is automatically adjusted to accommodate the after buffer time.
BlockTimeAfterUnit	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specify the unit of time for BlockTimeAfterAppointment. Possible values are: - Hours - Minutes The default value is 'Minutes'.
BlockTimeBeforeAppointment	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the before buffer time for the service appointment.  Note: In Salesforce Scheduler, during appointment scheduling, the number of available time slots is automatically adjusted to accommodate the before buffer time.
BlockTimeBeforeUnit	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specify the unit of time for BlockTimeBeforeAppointment. Possible values are: - Hours - Minutes The default value is 'Minutes'.
DefaultAppointmentType	Type picklist Properties Create, Filter, Group, Nillable, Sort, Update

Field Name	Details
	Description The default appointment type of the work type. Possible values are: • Phone • At Branch • Video In Lobby Management, the Scheduled Service Appointments list only shows appointments that are set to At Branch.
Description	Type textarea Properties Create, Nillable, Update Description The description of the work type. Try to add details about the task or tasks that this work type represents.
DurationInMinutes	Type double Properties Filter, Nillable, Sort Description The estimated duration of the work type in minutes.
DurationType	Type picklist Properties Create, Filter, Group, Defaulted on create, Restricted picklist, Sort, Update Description The unit of the Estimated Duration: Minutes or Hours.
EstimatedDuration	Type double Properties Create, Filter, Sort, Update Description The estimated length of the work. The estimated duration is in minutes or hours based on the value selected in the Duration Type field.
LastReferencedDate	Type dateTime

Field Name	Details
	Properties Filter, Nillable, Sort Description The date when the work type was last modified. Its label in the user interface is <code>Last Modified Date</code>.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the work type was last viewed by the current user.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of the work type.
OperatingHoursId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the operating hours that's assigned to the work type. If a service resource needs special operating hours, create them in Setup and select them in the <code>Operating Hours</code> lookup field on the member's detail page. This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update

Field Name	Details
	Description The work type's owner. This is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
ProductId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description References the product associated with the work type. This field is available in API version 63.0 and later. This field is a relationship field. Relationship Name Product Refers To Product2
TimeFrameEndUnit	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specify the unit of time for TimeFrame End. Possible values are: - Days - Hours The default value is 'Days'.
TimeFrameStartUnit	Type picklist Properties Create, Defaulted on create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description Specify the unit of time for TimeFrame Start.

Field Name	Details
	Possible values are: • Days • Hours The default value is 'Days'.
TimeframeEnd	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the timeframe end to show only time slots that end before the duration that is set in Timeframe End.
TimeframeStart	Type int Properties Create, Filter, Group, Nillable, Sort, Update Description Specify the timeframe start to show only time slots that start after the duration that is set in Timeframe Start.

Usage

You can specify meeting preparation and wrap-up time by specifying `BlockTimeBeforeAppointment` and `BlockTimeAfterAppointment`. Specify the units of time as minutes or hours. During appointment scheduling, the number of available time slots is automatically adjusted to accommodate the before and after buffer time. By default, the before and after appointment buffers aren't reflected on the service resource's Salesforce calendar. Enable the [Block Resource Availability setting](#) to reflect the before and after appointment buffers on the Salesforce calendar.



Note: Don't specify more than 24 hours as buffer time.

Timeframe Start and Timeframe End show time slots in a dynamic time frame based on when a user books an appointment. Salesforce Scheduler shows only time slots that start after the duration that is set in Timeframe Start and end before the duration that is set in Timeframe End. For example, you've set Timeframe Start to 2 days and Timeframe End to 5 days and a user schedules an appointment on Sep 13, 10:00 AM. Then, only time slots that start on or after Sep 15, 10:00 AM and end on or before Sep 18, 10:00 AM are shown.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

WorkTypeChangeEvent (API version 48.0)

Change events are available for the object.

WorkTypeFeed

Feed tracking is available for the object.

WorkTypeHistory

History is available for tracked fields of the object.

WorkTypeOwnerSharingRule

Sharing rules are available for the object.

WorkTypeShare

Sharing is available for the object.

WorkTypeGroup

Represents a grouping of work types used to categorize types of appointments available in Salesforce Scheduler. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AdditionalInformation	Type multipicklist Properties Create, Filter, Nillable, Update Description Additional information about the types of appointments this work type group represents.
Description	Type textarea Properties , Nillable, Description A description of this work type group.
GroupType	Type picklist

Field	Details
	Properties Create, , , Group, Restricted picklist, Sort, Description The category of this work type group. Possible values are: • Default—A non-capacity group of work types used in Salesforce Scheduler.
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Description Indicates whether this work type group can be used for appointment scheduling.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The name of this work type group.
OwnerId	Type reference Properties , Defaulted on create, Filter, Group, Sort, Update Description The ID of the user who created this record. This is a polymorphic relationship field.

Field	Details
	Relationship Name Owner
	Relationship Type Lookup
	Refers To Group, User

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[WorkTypeGroupFeed](#)

Feed tracking is available for the object.

[WorkTypeGroupHistory](#)

History is available for tracked fields of the object.

[WorkTypeGroupOwnerSharingRule](#)

Sharing rules are available for the object.

[WorkTypeGroupShare](#)

Sharing is available for the object.

WorkTypeGroupDataTranslation

Represents the translated values of the data stored within a [WorkTypeGroup](#) record's fields. This object is available in API version 54.0 and later.

Supported Calls

`create()`, `delete()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

- Your organization must be using Enterprise, Performance, Unlimited, or Developer edition.
- Translation Workbench and data translation must be enabled in your org.
- To view this object, you must have the "View Setup and Configuration" permission

Fields

Field	Details
Description	Type textarea

Field	Details
	Properties Create, Nillable, Update Description The translated value for the WorkTypeGroup description.
IsOutOfDate	Type boolean Properties Defaulted on create, Filter, Group, Sort Description Indicates whether the translation is out-of-date (<code>true</code>) or current (<code>false</code>). A translation is out-of-date if the parent WorkTypeGroup record is updated after the last translation was filed.
Language	Type picklist Properties Create, Filter, Group, Restricted picklist, Sort Description The language for these translated values.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update Description The translated value for the WorkTypeGroup record name. This field is required to translate the text in other fields.
ParentId	Type reference Properties Create, Filter, Group, Sort, Update Description The record ID of the WorkTypeGroup associated with the data that is being translated. This field is a relationship field. Relationship Name Parent Relationship Type Lookup

Field	Details
	Refers To WorkTypeGroup

Usage

Use this object to translate the data stored in a WorkTypeGroup record into the different languages supported by Salesforce. If data translation is enabled for custom fields on the WorkTypeGroup object, additional WorkTypeGroupDataTranslation fields exist for translating the data contained within those fields.

You can't use a custom external id field in an upsert call for a WorkTypeGroupDataTranslation object.

SEE ALSO:

[Salesforce Help: Manage Objects' Data Translations](#)

CHAPTER 5 Salesforce Scheduler Custom Objects

In this chapter ...

- [ActionableList/MiniInvitation](#)
- [AppointmentTopicTimeSlot](#)
- [EngagementChannelType](#)
- [EngagementChannel/WorkType](#)
- [ServiceTerritoryWorkType](#)
- [ShiftEngagementChannel](#)
- [ShiftWorkTopic](#)
- [WaitlistServiceResource](#)
- [WaitlistWorkType](#)
- [WorkTypeGroup/Member](#)

This section provides details on custom objects, including junction objects. The Junction Object is a custom object that enables you to link a custom object with a large number of child records and link each child record to a large number of parent objects.

Salesforce Scheduler is available for an extra cost in Lightning Experience.

Available in: Enterprise, Unlimited, Performance, and Developer editions.

SEE ALSO:

[Create a Many-to-Many Object Relationship](#)

ActionableListMbrInvitation

Represents a relationship between an Actionable List Member and an Appointment Invitation. This object is available in API version 59.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
ActionableListMemberId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the actionable list member that's associated with the actionable list member invitation record. This field is a relationship field. Relationship Name ActionableListMember Relationship Type Lookup Refers To ActionableListMember
AppointmentInvitationId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the appointment invitation that's associated with the actionable list member invitation record. This field is a relationship field. Relationship Name AppointmentInvitation

Field	Details
	Relationship Type Lookup Refers To AppointmentInvitation
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed a related record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time when the current user last viewed this record.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-assigned number that identifies the actionable list member invitation record.
ServiceAppointmentId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the service appointment that's associated with the actionable list member invitation. This field is a relationship field. Relationship Name ServiceAppointment Relationship Type Lookup Refers To ServiceAppointment

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ActionableListMbrInvitationFeed

Feed tracking is available for the object.

ActionableListMbrInvitationHistory

History is available for tracked fields of the object.

AppointmentTopicTimeSlot

Represents a lookup to a work type or a work type group for a time slot. This object is available in API version 52.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
AppointmentTopicTimeSlotKey	Type string Properties Create, Filter, Group, idLookup, Nillable, Sort, Update Description Non-editable validating field used to ensure no two rows have the same time slot and work type or work type group values in an instance.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Name or ID of the AppointmentTopicTimeSlot object.
OperatingHoursId	Type reference Properties Filter, Group, Nillable, Sort Description The operating hours that contain the time slot.

Field	Details
	This is a relationship field. Relationship Name OperatingHours Relationship Type Lookup Refers To OperatingHours
TimeSlotId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the time slot. This is a relationship field. Relationship Name TimeSlot Relationship Type Lookup Refers To TimeSlot
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The work type group associated with this time slot. This is a relationship field. Relationship Name WorkTypeGroup Relationship Type Lookup Refers To WorkTypeGroup
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update

Field	Details
	Description The work type associated with this time slot. This is a relationship field.
	Relationship Name WorkType
	Relationship Type Lookup
	Refers To WorkType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

AppointmentTopicTimeSlotChangeEvent

Change events are available for the object.

AppointmentTopicTimeSlotFeed

Feed tracking is available for the object.

AppointmentTopicTimeSlotHistory

History is available for tracked fields of the object.

AppointmentTopicTimeSlotOwnerSharingRule

Sharing rules are available for the object.

AppointmentTopicTimeSlotShare

Sharing is available for the object.

EngagementChannelType

Represents a channel through which a customer can be reached for communication. The Engagement Channel Type object supports only the English language. This object is available in API version 48.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
ContactPointType	Type picklist Properties Create, Filter, Group, Nillable, Restricted picklist, Sort, Update Description The contact point type of the channel. Possible values are: • InPerson—In Person • Phone • Video
IsActive	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the engagement channel type is active (true) or not (false). This field is available in API version 56.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed a record related to this record.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this record. If this value is null, it's possible that this record was referenced (<code>LastReferencedDate</code>) and not viewed.
Name	Type string Properties Create, Filter, Group, idLookup, Sort, Update

Field	Details
	Description Required. Name of the communication subscription consent record.
OwnerId	Type reference Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The ID of the account owner associated with this customer. This field is a polymorphic relationship field. Relationship Name Owner Relationship Type Lookup Refers To Group, User
UsageType	Type multipicklist Properties Create, Filter, Nillable, Update Description Specifies the usage of the engagement channel type. This field is available in API version 56.0 and later. Possible values are: • <code>Salesforce Scheduler</code>

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[EngagementChannelTypeFeed](#)

Feed tracking is available for the object.

[EngagementChannelTypeHistory](#)

History is available for tracked fields of the object.

[EngagementChannelTypeShare](#)

Sharing is available for the object.

EngagementChannelWorkType

Represents the relationship between an Engagement Channel Type object and a Work Type object for Salesforce Scheduler. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AreAllEngmtChnlSupported	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the work type supports all engagement channels (<code>true</code>) or not (<code>false</code>).
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the engagement channel type that's related to the work type indicated in the <code>WorkTypeId</code> field. This field is a relationship field. Relationship Name EngagementChannelType Relationship Type Lookup Refers To EngagementChannelType
LastReferencedDate	Type dateTime

Field	Details
	Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of this engagement channel-work type relationship.
WorkTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work type that's related to the engagement channel type indicated in the <code>EngagementChannelTypeId</code> field. This field is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

EngagementChannelWorkTypeFeed

Feed tracking is available for the object.

EngagementChannelWorkTypeHistory

History is available for tracked fields of the object.

ServiceTerritoryWorkType

Represents the relationship between a ServiceTerritory object and a WorkType object for Salesforce Scheduler appointments. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Fields

Field	Details
IsSlotPublished	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicate whether records in the Shift object are created for the selected Service Territory and Work Type. The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of this service territory-work type relationship.
ServiceTerritoryId	Type reference Properties Create, Filter, Group, Sort Description The ID of the service territory that's related to the work type indicated in the <code>WorkTypeId</code> field. This is a relationship field. Relationship Name ServiceTerritory Relationship Type Lookup Refers To ServiceTerritory
TeamId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description Represents the team associated with the service territory for a specific work type. This field is a relationship field and is available in API version 58.0 and later. Relationship Name Team Relationship Type Lookup Refers To Team
WorkTypeId	Type reference Properties Create, Filter, Group, Sort Description The ID of the work type that's related to the service territory indicated in the <code>ServiceTerritoryId</code> field.

Field	Details
	This is a relationship field.
	Relationship Name WorkType
	Relationship Type Lookup
	Refers To WorkType

Associated Objects

This object has the following associated objects. Unless noted, they are available in the same API version as this object.

ServiceTerritoryWorkTypeFeed

Feed tracking is available for the object.

ServiceTerritoryWorkTypeHistory

History is available for tracked fields of the object.

ShiftEngagementChannel

Represents the relationship between a Shift object and an Engagement Channel Type object for Salesforce Scheduler. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AreAllEngmtChnlSupported	Type boolean
	Properties Create, Defaulted on create, Filter, Group, Sort, Update
	Description Indicates whether the shift supports all engagement channels (true) or not (false).

Field	Details
EngagementChannelTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the engagement channel type that's related to the shift indicated in the <code>ShiftId</code> field. This field is a relationship field. Relationship Name EngagementChannelType Relationship Type Lookup Refers To EngagementChannelType
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description The name of this shift-engagement channel type relationship.
ShiftId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the shift that's related to the engagement channel type indicated in the <code>EngagementChannelTypeId</code> field. This field is a relationship field. Relationship Name Shift Relationship Type Lookup Refers To Shift

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[ShiftEngagementChannelFeed](#)

Feed tracking is available for the object.

[ShiftEngagementChannelHistory](#)

History is available for tracked fields of the object.

ShiftWorkTopic

Represents the relationship between a Shift object and a Work Type or Work Type Group object for Salesforce Scheduler. This object is available in API version 56.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
<code>AreAllTopicsSupported</code>	Type boolean

Field	Details
	Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the shift supports all work type or work type groups (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
AttendeeLimit	Type int Properties Create, Defaulted on create, Filter, Group, Sort, Update Description The maximum number of attendees for a group service appointment in a shift. This field is considered when the appointment mode is Group. Available in API version 61.0 and later.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
MaxAppointments	Type int Properties Create, Defaulted on create, Filter, Group, Nillable, Sort, Update Description The maximum number of appointments allowed for each time slot for a shift. This field is considered when <code>workTypeId</code> or <code>workTypeGroupId</code> is provided. This field is available in API version 60.0 and later.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort

Field	Details
	Description The name of this shift-work topic relationship.
ShiftId	Type reference Properties Create, Filter, Group, Sort Description The ID of the shift that's related to the work type indicated in the <code>workTypeId</code> field or the work type group indicated in the <code>workTypeGroupId</code> field. This field is a relationship field. Relationship Name Shift Relationship Type Lookup Refers To Shift
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the work type group that's related to the shift indicated in the <code>ShiftId</code> field. This field is a relationship field. Relationship Name WorkTypeGroup Relationship Type Lookup Refers To WorkTypeGroup
WorkTypeId	Type reference Properties Create, Filter, Group, Nillable, Sort, Update Description The ID of the work type that's related to the shift indicated in the <code>ShiftId</code> field. This field is a relationship field. Relationship Name WorkType

Field	Details
	Relationship Type Lookup
	Refers To WorkType

Usage

For a ShiftWorkTopic record, you must specify either a work type or a work type group (based on the Salesforce Scheduler for Health Cloud option), or set `AreAllTopicsSupported` as `true`. Use `WorkTypeGroupId` for Salesforce Scheduler and use `workTypeId` only when the Salesforce Scheduler for Health Cloud option is enabled.

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

ShiftWorkTopicChangeEvent

Change events are available for the object.

ShiftWorkTopicFeed

Feed tracking is available for the object.

ShiftWorkTopicHistory

History is available for tracked fields of the object.

ShiftWorkTopicOwnerSharingRule

Sharing rules are available for the object.

ShiftWorkTopicShare

Sharing is available for the object.

WaitlistServiceResource

Represents the relationship between the Waitlist object and the Service Resource object for Salesforce Scheduler. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
AccessLevel	Type picklist Properties Create, Defaulted on create, Filter, Group, Restricted picklist, Sort, Update Description The access level of the user. The level determines the information that's masked from the service resource for a drop-in participant. Possible values are: • Default • Enhanced The default value is <code>Default</code>.
IsAvailable	Type boolean Properties Create, Defaulted on create, Filter, Group, Sort, Update Description Indicates whether the service resource is available to accept a drop-in participant from the waitlist (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code>.
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist service resource record was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist service resource record was last viewed.
Name	Type string

Field	Details
	Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number that identifies the waitlist-service resource type record. For example, WSR-0001 and WSR-0002.
ServiceResourceId	Type reference Properties Create, Filter, Group, Sort Description The ID of the service resource that's related to the waitlist. This field is a relationship field. Relationship Name ServiceResource Relationship Type Lookup Refers To ServiceResource
WaitlistId	Type reference Properties Create, Filter, Group, Sort Description The ID of the waitlist that's related to the service resource. This field is a relationship field. Relationship Name Waitlist Relationship Type Lookup Refers To Waitlist

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WaitlistServiceResourceFeed](#)

Feed tracking is available for the object.

WaitlistServiceResourceHistory

History is available for tracked fields of the object.

WaitlistWorkType

Represents the relationship between the Waitlist object and the Work Type object for Salesforce Scheduler. This object is available in API version 58.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist work type record was last modified. Its label in the user interface is Last Modified Date.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The date when the waitlist work type record was last viewed.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Auto-generated number that identifies the waitlist-work type record. For example, WWT-0001 and WWT-0002.

Field	Details
WaitlistId	Type reference Properties Create, Filter, Group, Sort Description The ID of the waitlist that's related to the wok type. This field is a relationship field. Relationship Name Waitlist Relationship Type Lookup Refers To Waitlist
WorkTypeId	Type reference Properties Create, Filter, Group, Sort, Update Description The ID of the work type that's related to the waitlist. This field is a relationship field. Relationship Name WorkType Relationship Type Lookup Refers To WorkType

Associated Objects

This object has the following associated objects. If the API version isn't specified, they're available in the same API versions as this object. Otherwise, they're available in the specified API version and later.

[WaitlistWorkTypeFeed](#)

Feed tracking is available for the object.

[WaitlistWorkTypeHistory](#)

History is available for tracked fields of the object.

WorkTypeGroupMember

Represents the relationship between a work type and the work type group it belongs to. This object is available in API version 45.0 and later.

Supported Calls

`create()`, `delete()`, `describeLayout()`, `describeSObjects()`, `getDeleted()`, `getUpdated()`, `query()`, `retrieve()`, `search()`, `undelete()`, `update()`, `upsert()`

Special Access Rules

Salesforce Scheduler must be enabled.

Fields

Field	Details
LastReferencedDate	Type dateTime Properties Filter, Nillable, Sort Description The date and time that the current user last viewed a record related to this object.
LastViewedDate	Type dateTime Properties Filter, Nillable, Sort Description The timestamp for when the current user last viewed this object.
Name	Type string Properties Autonumber, Defaulted on create, Filter, idLookup, Sort Description Autogenerated number identifying the work type group membership. It uses the format #####.
WorkTypeGroupId	Type reference Properties Create, Filter, Group, Sort

Field	Details
	Description The ID of the work type group that this record belongs to.
	Relationship Name WorkTypeGroup
	Relationship Type Lookup
	Refers To WorkTypeGroup
WorkTypeId	Type reference
	Properties Create, Filter, Group, Sort
	Description The ID of the work type that this record corresponds to. This is a relationship field.
	Relationship Name WorkType
	Relationship Type Lookup
	Refers To WorkType

Associated Objects

This object has the following associated objects. Unless noted, they're available in the same API version as this object.

[WorkTypeGroupMemberFeed](#)

Feed tracking is available for the object.

[WorkTypeGroupMemberHistory](#)

History is available for tracked fields of the object.

CHAPTER 6 Salesforce Scheduler Platform Events

In this chapter ...

- [ServiceAppointmentEvent](#)

Use the ServiceAppointmentEvent platform event to notify subscribers about service appointment details.

This platform event object is available within the Salesforce Scheduler platform.

ServiceAppointmentEvent

Notifies subscribers of the service appointment details that are generated from the event platform. This object is available in API version 59.0 and later.

Supported Calls

`describeSObjects()`

Supported Subscribers

Subscriber	Supported?
Apex Triggers	✓
Flows	
Processes	
Pub/Sub API	✓
Streaming API (CometD)	✓

Subscription Channel

`/event/ServiceAppointmentEvent`

Special Access Rules

This object is available when Salesforce Scheduler is enabled.

Fields

Field	Details
<code>AsgnRsrcApptSchdDt1Event</code>	Type <code>AsgnRsrcApptSchdEvent[]</code> Properties Nillable Description One or multiple assigned resource records related to the scheduler appointment event.
<code>ChangeType</code>	Type string Properties Nillable

Field	Details
	Description The operation that caused the change. For example: CREATE, UPDATE, DELETE.
EventUuid	Type string Properties Nillable Description A universally unique identifier (UUID) that identifies a platform event message.
ReplayId	Type string Properties Nillable Description Represents an ID value that is populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.
ServiceApptScheduleEvent	Type SvcApptSchdEvent[] Properties Nillable Description The service appointment related to the scheduler appointment event.

CHAPTER 7 Salesforce Scheduler Metadata API Types

In this chapter ...

- [IndustriesSettings](#)

Metadata API enables you to access some types and feature settings that you can customize in the user interface. For more information about Metadata API and to find a complete reference of existing metadata types, see [Metadata API Developer Guide](#).

IndustriesSettings

Represents settings for Salesforce Scheduler.

This type extends the Metadata metadata type and inherits its `fullName` field.

In the package manifest, all organization settings metadata types are accessed using the Settings name. See Settings for more details.

File Suffix and Directory Location

IndustriesSettings are stored in a single file named `Industries.settings` in the `settings` directory.

Version

Industries settings for Salesforce Scheduler are available in API version 47.0 and later.

Fields

Field Name	Field Type	Description
<code>appointmentDistributionOrgPref</code>	boolean	Indicates whether to schedule appointments for service resources based on appointment distribution (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 52.0 and later.
<code>captureResourceUtilizationOrgPref</code>	boolean	Indicates whether to use a background process to calculate the usage of service resources from service appointments (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 52.0 and later.
<code>enableAnyResourceTypeOrgPref</code>	boolean	Indicates whether to enable Salesforce Scheduler to consider service resource records with Agent resource type (<code>true</code>) or not (<code>false</code>). Before enabling this setting, create a service resource record as Main for each user, or update one of the service resource records as Main for each user. The default value is <code>false</code> . Available in API version 57.0 and later.
<code>enableAppFrmAnywhereOrgPref</code>	boolean	Indicates whether to use engagement channels for setting up shifts, work types, and booking a service appointment (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 56.0 and later. See the prerequisites before you enable this setting.
<code>enableBlockResourceAvailabilityOrgPref</code>	boolean	Indicates whether Salesforce Scheduler service appointments are added to users' Salesforce calendars. For example, if set to <code>false</code> , users don't see their service appointments on their calendars. The default is <code>false</code> . Available in API version 47.0 and later. This setting is used in Financial Services Cloud.
<code>enableCapacitySchedulingPref</code>	boolean	Indicates whether users can use capacity-based scheduling (<code>true</code>) or not (<code>false</code>). Use capacity-based scheduling to control the number of appointments that can be scheduled for a given shift and type of work. Available in API version 62.0 and later. See the prerequisite before you enable this setting.

Field Name	Field Type	Description
<code>enableCreateMultiAttendeeEventOrgPref</code>	boolean	Indicates whether users can group individual events, and view the list of all attendees under a single event (<code>true</code>) or not (<code>false</code>). The default is <code>false</code> . See the prerequisites before you enable this setting. Available in API version 55.0 and later. This setting is used in Financial Services Cloud.
<code>enableDropInAppointmentsOrgPref</code>	boolean	Indicates whether users can manage drop-in participants (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 58.0 and later. See the prerequisite before you enable this setting.
<code>enableDropInSkillMatchingOrgPref</code>	boolean	Indicates whether skill and skill level matching is enabled for service resources that are assigned to waitlists for a service territory (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 58.0 and later.
<code>enableEventManagerOrgPref</code>	boolean	Indicates whether users can add Salesforce Scheduler service appointments to their Salesforce calendars. The default is <code>false</code> . Available in API version 47.0 and later. This setting is used in Financial Services Cloud.
<code>enableEventWriteOrgPref</code>	boolean	Indicates whether to publish high-volume platform events when users create, update, or delete service appointments in Salesforce Scheduler (<code>true</code>) or not (<code>false</code>). If enabled, write these events to an external system to update it with Salesforce Scheduler service appointments. The default value is <code>false</code> . Available in API version 49.0 and later.
<code>enableMultipleTopicsForShiftsOrgPref</code>	boolean	Indicates whether the multiple topics for shifts feature is enabled (<code>true</code>) or disabled (<code>false</code>). The default value is <code>false</code> . Available in API version 56.0 and later. See the prerequisite before you enable this setting.
<code>enableMultiResourceOrgPref</code>	boolean	Indicates whether users can add multiple service resources to a service appointment. The default is <code>false</code> . Available in API version 47.0 and later. This setting is used in Financial Services Cloud.
<code>enableOverbookingOrgPref</code>	boolean	Indicates whether users can add multiple service appointments to a single time slot for a service resource. If set to <code>false</code> , concurrent time slots are visible, but can't be modified. The default is <code>false</code> . Available in API version 47.0 and later. This setting is used in Financial Services Cloud.
<code>enableShareSaWithArOrgPref</code>	boolean	Indicates whether to share service appointments with assigned resources (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 55.0 and later.
<code>enableTopicOrTemplate</code>	boolean	Indicates whether to use Salesforce Scheduler to manage Health Cloud appointments (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> .

Field Name	Field Type	Description
		You must enable the <code>enableTopicTimeSlot</code> field before enabling this setting. Available in API version 52.0 and later.
<code>enableTopicTimeSlot</code>	boolean	Indicates whether to set operating hours for Service Territory Members for Work Type Groups (<code>true</code>) or not (<code>false</code>). The default value is <code>false</code> . Available in API version 52.0 and later. See the prerequisites before you enable this setting. After you enable this setting, you can't disable it.

Declarative Metadata Sample Definition

The following is an example of an `Industries.Settings` metadata file.

```
<?xml version="1.0" encoding="UTF-8"?>
<IndustriesSettings xmlns="http://soap.sforce.com/2006/04/metadata">
  <appointmentDistributionOrgPref>true</appointmentDistributionOrgPref>
  <captureResourceUtilizationOrgPref>true</captureResourceUtilizationOrgPref>
  <enableBlockResourceAvailabilityOrgPref>true</enableBlockResourceAvailabilityOrgPref>
  <enableCreateMultiAttendeeEventOrgPref>true</enableCreateMultiAttendeeEventOrgPref>
  <enableDropInSkillMatchingOrgPref>true</enableDropInSkillMatchingOrgPref>
  <enableEventManagerOrgPref>true</enableEventManagerOrgPref>
  <enableAppFrmAnywhereOrgPref>true</enableAppFrmAnywhereOrgPref>
  <enableAnyResourceTypeOrgPref>true</enableAnyResourceTypeOrgPref>
  <enableDropInAppointmentsOrgPref>true</enableDropInAppointmentsOrgPref>
  <enableEventWriteOrgPref>true</enableEventWriteOrgPref>
  <enableMultipleTopicsForShiftsOrgPref>true</enableMultipleTopicsForShiftsOrgPref>
  <enableMultiResourceOrgPref>true</enableMultiResourceOrgPref>
  <enableOverbookingOrgPref>true</enableOverbookingOrgPref>
  <enableShareSaWithArOrgPref>true</enableShareSaWithArOrgPref>
  <enableTopicOrTemplate>true</enableTopicOrTemplate>
  <enableTopicTimeSlot>true</enableTopicTimeSlot>
</IndustriesSettings>
```

The following is an example `package.xml` that references the previous definition.

```
<?xml version="1.0" encoding="UTF-8"?>
<Package xmlns="http://soap.sforce.com/2006/04/metadata">
  <types>
    <members>Industries</members>
    <name>Settings</name>
  </types>
  <version>47.0</version>
</Package>
```


CHAPTER 8 Authenticate Salesforce Scheduler APIs

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.



Note: To build a custom appointment scheduling application using Salesforce Scheduler APIs for prospects or unauthenticated users, you must build it using a logged-in user. For example, an integration user or an administrator.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

SEE ALSO:

[Connect REST API Developer Guide: Connect REST API Quick Start](#)

CHAPTER 9 Translate SOQL Query Results

To translate SOQL query results into the language of the user who submits the query, use the `toLabel` method. If no translation is available, the method returns the search results in the default language of the organization.

Any organization can use the `toLabel()` method. It's useful for organizations that enabled the data translation. For information on how to enable data translation, see [Manage Entities' Data Translation](#) in Salesforce Scheduler Help.

The `toLabel` method uses the following syntax:

```
toLabel(object.field)
```

This method is supported on the `WorkTypeGroup`, `ServiceResource`, and `ServiceTerritory` objects. Use this method to return translated search results on the following fields:

- Name
- Description
- Custom fields of type Text, MultiLine Text, Long Text Area, Rich Text Area, and URL

You can't use the `toLabel()` method in the `ORDER BY` clause. For limitations that apply to the translation, see [Translate Returned SOQL Results](#) in SOQL and SOSL Reference.

Sample Request

Example of data translation request for `WorkTypeGroup`:

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+toLabel(Name),+toLabel(Description),+toLabel(Details__c),+toLabel(Disclaimer__c)+From+WorkTypeGroup
```

Example of data translation request for `ServiceResource`:

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+toLabel(Name),+toLabel(Description),+toLabel(Profile_URL__c)+From+ServiceResource
```

Example of data translation request for `ServiceTerritory`:

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+toLabel(Name),+toLabel(Description),+toLabel(Notes__c)+From+ServiceTerritory
```

Sample Response

Example of translated query results for `WorkTypeGroup`:

```
{
  "totalSize": 6,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url":
"/services/data/v54.0/subjects/WorkTypeGroup/0VSx00000000ZTDGA2"
```

```

    },
    "Name": "□□",
    "Description": "□□",
    "Details__c": "<ul><li><b><i><u>□□□□□□□□□□</u></i></b><span style=\"color: rgb(0, 0, 0);\"></span></li></ul>",
    "Disclaimer__c": "□□"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url":
"/services/data/v54.0/subjects/WorkTypeGroup/0VSx00000000ZTAGA2"
    },
    "Name": "WTG 3",
    "Description": null,
    "Details__c": null,
    "Disclaimer__c": null
  }
]
}

```

Example of translated query results for ServiceResource:

```

{
  "totalSize": 2,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceResource",
        "url":
"/services/data/v54.0/subjects/ServiceResource/0Hnx000000003I6CAI"
      },
      "Name": "Адам Смит",
      "Description": "описание",
      "Profile_URL__c": "http:// профиль"
    },
    {
      "attributes": {
        "type": "ServiceResource",
        "url":
"/services/data/v54.0/subjects/ServiceResource/0Hnx000000003I9CAI"
      },
      "Name": "Stacy Simon",
      "Description": null,
      "Profile_URL__c": null
    }
  ]
}

```

Example of translated query results for ServiceTerritory:

```
{
  "totalSize": 2,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceTerritory",
        "url":
"/services/data/v54.0/subjects/ServiceTerritory/0Hhx00000000c9tCAA"

      },
      "Name": "l'apollon",
      "Description": "à la mode",
      "Notes__c": "française"
    },
    {
      "attributes": {
        "type": "ServiceTerritory",
        "url":
"/services/data/v54.0/subjects/ServiceTerritory/0Hhx00000000cgaCAA"

      },
      "Name": "tempST",
      "Description": null,
      "Notes__c": null
    }
  ]
}
```

CHAPTER 10 Salesforce Scheduler Business APIs

In this chapter ...

- [REST APIs](#)
- [Connect APIs](#)
- [Error Codes and Responses](#)

Salesforce Scheduler gives various developer resources that you need to simplify appointment scheduling in Salesforce.

These resources include REST APIs and Connect REST APIs. The APIs don't have full parity, and you may need to use both REST and Connect to accomplish your business goals.

REST APIs

Use Salesforce Scheduler REST APIs to get appointment time slots and available service resources based on work type groups and service territories.



Note: Salesforce Scheduler is built on the Salesforce platform (also known as Lightning Experience). The Salesforce platform specific API rate limits apply to the Salesforce Scheduler REST APIs. For more information on Lightning platform common limits and allocations, see [API Request Limits and Allocations](#).

The following is a list of REST APIs available within the Salesforce Scheduler platform.

[Resources](#)

[Request Bodies](#)

[Response Bodies](#)

SEE ALSO:

[REST API Developer Guide: Introducing Lightning Platform REST API](#)

[Salesforce Developer Limits and Allocations Quick Reference: About This Quick Reference](#)

Resources

Use Salesforce Scheduler REST APIs to get appointment time slots or available service resources based on work type groups and service territories.

[Get Appointment Candidates](#)

Returns a list of service resources (appointment candidates) based on work type group or work type and service territories.

[Get Appointment Slots](#)

Returns a list of available appointment time slots for a resource based on given work type group or work type and service territories.

[Scheduling](#)

Returns a list of available Salesforce Scheduler REST resources and corresponding URIs. This resource is available in REST API version 45.0 and later.

Get Appointment Candidates

Returns a list of service resources (appointment candidates) based on work type group or work type and service territories.

Set up Salesforce Scheduler before making requests. This setup includes creating or configuring Service Resources, Service Territory Members, Work Type Groups, Work Types, Work Type Group Members, and Service Territory Work Types. See [Set Up Salesforce Scheduler](#) for more information.

The appointment time slots are determined based on multiple factors, such as field values, scheduled appointments, absences, Scheduler Settings, and Scheduling Policies to determine available time slots. See [How Salesforce Scheduler Determines Available Time Slots](#) for more information.

The following factors are considered for returning start time and end time of resources.

Resource Availability

Determined using service territory member, service territory, work type, and account operating hours fields.

Resource Unavailability

Determined by resource absences, existing appointments that the resource is assigned to. The resource must be marked as a required resource for the appointment with a status that isn't in closed, canceled, or completed.

Appointment Start Time Interval in the Scheduling Policy

Appointment start time interval field in the Scheduling Policy is used to determine when the appointment can start. This interval can be 5, 10, 15, 20, 30, or 60. By default, it's set to 15.

Work Type Duration

The end time is calculated as start time + duration of the work type.



Note: If asset scheduling is enabled, the response also includes asset-based candidates.

Syntax**URI**

```
/services/data/vxx.x/scheduling/getAppointmentCandidates
```

Available version

45.0

Formats

JSON, XML

HTTP methods

POST

Request body

Parameter	Required	Type	Description
accountId	No	String	The ID of the associated account.
allowConcurrentScheduling	No	Boolean	If true, allows scheduling of concurrent appointments in a time slot. If false, concurrent appointments aren't allowed. The default is false. This field is available in API version 47.0 and later.
correlationId	No	String	The ID to pass custom information to the <code>ServiceResourceScheduleHandler</code> Apex interface. For example, you can use the correlation ID to identify the app, website, or any other external system that calls this Apex interface implementation. If you don't pass a custom value, a randomly generated identifier is passed. This field is available in API version 53.0 and later.
endTime	No	String	The latest time that a time slot can end (inclusive).  Note: The API only returns time slots up to 31 days from the <code>startTime</code> .

Parameter	Required	Type	Description
engagementChannelTypeIds	No	String[]	The ID of the engagement channel type record. The availability of service resources is filtered based on the engagement channel type selected. This field is available in API version 56.0 and later. This field supports only one engagement channel type ID. You can use engagement channel types with the <code>getAppointmentCandidates</code> API only if: - The Schedule Appointments Using Engagement Channels setting is enabled in Salesforce Scheduler Settings in your Salesforce org. - Shifts are defined in the scheduling policy. For more information on setting up shifts in scheduling policy, see Define Shift Rules in Scheduling Policy.  Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.
filterByResources	No	String[]	A comma-separated list of service resource IDs. API returns only eligible service resources that are both in the list and in the selected service territory. The resources are sorted by the order in which the resource IDs are passed. Available in API version 51.0 and later.  Note: Scheduler doesn't support appointment Distribution when you've specified a list of resource IDs in the <code>filterByResources</code> parameter.
resourceLimitApptDistribution	No	Integer	Specify the maximum number of service resources that you want to show during appointment scheduling when appointment distribution is enabled. Available in API version 53.0 and later.  Note: The <code>filterByResources</code> field takes precedence over the <code>resourceLimitApptDistribution</code> field.
startTime	No	String	The earliest time that a time slot can begin (inclusive). Defaults to the current time of the request, if empty. You can also use a time from the past.
schedulingPolicyId	No	String	The ID of the AppointmentSchedulingPolicy object. If no scheduling policy is passed in the request body, the default configurations are used. All Scheduling Policy Configurations are considered when using this API.
territoryIds	Yes	String[]	List of service territory IDs, where the work that is being requested is performed.
workType	Required if workType isn't given.	Work Type	The type of the work to be performed.

Parameter	Required	Type	Description
workTypeGroupId	Required if workType isn't given.	String	The ID of the work type group containing the work types that are being performed.



Note: To determine the required fields in your request body, consider the following points:

- Provide either the `workTypeGroupId` or `workType` parameter in your request body, but not both.
- If the `workType` parameter is specified, then you must provide either the `id` or `durationInMinutes` parameter.
- If `id` of the `workType` parameter is specified, then the rest of the `workType` fields are optional.



Important:

- When you're using shifts: You must specify `workTypeGroupId` or the ID of the work type. When you specify the ID of the work type, all other `workType` fields become optional, and Scheduler retrieves their values from the database.
- When you're using operating hours: You don't need to specify `workTypeGroupId` or the ID of the work type. Scheduler applies `durationInMinutes` and all other `workType` fields as you configure them.

Response Body

Execution of a successful request returns the response body containing a list of available appointment resources.

Parameter	Required	Type	Description
candidates	Yes	Candidates on page 145 []	List of available appointment candidates.

Examples

Example Request Body

Using `workTypeGroupId`:

```
{
  "startTime": "2019-01-23T00:00:00.000Z",
  "endTime": "2019-02-30T00:00:00.000Z",
  "workTypeGroupId": "0VSB0000000KyjBOAS",
  "accountId": "001B000000qAUAWIA4",
  "territoryIds": [
    "0HhB0000000TO9WKAW"
  ],
  "schedulingPolicyId": "0VrB0000000KyjB",
  "engagementChannelTypeIds": [
    "0eFRM00000000Bv2AI"
  ]
}
```

Using `workTypeId`:

```
{
  "startTime": "2019-01-23T00:00:00.000Z",
```

```

    "endTime": "2019-02-30T00:00:00.000Z",
    "workType": {
      "id": "08qRM000000003fkYAA"
    },
    "territoryIds": [
      "0HhRM000000003OZ0AY"
    ],
    "accountId": "001B000000qAUAWIA4",
    "schedulingPolicyId": "0VrB0000000KyjB",
    "engagementChannelTypeIds": [
      "0eFRM00000000Bv2AI"
    ]
  }
}

```

Example Response Body

```

{
  "candidates": [
    {
      "endTime": "2019-01-23T19:15:00.000+0000",
      "resources": [
        "0HnB0000000D2DsKAK"
      ],
      "startTime": "2019-01-23T16:15:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW",
      "engagementChannelTypeIds": [
        "0eFRM00000000Bv2AI"
      ]
    },
    {
      "endTime": "2019-01-23T19:30:00.000+0000",
      "resources": [
        "0HnB0000000D2DsKAK"
      ],
      "startTime": "2019-01-23T16:30:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW",
      "engagementChannelTypeIds": [
        "0eFRM00000000Bv2AI"
      ]
    },
    {
      "endTime": "2019-01-23T19:45:00.000+0000",
      "resources": [
        "0HnB0000000D2DsKAK"
      ],
      "startTime": "2019-01-23T16:45:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW",
      "engagementChannelTypeIds": [
        "0eFRM00000000Bv2AI"
      ]
    }
  ]
}

```

Get Appointment Slots

Returns a list of available appointment time slots for a resource based on given work type group or work type and service territories.

The appointment time slots are determined based on your Salesforce Scheduler data model configurations. Here are some prerequisites that you can consider while setting up data.

- Set up Salesforce Scheduler before making your requests. The setup includes creating or configuring Service Resources, Service Territory Members, Work Type Groups, Work Types, Work Type Group Members, and Service Territory Work Types. See [Manage Business Information in Salesforce Scheduler](#) for more information.
- Configure a work type mapped for each territory in the request body via Service Territory Work Type. Map the same work type to the work type group, via work type group member.

The following factors affect how time slots are calculated and returned.

- Timezones that differ across operating hours are handled and results are always returned in UTC.
- The resource must be marked as a required resource on the assigned resource object.
- The resource is considered unavailable if the status categories of the resource assigned to service appointments are other than Canceled, Cannot Complete, and Completed.
- Resource Absences of all types are considered unavailable from start to end.
- The following fields of Work Type records, if configured, are used to fine-tune time slot requirements. For more information, see [Create Work Types in Salesforce Scheduler](#).

Parameter	Description
Timeframe Start	Time slots sooner than current time + Timeframe Start aren't returned.
Timeframe End	Time slots later than current time + Timeframe End aren't returned.
Block Time Before Appointment	The time period before the appointment is considered as unavailable.
Block Time After Appointment	The time period after the appointment is considered as unavailable.
Operating Hours	The overlap of all operating hours from the account, work type, service territory, and service territory member are considered while determining time slots. For more information, see Set Up Operating Hours in Salesforce Scheduler .

- Only the time slots within the period of 31 days from the start date are returned.
- Salesforce Scheduler uses multiple factors, such as field values, scheduled appointments, absences, Scheduler Settings, and Scheduling Policies to determine available time slots, including the earliest and latest appointment slots. See [How Does Salesforce Scheduler Determine Available Time Slots](#).



Note: If asset scheduling is enabled, you can provide an asset-based service resource in `requiredResourceIds` to retrieve available timeslots for the asset resource.

Syntax

URI

```
/services/data/vXX.X/scheduling/getAppointmentSlots
```

Available version

45.0

Formats

JSON, XML

HTTP methods

POST

AuthenticationAuthorization: Bearer *token***Request body**

Parameter	Required	Type	Description
accountId	No	String	The ID of the associated account.
allowConcurrentScheduling	No	Boolean	If true, allows scheduling of concurrent appointments in a time slot. If false, concurrent appointments aren't allowed. The default is false. Available in API version 47.0 and later.
correlationId	No	String	The ID to pass custom information to the <code>ServiceResourceScheduleHandler</code> Apex interface. For example, you can use the correlation ID to identify the app, website, or any other external system that calls this Apex interface implementation. If you don't pass a custom value, a randomly generated identifier is passed. This field is available in API version 53.0 and later.
endTime	No	String	The latest time that a time slot can end (inclusive).
engagementChannelTypeIds	No	String[]	The ID of the engagement channel type record. The availability of time slots is filtered based on the engagement channel type selected. This field is available in API version 56.0 and later.



Note: This field supports only one engagement channel type ID.

You can use engagement channel types with the `getAppointmentSlots` API only if:

- The **Schedule Appointments Using Engagement Channels** setting is enabled in Salesforce Scheduler Settings in your Salesforce org.
- Shifts are defined in the scheduling policy. For more information on setting up shifts in scheduling policy, see [Define Shift Rules in Scheduling Policy](#).



Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.

Parameter	Required	Type	Description
<code>primaryResourceId</code>	No	String	The ID of the primary resource in multi-resource scheduling. This field is available in API version 48.0 and later.  Note: This field is required only when multi-resource scheduling is enabled.
<code>requiredResourceIds</code>	Yes	String[]	List of resource IDs that must be available during the time slot.
<code>schedulingPolicyId</code>	No	String	The ID of the AppointmentSchedulingPolicy object. If no scheduling policy is passed in the request body, the default configurations are used. The only scheduling policy configuration that is used in determining time slots is the enforcement of account visiting hours.
<code>startTime</code>	No	String	The earliest time that a time slot can begin (inclusive). Defaults to the current time of the request, if empty.
<code>territoryIds</code>	Yes	String[]	List of IDs of service territories, where the work that is being requested is performed.
<code>workType</code>	Required if <code>workTypeId</code> isn't specified.	Work Type	The type of the work to be performed.
<code>workTypeGroupId</code>	Required if <code>workType</code> isn't given.	String	The ID of the work type group containing the work types that are being performed.

 **Note:** To determine the required fields in your request body, consider the following points:

- Provide either the `workTypeGroupId` or `workType` parameter in your request body, but not both.
- If the `workType` parameter is specified, then you must provide either the `id` or `durationInMinutes` parameter.
- If `id` of the `workType` parameter is specified, then the rest of the `workType` fields are optional.

Response Body

Execution of a successful request returns the response body containing a list of available time slots.

Parameter	Required	Type	Description
<code>timeSlots</code>	Yes	TimeSlots on page 145 []	List of time slots included in each territory.

Example

Example Request Body

Using workTypeGroupId:

```
{
  "startTime": "2019-01-23T00:00:00.000Z",
  "endTime": "2019-02-28T00:00:00.000Z",
  "workTypeGroupId": "0VSB0000000KyjBOAS",
  "accountId": "001B000000qAUAWIA4",
  "territoryIds": [
    "0HhB0000000TO9WKAW"
  ],
  "schedulingPolicyId": "0VrB0000000KyjB",
  "requiredResourceIds": [
    "0HnB0000000TO8gKAK"
  ],
  "engagementChannelTypeIds": [
    "0eFRM00000000Bv2AI"
  ]
}
```

Using workType:

```
{
  "startTime": "2019-01-23T00:00:00.000Z",
  "endTime": "2019-02-28T00:00:00.000Z",
  "workType": {
    "id": "08qRM00000003fkYAA"
  },
  "requiredResourceIds": [
    "0HnB0000000TO8gKAK"
  ],
  "territoryIds": [
    "0HhRM00000003OZ0AY"
  ],
  "accountId": "001B000000qAUAWIA4",
  "schedulingPolicyId": "0VrB0000000KyjB",
  "engagementChannelTypeIds": [
    "0eFRM00000000Bv2AI"
  ]
}
```

Example Response Body

```
{
  "timeSlots": [
    {
      "endTime": "2019-01-21T19:15:00.000+0000",
      "startTime": "2019-01-21T16:15:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW"
    },
    {
      "endTime": "2019-01-21T19:30:00.000+0000",
      "startTime": "2019-01-21T16:30:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW"
    }
  ]
}
```

```
    },
    {
      "endTime": "2019-01-21T19:45:00.000+0000",
      "startTime": "2019-01-21T16:45:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW"
    }
  ]
}
```

Scheduling

Returns a list of available Salesforce Scheduler REST resources and corresponding URIs. This resource is available in REST API version 45.0 and later.

Syntax

URI

/services/data/v**XX.X**/scheduling/

Formats

JSON, XML

HTTP methods

GET

Authentication

Authorization: Bearer *token*

Example

Example Response Body

```
{
  "getAppointmentCandidates" : "/services/data/v67.0/scheduling/getAppointmentCandidates",
  "getAppointmentSlots" : "/services/data/v67.0/scheduling/getAppointmentSlots"
}
```

Request Bodies

To perform a POST, PATCH, or PUT request, create a request body formatted in either XML or JSON. This chapter lists the request bodies.

[Skill Requirement](#)

List of skills that are required to complete a particular task for a work type.

[Work Type](#)

Details about the type of work to be performed.

Skill Requirement

List of skills that are required to complete a particular task for a work type.

Name	Type	Required	Description
<code>skillId</code>	String	Yes	The skill that is required.
<code>SkillLevel</code>	String	No	The level of the skill required. Skill levels can range from zero to 99.99. Depending on your business needs, you might want the skill level to reflect years of experience, certification levels, or license classes.

Work Type

Details about the type of work to be performed.

Name	Type	Required	Description
<code>id</code>	String	Required if <code>durationInMinutes</code> is not given.	Id of the work type.
<code>durationInMinutes</code>	Integer	Required if <code>id</code> is not given.	Contains the event length, in minutes.
<code>timeframeStartInMinutes</code>	String	No	The beginning of the timeframe.
<code>timeframeEndInMinutes</code>	String	No	The end of the timeframe.
<code>blockBeforeAppointmentInMinutes</code>	String	No	The time period before the appointment is considered as unavailable.
<code>blockAfterAppointmentInMinutes</code>	String	No	The time period after the appointment is considered as unavailable.
<code>operatingHoursId</code>	String	No	The overlap of all operating hours from the account, work type, service territory, and service territory member are considered while determining time slots.
<code>skillRequirements</code>	Skill Requirement[]	No	List of skills that are required to complete a particular task for a work type.



Note: Provide either `id` or `durationInMinutes` in the request body, but not both.

Response Bodies

Successful execution of a request to a Salesforce Scheduler resource can return a response body either in JSON or XML format. For example, the request to get appointment time slots returns a list of available time slots for a selection of work type group and territories.

Candidates

Describes the result of Get Appointments Candidates request.

Time Slots

Describes the result of Get Appointments Slots request.

Candidates

Describes the result of Get Appointments Candidates request.

List of available service resources.

Name	Type	Description
endTime	String	The end time of the appointment time slot.
engagementChanneltypeIds	String[]	The engagement channel type ID associated with this resource for that time slot. This field is available in API version 56.0 and later.
resources	String[]	List of service resource IDs that are available.  Important: At present, only one resource is returned on this list. If there is more than one resource included in a territory, a new child object is added for each resource in the response JSON body.
startTime	String	The start time of the appointment time slot.
territoryId	String	The service territory associated with this resource.

Time Slots

Describes the result of Get Appointments Slots request.

List of time slots available for each territory.

Name	Type	Description
endTime	String	The end time of the appointment time slot.
engagementChanneltypeIds	String[]	The engagement channel type ID associated with this time slot. This field is available in API version 56.0 and later.
remainingAppointments	Integer	The number of appointments available in the time slot. <code>Appointments available in a time slot = Maximum number of appointments defined for the time slot - Number of appointments scheduled so far in the time slot</code>
startTime	String	The start time of the appointment time slot.
territoryId	String	The service territory associated with this time slot.

Connect APIs

Use Salesforce Scheduler Connect REST APIs to get service territories, get consolidated availability of each service resource within specified territories, and create service appointments.

 **Note:** Salesforce Scheduler is built on the Salesforce platform (also known as Lightning Experience). The Salesforce platform specific API rate limits apply to the Salesforce Scheduler Connect APIs. The rate limit for the Connect APIs is per user, per application, per hour limit. Salesforce Scheduler Connect APIs are better equipped to handle a large number of requests and can support the rate limit of 10000 per user, per application, per hour. For more information on Lightning platform common limits and allocations, see [Connect REST API Limits](#).

The following is a list of Connect APIs available within the Salesforce Scheduler platform.

[Resources](#)

[Connect REST API Request Bodies](#)

To perform a POST, PATCH, or PUT request, pass query parameters or create a request body formatted in either XML or JSON. This chapter lists the request bodies. The query parameters are listed with each resource.

[Connect REST API Response Bodies](#)

The successful execution of a request to a Connect REST API resource can return a response body in either JSON or XML format.

SEE ALSO:

[Connect REST API Developer Guide: Connect REST API Introduction](#)

[Salesforce Developer Limits and Allocations Quick Reference: About This Quick Reference](#)

Resources

Use Salesforce Scheduler REST APIs to get service territories and create service appointments.

[Available Territory Slots](#)

Get consolidated availability of each service resource within specified territories.

[Engagement Channel Types](#)

Retrieve a list of the engagement channel types from your Salesforce org. The API returns only the channel types that are active and whose usage type is set to Salesforce Scheduler.

[Estimated Wait Time](#)

Get the estimated wait time for a customer waiting for service that belongs to a specified work type group.

[Group Appointments \(POST\)](#)

Get a list of group appointments along with the remaining attendee limit.

[Service Appointments](#)

Create and update service appointment records, assign resources, and generate leads, including group appointments with multiple participants.

[Service Territories](#)

Get service territories for a `workTypeId` or `workTypeGroupId`. Filter and sort the service territories using the `radius`, `latitude`, `longitude`, `sortBy`, and `sortOrder` properties.

[Waitlists](#)

Get waitlist details with the list of participants. A waitlist is a queue that includes participants without a scheduled appointment.

[Waitlist Check Ins](#)

Check in or register a participant to a waitlist who arrives at the service territory for a drop-in appointment.

[Waitlist Participants](#)

Move a participant to a specific position in a waitlist, to the top of the waitlist, or to the bottom of the waitlist.

Available Territory Slots

Get consolidated availability of each service resource within specified territories.

Resource

```
/connect/scheduling/available-territory-slots
```

Available version

49.0

HTTP methods

POST

Request example

```
{
  "startTime": "2022-07-27T00:00:00.000Z",
  "endTime": "2022-07-29T00:00:00.000Z",
  "workTypeGroupId": "0VSB0000000KyjBOAS",
  "accountId": "001B000000qAUAWIA4",
  "territoryIds": [
    "0HhB0000000TO9WKAW"
  ],
  "schedulingPolicyId": "0VrB0000000KyjB",
  "requiredResourceIds": [
    "0HnB0000000TO8gKAK"
  ],
  "engagementChannelTypeIds": [
    "0eFRM00000000CJ2AY"
  ]
}
```

Request example with only required fields

```
{
  "workType": {
    "id": "08qS70000004DTsIAM"
  },
  "territoryIds": [
    "0HhS70000004DTdKAM"
  ],
  "engagementChannelTypeIds": [
    "0eFRM00000000CJ2AY"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the associated account.	Optional	49.0

Name	Type	Description	Required or Optional	Available Version
allowConcurrentScheduling	Boolean	Indicates whether concurrent appointments are allowed (<code>true</code>) or not allowed (<code>false</code>). The default value is <code>false</code> .	Optional	49.0
correlationId	String	ID to pass custom information to the <code>ServiceResourceScheduleHandler</code> Apex interface. For example, you can use the correlation ID to identify the app, website, or any other external system that calls this Apex interface implementation. If you don't pass a custom value, a randomly generated identifier is passed.	Optional	53.0
endTime	String	Latest time that an appointment can end.  Note: The API only returns time slots up to 31 days from the <code>startTime</code> .	Optional	49.0
engagementChannelIds	String[]	The ID of the engagement channel type record. The resources and their associated time slots are filtered by the specified engagement channel type.  Note: This field supports only one engagement channel type ID. You can use engagement channel types with the <code>available-territory-slots</code> API only if: • Schedule Appointments Using Engagement Channels is enabled in Salesforce Scheduler Settings in your Salesforce org. • Shifts are defined in the scheduling policy. For more information on setting up shifts in the scheduling policy, see Define Shift Rules in Scheduling Policy.  Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.	Optional	56.0

Name	Type	Description	Required or Optional	Available Version
<code>filterByResources</code>	<code>String[]</code>	Comma-separated list of service resource IDs. API returns only eligible service resources that are both in the list and in the selected service territory. The resources are sorted by the order in which the resource IDs are passed.  Note: You can either pass <code>filterByResources</code> or <code>requiredResourceIds</code> in a request.	Optional	51.0
<code>recordLimit</code>	<code>Integer</code>	The maximum number of earliest available slots across the specified territories. The API outputs the specified number of sorted slots across service territories.	Optional	63.0
<code>requiredResourceIds</code>	<code>String[]</code>	List of resource IDs that you want to get available time slots for. When you pass more than one resource ID, the API returns all the slots where any of the passed resources are available. For example, suppose that you have three qualified resources: A, B, and C. If you pass resource IDs A and B, the API returns all the slots where: • only A is available • only B is available • both A and B are available • both A and C are available • both B and C are available • A, B, and C are all available The API doesn't return the slots where only C is available. If this field is empty, time slots for all qualified resources are returned.  Note: The API request doesn't show time slots for the resource specified in <code>requiredResourceIds</code> if it does not appear in the list of least utilized resources set for <code>resourceLimitAppointmentDistribution</code>.	Optional	49.0

Name	Type	Description	Required or Optional	Available Version
		For example, if you specify a resource A in <code>requiredResourceIds</code> and <code>resourceLimitApptDistribution</code> is set to 15, the request doesn't show time slots for this resource, as A isn't among the top 15 least utilized resources.		
<code>resourceLimitApptDistribution</code>	Integer	Specify the maximum number of service resources that you want to show during appointment scheduling when appointment distribution is enabled. Default value is 10.	Optional	53.0
		 Note: The <code>filterByResources</code> field takes precedence over the <code>resourceLimitApptDistribution</code> field.		
<code>schedulingPolicyId</code>	String	ID of the AppointmentSchedulingPolicy object. If not provided, the default configurations are considered.	Optional	49.0
<code>startTime</code>	String	Earliest time that an appointment can start. Defaults to the current time of the request, if empty. You can also use a time from the past.	Optional	49.0
<code>territoryIds</code>	String[]	List of IDs of service territories where the specified work is performed.	Required	49.0
<code>workType</code>	Work Type Input	Type of work performed.	Required if <code>workTypeGroupId</code> isn't provided	49.0
<code>workTypeGroupId</code>	String	ID of the work type group containing all work types performed.	Required if <code>workType</code> isn't provided	49.0

Response example

```
{
  "result": {
    "territorySlots": [
      {
```

```

    "territoryId": "0HhB0000000TO9WKAW",
    "slots": [
      {
        "endTime": "2019-01-23T19:15:00.000+0000",
        "resources": [
          "0HnB0000000D2DsKAK",
          "0HnB0000000D2DsJKL"
        ],
        "startTime": "2019-01-23T16:15:00.000+0000"
      },
      {
        "endTime": "2019-01-23T19:30:00.000+0000",
        "resources": [
          "0HnB0000000D2DsKAK",
          "0HnB0000000D2DsJKL"
        ],
        "startTime": "2019-01-23T16:30:00.000+0000"
      }
    ]
  },
  {
    "territoryId": "0HhB0000000TO9WERT",
    "slots": [
      {
        "endTime": "2019-01-23T19:15:00.000+0000",
        "resources": [
          "0HnB0000000D2DsKAK"
        ],
        "startTime": "2019-01-23T16:15:00.000+0000"
      },
      {
        "endTime": "2019-01-23T19:30:00.000+0000",
        "resources": [
          "0HnB0000000D2DsKAK",
          "0HnB0000000D2DsJKL"
        ],
        "startTime": "2019-01-23T16:30:00.000+0000"
      }
    ]
  }
]
}
}
}

```

Response body for POST

[Available Territory Slots Output](#)

Engagement Channel Types

Retrieve a list of the engagement channel types from your Salesforce org. The API returns only the channel types that are active and whose usage type is set to Salesforce Scheduler.

Resource

```
/connect/scheduling/engagement-channel-types
```

Examples

```
https://yourInstance.salesforce.com/services/data/v56.0/connect/scheduling/engagement-channel-types
```

```
https://yourInstance.salesforce.com/services/data/v56.0/connect/scheduling/engagement-channel-types?workTypeGroupIds=0VSRM000000BgX4AU
```

```
https://yourInstance.salesforce.com/services/data/v56.0/connect/scheduling/engagement-channel-types?workTypeIds=08q2w000000XmniAAC,08q2w000000XmniAAS
```

Available version

56.0

HTTP methods

GET

Request parameters for GET



Note: You can either specify `workTypeGroupIds` or `workTypeIds` in the request to filter the engagement channel type results.

Parameter Name	Type	Description	Required or Optional	Available Version
<code>workTypeGroupIds</code>	String	List of the work type group IDs. The API returns the list of engagement channel type records that are associated with the specified work type group IDs. For example, suppose that you have three engagement channel types: EC1, EC2, and EC3. If you pass work type group IDs WTG1 that is associated with EC1 and EC2 and WTG2 that is associated with EC2, the API returns the list of engagement channel types where: • EC1 is with WTG1 only • EC2 is with both WTG1 and WTG2 Because EC3 is not associated with any of the specified work type group IDs, the API doesn't return the engagement channel type EC3.	Optional	56.0
<code>workTypeIds</code>	String	List of the work type IDs. The API returns the engagement channel type records that are associated with the specified work type IDs. For example, suppose that you have three engagement channel types: EC1, EC2, and EC3. If you pass work type IDs WT1 that is associated with EC1 and EC3 and WT2 that	Optional	56.0

Parameter Name	Type	Description	Required or Optional	Available Version
		is associated with EC3, the API returns the list of engagement channel types where: • EC1 is with WT1 only • EC3 is with both WT1 and WT2 Because EC2 is not associated with any of the specified work type IDs, the API doesn't return the engagement channel type EC2.		

Response body for GET[Engagement Channel Type Output](#)

Estimated Wait Time

Get the estimated wait time for a customer waiting for service that belongs to a specified work type group.

Resource

```
/connect/scheduling/estimated-wait-time
```

Resource example

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/estimated-wait-time
```

Available version

65.0

HTTP methods

POST

Request body for POST**Root XML tag**

```
<estimatedWaitTime>
```

JSON example with waitlist ID

```
{
  "waitlistId": "11wfi700000262vAAA"
}
```

JSON example with waitlist participant ID

```
{
  "waitlistParticipantId": "12oxx0000004FGiAAM"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
waitlistId	String	ID of the waitlist.	Required if the waitlistParticipantId parameter isn't specified.	65.0
waitlistParticipantId	String	ID of the waitlist participant.	Required if the waitlistId parameter isn't specified.	65.0

Response body for POST

[Estimated Wait Time](#)

Group Appointments (POST)

Get a list of group appointments along with the remaining attendee limit.

Resource

```
/connect/scheduling/group-appointments
```

Resource example

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/group-appointments
```

Available version

61.0

HTTP methods

POST

Request body for POST

JSON example

```
{
  "startTime": "2024-01-23T00:00:00.000Z",
  "endTime": "2024-02-28T00:00:00.000Z",
  "filterByWorkTypes": [
    "08qRM00000003fkYAA"
  ],
  "filterByResources": [
    "0HnB0000000TO8gKAK"
  ],
  "filterByTerritories": [
    "0HhRM00000003OZ0AY"
  ],
  "filterByParentRecords": [
    "001B0000000qAUAWIA4"
  ],
}
```

```

    "filterByEngagementChannelTypes": [
      "0eFRM00000000Bv2AI"
    ],
    "extendedFieldsToQuery": [
      "subject",
      "description"
    ]
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
endTime	String	Latest end time for the group appointments to be retrieved.	Optional	61.0
excludeAssociatedAppts	Boolean	Indicates whether the response excludes appointments where the current user is associated as an attendee or assigned resource (<code>true</code>) or not (<code>false</code>).	Optional	61.0
extendedFieldsToQuery	String[]	List of the extended custom fields to fetch in the output.	Optional	61.0
filterByEngagementChannelTypes	String[]	ID of the engagement channel type record. Group appointments are filtered based on the selected engagement channel type.	Optional	61.0
filterByParentRecords	String[]	The ID of the associated parent record.	Optional	61.0
filterByResources	String[]	List of the group appointments where all the given resources are present.	Optional	61.0
filterByTerritories	String[]	List of IDs of the service territories where the requested work is performed.	Optional	61.0
filterByWorkTypeGroups	String[]	IDs of the work type groups containing the work types that are being performed.	Optional	61.0
filterByWorkTypes	String[]	List of IDs of the work types to be performed.	Optional	61.0
limit	Integer	Maximum number of records to be fetched.	Optional	61.0
offset	Integer	Number of records to be skipped.	Optional	61.0
startTime	String	The earliest start time for the group appointments to be retrieved. If not provided, it defaults to the current time of the request.	Optional	61.0

Response body for POST[Group Appointments](#)

Service Appointments

Create and update service appointment records, assign resources, and generate leads, including group appointments with multiple participants.



Note: When these parameters aren't specified, the API doesn't check for the availability of time slots. To ensure that duplicate service appointments aren't created, specify these parameters.

- WorkTypeld
- ServiceTerritoryId
- SchedStartTime
- SchedEndTime
- AssignedResources

Resource

```
/connect/scheduling/service-appointments
```

Example

```
https://yourInstance.salesforce.com/services/data/v67.0/connect  
/scheduling/service-appointments
```

Available version

48.0

HTTP methods

POST, PATCH

PATCH is available in version 51.0 and later.

Request body for POST**JSON example**

```
{  
  "serviceAppointment": {  
    "parentRecordId": "0012w000004oZXgAAM",  
    "workTypeId": "08q2w000000XmniAAC",  
    "serviceTerritoryId": "0Hh2w000000XmoXCAS",  
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",  
    "schedStartTime": "2020-02-26T15:00:00.000Z",  
    "schedEndTime": "2020-02-26T16:00:00.000Z",  
    "street": "1 Market Street",  
    "city": "San Francisco",  
    "state": "CA",  
    "postalCode": "94105",  
    "country": "USA",  
    "appointmentType": "In Person",  
    "appointmentMode": "Group",  
    "attendeeLimit": "20",  
    "extendedFields": [  
      {
```

```

        "name": "Email",
        "value": "rachel.adams@salesforce.com"
    },
    {
        "name": "Phone",
        "value": "1111111111"
    },
    {
        "name": "Description",
        "value": "Test Description"
    }
]
},
"assignedResources": [
    {
        "serviceResourceId": "0Hn2w000000gDWDCA2",
        "isRequiredResource": true,
        "isPrimaryResource": true,
        "extendedFields": []
    },
    {
        "serviceResourceId": "0Hn2w000000gCqnCAE",
        "isRequiredResource": true,
        "isPrimaryResource": false,
        "extendedFields": []
    }
]
}

```

JSON example for unauthenticated user

```

{
  "serviceAppointment": {
    "workTypeId": "08q2w000000XmniAAC",
    "serviceTerritoryId": "0Hh2w000000XmoXCAS",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "schedStartTime": "2020-02-26T15:00:00.000Z",
    "schedEndTime": "2020-02-26T16:00:00.000Z",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "appointmentType": "In Person",
    "appointmentMode": "Group",
    "attendeeLimit": "20",
    "extendedFields": []
  },
  "assignedResources": [
    {
        "serviceResourceId": "0Hn2w000000gDWDCA2",
        "isRequiredResource": true,
        "isPrimaryResource": true,
        "extendedFields": []
    }
  ]
}

```

```
  },
  "lead": {
    "firstName": "Rachel",
    "lastName": "Adams",
    "phone": "012-345-6789",
    "email": "rachel.adams@salesforce.com",
    "company": "Salesforce",
    "extendedFields": []
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assignedResources	Assigned Resource Input[]	Service resource who is assigned to a service appointment.  Note: When creating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>assignedResources</code> as long as you have edit access to those fields.	Optional	48.0
lead	Lead Input[]	Prospect or lead.	Required if <code>serviceAppointment</code> isn't provided  Note: Required to create a service appointment with unauthenticated guest users.	48.0
schedulingPolicyId	String	ID of the <code>AppointmentSchedulingPolicy</code> object. If no scheduling policy is passed in the request body, the default configurations are used. The only scheduling policy configuration that is used in determining time slots is the enforcement of account visiting hours.	Optional	48.0

Name	Type	Description	Required or Optional	Available Version
<code>serviceAppointment</code>	Service Appointment Input	Appointment to complete a service work for a customer.  Note: When creating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>serviceAppointment</code> as long as you have edit access to those fields.	Required if lead isn't provided	48.0

Request body for PATCH

JSON example

```
{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "workTypeId": "08pxx0000004C92AAE",
    "serviceTerritoryId": "0Hh2xx0000004CAeCAM",
    "engagementChannelTypeId": "0eFRM0000004CC22AM",
    "schedStartTime": "2020-09-15T16:00:00+0000",
    "schedEndTime": "2020-09-15T17:00:00+0000",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "appointmentType": "In Person",
    "appointmentMode": "Group",
    "attendeeLimit": "20",
    "extendedFields": [
      {
        "name": "Email",
        "value": "rachel.adams@salesforce.com"
      },
      {
        "name": "Phone",
        "value": "1111111111"
      },
      {
        "name": "Description",
        "value": "Test Description"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0Hnxx0000004CAeCAM",
      "isRequiredResource": true,

```

```

        "isPrimaryResource": false,
        "extendedFields": []
      },
    ]
  }

```

Request example to update the scheduled time

 **Note:** The API updates the equivalent Salesforce calendar events and block times when the scheduled time is updated.

```

{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "schedStartTime": "2020-09-15T16:00:00+0000",
    "schedEndTime": "2020-09-15T17:00:00+0000",
  }
}

```

Request example to update the work type

```

{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "workTypeId": "08qxx0000004C92AAE",
  }
}

```

Request example to update the service territory

```

{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "serviceTerritoryId": "0Hhxx0000004CAeCAM"
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
assigned Resources	Assigned Resource Input[]	Service resource who is assigned to a service appointment. When updating an appointment, pass the complete list of resources needed. If you don't pass a resource that is assigned to a service appointment, the API deletes that assigned resource. For example, suppose that an existing service appointment has assigned resources: A and B and if you pass assigned resources: B and C. The API checks the resource availability of B and C for existing work type and service territory, and if both are available, the service appointment gets updated with:	Optional	51.0

Name	Type	Description	Required or Optional	Available Version
		- Resource A—Deleted - Resource B—Updated - Resource C—Created However, if you don't pass any of the assigned resources, the API assumes there is no change.  Note: When updating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>assignedResources</code> as long as you have edit access to those fields.		
scheduling PolicyId	String	ID of the <code>AppointmentSchedulingPolicy</code> object. If no scheduling policy is passed in the request body, the default configurations are used. The only scheduling policy configuration that is used in determining time slots is the enforcement of account visiting hours.	Optional	51.0
service Appointment	Service Appointment Input[]	Appointment to complete a service work for a customer. When updating an appointment, pass only the fields that need to be updated.  Note: When updating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>serviceAppointment</code> as long as you have edit access to those fields.	Required	51.0
service AppointmentId	String	ID of the service appointment that you want to update.	Required	51.0

Response body for POST and PATCH[Service Appointment Output](#)

Considerations for using engagement channel types with the `service-appointments` resource

- **Schedule Appointments Using Engagement Channels** must be enabled in Salesforce Scheduler Settings in your Salesforce org.
- When you create or modify appointments, shifts must be defined in the scheduling policy. For more information on setting up shifts in the scheduling policy, see [Define Shift Rules in Scheduling Policy](#).
-  **Note:** Engagement channel types are not supported with operating hours rules in the scheduling policy.
- When you use engagement channels and shifts to create or modify a service appointment, Salesforce Scheduler must consider the default value for the Appointment Type (if not specified). However, Salesforce Scheduler only considers the engagement channel and Appointment Type is ignored.

Service Territories

Get service territories for a `workTypeId` or `workTypeGroupId`. Filter and sort the service territories using the `radius`, `latitude`, `longitude`, `sortBy`, and `sortOrder` properties.

Resource

```
/connect/scheduling/service-territories
```

Resource example

```
https://yourInstance.salesforce.com/services/data/67.0/connect/  
scheduling/service-territories?workTypeGroupId=0VSRM000000009Z4AQ&latitude=37.79332  
&longitude=-122.392761&radius=50&radiusUnit=km&sortBy=Distance&sortOrder=asc
```

Available version

48.0

HTTP methods

GET

Query parameters

Parameter Name	Type	Description	Required or Optional	Available Version
<code>filterByTerritoryIds</code>	String[]	Comma-separated list of service territory IDs to filter the API response.	Optional	57.0
<code>latitude</code>	Double	Latitude of the service territory area.	Optional	48.0
<code>limit</code>	Integer	Limit of the service territories returned. For example, specify <code>limit=1</code> to have only one service territory in the service territories list. The default value is 40.	Optional	48.0
<code>longitude</code>	Double	Longitude of the service territory area.	Optional	48.0
<code>offset</code>	Integer	Offset for the service territories returned. The default value is 0.	Optional	48.0
<code>radius</code>	Integer	Radius around the latitude and longitude values to get service territories. Default	Optional	48.0

Parameter Name	Type	Description	Required or Optional	Available Version
		value is 5 when latitude and longitude values are provided, otherwise there is no default value.		
radiusUnit	String	Unit for the radius value. Possible values are <code>mi</code> for miles and <code>km</code> for kilometer. Default value is <code>mi</code> when latitude and longitude values are provided, otherwise there is no default value.	Optional	48.0
schedulingPolicyId	String	ID of the <code>AppointmentSchedulingPolicy</code> object. If no scheduling policy is passed in the request body, the default configurations are used. All Scheduling Policy Configurations are considered when using this API.	Optional	48.0
serviceResourceIds	String[]	Comma-separated list of service territory technician or asset IDs to filter the API response.	Optional	48.0
sortBy	String[]	Criteria to sort the service territories list. Possible case-insensitive values are <code>distance</code> and <code>name</code> . The default value is <code>distance</code> when latitude and longitude values are provided, otherwise <code>name</code> .	Optional	48.0
sortOrder	String[]	Sorting order of the service territory list. Possible case-insensitive values are <code>asc</code> for ascending and <code>desc</code> for descending. The default value is <code>asc</code> .	Optional	48.0
workTypeGroupId	String	ID of the work type group containing the work types that are being performed.	Required if <code>workTypeId</code> isn't given	48.0
workTypeId	String	ID of the type of work to be performed.	Required if <code>workTypeGroupId</code> isn't given	48.0

Response body[Service Territories Output](#)**Sample Response body**

```
{
  "result" : {
    "serviceTerritories" : [ {
```

```

    "city" : "San Francisco",
    "country" : "United States",
    "id" : "0HhRM00000002U50AI",
    "latitude" : 37.79332,
    "longitude" : -122.392761,
    "name" : "Chase 1 Mission",
    "operatingHoursId" : "0OHRM00000002Ps4AI",
    "postalCode" : "94105",
    "state" : "CA",
    "street" : "1 Mission Street"
  }, {
    "city" : "San Francisco",
    "country" : "United States",
    "id" : "0HhRM00000002Tq0AI",
    "latitude" : 37.793872,
    "longitude" : -122.394865,
    "name" : "Chase 1 Market",
    "operatingHoursId" : "0OHRM00000002Ps4AI",
    "postalCode" : "94105",
    "state" : "CA",
    "street" : "1 Market Street"
  } ]
}
}

```

Waitlists

Get waitlist details with the list of participants. A waitlist is a queue that includes participants without a scheduled appointment.

Resource

```
/connect/scheduling/waitlists
```

Resource example

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/waitlists?waitlistIds=0010000XKJSMEDD
```

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/waitlists?waitlistIds=0010000XKJSMEDD,0010000XKJSMEDD
```

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/waitlists?serviceTerritoryId=0010000XKJSMEDD&isActive=true
```

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/waitlists?waitlistIds=0010000XKJSMEDD&participantFields=Source__c
```

Available version

59.0

HTTP methods

GET

Request parameters for GET

Parameter Name	Type	Description	Required or Optional	Available Version
isActive	Boolean	Indicates whether to fetch the active waitlists (<code>true</code>) or inactive waitlists	Optional	59.0

Parameter Name	Type	Description	Required or Optional	Available Version
		(false). Used when the <code>serviceTerritoryId</code> parameter is specified.		
<code>maxLimit</code>	Integer	Batch size of the waitlist participant records to fetch for each waitlist ID or service territory ID. The default value is 50.	Optional	59.0
<code>offset</code>	Integer	Number of waitlist participant records to skip from the response, in ascending order as per the created date. The default value is 0. The maximum offset value is 2000.	Optional	59.0
<code>participantFields</code>	String[]	Comma-separated list of fields to fetch from the waitlist participant object.	Optional	59.0
<code>requestId</code>	String	For internal use only.	Optional	59.0
<code>serviceTerritoryId</code>	String	ID of the service territory to fetch the details of the waitlists.	Required if the <code>waitlistIds</code> parameter isn't specified.	59.0
<code>waitlistIds</code>	String	Comma-separated list of the waitlist IDs to filter the result.	Required if the <code>serviceTerritoryId</code> parameter isn't specified.	59.0

Response body for GET[Waitlist Output](#)

Waitlist Check Ins

Check in or register a participant to a waitlist who arrives at the service territory for a drop-in appointment.

Resource

```
/connect/scheduling/waitlist-checkin
```

Resource example

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/waitlist-checkin
```

Available version

59.0

HTTP methods

POST

Request body for POST**Root XML tag**

```
<waitlistCheckIn>
```

JSON example

```
{
  "lead": {
    "firstName": "Tom",
    "lastName": "Scott",
    "phone": "012-345-6789",
    "email": "tom.scott@phoenix.com",
    "company": "Phoenix",
    "extendedFields": []
  },
  "participantId": "00Q5h00000JdQWzEAN",
  "waitlistId": "0D3B0000000S2SeNOP",
  "workTypeId": "08q5h000000UuEcAAK",
  "workTypeGroupId": "0VSRM0000004MBk4AM",
  "serviceResourceId": "0Hn0000000S2SeNOP",
  "description": "Registration for a drop-in appointment.",
  "extendedFields": [
    {
      "name": "Source__c",
      "value": "Email"
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description of the participant.	Optional	59.0
extended Fields	Extended Field Input[]	Details of the extended custom fields.	Optional	59.0
lead	Lead Input	Details of the prospect or lead.	Required if the participantId parameter isn't specified.	59.0
participant Id	String	ID of the participant with an appointment. The participant can be an account, a contact, or a lead.	Required if the lead parameter isn't specified.	59.0
service ResourceId	String	ID of the service resource.	Optional	59.0
waitlistId	String	ID of the waitlist that the participant is checked in.	Required	59.0

Name	Type	Description	Required or Optional	Available Version
workType GroupId	String	ID of the work type group.	Required if the workTypeId parameter isn't specified.	59.0
workTypeId	String	ID of the work type that represents the topic for the appointment.	Required if the workTypeGroupId parameter isn't specified.	59.0

Response body for POST[Waitlist Check In](#)

Waitlist Participants

Move a participant to a specific position in a waitlist, to the top of the waitlist, or to the bottom of the waitlist.

Resource

```
/connect/scheduling/waitlist/participants
```

Resource example

```
https://yourInstance.salesforce.com/services/data/v67.0/connect/scheduling/waitlist/participants
```

Available version

62.0

HTTP methods

PATCH

Request body for PATCH**Root XML tag**

```
<updateWaitlistParticipant>
```

JSON example

```
{
  "waitlistParticipantId": "12oRM0000004FGiYAM",
  "targetPosition": 3
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
target Position	Integer	Position in the waitlist to move the participant to. A value of 1 moves the participant to the top, and -1 moves the participant to the bottom. In API	Required	62.0

Name	Type	Description	Required or Optional	Available Version
		version 65.0 and later, a positive integer <i>n</i> moves the participant to the <i>n</i> th position; if <i>n</i> exceeds the number of participants in the waitlist, the participant moves to the bottom.		
waitlist ParticipantId	String	ID of the waitlist participant record to move. The participant's <i>Status</i> must be <i>Unassigned</i> .	Required	62.0

Response body for PATCH[Waitlist Participants Update](#)

Connect REST API Request Bodies

To perform a POST, PATCH, or PUT request, pass query parameters or create a request body formatted in either XML or JSON. This chapter lists the request bodies. The query parameters are listed with each resource.

 **Important:** We're making major improvements to the Connect REST API reference content in July 2026. We're replacing the separate pages for resources, request bodies, and response bodies with a unified, single-page layout that expands to show details as you need them. Existing resource pages will automatically redirect to the correct resource in the new interface. Request and response body pages will redirect to the main API reference page because this information appears in context with its associated resources. To preview the new interface, see the [Data 360 Connect REST API](#).

To create a JSON request body, specify the properties of the request body in JSON format.

This is an example of a Comment request body.

```
{
  "body" : "Let's look for a new solution."
}
```

If a request body is top-level, it has a root XML tag listed. To create an XML request body, nest the properties as XML tags inside the root XML tag.

This is the same Connect request body in XML format:

```
<comment>
  <body>Let's look for a new solution.</body>
</comment>
```

[Available Territory Slots Input](#)

Input representation of the available territory slots request.

[Assigned Resource Input](#)

Input representation of the assigned resource details.

[Estimated Wait Time Input](#)

Input representation of the request for the estimated wait time of a waitlist or waitlist participant.

[Extended Fields Input](#)

Input representation for extended fields.

[Group Appointments Input](#)

Input representation of the criteria to filter and retrieve group appointments.

[Lead Input](#)

Lead input.

[Service Appointments Create Input](#)

Input representation for creating a service appointment. You can create service appointments, assign resources, and generate leads with either `parentRecordId` or `lead` but not both.

[Service Appointment Update Input](#)

Input representation for updating a service appointment. Use to update the scheduled times, assigned resource(s), service territory or even work type for existing appointments.

[Service Appointment Input](#)

Input representation of the service appointment details.

[Skill Requirement Input](#)

Skill requirement.

[Waitlist Check In Input](#)

Input representation of the participant's waitlist check in request.

[Waitlist Participants Input](#)

Input representation to move a waitlist participant to a specific position in a waitlist.

[Work Type Input](#)

Work type.

Available Territory Slots Input

Input representation of the available territory slots request.

Request example

```
{
  "startTime": "2022-07-27T00:00:00.000Z",
  "endTime": "2022-07-29T00:00:00.000Z",
  "workTypeGroupId": "0VSB0000000KyjBOAS",
  "accountId": "001B000000qAUAWIA4",
  "territoryIds": [
    "0HhB0000000TO9WKAW"
  ],
  "schedulingPolicyId": "0VrB0000000KyjB",
  "requiredResourceIds": [
    "0HnB0000000TO8gKAK"
  ],
  "engagementChannelTypeIds": [
    "0eFRM00000000CJ2AY"
  ]
}
```

Request example with only required fields

```
{
  "workType": {
    "id": "08qS70000004DTsIAM"
  },
  "territoryIds": [
    "0HhS700000004DTdKAM"
  ],
  "engagementChannelTypeIds": [
    "0eFRM00000000CJ2AY"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
accountId	String	ID of the associated account.	Optional	49.0
allowConcurrent Scheduling	Boolean	Indicates whether concurrent appointments are allowed (<code>true</code>) or not allowed (<code>false</code>). The default value is <code>false</code> .	Optional	49.0
correlationId	String	ID to pass custom information to the <code>ServiceResourceScheduleHandler</code> Apex interface. For example, you can use the correlation ID to identify the app, website, or any other external system that calls this Apex interface implementation. If you don't pass a custom value, a randomly generated identifier is passed.	Optional	53.0
endTime	String	Latest time that an appointment can end.  Note: The API only returns time slots up to 31 days from the <code>startTime</code> .	Optional	49.0
engagementChannelTypeIds	String[]	The ID of the engagement channel type record. The resources and their associated time slots are filtered by the specified engagement channel type.  Note: This field supports only one engagement channel type ID. You can use engagement channel types with the <code>available-territory-slots</code> API only if:	Optional	56.0

Name	Type	Description	Required or Optional	Available Version
		• Schedule Appointments Using Engagement Channels is enabled in Salesforce Scheduler Settings in your Salesforce org. • Shifts are defined in the scheduling policy. For more information on setting up shifts in the scheduling policy, see Define Shift Rules in Scheduling Policy.  Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.		
<code>filterByResources</code>	<code>String[]</code>	Comma-separated list of service resource IDs. API returns only eligible service resources that are both in the list and in the selected service territory. The resources are sorted by the order in which the resource IDs are passed.  Note: You can either pass <code>filterByResources</code> or <code>requiredResourceIds</code> in a request.	Optional	51.0
<code>recordLimit</code>	<code>Integer</code>	The maximum number of earliest available slots across the specified territories. The API outputs the specified number of sorted slots across service territories.	Optional	63.0
<code>requiredResourceIds</code>	<code>String[]</code>	List of resource IDs that you want to get available time slots for. When you pass more than one resource ID, the API returns all the slots where any of the passed resources are available. For example, suppose that you have three qualified resources: A, B, and C. If you pass resource IDs A and B, the API returns all the slots where: • only A is available • only B is available • both A and B are available • both A and C are available • both B and C are available	Optional	49.0

Name	Type	Description	Required or Optional	Available Version
		A, B, and C are all available The API doesn't return the slots where only C is available. If this field is empty, time slots for all qualified resources are returned.  Note: The API request doesn't show time slots for the resource specified in <code>requiredResourceIds</code> if it does not appear in the list of least utilized resources set for <code>resourceLimitAppointmentDistribution</code>. For example, if you specify a resource A in <code>requiredResourceIds</code> and <code>resourceLimitAppointmentDistribution</code> is set to 15, the request doesn't show time slots for this resource, as A isn't among the top 15 least utilized resources.		
<code>resourceLimitAppointmentDistribution</code>	Integer	Specify the maximum number of service resources that you want to show during appointment scheduling when appointment distribution is enabled. Default value is 10.  Note: The <code>filterByResources</code> field takes precedence over the <code>resourceLimitAppointmentDistribution</code> field.	Optional	53.0
<code>schedulingPolicyId</code>	String	ID of the AppointmentSchedulingPolicy object. If not provided, the default configurations are considered.	Optional	49.0
<code>startTime</code>	String	Earliest time that an appointment can start. Defaults to the current time of the request, if empty. You can also use a time from the past.	Optional	49.0
<code>territoryIds</code>	String[]	List of IDs of service territories where the specified work is performed.	Required	49.0

Name	Type	Description	Required or Optional	Available Version
workType	Work Type Input	Type of work performed.	Required if workTypeGroupId isn't provided	49.0
workType GroupId	String	ID of the work type group containing all work types performed.	Required if workType isn't provided	49.0

Assigned Resource Input

Input representation of the assigned resource details.

Root XML tag

```
<assignedResources>
```

JSON example

```
{
  "assignedResources": [
    {
      "serviceResourceId": "0HnRM0000004Gzy0AE",
      "isRequiredResource": true,
      "isPrimaryResource": true,
      "extendedFields": []
    },
    {
      "serviceResourceId": "0HnRM0000004Mln0AE",
      "isRequiredResource": true,
      "isPrimaryResource": false,
      "extendedFields": []
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
extended Fields	Extended Fields Input[]	Custom fields.	Optional	48.0
isPrimary Resource	Boolean	Indicates whether the assigned resource is the primary resource. For multi-resource appointments, only one resource can be a primary resource.	Required if multi-resource scheduling is enabled.	48.0
isRequired Resource	Boolean	Indicates whether the assigned resource is a required resource.	Required	48.0

Name	Type	Description	Required or Optional	Available Version
service ResourceId	String	Resource who is assigned to the service appointment.	Required	48.0

Estimated Wait Time Input

Input representation of the request for the estimated wait time of a waitlist or waitlist participant.

Root XML tag

```
<estimatedWaitTime>
```

JSON example with waitlist ID

```
{
  "waitlistId": "11wfi700000262vAAA"
}
```

JSON example with waitlist participant ID

```
{
  "waitlistParticipantId": "12oxx0000004FGiAAM"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
waitlistId	String	ID of the waitlist.	Required if the waitlistParticipantId parameter isn't specified.	65.0
waitlist ParticipantId	String	ID of the waitlist participant.	Required if the waitlistId parameter isn't specified.	65.0

Extended Fields Input

Input representation for extended fields.

Root XML tag

```
<extendedFields>
```

JSON example

```
{
  "extendedFields": [
    {
      "name": "assigned_to__c",
      "value": "abcd"
    }
  ]
}
```

```
    },
    {
      "name": "ownership__c",
      "value": true
    }
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
name	String	Name of the custom field.	Optional	48.0
value	String	Value of the custom field.	Optional	48.0

Group Appointments Input

Input representation of the criteria to filter and retrieve group appointments.

JSON example

```
{
  "startTime": "2024-01-23T00:00:00.000Z",
  "endTime": "2024-02-28T00:00:00.000Z",
  "filterByWorkTypes": [
    "08qRM000000003fkYAA"
  ],
  "filterByResources": [
    "0HnB00000000T08gKAK"
  ],
  "filterByTerritories": [
    "0HhRM000000003OZ0AY"
  ],
  "filterByParentRecords": [
    "001B0000000qAUAWIA4"
  ],
  "filterByEngagementChannelTypes": [
    "0eFRM000000000Bv2AI"
  ],
  "extendedFieldsToQuery": [
    "subject",
    "description"
  ]
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
endTime	String	Latest end time for the group appointments to be retrieved.	Optional	61.0

Name	Type	Description	Required or Optional	Available Version
excludeAssociatedAppts	Boolean	Indicates whether the response excludes appointments where the current user is associated as an attendee or assigned resource (<code>true</code>) or not (<code>false</code>).	Optional	61.0
extendedFieldsToQuery	String[]	List of the extended custom fields to fetch in the output.	Optional	61.0
filterByEngagementChannelTypes	String[]	ID of the engagement channel type record. Group appointments are filtered based on the selected engagement channel type.	Optional	61.0
filterByParentRecords	String[]	The ID of the associated parent record.	Optional	61.0
filterByResources	String[]	List of the group appointments where all the given resources are present.	Optional	61.0
filterByTerritories	String[]	List of IDs of the service territories where the requested work is performed.	Optional	61.0
filterByWorkTypeGroups	String[]	IDs of the work type groups containing the work types that are being performed.	Optional	61.0
filterByWorkTypes	String[]	List of IDs of the work types to be performed.	Optional	61.0
limit	Integer	Maximum number of records to be fetched.	Optional	61.0
offset	Integer	Number of records to be skipped.	Optional	61.0
startTime	String	The earliest start time for the group appointments to be retrieved. If not provided, it defaults to the current time of the request.	Optional	61.0

Lead Input

Lead input.

Root XML tag

```
<lead>
```

JSON example

```
{
  "lead": {
    "firstName": "Rachel",
    "lastName": "Adams",
    "phone": "012-345-6789",
    "email": "rachel.adams@jpmc.com",
```



```

    "company": "Salesforce",
    "extendedFields": []
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
company	String	Lead's company.	Optional	48.0
email	String	Lead's email address.	Optional	48.0
extendedFields	Extended Fields Input[]	Custom fields.	Optional	48.0
firstName	String	Lead's first name.	Optional	48.0
lastName	String	Lead's last name.	Required	48.0
phone	String	Lead's phone number.	Optional	48.0

Service Appointments Create Input

Input representation for creating a service appointment. You can create service appointments, assign resources, and generate leads with either `parentRecordId` or `lead` but not both.

JSON example

```

{
  "serviceAppointment": {
    "parentRecordId": "0012w000004oZXgAAM",
    "workTypeId": "08q2w000000XmniAAC",
    "serviceTerritoryId": "0Hh2w000000XmoXCAS",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "schedStartTime": "2020-02-26T15:00:00.000Z",
    "schedEndTime": "2020-02-26T16:00:00.000Z",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "appointmentType": "In Person",
    "appointmentMode": "Group",
    "attendeeLimit": "20",
    "extendedFields": [
      {
        "name": "Email",
        "value": "rachel.adams@salesforce.com"
      },
      {
        "name": "Phone",
        "value": "1111111111"
      }
    ]
  }
}

```

```

        {
          "name": "Description",
          "value": "Test Description"
        }
      ],
    },
    "assignedResources": [
      {
        "serviceResourceId": "0Hn2w000000gDWdCA2",
        "isRequiredResource": true,
        "isPrimaryResource": true,
        "extendedFields": []
      },
      {
        "serviceResourceId": "0Hn2w000000gCqnCAE",
        "isRequiredResource": true,
        "isPrimaryResource": false,
        "extendedFields": []
      }
    ]
  }
}

```

JSON example for unauthenticated user

```

{
  "serviceAppointment": {
    "workTypeId": "08q2w000000XmniAAC",
    "serviceTerritoryId": "0Hh2w000000XmoXCAS",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "schedStartTime": "2020-02-26T15:00:00.000Z",
    "schedEndTime": "2020-02-26T16:00:00.000Z",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "appointmentType": "In Person",
    "appointmentMode": "Group",
    "attendeeLimit": "20",
    "extendedFields": []
  },
  "assignedResources": [
    {
      "serviceResourceId": "0Hn2w000000gDWdCA2",
      "isRequiredResource": true,
      "isPrimaryResource": true,
      "extendedFields": []
    }
  ],
  "lead": {
    "firstName": "Rachel",
    "lastName": "Adams",
    "phone": "012-345-6789",
    "email": "rachel.adams@salesforce.com",
    "company": "Salesforce",
  }
}

```

```

    "extendedFields": []
  }
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
assignedResources	Assigned Resource Input[]	Service resource who is assigned to a service appointment.  Note: When creating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>assignedResources</code> as long as you have edit access to those fields.	Optional	48.0
lead	Lead Input[]	Prospect or lead.	Required if <code>serviceAppointment</code> isn't provided  Note: Required to create a service appointment with unauthenticated guest users.	48.0
schedulingPolicyId	String	ID of the <code>AppointmentSchedulingPolicy</code> object. If no scheduling policy is passed in the request body, the default configurations are used. The only scheduling policy configuration that is used in determining time slots is the enforcement of account visiting hours.	Optional	48.0
serviceAppointment	Service Appointment Input[]	Appointment to complete a service work for a customer.  Note: When creating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>serviceAppointment</code> as	Required if <code>lead</code> isn't provided	48.0

Name	Type	Description	Required or Optional	Available Version
		long as you have edit access to those fields.		

Service Appointment Update Input

Input representation for updating a service appointment. Use to update the scheduled times, assigned resource(s), service territory or even work type for existing appointments.

Limitations

You cannot use the resource to modify the following:

- Parent record ID (`parentRecordId`) and Service appointment ID (`serviceAppointmentId`)
- Canceled appointments.
- Past date appointments.
- lead details.
- When multi-resource scheduling is enabled, you can't add a new resource and make it as the primary resource in a single request. Add the new resource in one request and then make another request to add the resource as a primary resource.

JSON example

```
{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "workTypeId": "08pxx0000004C92AAE",
    "serviceTerritoryId": "0Hh2xx0000004CAeCAM",
    "engagementChannelTypeId": "0eFRM0000004CC22AM",
    "schedStartTime": "2020-09-15T16:00:00+0000",
    "schedEndTime": "2020-09-15T17:00:00+0000",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "appointmentType": "In Person",
    "appointmentMode": "Group",
    "attendeeLimit": "20",
    "extendedFields": [
      {
        "name": "Email",
        "value": "rachel.adams@salesforce.com"
      },
      {
        "name": "Phone",
        "value": "1111111111"
      },
      {
        "name": "Description",
        "value": "Test Description"
      }
    ]
  }
}
```

```
    }
  ],
  "assignedResources": [
    {
      "serviceResourceId": "0Hnxx0000004CAeCAM",
      "isRequiredResource": true,
      "isPrimaryResource": false,
      "extendedFields": []
    },
  ],
]
```

Request example to update the scheduled time

 **Note:** The API updates the equivalent Salesforce calendar events and block times when the scheduled time is updated.

```
{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "schedStartTime": "2020-09-15T16:00:00+0000",
    "schedEndTime": "2020-09-15T17:00:00+0000",
  }
}
```

Request example to update the work type

```
{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "workTypeId": "08qxx0000004C92AAE",
  }
}
```

Request example to update the service territory

```
{
  "serviceAppointmentId": "08pxx0000004C92AAE",
  "serviceAppointment": {
    "serviceTerritoryId": "0Hhxx0000004CAeCAM"
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
assigned Resources	Assigned Resource Input[]	Service resource who is assigned to a service appointment. When updating an appointment, pass the complete list of resources needed. If you don't pass a resource that is assigned to a service appointment, the API deletes that assigned resource. For example, suppose that an existing service appointment has assigned resources: A and B and if you pass assigned resources:	Optional	51.0

Name	Type	Description	Required or Optional	Available Version
		B and C. The API checks the resource availability of B and C for existing work type and service territory, and if both are available, the service appointment gets updated with: • Resource A—Deleted • Resource B—Updated • Resource C—Created However, if you don't pass any of the assigned resources, the API assumes there is no change.  Note: When updating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>assignedResources</code> as long as you have edit access to those fields.		
scheduling PolicyId	String	ID of the <code>AppointmentSchedulingPolicy</code> object. If no scheduling policy is passed in the request body, the default configurations are used. The only scheduling policy configuration that is used in determining time slots is the enforcement of account visiting hours.	Optional	51.0
service Appointment	Service Appointment Input[]	Appointment to complete a service work for a customer. When updating an appointment, pass only the fields that need to be updated.  Note: When updating an appointment, you can use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>serviceAppointment</code> as long as you have edit access to those fields.	Required	51.0
service AppointmentId	String	ID of the service appointment that you want to update.	Required	51.0

Service Appointment Input

Input representation of the service appointment details.

Root XML tag

```
<serviceAppointment>
```

JSON example

```
{
  "serviceAppointment": {
    "parentRecordId": "001RM000004PhDgYAK",
    "workTypeId": "08qRM0000004LyJYAU",
    "serviceTerritoryId": "0HhRM0000004MNd0AM",
    "schedStartTime": "2019-10-30T13:00:00.000Z",
    "schedEndTime": "2019-10-30T14:00:00.000Z",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "appointmentType": "In Person",
    "appointmentMode": "Group",
    "attendeeLimit": "20",
    "extendedFields": []
  }
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
additional Information	String	Additional information about the service appointment.	Optional	48.0
appointment Type	String	Specifies the API name of the appointment type for the service appointment.	Optional	48.0
appointment Mode	String	Mode of the service appointment. Valid values are: - Group - Regular The default value is Regular.	Optional	60.0
attendeeLimit	Integer	Maximum number of customers that's allowed to attend the service appointment.	Required if the appointment mode is Group.	60.0
city	String	City where the appointment is completed.	Optional	48.0
comments	String	Comments about the appointment.	Optional	48.0
contactId	String	Contact associated with the parent record.	Optional	48.0

Name	Type	Description	Required or Optional	Available Version
country	String	Country where the appointment is completed.	Optional	48.0
description	String	Description of the appointment.	Optional	48.0
engagementChannelTypeId	String	ID of the engagement channel type to associate with the appointment. You can use engagement channel type only if: • Schedule Appointments Using Engagement Channels is enabled in Salesforce Scheduler Settings in your Salesforce org. • Shifts are defined in the scheduling policy. For more information on setting up shifts in the scheduling policy, see Define Shift Rules in Scheduling Policy.  Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.	Optional	56.0
extendedFields	Extended Fields Input[]	Custom fields.	Optional	48.0
parentRecordId	String	Parent record associated with the appointment.	Required	48.0
postalCode	String	Postal code where the appointment is completed.	Optional	48.0
schedEndTime	String	Time at which the appointment is scheduled to end. Ensure the scheduled start time and end time align with the available time slots.	Optional	48.0
schedStartTime	String	Time at which the appointment is scheduled to start. Ensure the scheduled start time and end time align with the available time slots.	Optional	48.0
serviceTerritoryId	String	Service territory associated with the appointment.	Optional	48.0
state	String	State where the service appointment is completed.	Optional	48.0

Name	Type	Description	Required or Optional	Available Version
street	String	Street number and name where the service appointment is completed.	Optional	48.0
subject	String	Short phrase describing the appointment.	Optional	48.0
workTypeId	String	Work type associated with the service appointment. If specified, it is added to the service appointment record.	Optional	48.0

Skill Requirement Input

Skill requirement.

Properties

Name	Type	Description	Required or Optional	Available Version
skillId	String	ID of the skill required.	Required	49.0
skillLevel	Double	Level of the skill required.	Optional	49.0

Waitlist Check In Input

Input representation of the participant's waitlist check in request.

Root XML tag

```
<waitlistCheckIn>
```

JSON example

```
{
  "lead": {
    "firstName": "Tom",
    "lastName": "Scott",
    "phone": "012-345-6789",
    "email": "tom.scott@phoenix.com",
    "company": "Phoenix",
    "extendedFields": []
  },
  "participantId": "00Q5h00000JdQWzEAN",
  "waitlistId": "0D3B0000000S2SeNOP",
  "workTypeId": "08q5h000000UuEcAAK",
  "workTypeGroupId": "0VSRM0000004MBk4AM",
  "serviceResourceId": "0Hn0000000S2SeNOP",
  "description": "Registration for a drop-in appointment.",
  "extendedFields": [
    {
      "name": "Source__c",
      "value": "Email"
    }
  ]
}
```

```

    ]
  }

```

Properties

Name	Type	Description	Required or Optional	Available Version
description	String	Description of the participant.	Optional	59.0
extended Fields	Extended Field Input[]	Details of the extended custom fields.	Optional	59.0
lead	Lead Input	Details of the prospect or lead.	Required if the participantId parameter isn't specified.	59.0
participantId	String	ID of the participant with an appointment. The participant can be an account, a contact, or a lead.	Required if the lead parameter isn't specified.	59.0
service ResourceId	String	ID of the service resource.	Optional	59.0
waitlistId	String	ID of the waitlist that the participant is checked in.	Required	59.0
workType GroupId	String	ID of the work type group.	Required if the workTypeId parameter isn't specified.	59.0
workTypeId	String	ID of the work type that represents the topic for the appointment.	Required if the workTypeGroupId parameter isn't specified.	59.0

Waitlist Participants Input

Input representation to move a waitlist participant to a specific position in a waitlist.

Root XML tag

```
<updateWaitlistParticipant>
```

JSON example

```

{
  "waitlistParticipantId": "12oRM0000004FGiYAM",
  "targetPosition": 3
}

```

Properties

Name	Type	Description	Required or Optional	Available Version
target Position	Integer	Position in the waitlist to move the participant to. A value of 1 moves the participant to the top, and -1 moves the participant to the bottom. In API version 65.0 and later, a positive integer <i>n</i> moves the participant to the <i>n</i> th position; if <i>n</i> exceeds the number of participants in the waitlist, the participant moves to the bottom.	Required	62.0
waitlist ParticipantId	String	ID of the waitlist participant record to move. The participant's <i>Status</i> must be <i>Unassigned</i> .	Required	62.0

Work Type Input

Work type.

JSON example

```
{
  "id" : "08qRM00000003fkYAA"
}
```

Properties

Name	Type	Description	Required or Optional	Available Version
blockTimeAfter AppointmentIn Minutes	Integer	Period after the appointment that is typically blocked for this work type.	Optional	49.0
blockTimeBefore AppointmentIn Minutes	Integer	Period before the appointment that is typically blocked for this work type.	Optional	49.0
durationIn Minutes	Integer	Duration of the appointment in minutes.	Required if <i>id</i> isn't provided	49.0
id	String	ID of the work type.	Required if <i>durationInMinutes</i> isn't provided	49.0
operatingHoursId	String	ID of the operating hours.	Optional	49.0
operatingHours TimeZone	String	Time zone for the operating hours.	Optional	49.0

Name	Type	Description	Required or Optional	Available Version
skillRequirements	Skill Requirement Input[]	List of skills required to complete the tasks associated with this work type.	Optional	49.0
timeFrameEndInMinutes	Integer	Ending of the appointment in minutes.	Optional	49.0
timeFrameStartInMinutes	Integer	Beginning of the appointment in minutes.	Optional	49.0

Connect REST API Response Bodies

The successful execution of a request to a Connect REST API resource can return a response body in either JSON or XML format.



Important: We're making major improvements to the Connect REST API reference content in July 2026. We're replacing the separate pages for resources, request bodies, and response bodies with a unified, single-page layout that expands to show details as you need them. Existing resource pages will automatically redirect to the correct resource in the new interface. Request and response body pages will redirect to the main API reference page because this information appears in context with its associated resources. To preview the new interface, see the [Data 360 Connect REST API](#).

A request to a Connect REST API resource always returns an HTTP response code, whether the request was successful or not.

[Available Territory Slots](#)

Slot's start and end time and available resources in the specified territory.

[Available Territory Slots List](#)

Available territory slots.

[Available Territory Slots Output](#)

Available territory slots result.

[Estimated Wait Time](#)

Output representation of the estimated wait time for a waitlist or waitlist participant.

[Engagement Channel Type List Result](#)

Output representation of the engagement channel type result.

[Engagement Channel Type Result](#)

Output representation of the details of the engagement channel type.

[Engagement Channel Type Output](#)

Output representation of the list of the engagement channel types.

[Extended Fields](#)

Output representation of the extended fields for Salesforce Scheduler.

[Group Appointments](#)

Output representation of the response that contains the retrieved group appointments.

[Group Appointments List Result](#)

Output representation of the list of group appointments.

[Group Appointment Result](#)

Output representation that contains the details of a specific group appointment.

[Service Appointment Output](#)

Output of the service appointment POST method.

[Service Appointment Result](#)

Result of the POST method.

[Service Territories Output](#)

Output for the service territories GET method.

[Service Territories List Result](#)

List of service territories returned as per the query in the GET service territories call.

[Service Territories Result](#)

Represents a service territory result.

[Waitlist Analytics](#)

Output representation of the waitlist analytics.

[Waitlist Check In](#)

Output representation of the waitlist check in request.

[Waitlist Check In Result](#)

Output representation of the waitlist check in result.

[Waitlist Details](#)

Output representation of the waitlist details.

[Waitlist List Result](#)

Output representation of the result of the list of waitlists.

[Waitlist Participant Details](#)

Output representation of the waitlist participant details.

[Waitlist Participant Result](#)

Output representation of a waitlist participant result. A waitlist participant is a customer who is added to a waitlist.

[Waitlist Participants Update](#)

Output representation of a waitlist participant move response.

[Waitlist Result](#)

Output representation of the waitlist result.

[Waitlist Service Resource](#)

Output representation of the waitlist service resource. Service resources are individual users who can attend customer appointments.

[Waitlist Work Type Group](#)

Output representation of the waitlist work type group. A work type group is a general appointment category or topic, such as a home loan or an investment.

[Work Type Group Estimated Wait Time Info](#)

Output representation of the estimated wait time for a specific work type group.

Available Territory Slots

Slot's start and end time and available resources in the specified territory.

Property Name	Type	Description	Filter Group and Version	Available Version
endTime	String	End time of the appointment.  Note: The API returns time slots up to 31 days from the <code>startTime</code> .	Small, 49.0	49.0
engagementChannelTypeIds	String[]	List of IDs of the engagement channel types for the service resource.	Small, 56.0	56.0
resources	String[]	List of resources available in the specified territory.	Small, 49.0	49.0
startTime	String	Start time of the appointment.	Small, 49.0	49.0

Available Territory Slots List

Available territory slots.

Property Name	Type	Description	Filter Group and Version	Available Version
territorySlots	Available Territory Slots[]	List of appointment territory slots.	Small, 49.0	49.0

Available Territory Slots Output

Available territory slots result.

Response example

```
{
  "result": {
    "territorySlots": [
      {
        "territoryId": "0HhB0000000TO9WKAW",
        "slots": [
          {
            "endTime": "2019-01-23T19:15:00.000+0000",
            "resources": [
              "0HnB0000000D2DsKAK",
              "0HnB0000000D2DsJKL"
            ],
            "startTime": "2019-01-23T16:15:00.000+0000"
          },
          {
            "endTime": "2019-01-23T19:30:00.000+0000",
            "resources": [
              "0HnB0000000D2DsKAK",
              "0HnB0000000D2DsJKL"
            ]
          }
        ]
      }
    ]
  }
}
```

```

        "startTime": "2019-01-23T16:30:00.000+0000"
      }
    ]
  },
  {
    "territoryId": "0HhB0000000TO9WERT",
    "slots": [
      {
        "endTime": "2019-01-23T19:15:00.000+0000",
        "resources": [
          "0HnB0000000D2DsKAK"
        ],
        "startTime": "2019-01-23T16:15:00.000+0000"
      },
      {
        "endTime": "2019-01-23T19:30:00.000+0000",
        "resources": [
          "0HnB0000000D2DsKAK",
          "0HnB0000000D2DsJKL"
        ],
        "startTime": "2019-01-23T16:30:00.000+0000"
      }
    ]
  }
]
}
}
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Available Territory Slots List	All available time slots and resources available for that time slot across each territory.	Small, 49.0	49.0

Estimated Wait Time

Output representation of the estimated wait time for a waitlist or waitlist participant.

JSON example

```

{
  "waitlistId": "1lwfi7000000262vAAA",
  "waitlistParticipantEstimatedWaitTime": "",
  "waitlistParticipantId": "",
  "workTypeGroups": [
    {
      "workTypeGroupEstimatedWaitTime": "Unavailable",
      "workTypeGroupId": "0VSfi700000008yTGAQ"
    }
  ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
waitlistId	String	ID of the waitlist.	Small, 65.0	65.0
waitlistParticipantEstimatedWaitTime	String	Estimated wait time for the waitlist participant. Empty when the request specifies only <code>waitlistId</code> .	Small, 65.0	65.0
waitlistParticipantId	String	ID of the waitlist participant. Empty when the request specifies only <code>waitlistId</code> .	Small, 65.0	65.0
workTypeGroups	Work Type Group Estimated Wait Time Info[]	Estimated wait times for the work type groups associated with the waitlist.	Small, 65.0	65.0

Engagement Channel Type List Result

Output representation of the engagement channel type result.

Property Name	Type	Description	Filter Group and Version	Available Version
engagementChannelTypes	Get Engagement Channel Type Result[]	Engagement channel type details.	Small, 56.0	56.0

Engagement Channel Type Result

Output representation of the details of the engagement channel type.

Property Name	Type	Description	Filter Group and Version	Available Version
contactPoint	String	The contact point for the engagement channel type.	Small, 56.0	56.0
contactPointType	String	The contact point type for the engagement channel type. Possible values are: • <code>InPerson</code> • <code>None</code> • <code>Phone</code>—Available in API version 57.0 and later. • <code>Video</code>—Available in API version 57.0 and later.	Small, 56.0	56.0
id	String	The ID of the engagement channel type record.	Small, 56.0	56.0

Property Name	Type	Description	Filter Group and Version	Available Version
name	String	The name of the engagement channel type.	Small, 56.0	56.0
workTypeGroupIds	String[]	The work type group IDs for the engagement channel type.  Note: When <code>workTypeID</code> is specified in the API request, this property is unspecified.	Small, 56.0	56.0
workTypeIds	String[]	The work type IDs for the engagement channel type.  Note: When <code>workTypeGroupID</code> is specified in the API request, this property is unspecified.	Small, 56.0	56.0

Engagement Channel Type Output

Output representation of the list of the engagement channel types.

JSON Example

```
{
  "result": {
    "engagementChannelTypes": [
      {
        "id": "0eFRM0000004CBs2AM",
        "name": "Inperson-2",
        "workTypeGroupIds": [
          "0VSRM0000000BgX4AU"
        ],
        "workTypeIds": []
      },
      {
        "contactPointType": "InPerson",
        "id": "0eFRM00000000BL2AY",
        "name": "A Channel",
        "workTypeGroupIds": [
          "0VSRM0000000BgX4AU"
        ],
        "workTypeIds": []
      },
      {
        "contactPointType": "InPerson",
        "id": "0eFRM00000000Bk2AI",
        "name": "Test",
        "workTypeGroupIds": [
          "0VSRM0000000BgX4AU"
        ],
        "workTypeIds": []
      }
    ]
  }
}
```

```
      "workTypeIds": []
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Get Engagement Channel Type List Result	List that contains the engagement channel types.	Small, 56.0	56.0

Extended Fields

Output representation of the extended fields for Salesforce Scheduler.

JSON example

```
"extendedFields": [
  {
    "name": "Source__c",
    "value": "Email"
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
name	String	Name of the extended field.	Small, 59.0	59.0
value	String	Value of the extended field.	Small, 59.0	59.0

Group Appointments

Output representation of the response that contains the retrieved group appointments.

Sample Response

```
{
  "groupAppointments": [
    {
      "appointmentId": "08pxx0000004HlQAAU",
      "attendeeCount": 10,
      "attendeeLimit": 25,
      "parentRecordId": "001B000000qAUAWIA4",
      "endTime": "2024-01-21T19:15:00.000+0000",
      "resourceIds": [
        "0HnB0000000TO8gKAK"
      ],
      "startTime": "2024-01-21T16:15:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW",
    }
  ]
}
```

```

    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "workTypeId": "08qRM00000003fkYAA",
    "extendedFields": [
      {
        "name": "subject",
        "value": "MSc Internship - Resume workshop"
      },
      {
        "name": "description",
        "value": "Resume workshop for MSc Internship for Section 4"
      }
    ]
  },
  {
    "appointmentId": "08pxx0000003HpQAAU",
    "attendeeCount": 0,
    "attendeeLimit": 15,
    "parentRecordId": "001B000000qAUAWIA4",
    "endTime": "2019-01-21T19:30:00.000+0000",
    "resourceIds": [
      "0HnB0000000TO8gKAK"
    ],
    "startTime": "2019-01-21T16:30:00.000+0000",
    "territoryId": "0HhB0000000TO9WKAW",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "workTypeId": "08qRM00000003fkYAA",
    "extendedFields": [
      {
        "name": "subject",
        "value": "MSc Internship - Resume workshop"
      },
      {
        "name": "description",
        "value": "Resume workshop for MSc Internship for Section 5"
      }
    ]
  },
  {
    "appointmentId": "08pxx0000009AsQAAU",
    "attendeeCount": 20,
    "attendeeLimit": 20,
    "parentRecordId": "001B000000qAUAWIA4",
    "endTime": "2019-01-21T19:45:00.000+0000",
    "resourceIds": [
      "0HnB0000000TO8gKAK"
    ],
    "startTime": "2019-01-21T16:45:00.000+0000",
    "territoryId": "0HhB0000000TO9WKAW",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "workTypeId": "08qRM00000003fkYAA",
    "extendedFields": [
      {
        "name": "subject",
        "value": "MSc Internship - Resume workshop"
      }
    ]
  }
}

```

```
    },
    {
      "name": "description",
      "value": "Resume workshop for MSc Internship for Section 3"
    }
  ]
}
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Group Appointments List Result	List of result objects for the retrieved group appointments.	Small, 61.0	61.0

Group Appointments List Result

Output representation of the list of group appointments.

Sample Response

```
{
  "groupAppointments": [
    {
      "appointmentId": "08pxx0000004HlQAAU",
      "attendeeCount": 10,
      "attendeeLimit": 25,
      "parentRecordId": "001B000000qAUAWIA4",
      "endTime": "2024-01-21T19:15:00.000+0000",
      "resourceIds": [
        "0HnB0000000TO8gKAK"
      ],
      "startTime": "2024-01-21T16:15:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW",
      "engagementChannelTypeId": "0eFRM00000000Bv2AI",
      "workTypeId": "08qRM000000003fkYAA",
      "extendedFields": [
        {
          "name": "subject",
          "value": "MSc Internship - Resume workshop"
        },
        {
          "name": "description",
          "value": "Resume workshop for MSc Internship for Section 4"
        }
      ]
    },
    {
      "appointmentId": "08pxx0000003HpQAAU",
      "attendeeCount": 0,
      "attendeeLimit": 15,
```

```

    "parentRecordId": "001B000000qAUAWIA4",
    "endTime": "2019-01-21T19:30:00.000+0000",
    "resourceIds": [
      "0HnB0000000TO8gKAK"
    ],
    "startTime": "2019-01-21T16:30:00.000+0000",
    "territoryId": "0HhB0000000TO9WKAW",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "workTypeId": "08qRM00000003fkYAA",
    "extendedFields": [
      {
        "name": "subject",
        "value": "MSc Internship - Resume workshop"
      },
      {
        "name": "description",
        "value": "Resume workshop for MSc Internship for Section 5"
      }
    ]
  },
  {
    "appointmentId": "08pxx00000009AsQAAU",
    "attendeeCount": 20,
    "attendeeLimit": 20,
    "parentRecordId": "001B000000qAUAWIA4",
    "endTime": "2019-01-21T19:45:00.000+0000",
    "resourceIds": [
      "0HnB0000000TO8gKAK"
    ],
    "startTime": "2019-01-21T16:45:00.000+0000",
    "territoryId": "0HhB0000000TO9WKAW",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "workTypeId": "08qRM00000003fkYAA",
    "extendedFields": [
      {
        "name": "subject",
        "value": "MSc Internship - Resume workshop"
      },
      {
        "name": "description",
        "value": "Resume workshop for MSc Internship for Section 3"
      }
    ]
  }
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
group Appointments	Group Appointment Result[]	List of group appointments in each territory.	Small, 61.0	61.0

Group Appointment Result

Output representation that contains the details of a specific group appointment.

Sample Response

```
{
  "groupAppointments": [
    {
      "appointmentId": "08pxx0000004H1QAAU",
      "attendeeCount": 10,
      "attendeeLimit": 25,
      "parentRecordId": "001B000000qAUAWIA4",
      "endTime": "2024-01-21T19:15:00.000+0000",
      "startTime": "2024-01-21T16:15:00.000+0000",
      "resource": {
        "id" : "0HnB0000000TO8gKAK",
        "name" : "Best Resource"
      },
      "territoryId": "0HhB0000000TO9WKAW",
      "engagementChannelTypeId": "0eFRM00000000Bv2AI",
      "workTypeId": "08qRM00000003fkYAA",
      "appointmentChannel": {
        "engagementChannelTypeId" : "0eFRM00000000Bv2AI" ,
        "engagementChannelTypeName" : "Video"
      },
      "workTypeGroup" : {
        "name" : "Wealth Management",
        "id" : "0eFRM00000000Bv2AI"
      },
      "extendedFields": [
        { "name": "subject",
          "value": "MSc Internship - Resume workshop" },
        { "name": "description",
          "value": "Resume workshop for MSc Internship for Section 4" }
      ]
    },
    {
      "appointmentId": "08pxx0000003HpQAAU",
      "attendeeCount": 0,
      "attendeeLimit": 15,
      "parentRecordId": "001B000000qAUAWIA4",
      "endTime": "2019-01-21T19:30:00.000+0000",
      "startTime": "2024-01-21T16:15:00.000+0000",
      "resource": {
        "id" : "0HnB0000000TO8gKAK",
        "name" : "Best Resource"
      },
      "startTime": "2019-01-21T16:30:00.000+0000",
      "territoryId": "0HhB0000000TO9WKAW",
      "engagementChannelTypeId": "0eFRM00000000Bv2AI",
      "workTypeId": "08qRM00000003fkYAA",
      "appointmentChannel": {
        "engagementChannelTypeId" : "0eFRM00000000Bv2AI",
        "engagementChannelTypeName" : "Video"
      }
    }
  ]
}
```

```

    },
    "workTypeGroup" : {
      "name" : "Wealth Management",
      "id" : "0eFRM00000000Bv2AI"
    },
    "extendedFields": [
      { "name": "subject",
        "value": "MSc Internship - Resume workshop" },
      { "name": "description",
        "value": "Resume workshop for MSc Internship for Section 5" }
    ]
  },
  {
    "appointmentId": "08pxx0000009AsQAAU",
    "attendeeCount": 20,
    "attendeeLimit": 20,
    "parentRecordId": "001B000000qAUAWIA4",
    "endTime": "2019-01-21T19:45:00.000+0000",
    "startTime": "2024-01-21T16:15:00.000+0000",
    "resource": {
      "id" : "0HnB0000000TO8gKAK",
      "name" : "Best Resource"
    },
    "startTime": "2019-01-21T16:45:00.000+0000",
    "territoryId": "0HhB0000000TO9WKAW",
    "engagementChannelTypeId": "0eFRM00000000Bv2AI",
    "workTypeId": "08qRM00000003fkYAA",
    "appointmentChannel": {
      "engagementChannelTypeId" : "0eFRM00000000Bv2AI",
      "engagementChannelTypeName" : "Video"
    },
    "workTypeGroup" : {
      "name" : "Wealth Management",
      "id" : "0eFRM00000000Bv2AI"
    },
    "extendedFields": [
      { "name": "subject",
        "value": "MSc Internship - Resume workshop" },
      { "name": "description",
        "value": "Resume workshop for MSc Internship for Section 3" }
    ]
  }
]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
appointmentId	String	ID of the group appointment.	Small, 61.0	61.0
attendeeCount	Integer	Number of attendees who are already associated with the appointment.	Small, 61.0	61.0

Property Name	Type	Description	Filter Group and Version	Available Version
attendeeLimit	Integer	Maximum attendee limit that's allowed for the appointment.	Small, 61.0	61.0
appointmentChannel	Object	The appointment type, engagement channel type ID, and engagement Channel type name associated with the appointment, based on preferences.	Small, 61.0	61.0
endTime	String	End time of the appointment.	Small, 61.0	61.0
engagementChannelTypeId	String	ID of the engagement channel type record.	Small, 61.0	61.0
extendedFields	Scheduler Extended Fields[]	Details of the extended custom fields.	Small, 61.0	61.0
parentRecordId	String	ID of the associated parent record.	Small, 61.0	61.0
resourceIds	String[]	Service resource IDs that are associated with the appointment.	Small, 61.0	61.0
startTime	String	Start time of the appointment.	Small, 61.0	61.0
territoryId	String	ID of the service territory that's associated with the appointment.	Small, 61.0	61.0
workTypeGroup	Object	ID and name of the work type group associated with the work type of the appointment.	Small, 61.0	61.0
workTypeId	String	ID of the work type for the appointment.	Small, 61.0	61.0

Service Appointment Output

Output of the service appointment POST method.

Property Name	Type	Description	Filter Group and Version	Available Version
result	Service Appointment Result	Result of the POST method.	Small, 48.0	48.0

Service Appointment Result

Result of the POST method.

Property Name	Type	Description	Filter Group and Version	Available Version
assignedResourceIds	String[]	IDs of the assigned resources	Small, 48.0	48.0
parentRecordId	String	ID of the parent record.	Small, 48.0	48.0
serviceAppointmentId	String	ID of the service appointment created.	Small, 48.0	48.0

Service Territories Output

Output for the service territories GET method.

Property Name	Type	Description	Filter Group and Version	Available Version
result	Service Territories List Result	Result for the GET method.	Small, 48.0	48.0

Service Territories List Result

List of service territories returned as per the query in the GET service territories call.

Property Name	Type	Description	Filter Group and Version	Available Version
serviceTerritories	Service Territories Result[]	List of service territories.	Small, 48.0	48.0

Service Territories Result

Represents a service territory result.

Property Name	Type	Description	Filter Group and Version	Available Version
city	String	Service territory city.	Small, 48.0	48.0
country	String	Service territory country.	Small, 48.0	48.0
id	String	ID of the service territory.	Small, 48.0	48.0
latitude	Double	Latitude of the service territory.	Small, 48.0	48.0
longitude	Double	Longitude of the service territory.	Small, 48.0	48.0
name	String	Name of the service territory.	Small, 48.0	48.0
operatingHoursId	String	ID of the service territory operatingHours record.	Small, 48.0	48.0

Property Name	Type	Description	Filter Group and Version	Available Version
postalCode	String	Service territory postal code.	Small, 48.0	48.0
state	String	Service territory state.	Small, 48.0	48.0
street	String	Service territory street.	Small, 48.0	48.0

Waitlist Analytics

Output representation of the waitlist analytics.

JSON example

```
{
  "waitlistAnalytics": {
    "currentParticipant": 1,
    "totalWaitingTime": 40,
    "avgWaitingTime": 20,
    "avgParticipants": 24
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
avg Participants	Integer	Count of average participants per day.	Small, 59.0	59.0
avg WaitingTime	Integer	Average waiting time in minutes.	Small, 59.0	59.0
current Participant	Integer	Number of current participants in the waitlist.	Small, 59.0	59.0
total WaitingTime	Integer	Total waiting time in minutes.	Small, 59.0	59.0

Waitlist Check In

Output representation of the waitlist check in request.

JSON example

```
{
  "result" : {
    "participantId" : "00Q5h00000JdQWzEAN",
    "serviceAppointmentId" : "08pxx0000004CYqAAM",
    "waitlistParticipantId" : "12oxx0000004FGiAAM"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Waitlist Check In Result	Result of the waitlist check in request.	Small, 59.0	59.0

Waitlist Check In Result

Output representation of the waitlist check in result.

JSON example

```
{
  "result" : {
    "participantId" : "00Q5h00000JdQWzEAN",
    "serviceAppointmentId" : "08pxx0000004CYqAAM",
    "waitlistParticipantId" : "12oxx0000004FGiAAM"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
participantId	String	ID of the participant who has an appointment.	Small, 59.0	59.0
serviceAppointmentId	String	ID of the service appointment.	Small, 59.0	59.0
waitlistParticipantId	String	ID of the waitlist participant.	Small, 59.0	59.0

Waitlist Details

Output representation of the waitlist details.

JSON example

```
{
  "description": "None",
  "isActive": true,
  "name": "Queue_1",
  "serviceResources": [
    {
      "id": "0Hnxx0000004C92CAE",
      "name": "Admin"
    },
    {
      "id": "0Hnxx0000004CFVCA2",
      "name": "Standard User 2 Technician"
    }
  ],
  "waitlistAnalytics": {
```

```

        "currentParticipant":1,
        "totalWaitingTime":40,
        "avgWaitingTime":20,
        "avgParticipants":24
    },
    "waitlistId":"11wxx0000005GTHAA2",
    "waitlistParticipants":[
        {
            "participant":{
                "id":"001xx000003GZUZA4",
                "name":"Global Media"
            },
            "participantIdentifier":"WP-0020",
            "serviceAppointmentId":"08pxx0000004CYqAAM",
            "serviceResource":{
                "id":"0Hnxx0000004C92CAE",
                "name":"Admin"
            },
            "waitlistParticipantId":"12oxx0000004FGiAAM",
            "workTypeGroup":{
                "id":"0VSxx0000004CoyGAE",
                "name":"General Banking WTG"
            },
            "createdDate" : "2023-05-02T12:23:34",
            "extendedFields":[
                {
                    "name":"Source__c",
                    "value":"Email"
                }
            ]
        }
    ],
    "workTypeGroups":[
        {
            "id":"0VSxx0000004CoyGAE",
            "name":"General Banking WTG"
        }
    ]
}

```

Property Name	Type	Description	Filter Group and Version	Available Version
description	String	Description of the waitlist.	Small, 59.0	59.0
isActive	Boolean	Indicates whether the waitlist is available to add drop-in customers (<code>true</code>) or not (<code>false</code>).	Small, 59.0	59.0
name	String	Name of the waitlist.	Small, 59.0	59.0
service Resources	Waitlist Service Resource[]	Details of the service resources that are related to the service appointment.	Small, 59.0	59.0

Property Name	Type	Description	Filter Group and Version	Available Version
waitlist Analytics	Waitlist Analytics	Details of the waitlist analytics.	Small, 59.0	59.0
waitlistId	String	ID of the waitlist.	Small, 59.0	59.0
waitlist Participants	Waitlist Participant Result[]	Participants who are added to the waitlist.	Small, 59.0	59.0
workType Groups	Waitlist Work Type Group[]	Details of the work type groups that are related to the service appointment.	Small, 59.0	59.0

Waitlist List Result

Output representation of the result of the list of waitlists.

JSON example

```

    "waitlists": [
      {
        "description": "None",
        "isActive": true,
        "name": "Queue_1",
        "serviceResources": [
          {
            "id": "0Hnxx0000004C92CAE",
            "name": "Admin"
          },
          {
            "id": "0Hnxx0000004CFVCA2",
            "name": "Standard User 2 Technician"
          }
        ],
        "waitlistAnalytics": {
          "currentParticipant": 1,
          "totalWaitingTime": 40,
          "avgWaitingTime": 20,
          "avgParticipants": 24
        },
        "waitlistId": "1lwxx0000005GTHAA2",
        "waitlistParticipants": [
          {
            "participant": {
              "id": "001xx000003GZUZA4",
              "name": "Global Media"
            },
            "participantIdentifier": "WP-0020",
            "serviceAppointmentId": "08pxx0000004CYqAAM",
            "serviceResource": {
              "id": "0Hnxx0000004C92CAE",
              "name": "Admin"
            }
          }
        ]
      }
    ]
  
```

```
    },
    "waitlistParticipantId": "120xx0000004FGiAAM",
    "workTypeGroup": {
      "id": "0VSxx0000004CoyGAE",
      "name": "General Banking WTG"
    },
    "createdDate": "2023-05-02T12:23:34",
    "extendedFields": [
      {
        "name": "Source__c",
        "value": "Email"
      }
    ]
  },
  "workTypeGroups": [
    {
      "id": "0VSxx0000004CoyGAE",
      "name": "General Banking WTG"
    }
  ]
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
waitlists	Waitlist Details[]	List of waitlists that are associated with a service appointment.	Small, 59.0	59.0

Waitlist Participant Details

Output representation of the waitlist participant details.

JSON example

```
{
  "participant": {
    "id": "001xx000003GZUZA4",
    "name": "Global Media"
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the waitlist participant.	Small, 59.0	59.0
name	String	Name of the waitlist participant.	Small, 59.0	59.0

Waitlist Participant Result

Output representation of a waitlist participant result. A waitlist participant is a customer who is added to a waitlist.

JSON example

```

    "waitlistParticipants": [
      {
        "participant": {
          "id": "001xx000003GZUZA4",
          "name": "Global Media"
        },
        "participantIdentifier": "WP-0020",
        "serviceAppointmentId": "08pxx0000004CYqAAM",
        "serviceResource": {
          "id": "0Hnxx0000004C92CAE",
          "name": "Admin"
        },
        "waitlistParticipantId": "12oxx0000004FGiAAM",
        "workTypeGroup": {
          "id": "0VSxx0000004CoyGAE",
          "name": "General Banking WTG"
        },
        "createdDate": "2023-05-02T12:23:34",
        "extendedFields": [
          {
            "name": "Source__c",
            "value": "Email"
          }
        ]
      }
    ]
  }
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
createdDate	String	Date when the waitlist participant record was created.	Small, 59.0	59.0
extended Fields	Extended Fields[]	List of extended fields associated with the waitlist participant record.	Big, 59.0	59.0
participant	Waitlist Participant Details	Details of the participant from the waitlist participant record.	Small, 59.0	58.0
participant Identifier	String	Alphanumeric unique identifier of the participant in a waitlist. For example, D101, E63, or A5015.	Small, 59.0	59.0
service AppointmentId	String	ID of the service appointment that's related to the waitlist participant.	Small, 59.0	59.0
service Resource	Waitlist Service Resource	Details of the service resource that's related to the service appointment for the waitlist participant.	Small, 59.0	59.0
waitlist ParticipantId	String	ID of the waitlist participant record.	Small, 59.0	59.0

Property Name	Type	Description	Filter Group and Version	Available Version
workTypeGroup	Waitlist Work Type Group	Details of the work type group that's associated with the service appointment.	Small, 59.0	59.0

Waitlist Participants Update

Output representation of a waitlist participant move response.

JSON example

```
{
  "message": "Participant successfully moved to first in the Main Lobby waitlist.",
  "status": "success",
  "waitlistParticipantId": "12oRM0000004FGiYAM"
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
message	String	Human-readable description of the result. Display this value to end users rather than branching on it. On success, the value matches one of these templates, depending on the value of targetPosition: Participant successfully moved to first in the {WaitlistName} waitlist. for 1, or Participant successfully moved to last in the {WaitlistName} waitlist. for -1. In API version 65.0 and later, a positive integer other than 1 returns Participant successfully repositioned in the {WaitlistName} waitlist.	Small, 62.0	62.0
status	String	Result of the request. The value is success on an HTTP 200 response. Use this property to branch programmatically.	Small, 62.0	62.0
waitlistParticipantId	String	ID of the waitlist participant record that was moved.	Small, 62.0	62.0



Note: The response doesn't include the participant's new position or the updated waitlist ordering. To read the new order, call [GET /connect/scheduling/waitlists](#) and use the array order of `waitlistParticipants` as the position.

Waitlist Result

Output representation of the waitlist result.

JSON example

```
{
  "result":{
    "waitlists":[
      {
        "description":"None",
        "isActive":true,
        "name":"Queue_1",
        "serviceResources":[
          {
            "id": "0Hnxx0000004C92CAE",
            "name":"Admin"
          },
          {
            "id": "0Hnxx0000004CFVCA2",
            "name":"Standard User 2 Technician"
          }
        ],
        "waitlistAnalytics":{
          "currentParticipant":1,
          "totalWaitingTime":40,
          "avgWaitingTime":20,
          "avgParticipants":24
        },
        "waitlistId":"1lwxx0000005GTHAA2",
        "waitlistParticipants":[
          {
            "participant":{
              "id":"001xx000003GZUZA4",
              "name":"Global Media"
            },
            "participantIdentifier":"WP-0020",
            "serviceAppointmentId":"08pxx0000004CYqAAM",
            "serviceResource":{
              "id":"0Hnxx0000004C92CAE",
              "name":"Admin"
            },
            "waitlistParticipantId":"12oxx0000004FGiAAM",
            "workTypeGroup":{
              "id":"0VSxx0000004CoyGAE",
              "name":"General Banking WTG"
            },
            "createdDate": "2023-05-02T12:23:34",
            "extendedFields":[
              {
                "name":"Source__c",
                "value":"Email"
              }
            ]
          }
        ]
      }
    ]
  }
}
```

```
    ],
    "workTypeGroups": [
      {
        "id": "0VSxx0000004CoyGAE",
        "name": "General Banking WTG"
      }
    ]
  }
}
```

Property Name	Type	Description	Filter Group and Version	Available Version
result	Waitlist List Result	Details of the waitlist, including the list of participants and work type groups.	Small, 59.0	59.0

Waitlist Service Resource

Output representation of the waitlist service resource. Service resources are individual users who can attend customer appointments.

JSON example

```
"serviceResources": [
  {
    "id": "0Hnxx0000004C92CAE",
    "name": "Admin"
  },
  {
    "id": "0Hnxx0000004CFVCA2",
    "name": "Standard User 2 Technician"
  }
]
```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the service resource.	Small, 59.0	59.0
name	String	Name of the service resource.	Small, 59.0	59.0

Waitlist Work Type Group

Output representation of the waitlist work type group. A work type group is a general appointment category or topic, such as a home loan or an investment.

JSON example

```
"workTypeGroups": [
  {
```

```

    "id": "0VSxx0000004CoyGAE",
    "name": "General Banking WTG"
  }
]

```

Property Name	Type	Description	Filter Group and Version	Available Version
id	String	ID of the work type group.	Small, 59.0	59.0
name	String	Name of the work type group.	Small, 59.0	59.0

Work Type Group Estimated Wait Time Info

Output representation of the estimated wait time for a specific work type group.

Property Name	Type	Description	Filter Group and Version	Available Version
workTypeGroup EstimatedWaitTime	String	Estimated wait time for the work type group.	Small, 65.0	65.0
workType GroupId	String	ID of the work type group.	Small, 65.0	65.0

Error Codes and Responses

When using the APIs in Salesforce Scheduler, you may encounter error codes and messages under certain conditions. For each Scheduler API, it lists the potential error codes, the associated error messages, and a description of what causes the error to occur.

The following is a list of error code details within the Salesforce Scheduler platform.

[Appointment Candidates \(GET\)](#)

Contains the error codes and error code messages related with the Salesforce Scheduler API for `getAppointmentSlots` (GET) resource.

[Appointment Slots \(GET\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `getAppointmentSlots` (GET) resource.

[Available Territory Slots \(POST\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `available-territory-slots` (POST) resource.

[Estimated Wait Time \(POST\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `estimated-wait-time` (POST) resource.

[Service Appointments \(PATCH\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `service-appointments` (PATCH) resource.

[Service Appointments \(POST\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `service-appointments` (POST) resource.

[Service Territories \(GET\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `service-territories` (GET) resource.

[Waitlist Participants \(PATCH\)](#)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `waitlist/participants` (PATCH) resource.

Appointment Candidates (GET)

Contains the error codes and error code messages related with the Salesforce Scheduler API for `getAppointmentSlots` (GET) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	MISSING_ARGUMENT	Specify either a <code>workTypeGroupId</code> or <code>WorkTypeId</code> .
400	MISSING_ARGUMENT	Specify a <code>serviceTerritoryId</code> with either a <code>workTypeGroupId</code> or <code>WorkTypeId</code> .
400	INVALID_INPUT	This isn't a valid <code>workTypeGroupId</code> value. Specify a valid ID for the <code>workTypeGroupId</code> parameter.
400	INVALID_INPUT	This isn't a valid <code>serviceTerritoryId</code> value. Specify a valid ID for the <code>territoryId</code> parameter.

Appointment Slots (GET)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `getAppointmentSlots` (GET) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	BAD_REQUEST	Specify either a <code>workTypeGroupId</code> or a <code>workTypeId</code> and try again.
400	BAD_REQUEST	This isn't a valid <code>durationInMinutes</code> value. Specify a valid duration in minutes for the <code>durationInMinutes</code> parameter.
400	BAD_REQUEST	<code>AppointmentTopicTimeSlot</code> is not accessible for the current user.
400	BAD_REQUEST	Looks like you don't have access to <code>{WorkTypeGroup}</code> or <code>{WorkType}</code> object. Your Salesforce admin can help with that.

HTTP Response Code	Error Code	Description
400	BAD_REQUEST	Looks like you don't have access to {ServiceTerritory} object. Your Salesforce admin can help with that.
400	BAD_REQUEST	Looks like you don't have access to {ServiceResource} object. Your Salesforce admin can help with that.
400	BAD_REQUEST	Remove the <code>primaryResourceId</code> from the <code>requiredResourceIds</code> list and try again.
400	BAD_REQUEST	Provide a valid <code>primaryResourceId</code> and try again.
400	BAD_REQUEST	The maximum number of required service resources is 5. Reduce the number of service resources in your request and try again.
400	BAD_REQUEST	Provide a resource ID in the <code>requiredResourceIds</code> field, and try again.
400	BAD_REQUEST	Specify a valid <code>workType</code> and try again.
400	BAD_REQUEST	Provide an end time that's after the start time, and try again.
400	BAD_REQUEST	This isn't a valid <code>startTime</code> or <code>endTime</code> value. Specify a valid date and time for the <code>startTime</code> or <code>endTime</code> parameter.
400	BAD_REQUEST	There is no active <code>workTypeGroup</code> .

Available Territory Slots (POST)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `available-territory-slots` (POST) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	MISSING_ARGUMENT	Specify a <code>serviceTerritoryId</code> with either a <code>workTypeGroupId</code> or <code>WorkTypeId</code> .
400	INTERNAL_ERROR	You can't specify both <code>requiredResourceIds</code> and <code>filterByResources</code> in the request body. Specify one or the other and try again.
400	INVALID_INPUT	Specify either a <code>workTypeGroupId</code> or a <code>WorkTypeId</code> .
400	INVALID_INPUT	This isn't a valid <code>workTypeGroupId</code> value. Specify a valid ID for the <code>workTypeGroupId</code> parameter.
400	INVALID_INPUT	This isn't a valid <code>workTypeId</code> value. Specify a valid ID for the <code>workTypeId</code> parameter.
400	INVALID_INPUT	Specify either a <code>workTypeId</code> or a value for the <code>durationInMinutes</code> parameter.

HTTP Response Code	Error Code	Description
400	INVALID_INPUT	This isn't a valid <code>serviceTerritoryId</code> value. Specify a valid ID for the <code>serviceTerritoryId</code> parameter.
400	INVALID_INPUT	This isn't a valid account ID. Specify a valid ID for the <code>accountId</code> parameter.
400	INTERNAL_ERROR	<code>AppointmentSchedulingPolicy</code> provided: {id} does not belong to <code>AppointmentSchedulingPolicy</code> .
400	INTERNAL_ERROR	Provide an end date that's after the start date, and try again.
400	INVALID_INPUT	This isn't a valid service resource ID in the <code>filterByResources</code> parameter. Specify a valid service resource ID in the <code>filterByResources</code> parameter.
400	INTERNAL_ERROR	Something went wrong. Ask your admin for help.
400	INSUFFICIENT_ACCESS	Looks like you don't have access to the <code>maxAppointments</code> or <code>workTypeGroup</code> field in the <code>TimeSlot</code> object. Your Salesforce admin can help with that.
400	INSUFFICIENT_ACCESS	Looks like you don't have access to the <code>{Service Resource}</code> object. Your Salesforce admin can help with that.
400	INTERNAL_ERROR	Specify a <code>workTypeGroup</code> with a <code>custom_workType</code> associated with an appointment category with a <code>Scheduled</code> type, and try again.
400	INTERNAL_ERROR	{id} (<code>AppointmentTopicTimeSlot</code>), is not accessible for the current user.
403	API_DISABLED_FOR_ORG	The Chatter Connect API is not enabled for this organization or user type.

Estimated Wait Time (POST)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `estimated-wait-time` (POST) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	JSON_PARSER_ERROR	The HTTP entity body is required, but this request has no entity body.
405	METHOD_NOT_ALLOWED	The request used an HTTP method other than <code>POST</code> .
500	INTERNAL_ERROR	Specify a valid Waitlist ID or Waitlist Participant ID and try again. Returned when both <code>waitlistId</code> and <code>waitlistParticipantId</code> are missing, empty, or null.

HTTP Response Code	Error Code	Description
500	INTERNAL_ERROR	The waitlist <id> doesn't have an active work type group. Returned when <code>waitlistId</code> is invalid.
500	INTERNAL_ERROR	Invalid waitlist participant id. Only one waitlist should be associated with waitlist participant. Returned when <code>waitlistParticipantId</code> is invalid.

Service Appointments (PATCH)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `service-appointments` (PATCH) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	INSUFFICIENT_ACCESS_OR_READONLY	Insufficient access rights on the <code>ServiceAppointment</code> object record.

Service Appointments (POST)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `service-appointments` (POST) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	INTERNAL_ERROR	We couldn't find any resources for your request. Specify a different <code>schedStartTime</code> and <code>schedEndTime</code> and try again.
400	INVALID_API_INPUT	Only one <code>assignedResource</code> can have <code>isPrimaryResource</code> set to true. Check the request and try again.
400	INVALID_API_INPUT	You haven't enabled the Schedule Appointments using Engagement Channels setting in your org. Contact your Salesforce admin for assistance.
400	INSUFFICIENT_ACCESS	Looks like you don't have access to the <code>MaxAppointments</code> field in the <code>TimeSlot</code> object. Your Salesforce admin can help with that.
400	INSUFFICIENT_ACCESS	Looks like you don't have access to <code>ServiceAppointment</code> object. Your Salesforce admin can help with that.

Service Territories (GET)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `service-territories` (GET) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	MISSING_ARGUMENT	Specify either a <code>workTypeGroupId</code> or <code>WorkTypeId</code> .

Waitlist Participants (PATCH)

Contains the error codes and error code messages related with Salesforce Scheduler API for the `waitlist/participants` (PATCH) resource.

This table lists HTTP response code descriptions that are unique to this resource.

HTTP Response Code	Error Code	Description
400	API_DISABLED_FOR_ORG	The Drop In Appointments setting isn't enabled in your org. Ask your Salesforce admin to enable the setting.
400	INSUFFICIENT_ACCESS	The calling user doesn't have access to Lobby Management. Assign a lobby management permission set, such as Facility Manager or Queue Manager, to the user.
400	INVALID_API_INPUT	One of: <code>waitlistParticipantId</code> is missing or empty; <code>waitlistParticipantId</code> doesn't match a waitlist participant whose <code>Status</code> is <code>Unassigned</code> ; <code>targetPosition</code> is missing; <code>targetPosition</code> is 0, a negative value other than <code>-1</code> , or otherwise invalid.
400	JSON_PARSER_ERROR	The <code>targetPosition</code> value isn't a number, or the value is outside the signed 32-bit integer range.
405	METHOD_NOT_ALLOWED	The request used an HTTP method other than <code>PATCH</code> .

CHAPTER 11 Salesforce Scheduler Apex Classes

In this chapter ...

- [ConnectApi Namespace](#)
- [LxScheduler Namespace](#)

Salesforce Scheduler provides the `ConnectApi` namespace (also called `Connect` in Apex) and `LxScheduler` namespace that contains classes for accessing the same data available in the Salesforce Scheduler Business APIs.

You can use these apex classes as an alternative to the Salesforce Scheduler Business APIs to simplify appointment scheduling in Salesforce. For example, use the `createServiceAppointment(createServiceAppointmentInput)` method of the `ConnectApi` namespace as an alternative to the `service-appointments` Connect API to create service appointments.

 **Note:** Salesforce Scheduler is built on the Salesforce platform (also known as Lightning Experience). The Salesforce platform specific Apex governor limits apply to the Salesforce Scheduler Apex classes and methods requests. For more information on the Lightning platform Apex governor limits, see [Apex Governor Limits](#) in Salesforce Developer Limits and Allocations Quick Reference.

The following table lists the available Salesforce Scheduler Apex methods, as well as the corresponding Connect REST API.

Apex Method	Connect REST API
<code>createServiceAppointment(createServiceAppointmentInput)</code>	<code>service-appointments</code> (POST)
<code>updateServiceAppointment(updateServiceAppointmentInput)</code>	<code>service-appointments</code> (PATCH)
<code>getAppointmentCandidates(getAppointmentCandidatesInput)</code>	<code>getAppointmentCandidates</code> (POST)
<code>getAppointmentSlots(getAppointmentSlotsInput)</code>	<code>getAppointmentSlots</code> (POST)

SEE ALSO:
[Salesforce Developer Limits and Allocations Quick Reference: About This Quick Reference](#)

ConnectApi Namespace

The `ConnectApi` namespace (also called `Connect` in Apex) provides classes creating and updating service appointments.

The following are the classes and the interface in the `ConnectApi` namespace.

LightningScheduler Class

Create and update service appointments.

Namespace

[ConnectApi](#)

LightningScheduler Methods

These methods are for `LightningScheduler`. All methods are static.

[createServiceAppointment\(createServiceAppointmentInput\)](#)

Create a service appointment.

[updateServiceAppointment\(updateServiceAppointmentInput\)](#)

Update a service appointment.

createServiceAppointment (createServiceAppointmentInput)

Create a service appointment.

API Version

53.0

Requires Chatter

No

Signature

```
public static ConnectApi.ServiceAppointmentOutput  
createServiceAppointment (ConnectApi.CreateServiceAppointmentInput  
createServiceAppointmentInput)
```

Parameters

createServiceAppointmentInput

Type: [ConnectApi.CreateServiceAppointmentInput](#)

Input parameters to create a service appointment.

Return Value

Type: `ConnectApi.ServiceAppointmentOutput`

Usage

Considerations for using engagement channel types with the `service-appointments` resource:

- Enable **Schedule Appointments Using Engagement Channels** in Salesforce Scheduler Settings in your Salesforce org.
- When you create or modify appointments, shifts must be defined in the scheduling policy. For more information on setting up shifts in the scheduling policy, see [Define Shift Rules in Scheduling Policy](#).
-  **Note:** Engagement channel types are not supported with operating hours rules in the scheduling policy.
- When you use engagement channel type and shifts to create a service appointment, Salesforce Scheduler considers the default value for the Appointment Type (if not specified). However, Salesforce Scheduler only considers the engagement channel type and Appointment Type is ignored.

Example

For an account (existing user):

```
ConnectApi.ExtendedFieldInput extendedFieldEmail = new ConnectApi.ExtendedFieldInput();
extendedFieldEmail.name = 'Email';
extendedFieldEmail.value = 'rachael.adams@salesforce.com';

ConnectApi.ExtendedFieldInput extendedFieldPhone = new ConnectApi.ExtendedFieldInput();
extendedFieldPhone.name = 'Phone';
extendedFieldPhone.value = '1234567890';

List<ConnectApi.ExtendedFieldInput> extendedFieldList = new
List<ConnectApi.ExtendedFieldInput>();
extendedFieldList.add(extendedFieldEmail);
extendedFieldList.add(extendedFieldPhone);

ConnectApi.ServiceAppointmentInput serviceAppInput = new
ConnectApi.ServiceAppointmentInput();
serviceAppInput.extendedFields = extendedFieldList;
serviceAppInput.engagementChannelTypeId = '0eFRM0000000Bv2AI';
serviceAppInput.serviceTerritoryId = '0Hhxx0000004C92CAE';
serviceAppInput.workTypeId = '08qxx0000004C92AAE';
serviceAppInput.parentRecordId = '001xx000003GYR1AAO';
serviceAppInput.schedStartTime = DateTime.valueOf('2021-05-28 12:15:00');
serviceAppInput.schedEndTime = DateTime.valueOf('2021-05-28 12:45:00');
serviceAppInput.appointmentMode = 'Group';
serviceAppInput.attendeeLimit = 20;

ConnectApi.AssignedResourcesInput asResourceInput = new ConnectApi.AssignedResourcesInput();
asResourceInput.serviceResourceId = '0Hnxx0000004CAiCAM';
asResourceInput.isRequiredResource = true;
asResourceInput.isPrimaryResource = true;

List<ConnectApi.AssignedResourcesInput> asResourceInputList = new
List<ConnectApi.AssignedResourcesInput>();
```

```

asResourceInputList.add(asResourceInput);

ConnectApi.CreateServiceAppointmentInput createInput = new
ConnectApi.CreateServiceAppointmentInput();
createInput.serviceAppointment = serviceAppInput;
createInput.assignedResources = asResourceInputList;

try{
    ConnectApi.ServiceAppointmentOutput appointmentResult =
ConnectApi.LightningScheduler.createServiceAppointment(createInput);
    String serviceAppointmentId = appointmentResult.result.serviceAppointmentId;
    List<String> assignedResourceIds = appointmentResult.result.assignedResourceIds;
}catch(ConnectApi.ConnectApiException ex){
    //Handle Exception
}

```

For a lead (authenticated guest user):

```

ConnectApi.LeadInput leadInput = new ConnectApi.LeadInput();
leadInput.firstName = 'Rachel';
leadInput.lastName = 'Adams';
leadInput.phone = '012-345-6789';
leadInput.email = 'rachel.adams@salesforce.com';
leadInput.company = 'Salesforce';

ConnectApi.ExtendedFieldInput extendedFieldEmail = new ConnectApi.ExtendedFieldInput();
extendedFieldEmail.name = 'Email';
extendedFieldEmail.value = 'rachael.adams@salesforce.com';

ConnectApi.ExtendedFieldInput extendedFieldPhone = new ConnectApi.ExtendedFieldInput();
extendedFieldPhone.name = 'Phone';
extendedFieldPhone.value = '1234567890';

List<ConnectApi.ExtendedFieldInput> extendedFieldList = new
List<ConnectApi.ExtendedFieldInput>();
extendedFieldList.add(extendedFieldEmail);
extendedFieldList.add(extendedFieldPhone);

ConnectApi.ServiceAppointmentInput serviceAppInput = new
ConnectApi.ServiceAppointmentInput();
serviceAppInput.extendedFields = extendedFieldList;
serviceAppInput.engagementChannelTypeId = '0eFRM0000000Bv2AI';
serviceAppInput.serviceTerritoryId = '0Hhxx0000004C92CAE';
serviceAppInput.workTypeId = '08qxx0000004C92AAE';
serviceAppInput.schedStartTime = DateTime.valueOf('2021-05-28 12:15:00');
serviceAppInput.schedEndTime = DateTime.valueOf('2021-05-28 12:45:00');

ConnectApi.AssignedResourcesInput asResourceInput = new ConnectApi.AssignedResourcesInput();
asResourceInput.serviceResourceId = '0Hnxx0000004CAiCAM';
asResourceInput.isRequiredResource = true;
asResourceInput.isPrimaryResource = true;

List<ConnectApi.AssignedResourcesInput> asResourceInputList = new
List<ConnectApi.AssignedResourcesInput>();

```

```

asResourceInputList.add(asResourceInput);

ConnectApi.CreateServiceAppointmentInput createInput = new
ConnectApi.CreateServiceAppointmentInput();
createInput.serviceAppointment = serviceAppInput;
createInput.assignedResources = asResourceInputList;
createInput.lead = leadInput;

try{
    ConnectApi.ServiceAppointmentOutput appointmentResult =
ConnectApi.LightningScheduler.createServiceAppointment(createInput);
    String serviceAppointmentId = appointmentResult.result.serviceAppointmentId;
    List<String> assignedResourceIds = appointmentResult.result.assignedResourceIds;
}catch (ConnectApi.ConnectApiException ex){
    //Handle Exception
}

```

updateServiceAppointment (updateServiceAppointmentInput)

Update a service appointment.

API Version

53.0

Requires Chatter

No

Signature

```

public static ConnectApi.ServiceAppointmentOutput
updateServiceAppointment (ConnectApi.UpdateServiceAppointmentInput
updateServiceAppointmentInput)

```

Parameters

updateServiceAppointmentInput
Type: ConnectApi.UpdateServiceAppointmentInput
Input parameters to update a service appointment.

Return Value

Type: ConnectApi.ServiceAppointmentOutput

Usage

Considerations for using engagement channel types with the `service-appointments` resource:

- Enable **Schedule Appointments Using Engagement Channels** in Salesforce Scheduler Settings in your Salesforce org.

- When you create or modify appointments, shifts must be defined in the scheduling policy. For more information on setting up shifts in the scheduling policy, see [Define Shift Rules in Scheduling Policy](#).



Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.

- When you use engagement channel type and shifts to modify an appointment, Salesforce Scheduler considers the default value for the Appointment Type (if not specified). However, Salesforce Scheduler only considers the engagement channel type and Appointment Type is ignored.

Example

```
ConnectApi.ExtendedFieldInput extendedFieldEmail = new ConnectApi.ExtendedFieldInput();
extendedFieldEmail.name = 'Email';
extendedFieldEmail.value = 'rachel.adams@salesforce.com.example';

ConnectApi.ExtendedFieldInput extendedFieldPhone = new ConnectApi.ExtendedFieldInput();
extendedFieldPhone.name = 'Phone';
extendedFieldPhone.value = '0123456789';

ConnectApi.ExtendedFieldInput extendedFieldStatus = new ConnectApi.ExtendedFieldInput();
extendedFieldStatus.name = 'Status';
extendedFieldStatus.value = 'None';

List<ConnectApi.ExtendedFieldInput> extendedFieldList = new
List<ConnectApi.ExtendedFieldInput>();
extendedFieldList.add(extendedFieldEmail);
extendedFieldList.add(extendedFieldPhone);
extendedFieldList.add(extendedFieldStatus);

ConnectApi.ServiceAppointmentInput serviceAppInput = new
ConnectApi.ServiceAppointmentInput();
serviceAppInput.extendedFields = extendedFieldList;
serviceAppInput.serviceTerritoryId = '0Hhxx0000004C92CAE';
serviceAppInput.workTypeId = '08qxx0000004C92AAE';
serviceAppInput.schedStartTime = DateTime.valueOf('2021-05-28 12:15:00');
serviceAppInput.schedEndTime = DateTime.valueOf('2021-05-28 12:45:00');

ConnectApi.AssignedResourcesInput asResourceInput = new ConnectApi.AssignedResourcesInput();
asResourceInput.serviceResourceId = '0Hnxx0000004CAiCAM';
asResourceInput.isRequiredResource = true;
asResourceInput.isPrimaryResource = true;

//Multi-resource
ConnectApi.AssignedResourcesInput asResourceInputReq = new
ConnectApi.AssignedResourcesInput();
asResourceInputReq.serviceResourceId = '0Hnxx0000004CAgCAM';
asResourceInputReq.isRequiredResource = true;
asResourceInputReq.isPrimaryResource = false;

List<ConnectApi.AssignedResourcesInput> asResourceInputList = new
List<ConnectApi.AssignedResourcesInput>();
asResourceInputList.add(asResourceInput);
asResourceInputList.add(asResourceInputReq);
```

```

ConnectApi.UpdateServiceAppointmentInput updateInput = new
ConnectApi.UpdateServiceAppointmentInput();
updateInput.serviceAppointment = serviceAppInput;
updateInput.assignedResources = asResourceInputList;
updateInput.serviceAppointmentId = '08pxx0000004CYqAAM';

try{
    ConnectApi.ServiceAppointmentOutput appointmentResult =
ConnectApi.LightningScheduler.updateServiceAppointment(updateInput);
    String serviceAppointmentId = appointmentResult.result.serviceAppointmentId;
    List<String> assignedResourceIds = appointmentResult.result.assignedResourceIds;
}catch (ConnectApi.ConnectApiException ex){
    //Handle Exception
}

```

ConnectApi Input Classes

Some ConnectApi methods take arguments that are instances of ConnectApi input classes.

Input classes are concrete unless marked abstract in this documentation. Concrete input classes have public constructors that have no parameters.

Some methods have parameters that are typed with an abstract class. You must pass in an instance of a concrete child class for these parameters.

Most input class properties can be set. Read-only properties are noted in this documentation.

ConnectApi.CreateServiceAppointmentInput

Contains information to create a service appointment.

Property	Type	Description	Required or Optional	Available Version
assignedResources	ConnectApi.AssignedResourceInput	Represents the service resources to be assigned to a service appointment.  Note: When creating an appointment, use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>assignedResources</code> as long as you have edit access to those fields.	Optional	53.0
lead	ConnectApi.LeadInput	Represents a prospect or lead.  Note: Required to create a service appointment for unauthenticated guest users.	Required if <code>serviceAppointment</code> isn't provided.	53.0

Property	Type	Description	Required or Optional	Available Version
schedulingPolicyId	String	The ID of the AppointmentSchedulingPolicy object. If no scheduling policy is passed in the request body, the default configurations are used. The only scheduling policy configuration that is used in determining time slots is the enforcement of account visiting hours.	Optional	53.0
serviceAppointment	ConnectApi.ServiceAppointment	Represents the service appointment details to book an appointment.  Note: When creating an appointment, use <code>extendedFields</code> to add values to any of the fields, including custom fields, in <code>assignedResources</code> as long as you have edit access to those fields.	Required if lead isn't provided.	53.0

ConnectApi.ExtendedFieldInput

Contains information about the extended field.

Property	Type	Description	Required or Optional	Available Version
name	String	The name of the field, including custom field.	Optional	53.0
value	String	The value of the field.	Optional	53.0

ConnectApi.LeadInput

Contains information about a lead or guest user.

Property	Type	Description	Required or Optional	Available Version
company	String	The company of the lead.	Optional	53.0
email	String	The email address of the lead.	Optional	53.0
extendedFields	ConnectApi.ExtendedFieldInput	Use to add values to any of the fields, including custom fields.	Optional	53.0
firstName	String	The first name of the lead.	Optional	53.0

Property	Type	Description	Required or Optional	Available Version
lastName	String	The last name of the lead.	Optional	53.0
phone	String	The phone number of the lead.	Optional	53.0

ConnectApi.ServiceAppointmentInput

Contains information about the service appointment.

Property	Type	Description	Required or Optional	Available Version
additionalInformation	String	Additional details about the service appointment.	Optional	53.0
appointmentMode	ConnectApi.AppointmentModeEnum	Mode of the service appointment. • Group— Service appointment mode is Group. • Regular— Default mode of service appointment.	Optional	60.0
appointmentType	String	Type of the appointment.	Optional	53.0
attendeeLimit	Integer	Maximum number of customers that's allowed to attend the service appointment.	Required if the appointment mode is Group.	60.0
city	String	Name of the city.	Optional	53.0
comments	String	Comments about the appointment.	Optional	53.0
contactId	String	ID of the contact associated with the parent record.	Optional	53.0
country	String	Name of the country.	Optional	53.0
description	String	Description of the appointment.	Optional	53.0
engagementChannelId	String	ID of the engagement channel type to associate with the appointment. You can use engagement channel type only if: • Schedule Appointments Using Engagement Channels is enabled in Salesforce Scheduler Settings in your Salesforce org. • Shifts are defined in the scheduling policy. For more information on setting	Optional	56.0

Property	Type	Description	Required or Optional	Available Version
		up shifts in the scheduling policy, see Define Shift Rules in Scheduling Policy .  Note: Engagement channel types are not supported with operating hours rules in the scheduling policy.		
extendedFields	ConnectApiExtendedField	Values to add to any of the fields, including custom fields.	Optional	53.0
parentRecordId	String	ID of the parent record associated with the account.	Required if lead isn't provided.	53.0
postalCode	String	Postal code of the city.	Optional	53.0
schedEndTime	Datetime	Time at which the appointment is scheduled to end.	Optional	53.0
schedStartTime	Datetime	Time at which the appointment is scheduled to start.	Optional	53.0
serviceTerritoryId	String	ID of the service territory associated with the service appointment.	Optional	53.0
state	String	Name of the state.	Optional	53.0
street	String	Name of the street.	Optional	53.0
subject	String	Short phrase describing the appointment.	Optional	53.0
workTypeId	String	ID of the work type associated with the service appointment. If specified, it is added to the service appointment record.	Optional	53.0

ConnectApi Output Classes

Most `ConnectApi` methods return instances of `ConnectApi` output classes.

All properties are read-only, except for instances of output classes created within test code.

All output classes are concrete unless marked abstract in this documentation.

All concrete output classes have no-argument constructors that you can invoke only from test code. See [Testing ConnectApi Code](#).

ConnectApi.ServiceAppointmentOutput

Output of the create service appointment request.

Property Name	Type	Description	Available Version
result	ConnectApi.ServiceAppointmentResult	Result of the create or update service appointment request.	53.0

ConnectApi.ServiceAppointmentResult

Contains result of the service appointment.

Property Name	Type	Description	Available Version
assignedResourceIds	List<String>	The IDs of the assigned resources.	53.0
parentRecordId	String	The ID of the parent record.	53.0
serviceAppointmentId	String	The ID of the service appointment record.	53.0

LxScheduler Namespace

The `LxScheduler` namespace provides an interface and classes for retrieving service resources and time slots to create an appointment.

The following are the classes and the interface in the `LxScheduler` namespace.

GetAppointmentCandidatesInput Class

Contains information about the available service resources (appointment candidates) based on work type group and service territories.

Set up Salesforce Scheduler before making requests. This setup includes creating or configuring Service Resources, Service Territory Members, Work Type Groups, Work Types, Work Type Group Members, and Service Territory Work Types. See [Set Up Salesforce Scheduler](#) for more information.

The appointment time slots are determined based on multiple factors, such as field values, scheduled appointments, absences, Scheduler Settings, and Scheduling Policies to determine available time slots. See [How Salesforce Scheduler Determines Available Time Slots](#) for more information.

The following factors are considered for returning start time and end time of resources.

Resource Availability

Determined using service territory member, service territory, work type, and account operating hours fields.

Resource Unavailability

Determined by resource absences, existing appointments that the resource is assigned to. The resource must be marked as a required resource for the appointment with a status that isn't in closed, canceled, or completed.

Appointment Start Time Interval in the Scheduling Policy

Appointment start time interval field in the Scheduling Policy is used to determine when the appointment can start. This interval can be 5, 10, 15, 20, 30, or 60. By default, it's set to 15.

Work Type Duration

The end time is calculated as start time + duration of the work type.



Note: If asset scheduling is enabled, the response also includes asset-based candidates.

Namespace

LxScheduler

Usage

The constructor for this class can't be called directly. Create an instance of this class using the [GetAppointmentCandidatesInputBuilder.build\(\)](#) method.

This example shows how to get a list of available appointment candidates based on `workTypeGroupId`:

```
//Build input for GetAppointmentCandidates API
    lxscheduler.GetAppointmentCandidatesInput input = new
lxscheduler.GetAppointmentCandidatesInputBuilder()
    .setWorkTypeGroupId('0VSRM0000000ABc4AM')
    .setTerritoryIds(new List<String>{'0HhRM0000000FXd0AM'})
    .setStartTime(System.now().format('yyyy-MM-dd\'T\'HH:mm:ssZ','America/New_York'))

    .setEndTime(System.now().addDays(5).format('yyyy-MM-dd\'T\'HH:mm:ssZ','America/New_York'))

    .setAccountId('001RM0000053iQgYAI')
    .setSchedulingPolicyId('0VrRM00000000Bx')
    .setApiVersion(Double.valueOf('50.0'))
    .build();

String response = lxscheduler.SchedulerResources.getAppointmentCandidates(input);
```

This example shows how to get a list of available appointment candidates based on `workType`:

```
//Build WorkType
    lxscheduler.WorkType workType = new lxscheduler.WorkTypeBuilder()
    .setId('08qRM00000000G9RYAU')
    .build();

    lxscheduler.GetAppointmentCandidatesInput input = new
lxscheduler.GetAppointmentCandidatesInputBuilder()
    .setWorkType(workType)
    .setTerritoryIds(new List<String>{'0HhRM0000000FXd0AM'})
    .setStartTime(System.now().format('yyyy-MM-dd\'T\'HH:mm:ssZ','America/New_York'))

    .setEndTime(System.now().addDays(5).format('yyyy-MM-dd\'T\'HH:mm:ssZ','America/New_York'))

    .setAccountId('001RM0000053iQgYAI')
    .setSchedulingPolicyId('0VrRM00000000Bx')
    .setApiVersion(Double.valueOf('50.0'))
    .build();

String response = lxscheduler.SchedulerResources.getAppointmentCandidates(input);
```

This example shows how to get a list of available candidate appointments based on `durationInMinutes` and without the `workTypeGroupId` or `workType` fields:

Important:

- When you're using shifts: You must specify `workTypeGroupId` or the ID of the work type. When you specify the ID of the work type, all other Builder parameters are optional and Scheduler retrieves their values from the database.

- When you're using operating hours: You don't need to specify `workTypeGroupId` or the ID of the work type. Scheduler applies `durationInMinutes` and all other builder parameters as you configure them.

```
//Build SkillRequirement
lxscheduler.SkillRequirement skillReq = new lxscheduler.SkillRequirementBuilder()
    .setSkillId('0C5RM0000004EzS0A2')
    .setSkillLevel(90)
    .build();

//Build WorkType
lxscheduler.WorkType workType = new lxscheduler.WorkTypeBuilder()
    .setDurationInMinutes(15)
    .setBlockTimeBeforeAppointmentInMinutes(5)
    .setBlockTimeAfterAppointmentInMinutes(5)
    .setTimeFrameStartInMinutes(10080)
    .setTimeFrameEndInMinutes(40320)
    .setOperatingHoursId('0OHRM0000000FmG4AU')
    .setSkillRequirements(new List<lxscheduler.SkillRequirement>{skillReq})
    .build();

lxscheduler.GetAppointmentCandidatesInput input = new
lxscheduler.GetAppointmentCandidatesInputBuilder()
    .setWorkType(workType)
    .setTerritoryIds(new List<String>{'0HhRM0000000FXd0AM'})
    .setSchedulingPolicyId('0VrRM00000000Bx')
    .setApiVersion(Double.valueOf('50.0'))
    .build();

String response = lxscheduler.SchedulerResources.getAppointmentCandidates(input);
```

This example shows a sample response of a list of available candidates:

```
[
  {
    "startTime": "2021-02-16T16:15:00.000+0000",
    "endTime": "2021-02-16T16:16:00.000+0000",
    "resources": [
      "0Hnxx0000004C9BCAU"
    ],
    "territoryId": "0Hhxx0000004C92CAE"
  },
  {
    "startTime": "2021-02-16T16:30:00.000+0000",
    "endTime": "2021-02-16T16:31:00.000+0000",
    "resources": [
      "0Hnxx0000004C9BCAU"
    ],
    "territoryId": "0Hhxx0000004C92CAE"
  },
]
```

GetAppointmentCandidatesInputBuilder Class

Contains methods to build an instance of the `lxscheduler.GetAppointmentCandidatesInput` class.

A Builder object is obtained by invoking one of the `GetAppointmentCandidatesInputBuilder` methods defined by the `GetAppointmentCandidatesInput` class.

Namespace

[LxScheduler](#)

GetAppointmentCandidatesInputBuilder Methods

The following are methods for `GetAppointmentCandidatesInputBuilder`.

build()

Returns an instance of the `lxscheduler.GetAppointmentCandidatesInput` object.

Signature

```
public lxscheduler.GetAppointmentCandidatesInput build()
```

Return Value

Type: [lxscheduler.GetAppointmentCandidatesInput](#)

setAccountId(accountId)

Sets the ID of the associated account for which you want to create the appointments.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setAccountId(String accountId)
```

Parameters

accountId
Type: String

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setAllowConcurrent(allowConcurrent)

Allows the scheduling of concurrent appointments.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setAllowConcurrent (Boolean allowConcurrent)
```

Parameters

allowConcurrent

Type: Boolean

If true, allows scheduling of concurrent appointments in a time slot. The default is false.

Available in API version 47.0 and later.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setApiVersion (apiVersion)

Sets the API version of the business logic for the `getAppointmentCandidates` method.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setApiVersion (Double apiVersion)
```

Parameters

apiVersion

Type: Double

Usage

The specified parameter must use the correct API version. For example, if API version is set to 45.0 and *filterByResources* is set (which is available in API version 51.0 and later), then this field is ignored. If no API version or incorrect API version is passed in the request body, by default the latest version is used.

 **Note:** The API is available since version 45.0.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setCorrelationId (correlationId)

Sets the correlation ID.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setCorrelationId (String correlationId)
```

Parameters

correlationId

Type: String

ID to pass custom information to the `ServiceResourceScheduleHandler` Apex interface. For example, you can use the correlation ID to identify the app, website, or any other external system that calls this Apex interface implementation. If you don't pass a custom value, a randomly generated identifier is passed. Available in API version 53.0 and later.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setEndTime(endTime)

Sets the scheduling end time.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setEndTime(String endTime)
```

Parameters

endTime

Type: String

The latest time that a time slot can end (inclusive).



Note: If end time is not specified, it defaults to 31 days.

Usage

The specified string should use the standard date format "[yyyy-MM-dd\T\HH:mm:ssZ]" in the local time zone. Defaults to the user's time zone.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setEngagementChannelTypeIds(engagementChannelTypeIds)

Sets an engagement channel type.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder  
setEngagementChannelTypeIds(List<String> engagementChannelTypeIds)
```

Parameters

engagementChannelTypeIds

Type: List<String>

The ID of the engagement channel type record. The availability of service resources is filtered based on the engagement channel type selected. This field is available in API version 56.0 and later.

 **Note:** This field supports only one engagement channel type ID.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

Usage

You can use engagement channel types only in these cases:

- The **Schedule Appointments Using Engagement Channels** setting is enabled in Salesforce Scheduler Settings in your Salesforce org.
- Shifts are defined in the scheduling policy. For more information on setting up shifts in scheduling policy, see [Define Shift Rules in Scheduling Policy](#).

 **Note:** Engagement channel types are not supported with operating-hours rules in the scheduling policy.

setFilterByResources (filterByResources)

Enables filtering resources using a comma-separated list of service resource IDs.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setFilterByResources (List<String>
filterByResources)
```

Parameters

filterByResources

Type: List<String>

Gets only eligible resources that are both in the list and in the selected service territory sorted by the order in which the resource IDs are passed. This field is available in API version 51.0 and later.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setResourceLimitApptDistribution (resourceLimitApptDistribution)

Sets the number of service resources to show during appointment scheduling.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder
setResourceLimitApptDistribution (Integer resourceLimitApptDistribution)
```

Parameters

resourceLimitApptDistribution

Type: Integer

Specify the maximum number of service resources that you want to show during appointment scheduling when appointment distribution is enabled. Available in API version 53.0 and later.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setSchedulingPolicyId(schedulingPolicyId)

Sets the ID of the AppointmentSchedulingPolicy object.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setSchedulingPolicyId(String schedulingPolicyId)
```

Parameters

schedulingPolicyId

Type: String

The ID of the AppointmentSchedulingPolicy object. If no scheduling policy is passed in the request body, the default configurations are used.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setStartTime(startTime)

Sets the scheduling start time to the specified time.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setStartTime(String startTime)
```

Parameters

startTime

Type: String

The earliest time that a time slot can begin (inclusive). You can also use a time from the past.

Usage

The specified string should use the standard date format "[yyyy-MM-dd'T\HH:mm:ssZ]" in the local time zone. Defaults to the user's time zone.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setTerritoryIds (territoryIds)

Sets the service territory IDs.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setTerritoryIds (List<String>
territoryIds)
```

Parameters

territoryIds

Type: List<String>

List of service territory IDs, where the work that is being requested is performed. This is a required field.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setWorkType (workType)

Sets the type of work to be performed.

Signature

```
public lxscheduler.GetAppointmentCandidatesInputBuilder setWorkType (lxscheduler.WorkType
workType)
```

Parameters

workType

Type: [lxscheduler.WorkType](#)

This method takes input as an instance of the `lxscheduler.WorkType` class. Build the instance of the input class using the `lxscheduler.WorkTypeBuilder` class.

Required if *workTypeGroupId* is not given. If id of the *workType* is given, the rest of *workType* fields are optional.

Usage

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

setWorkTypeGroupId (workTypeGroupId)

Sets the ID of the work type group.

Signature

```
public LxScheduler.GetAppointmentCandidatesInputBuilder setWorkTypeId(String
workTypeId)
```

Parameters

workTypeId

Type: String

The ID of the work type group containing the work types that are being performed. Required if *workType* is not given. If *workType* is given, then you must provide either *id* or *durationInMinutes*, but not both.

Return Value

Type: [LxScheduler.GetAppointmentCandidatesInputBuilder](#)

GetAppointmentSlotsInput Class

Contains information about the available appointment time slots for a resource based on given work type group and territories.

The appointment time slots are determined based on your Salesforce Scheduler data model configurations. Here are some prerequisites that you can consider while setting up data.

- Set up Salesforce Scheduler before making your requests. The setup includes creating or configuring Service Resources, Service Territory Members, Work Type Groups, Work Types, Work Type Group Members, and Service Territory Work Types. See [Manage Business Information in Salesforce Scheduler](#) for more information.
- Configure a work type mapped for each territory in the request body via Service Territory Work Type. Map the same work type to the work type group, via work type group member.

The following factors affect how time slots are calculated and returned.

- Timezones that differ across operating hours are handled and results are always returned in UTC.
- The resource must be marked as a required resource on the assigned resource object.
- The resource is considered unavailable if the status categories of the resource assigned to service appointments are other than Canceled, Cannot Complete, and Completed.
- Resource Absences of all types are considered unavailable from start to end.
- The following fields of Work Type records, if configured, are used to fine-tune time slot requirements. For more information, see [Create Work Types in Salesforce Scheduler](#).

Parameter	Description
Timeframe Start	Time slots sooner than current time + Timeframe Start aren't returned.
Timeframe End	Time slots later than current time + Timeframe End aren't returned.
Block Time Before Appointment	The time period before the appointment is considered as unavailable.
Block Time After Appointment	The time period after the appointment is considered as unavailable.
Operating Hours	The overlap of all operating hours from the account, work type, service territory, and service territory member are considered while determining time slots. For more information, see Set Up Operating Hours in Salesforce Scheduler .

- Only the time slots within the period of 31 days from the start date are returned.
- Salesforce Scheduler uses multiple factors, such as field values, scheduled appointments, absences, Scheduler Settings, and Scheduling Policies to determine available time slots, including the earliest and latest appointment slots. See [How Does Salesforce Scheduler Determine Available Time Slots](#).



Note: If asset scheduling is enabled, you can provide an asset-based service resource in `requiredResourceIds` to retrieve available timeslots for the asset resource.

Namespace

`LxScheduler`

Usage

The constructor for this class can't be called directly. Create an instance of this class using the `GetAppointmentSlotsInputBuilder.build()` method.

This example shows how to get a list of available time slots based on `workTypeId`:

```
//Build input for GetAppointmentSlots API
LxScheduler.GetAppointmentSlotsInput input = new
LxScheduler.GetAppointmentSlotsInputBuilder()
    .setWorkTypeId('0VSxx0000004C92GAE')
    .setTerritoryIds(new List<String>{'0Hhxx0000004C92CAE'})
    .setStartTime(System.now().format('yyyy-MM-dd\T\HH:mm:ssZ'))
    .setEndTime(System.now().addDays(1).format('yyyy-MM-dd\T\HH:mm:ssZ'))
    .setAccountId('001xx000003GYK0AAO')
    .setRequiredResourceIds(new List<String>{'0Hnxx0000004C92CAE'})
    .setSchedulingPolicyId('0Vrxx0000004CAE')
    .setApiVersion(Double.valueOf('48.0'))
    .build();

String response = LxScheduler.SchedulerResources.getAppointmentSlots(input);
```

This example shows how to get a list of available time slots based on `workType`:

```
//Build WorkType
LxScheduler.WorkType workType = new LxScheduler.WorkTypeBuilder()
    .setId('08qxx0000004C92AAE')
    .build();

LxScheduler.GetAppointmentSlotsInput input = new
LxScheduler.GetAppointmentSlotsInputBuilder()
    .setWorkType(workType)
    .setTerritoryIds(new List<String>{'0Hhxx0000004C92CAE'})
    .setStartTime(System.now().format('yyyy-MM-dd\T\HH:mm:ssZ'))
    .setEndTime(System.now().addDays(1).format('yyyy-MM-dd\T\HH:mm:ssZ'))
    .setAccountId('001xx000003GYK0AAO')
    .setRequiredResourceIds(new List<String>{'0Hnxx0000004C92CAE'})
    .setSchedulingPolicyId('0Vrxx0000004CAE')
    .setApiVersion(Double.valueOf('48.0'))
    .build();

String response = LxScheduler.SchedulerResources.getAppointmentSlots(input);
```

This example shows how to get a list of available time slots based on `durationInMinutes` and without `workTypeGroupId` or `workType` fields:

```
//Build WorkType
lxscheduler.WorkType workType = new lxscheduler.WorkTypeBuilder()
    .setDurationInMinutes(60)
    .build();

lxscheduler.GetAppointmentSlotsInput input = new
lxscheduler.GetAppointmentSlotsInputBuilder()
    .setWorkType(workType)
    .setTerritoryIds(new List<String>{'0Hhxx0000004C92CAE'})
    .setRequiredResourceIds(new List<String>{'0Hnxx0000004C92CAE'})
    .setApiVersion(Double.valueOf('48.0'))
    .build();

String response = lxscheduler.SchedulerResources.getAppointmentSlots(input);
```

This example shows a sample response of a list of available time slots:

```
[
  {
    "territoryId": "0Hhxx0000004C92CAE",
    "startTime": "2021-02-10T16:00:00.000+0000",
    "endTime": "2021-02-10T16:15:00.000+0000",
    "remainingAppointments": 1
  },
  {
    "territoryId": "0Hhxx0000004C92CAE",
    "startTime": "2021-02-10T16:15:00.000+0000",
    "endTime": "2021-02-10T16:30:00.000+0000",
    "remainingAppointments": 1
  },
]
```

GetAppointmentSlotsInputBuilder Class

Contains methods to build an instance of the `lxscheduler.GetAppointmentSlotsInput` class.

A Builder object is obtained by invoking one of the `GetAppointmentSlotsInputBuilder` methods defined by the `GetAppointmentSlotsInput` class.

Namespace

[LxScheduler](#)

GetAppointmentSlotsInputBuilder Methods

The following are methods for `GetAppointmentSlotsInputBuilder`.

build()

Returns an instance of the `lxscheduler.GetAppointmentSlotsInput` object.

Signature

```
public lxscheduler.GetAppointmentSlotsInput build()
```

Return Value

Type: [lxscheduler.GetAppointmentSlotsInput](#)

setAccountId(accountId)

Sets the ID of the associated account for which you want to create appointments.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setAccountId(String accountId)
```

Parameters

accountId

Type: String

The ID of the associated account.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setAllowConcurrentScheduling(allowConcurrentScheduling)

Allows the scheduling of concurrent appointments.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setAllowConcurrentScheduling(Boolean allowConcurrentScheduling)
```

Parameters

allowConcurrentScheduling

Type: Boolean

If true, allows scheduling of concurrent appointments in a time slot. If false, concurrent appointments are not allowed. The default is false. Available in API version 47.0 and later.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setApiVersion(apiVersion)

Sets the API version of the business logic for the `getAppointmentSlots` method.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setApiVersion(Double apiVersion)
```

Parameters

apiVersion
Type: Double

Usage

The specified parameter must use the correct API version. For example, if API version is set to 45.0 and *primaryResourceId* is set (which is available in API version 48.0 and later), then this field is ignored. If no API version or incorrect API version is passed in the request body, by default the latest version is used.

 **Note:** The API is available since version 45.0.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setCorrelationId(correlationId)

Sets the correlation ID.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setCorrelationId(String correlationId)
```

Parameters

correlationId
Type: String

ID to pass custom information to the `ServiceResourceScheduleHandler` Apex interface. For example, you can use the correlation ID to identify the app, website, or any other external system that calls this Apex interface implementation. If you don't pass a custom value, a randomly generated identifier is passed. Available in API version 53.0 and later.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setEndTime(endTime)

Sets the scheduling end time.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setEndTime(String endTime)
```


Parameters

endTime

Type: String

The latest time that a time slot can end (inclusive). If end time is not specified, it defaults to 31 days.

Usage

The specified string should use the standard date format "[yyyy-MM-dd'T\HH:mm:ssZ]" in the local time zone. Defaults to the user's time zone.

Return Value

Type: [Ixscheduler.GetAppointmentSlotsInputBuilder](#)

setEngagementChannelTypeIds (engagementChannelTypeIds)

Sets an engagement channel type.

Signature

```
public Ixscheduler.GetAppointmentSlotsInputBuilder  
setEngagementChannelTypeIds (List<String> engagementChannelTypeIds)
```

Parameters

engagementChannelTypeIds

Type: List<String>

The ID of the engagement channel type record. The availability of time slots is filtered based on the engagement channel type selected. This field is available in API version 56.0 and later.



Note: This field supports only one engagement channel type ID.

Return Value

Type: [Ixscheduler.GetAppointmentSlotsInputBuilder](#)

Usage

You can use engagement channel types only in these cases:

- The **Schedule Appointments Using Engagement Channels** setting is enabled in Salesforce Scheduler Settings in your Salesforce org.
- Shifts are defined in the scheduling policy. For more information on setting up shifts in scheduling policy, see [Define Shift Rules in Scheduling Policy](#).



Note: Engagement channel types are not supported with operating-hours rules in the scheduling policy.

setPrimaryResourceId(primaryResourceId)

Sets the ID of the primary resource.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setPrimaryResourceId(String  
primaryResourceId)
```

Parameters

primaryResourceId

Type: String

The ID of the primary resource in multi-resource scheduling. Required only when multi-resource scheduling is enabled. Available in API version 48.0 and later.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setRequiredResourceIds(requiredResourceIds)

Sets the resource IDs.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setRequiredResourceIds(List<String>  
requiredResourceIds)
```

Parameters

requiredResourceIds

Type: List<String>

List of resource IDs that must be available during the time slot. This is a required field.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setSchedulingPolicyId(schedulingPolicyId)

Sets the ID of the AppointmentSchedulingPolicy object.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setSchedulingPolicyId(String  
schedulingPolicyId)
```

Parameters

schedulingPolicyId

Type: String

If no scheduling policy is passed in the request body, the default configurations are used.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setStartTime(startTime)

Sets the scheduling start time.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setStartTime(String startTime)
```

Parameters

startTime

Type: String

The earliest time that a time slot can begin (inclusive). Defaults to the current time of the request, if empty.

Usage

The specified string should use the standard date format "[yyyy-MM-dd'T\HH:mm:ssZ]" in the local time zone. Defaults to the user's time zone.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setTerritoryIds(territoryIds)

Sets the IDs of service territories.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setTerritoryIds(List<String> territoryIds)
```

Parameters

territoryIds

Type: List<String>

List of IDs of service territories, where the work that is being requested is performed. This is a required field.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setWorkType (workType)

Sets the type of work to be performed.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setWorkType(lxscheduler.WorkType workType)
```

Parameters

workType

Type: [lxscheduler.WorkType](#)

This method takes input as an instance of the `lxscheduler.WorkType` class. Build the instance of the input class using the `lxscheduler.WorkTypeBuilder` class.

Required if *workTypeGroupId* is not given.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

setWorkTypeGroupId (workTypeGroupId)

Sets the ID of the work type group.

Signature

```
public lxscheduler.GetAppointmentSlotsInputBuilder setWorkTypeGroupId(String workTypeGroupId)
```

Parameters

workTypeGroupId

Type: String

The ID of the work type group containing the work types that are being performed.

Return Value

Type: [lxscheduler.GetAppointmentSlotsInputBuilder](#)

SchedulerResources Class

Contains methods that holds the business logic to get resources availability.

Namespace

[LxScheduler](#)

Implementation Considerations

Apex implementation of the methods in the `SchedulerResources` class should adhere to Apex Governor Limits. It includes synchronous heap size limit, synchronous CPU time limit, and synchronous concurrent transactions for long running transactions. To avoid governor limits, you must tune the input by reducing the time frame, limiting number of service resources, or limiting number of territories at a time. This will reduce the overall transaction time and response size of the implementation. For more information on standard Apex Governor Limits, see [Salesforce Developer Limits and Allocations Quick Reference](#).

Example

To get list of available service resources (appointment candidates):

```
String response = lxscheduler.SchedulerResources.getAppointmentsCandidates(input);
```

To get a list of available appointment time slots for a resource:

```
String response = lxscheduler.SchedulerResources.getAppointmentsSlots(input);
```

SchedulerResources Methods

The following are methods for `SchedulerResources`.

`getAppointmentsCandidates (getAppointmentsCandidatesInput)`

Returns a list of service resources based on work type group or work type and service territories.

Set up Salesforce Scheduler before making requests. This setup includes creating or configuring Service Resources, Service Territory Members, Work Type Groups, Work Types, Work Type Group Members, and Service Territory Work Types. See [Set Up Salesforce Scheduler](#) for more information.

The appointment time slots are determined based on multiple factors, such as field values, scheduled appointments, absences, Scheduler Settings, and Scheduling Policies to determine available time slots. See [How Salesforce Scheduler Determines Available Time Slots](#) for more information.

The following factors are considered for returning start time and end time of resources.

Resource Availability

Determined using service territory member, service territory, work type, and account operating hours fields.

Resource Unavailability

Determined by resource absences, existing appointments that the resource is assigned to. The resource must be marked as a required resource for the appointment with a status that isn't in closed, canceled, or completed.

Appointment Start Time Interval in the Scheduling Policy

Appointment start time interval field in the Scheduling Policy is used to determine when the appointment can start. This interval can be 5, 10, 15, 20, 30, or 60. By default, it's set to 15.

Work Type Duration

The end time is calculated as start time + duration of the work type.

 **Note:** If asset scheduling is enabled, the response also includes asset-based candidates.

Signature

```
public static String getAppointmentCandidates(lxscheduler.GetAppointmentCandidatesInput
getAppointmentCandidatesInput)
```

Parameters

getAppointmentCandidatesInput

Type: [lxscheduler.GetAppointmentCandidatesInput](#)

This method takes input as an instance of the `lxscheduler.GetAppointmentCandidatesInput` class. Build the instance of the input class using the `lxscheduler.GetAppointmentCandidatesInputBuilder` class.

Return Value

Type: String

getAppointmentSlots (getAppointmentSlotsInput)

Returns a list of available appointment time slots for a resource based on given work type group or work type and service territories.

The appointment time slots are determined based on your Salesforce Scheduler data model configurations. Here are some prerequisites that you can consider while setting up data.

- Set up Salesforce Scheduler before making your requests. The setup includes creating or configuring Service Resources, Service Territory Members, Work Type Groups, Work Types, Work Type Group Members, and Service Territory Work Types. See [Manage Business Information in Salesforce Scheduler](#) for more information.
- Configure a work type mapped for each territory in the request body via Service Territory Work Type. Map the same work type to the work type group, via work type group member.

The following factors affect how time slots are calculated and returned.

- Timezones that differ across operating hours are handled and results are always returned in UTC.
- The resource must be marked as a required resource on the assigned resource object.
- The resource is considered unavailable if the status categories of the resource assigned to service appointments are other than Canceled, Cannot Complete, and Completed.
- Resource Absences of all types are considered unavailable from start to end.
- The following fields of Work Type records, if configured, are used to fine-tune time slot requirements. For more information, see [Create Work Types in Salesforce Scheduler](#).

Parameter	Description
Timeframe Start	Time slots sooner than current time + Timeframe Start aren't returned.
Timeframe End	Time slots later than current time + Timeframe End aren't returned.
Block Time Before Appointment	The time period before the appointment is considered as unavailable.
Block Time After Appointment	The time period after the appointment is considered as unavailable.

Parameter	Description
Operating Hours	The overlap of all operating hours from the account, work type, service territory, and service territory member are considered while determining time slots. For more information, see Set Up Operating Hours in Salesforce Scheduler .

- Only the time slots within the period of 31 days from the start date are returned.
- Salesforce Scheduler uses multiple factors, such as field values, scheduled appointments, absences, Scheduler Settings, and Scheduling Policies to determine available time slots, including the earliest and latest appointment slots. See [How Does Salesforce Scheduler Determine Available Time Slots](#).



Note: If asset scheduling is enabled, you can provide an asset-based service resource in `requiredResourceIds` to retrieve available timeslots for the asset resource.

Signature

```
public static String getAppointmentSlots(lxscheduler.GetAppointmentSlotsInput
getAppointmentSlotsInput)
```

Parameters

getAppointmentSlotsInput

Type: [lxscheduler.GetAppointmentSlotsInput](#)

This method takes input as an instance of the `lxscheduler.GetAppointmentSlotsInput` class. Build the instance of the input class using the `lxscheduler.GetAppointmentSlotsInputBuilder` class.

Return Value

Type: String

setAppointmentCandidatesMock (expectedResponse)

Sets a mock object when running tests for the `getAppointmentCandidates` method.

This constructor is intended for test usage and throws an exception if used outside of the Apex test context.

Signature

```
public static void setAppointmentCandidatesMock(String expectedResponse)
```

Parameters

expectedResponse

Type: String

Return Value

Type: void

This example shows a sample implementation of the `GetAppointmentCandidates` class:

```

public class AppointmentCandidateService {
    //Instance members for parsing
    public String startTime;
    public String endTime;
    public List<String> resources;
    public String territoryId;
    public static List<AppointmentCandidateService> getAppointmentCandidates(){
        //Build input for GetAppointmentCandidates API
        lxscheduler.GetAppointmentCandidatesInput input = new
lxscheduler.GetAppointmentCandidatesInputBuilder()
            .setWorkTypeGroupId('0VSRM00000000AGT4A2')
            .setTerritoryIds(new List<String>{'0HhRM00000000G8W0AU'})
            .setStartTime(System.now().format('yyyy-MM-dd\'T\'HH:mm:ssZ','America/Los_Angeles'))

.setEndTime(System.now().addDays(2).format('yyyy-MM-dd\'T\'HH:mm:ssZ','America/Los_Angeles'))

            .setSchedulingPolicyId('0VrRM00000000D0')
            .setApiVersion(Double.valueOf('50.0'))
            .build();
        List<AppointmentCandidateService> vList =
parse(lxscheduler.SchedulerResources.getAppointmentCandidates(input));
        return vList;
    }
    private static List<AppointmentCandidateService> parse(String json) {
        return (List<AppointmentCandidateService>) System.JSON.deserialize(json,
List<AppointmentCandidateService>.class);
    }
}

```

This example shows how to set a sample mock using the `setAppointmentCandidatesMock` method:

```
@isTest
private class GetAppointmentCandidatesTest {
    static testMethod void getAppCandidatesTest() {
        String expectedResponse = '[' +
            '{' +
            '    \"startTime\": \"2021-03-18T16:00:00.000+0000\",'
+
            '    \"endTime\": \"2021-03-18T17:00:00.000+0000\",'
+
            '    \"resources\": [' +
            '        \"0HnRM0000000Fxxv0AE\"' +
            '    ],' +
            '    \"territoryId\": \"0HhRM00000000G8W0AU\"' +
            '    },' +
            '{' +
            '    \"startTime\": \"2021-03-18T19:00:00.000+0000\",'
+
            '    \"endTime\": \"2021-03-18T20:00:00.000+0000\",'
```



```

        '        \"resources\": [' +
        '            \"0HhRM0000000Fxxv0AE\"' +
        '        ],' +
        '        \"territoryId\": \"0HhRM0000000G8W0AU\"' +
        '    }' +
        '];'

lxscheduler.SchedulerResources.setAppointmentCandidatesMock(expectedResponse);

Test.startTest();
    List<AppointmentCandidateService> candidateList =
AppointmentCandidateService.getAppointmentCandidates();
    System.assertEquals(2, candidateList.size(), 'Should return only 2 records!');
    Test.stopTest();
}
}

```

setAppointmentSlotsMock(expectedResponse)

Sets a mock object when running tests for the `getAppointmentSlots` method.

This constructor is intended for test usage and throws an exception if used outside of the Apex test context.

Signature

```
public static void setAppointmentSlotsMock(String expectedResponse)
```

Parameters

expectedResponse

Type: String

Return Value

Type: void

SkillRequirement Class

Contains information about the set of skills that are required to complete a particular task for a work type.

Namespace

[LxScheduler](#)

Usage

The constructor for this class can't be called directly. Create an instance of this class using the [SkillRequirementBuilder.build\(\)](#) method.

SkillRequirementBuilder Class

Contains methods to build an instance of the `lxscheduler.SkillRequirement` class.

A Builder object is obtained by invoking one of the `SkillRequirementBuilder` methods defined by the `SkillRequirement` class.

Namespace

`LxScheduler`

SkillRequirementBuilder Methods

The following are methods for `SkillRequirementBuilder`.

build()

Returns an instance of the `lxscheduler.SkillRequirement` object.

Signature

```
public lxscheduler.SkillRequirement build()
```

Return Value

Type: `lxscheduler.SkillRequirement`

setSkillId(skillId)

Sets the skill that is required to complete a particular task for a work type. This is a required field.

Signature

```
public lxscheduler.SkillRequirementBuilder setSkillId(String skillId)
```

Parameters

skillId

Type: String

Return Value

Type: `lxscheduler.SkillRequirementBuilder`

setSkillLevel(skillLevel)

Sets the level of the skill that is required to complete a particular task for a work type

Signature

```
public lxscheduler.SkillRequirementBuilder setSkillLevel(Double skillLevel)
```

Parameters

skillLevel

Type: Double

The skill levels can range from zero to 99.99. Depending on your business needs, you might want the skill level to reflect years of experience, certification levels, or license classes.

Return Value

Type: [lxscheduler.SkillRequirementBuilder](#)

WorkType Class

Contains information about the type of work to be performed.

Namespace

[LxScheduler](#)

Usage

The constructor for this class can't be called directly. Create an instance of this class using the [WorkTypeBuilder.build\(\)](#) method.

WorkTypeBuilder Class

Contains methods to build an instance of the `lxscheduler.WorkType` class.

A Builder object is obtained by invoking one of the `WorkTypeBuilder` methods defined by the `WorkType` class.

Namespace

[LxScheduler](#)

WorkTypeBuilder Methods

The following are methods for `WorkTypeBuilder`.

build()

Returns an instance of the `lxscheduler.WorkType` object.

Signature

```
public lxscheduler.WorkType build()
```

Return Value

Type: [lxscheduler.WorkType](#)

setBlockTimeAfterAppointmentInMinutes (blockTimeAfterAppointmentInMinutes)

Sets the time period, in minutes.

Signature

```
public lxscheduler.WorkTypeBuilder setBlockTimeAfterAppointmentInMinutes(Integer  
blockTimeAfterAppointmentInMinutes)
```

Parameters

blockTimeAfterAppointmentInMinutes

Type: Integer

The time period after the appointment is considered unavailable.

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setBlockTimeBeforeAppointmentInMinutes (blockTimeBeforeAppointmentInMinutes)

Sets the time period, in minutes.

Signature

```
public lxscheduler.WorkTypeBuilder setBlockTimeBeforeAppointmentInMinutes(Integer  
blockTimeBeforeAppointmentInMinutes)
```

Parameters

blockTimeBeforeAppointmentInMinutes

Type: Integer

The time period before the appointment is considered as unavailable.

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setDurationInMinutes (durationInMinutes)

Sets the event length.

Signature

```
public lxscheduler.WorkTypeBuilder setDurationInMinutes(Integer durationInMinutes)
```

Parameters

durationInMinutes

Type: Integer

Contains the event length, in minutes. Required if *id* is not given.

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setId(id)

Sets the ID of the work type to the specified ID.

Signature

```
public lxscheduler.WorkTypeBuilder setId(String id)
```

Parameters

id

Type: String

The ID of the work type. Required if you're using shifts or if *durationInMinutes* is not given.

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setOperatingHoursId(operatingHoursId)

Sets the overlap of operating hours.

Signature

```
public lxscheduler.WorkTypeBuilder setOperatingHoursId(String operatingHoursId)
```

Parameters

operatingHoursId

Type: String

The overlap of all operating hours from the account, work type, service territory, and service territory member are considered while determining time slots.

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setSkillRequirements(skillRequirements)

Sets the skills that are required to complete a particular task for a work type.

Signature

```
public lxscheduler.WorkTypeBuilder  
setSkillRequirements(List<lxscheduler.SkillRequirement> skillRequirements)
```

Parameters

skillRequirements

Type: List<lxscheduler.SkillRequirement>

This method takes input as an instance of the `lxscheduler.SkillRequirement` class. Build the instance of the input class using the `lxscheduler.SkillRequirementBuilder` class.

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setTimeFrameEndInMinutes (timeFrameEndInMinutes)

Sets the end of the timeframe.

Signature

```
public lxscheduler.WorkTypeBuilder setTimeFrameEndInMinutes(Integer  
timeFrameEndInMinutes)
```

Parameters

timeFrameEndInMinutes

Type: Integer

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

setTimeFrameStartInMinutes (timeFrameStartInMinutes)

Sets the beginning of the timeframe.

Signature

```
public lxscheduler.WorkTypeBuilder setTimeFrameStartInMinutes(Integer  
timeFrameStartInMinutes)
```

Parameters

timeFrameStartInMinutes

Type: Integer

Return Value

Type: [lxscheduler.WorkTypeBuilder](#)

CHAPTER 12 Build Custom Appointment Booking Experiences Using Salesforce Scheduler APIs

In this chapter ...

- [Schedule an Anonymous Appointment](#)
- [Schedule Anonymous Appointments with Appointment Distribution](#)
- [Schedule Appointments by Selecting Location First](#)
- [Modify an Anonymous Appointment](#)
- [Create a Single-Resource Appointment](#)
- [Modify a Service Appointment](#)
- [Create a Multi-Resource Appointment](#)
- [Modify a Multi-Resource Service Appointment](#)
- [Create a Concurrent Appointment](#)
- [Schedule Appointments by Using Sharing Availability](#)
- [Schedule Appointments with a Dummy Resource and Reassign to Actual Resources](#)

This section demonstrates how to build a seamless appointment booking experience using our Salesforce Scheduler APIs. With these use cases, developers can learn how to build custom scheduling apps with the Salesforce Scheduler APIs.


The sample application currently shows an example implementation for simple appointment booking, automatic resource assignment, and anonymous appointment booking. It also shows an example of an appointment booking modification. These implementations help development teams understand how to use the APIs and begin their own journey of building amazing appointment booking experiences.

Schedule an Anonymous Appointment

Build a scheduling application using Salesforce Scheduler APIs to book an anonymous appointment by assigning service resources automatically. Account users and guest users don't always know the name of the service resource, and sometimes they don't care which resource they're assigned to. You can automatically assign a service resource based on the time slot that a user selects. To protect users' privacy, you can also hide their names on the review appointment page.

Before you can use the scheduler developer resources to build the app, set up Salesforce Scheduler for your organization. For more information, see [Set Up Salesforce Scheduler](#).

These steps provide a high-level overview of how you can create an app to let users schedule appointments without selecting service resources.

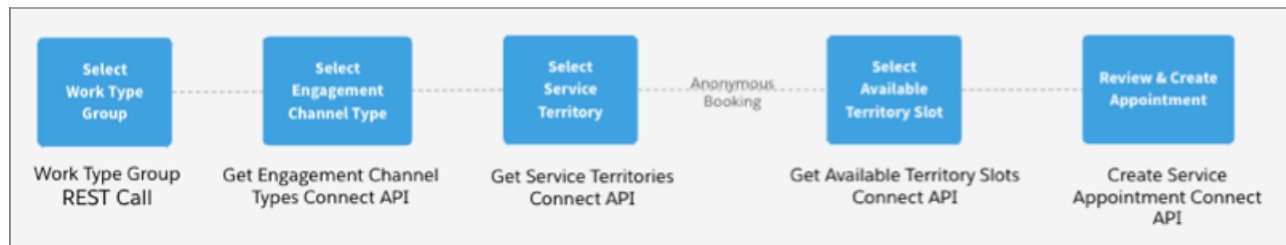

1. [Authenticate with a Connected App](#)

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

2. [Get Work Type Groups](#)

A work type group represents a general appointment category or topic, such as a home loan or investment. Use the `Query()` method on the `WorkTypeGroup` object to retrieve a list of work type groups.

3. [Get Engagement Channels](#)

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

4. [Get Service Territories](#)

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Use the `service-territories` Connect API to fetch a list of service territories based on a work type group or work type.

5. [Get Available Territory Slots](#)

A time slot represents a period in a day when an appointment can be scheduled. Use the `available-territory-slots` Connect API to fetch the consolidated availability of each service resource within the selected territory.

6. [Create Service Appointments](#)

A service appointment represents an appointment booked through Salesforce Scheduler. Make a POST request on the `service-appointments` Connect API to create the appointment.

Authenticate with a Connected App

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

 **Note:** To build a custom appointment scheduling application using Salesforce Scheduler APIs for prospects or unauthenticated users, you must build it using a logged-in user. For example, an integration user or an administrator.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

Get Work Type Groups

A work type group represents a general appointment category or topic, such as a home loan or investment. Use the `Query()` method on the `WorkTypeGroup` object to retrieve a list of work type groups.

1. Create a page in your app where you can show the work type groups from your org.
2. Use the `Query()` request to retrieve work type groups. For more information, see [Execute a SOQL Query](#).

Sample Request

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+Id,+Name+From+WorkTypeGroup+Where+isActive+=+true+ORDER+BY+NAME+DESC
```


You can use the `toLabel` method to translate the SOQL query results in the language of the user. For more information, see [Translate SOQL Query Results](#) on page 130.

Sample Response

The method returns the available work type groups from your org.

```
{
  "totalSize" : 3,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "WorkTypeGroup",
      "url" : "/services/data/v59.0/subjects/WorkTypeGroup/0VSS700000000sLOAQ"
    },
    "Id" : "0VSS700000000sLOAQ",
    "Name" : "Wealth Management"
  }, {
    "attributes" : {
      "type" : "WorkTypeGroup",
      "url" : "/services/data/v59.0/subjects/WorkTypeGroup/0VSS700000000sQOAQ"
    },
    "Id" : "0VSS700000000sQOAQ",
    "Name" : "Loans"
  }, {
    "attributes" : {
      "type" : "WorkTypeGroup",
      "url" : "/services/data/v59.0/subjects/WorkTypeGroup/0VSS700000000sVOAQ"
    },
    "Id" : "0VSS700000000sVOAQ",
    "Name" : "Banking"
  } ]
}
```

3. Parse the JSON response, and display the work type groups on a page in your app so that users can select a work type group during appointment scheduling. Here's how that page can look.

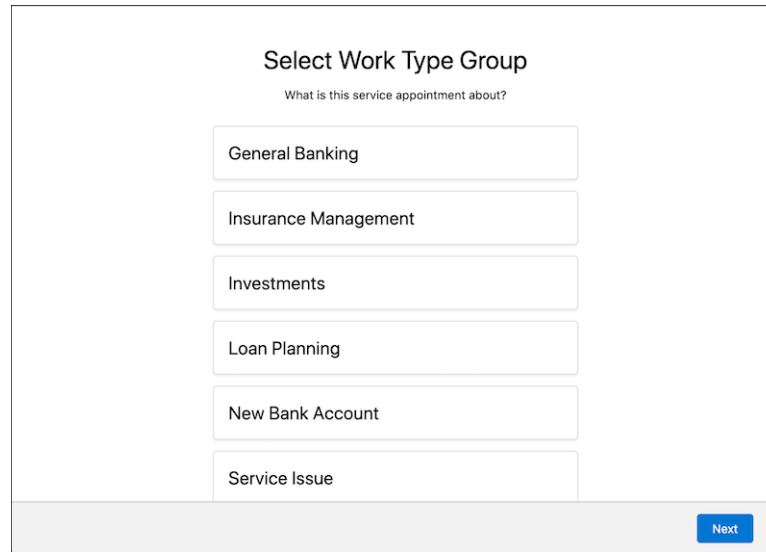

On the next page in your app, you can provide users an option to search for service territories.

Get Engagement Channels

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

Before using engagement channels for scheduling appointments:

- Enable engagement channels in the Salesforce Scheduler Settings of your instance. See [Enable the Scheduling Appointments Using Engagement Channels Setting](#).
 - Set up engagement channels, including setting the required access and creating engagement channels. See [Engagement Channels](#).
 - Create the Shift Engagement Channel and Engagement Channel Work Type records for the applicable shifts.
 - Define Shift Rules in the scheduling policy. See [Define Shift Rules in Scheduling Policy](#).
1. Create a page to show the engagement channel types. Salesforce Scheduler shows service resources and resource time slots based on the channel that a user selects when creating an appointment.
 2. Make a GET request on the [engagement-channel-types](#) Connect API.

Sample Request

Filter the engagement channel types by the `workTypeGroupId` selected in the previous step.

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/engagement-channel-types?workTypeGroupIds=0VSS700000000sVOAQ
```

 **Note:** You can filter the engagement channel type results by `workTypeGroupIds` or `workTypeIds`.

Sample Response

The request returns the engagement channels for the `workTypeGroupId` specified in the request.

```
{
  "result" : {
    "engagementChannelTypes" : [ {
      "contactPointType" : "Video",
```

```

    "id" : "0eFS70000004CGAMA2",
    "name" : "EngagementChannel2",
    "workTypeGroupIds" : [ ],
    "workTypeIds" : [ ]
  }, {
    "contactPointType" : "InPerson",
    "id" : "0eFS70000004CG5MAM",
    "name" : "EngagementChannel1",
    "workTypeGroupIds" : [ ],
    "workTypeIds" : [ ]
  }, {
    "contactPointType" : "Video",
    "id" : "0eFS70000004CGFMA2",
    "name" : "EngagementChannel3",
    "workTypeGroupIds" : [ ],
    "workTypeIds" : [ ]
  } ]
}

```

3. Parse the JSON response, and show the engagement channel types on the page that you created.

Your users can select an engagement channel type for the appointment from the page.

Get Service Territories

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Use the `service-territories` Connect API to fetch a list of service territories based on a work type group or work type.

1. Create a page where you can provide users an option to search for service territories. Here's how a Select Service Territory page can look.

2. Make a GET request on the `service-territories` on page 162 Connect API by passing the user-entered search values and the selected work type group ID as the input parameters in the query string. You can also use a combination of the radius, latitude, longitude, sortBy, and sortOrder parameters to filter and sort the service territories.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-territories
```

Sample Request

This sample GET request specifies the query string on the service territories Connect API.

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-territories?workTypeGroupId=0VSS700000000SVQAQ&latitude=44.357422&longitude=-73.193952&radius=5&radiusUnit=mi&sortBy=Distance&sortOrder=asc
```

Sample Response

The API returns the available service territories based on the passed work type group ID and search criteria.

```
{
  "result": {
    "serviceTerritories": [
      {
        "city": "Charlotte",
        "country": "United States",
        "id": "0HhS700000001DYKAY",
        "latitude": 44.357422,
        "longitude": -73.193952,
        "name": "Spear Street Branch",
        "operatingHoursId": "0OHS700000001H1OAI",
        "postalCode": "05445",
        "state": "VT",
        "street": "121 Spear Street"
      }
    ]
  }
}
```

3. Parse the JSON response, and show the available service territories on the Select Service Territory page so that the user can select a service territory.

Here's a Select Service Territory page showing the available service territories.

Select Service Territory

Enter an address, city, or ZIP code

1 market

Within 5 miles

- 1 Market Street
Brantford, ON, Canada
- 1 Market Street
Toronto, ON, Canada
- 1 Market Street
San Francisco, CA, USA
- 1 Market Place
San Diego, CA, USA

Previous Next

Here's how the service territory details are displayed when the user selects a service territory.

Select Service Territory		
Enter an address, city, or ZIP code		
1 Market Street, San Francisco, CA, USA		Within 5 miles
powered by Google		
0.05 mi		
Market Street Branch	Hours	
1 Market Street	Monday	8:00 AM - 6:00 PM
San Francisco 94105	Tuesday	8:00 AM - 6:00 PM
CA	Wednesday	8:00 AM - 6:00 PM
United States	Thursday	8:00 AM - 6:00 PM
	Friday	8:00 AM - 6:00 PM
		Previous Next

On the next page in your app, you can show the available time slots for the appointment.

Get Available Territory Slots

A time slot represents a period in a day when an appointment can be scheduled. Use the `available-territory-slots` Connect API to fetch the consolidated availability of each service resource within the selected territory.

1. Create a page in your app where you can show the available time slots based on the work type group and service territory.
2. Make a POST request on the [available-territory-slots](#) on page 147 Connect API by passing the required `workTypeGroupId` and `territoryIds` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/available-territory-slots
```

For an Existing User (Account)

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body. The preference is enforced when the [Enforce Account's Visiting Hours policy rule](#) is enabled.

Sample Request

```
{
  "accountId" : "001S7000001pFlJIAU",
  "workTypeGroupId" : "0VSS700000000sVOAQ",
  "territoryIds" : [
    "0HhS700000001DYKAY"
  ],
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ]
}
```

Sample Response

The API returns the available time slots and service resources.

```
{
  "result" : {
    "territorySlots" : [ {
      "slots" : [{
        "endTime" : "2023-11-29T20:00:00.000Z",
```

```

    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T19:00:00.000Z"
  }, {
    "endTime" : "2023-11-29T20:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T19:15:00.000Z"
  }, {
    "endTime" : "2023-11-29T20:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T19:30:00.000Z"
  }, {
    "endTime" : "2023-11-29T20:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T19:45:00.000Z"
  }, {
    "endTime" : "2023-11-29T21:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T20:00:00.000Z"
  }, {
    "endTime" : "2023-11-29T21:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T20:15:00.000Z"
  }, {
    "endTime" : "2023-11-29T21:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T20:30:00.000Z"
  }, {
    "endTime" : "2023-11-29T21:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T20:45:00.000Z"
  }, {
    "endTime" : "2023-11-29T22:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T21:00:00.000Z"
  }, {
    "endTime" : "2023-11-29T22:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T21:15:00.000Z"
  }, {
    "endTime" : "2023-11-29T22:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T21:30:00.000Z"
  }, {

```

```

        "endTime" : "2023-11-29T22:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T21:45:00.000Z"
    }, {
        "endTime" : "2023-11-29T23:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T22:00:00.000Z"
    }, {
        "endTime" : "2023-11-29T23:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T22:15:00.000Z"
    }, {
        "endTime" : "2023-11-29T23:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T22:30:00.000Z"
    }, {
        "endTime" : "2023-11-29T23:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T22:45:00.000Z"
    }, {
        "endTime" : "2023-11-30T00:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T23:00:00.000Z"
    }, {
        "endTime" : "2023-11-30T00:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T23:15:00.000Z"
    }, {
        "endTime" : "2023-11-30T00:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T23:30:00.000Z"
    }, {
        "endTime" : "2023-11-30T00:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T23:45:00.000Z"
    }, {
        "endTime" : "2023-11-30T01:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T00:00:00.000Z"
    }, {
        "endTime" : "2023-11-30T01:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T00:15:00.000Z"
    }

```

```

    }, {
      "endTime" : "2023-11-30T01:30:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T00:30:00.000Z"
    }, {
      "endTime" : "2023-11-30T01:45:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T00:45:00.000Z"
    }, {
      "endTime" : "2023-11-30T02:00:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T01:00:00.000Z"
    }, {
      "endTime" : "2023-11-30T18:00:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T17:00:00.000Z"
    }, {
      "endTime" : "2023-11-30T18:15:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T17:15:00.000Z"
    }, {
      "endTime" : "2023-11-30T18:30:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T17:30:00.000Z"
    }, {
      "endTime" : "2023-11-30T18:45:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T17:45:00.000Z"
    }, {
      "endTime" : "2023-11-30T19:00:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T18:00:00.000Z"
    }, {
      "endTime" : "2023-11-30T19:15:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T18:15:00.000Z"
    }, {
      "endTime" : "2023-11-30T19:30:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],
      "startTime" : "2023-11-30T18:30:00.000Z"
    }, {
      "endTime" : "2023-11-30T19:45:00.000Z",
      "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
      "resources" : [ "0HnS700000002jAKAQ" ],

```



```

        "startTime" : "2023-11-30T18:45:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:00:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:15:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:30:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:45:00.000Z"
    }, {
        "endTime" : "2023-11-30T21:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T20:00:00.000Z"
    }, {
        "endTime" : "2023-11-30T21:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T20:15:00.000Z"
    }
  ],
  "territoryId" : "0HhS700000001DYKAY"
} ]
}

```

For a Guest User (Lead)

Sample Request

```

{
  "workTypeGroupId" : "0VSS700000000sVOAQ",
  "territoryIds" : [
    "0HhS700000001DYKAY"
  ],
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ]
}

```

Sample Response

The API returns the available time slots and service resources.

```
{
  "result" : {
    "territorySlots" : [ {
      "slots" : [{
        "endTime" : "2023-11-29T20:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T19:00:00.000Z"
      }, {
        "endTime" : "2023-11-29T20:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T19:15:00.000Z"
      }, {
        "endTime" : "2023-11-29T20:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T19:30:00.000Z"
      }, {
        "endTime" : "2023-11-29T20:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T19:45:00.000Z"
      }, {
        "endTime" : "2023-11-29T21:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T20:00:00.000Z"
      }, {
        "endTime" : "2023-11-29T21:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T20:15:00.000Z"
      }, {
        "endTime" : "2023-11-29T21:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T20:30:00.000Z"
      }, {
        "endTime" : "2023-11-29T21:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T20:45:00.000Z"
      }, {
        "endTime" : "2023-11-29T22:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-29T21:00:00.000Z"
      }, {
        "endTime" : "2023-11-29T22:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
```

```

    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T21:15:00.000Z"
  }, {
    "endTime" : "2023-11-29T22:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T21:30:00.000Z"
  }, {
    "endTime" : "2023-11-29T22:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T21:45:00.000Z"
  }, {
    "endTime" : "2023-11-29T23:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T22:00:00.000Z"
  }, {
    "endTime" : "2023-11-29T23:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T22:15:00.000Z"
  }, {
    "endTime" : "2023-11-29T23:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T22:30:00.000Z"
  }, {
    "endTime" : "2023-11-29T23:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T22:45:00.000Z"
  }, {
    "endTime" : "2023-11-30T00:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T23:00:00.000Z"
  }, {
    "endTime" : "2023-11-30T00:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T23:15:00.000Z"
  }, {
    "endTime" : "2023-11-30T00:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T23:30:00.000Z"
  }, {
    "endTime" : "2023-11-30T00:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS700000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-29T23:45:00.000Z"
  }, {
    "endTime" : "2023-11-30T01:00:00.000Z",

```

```

    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T00:00:00.000Z"
  }, {
    "endTime" : "2023-11-30T01:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T00:15:00.000Z"
  }, {
    "endTime" : "2023-11-30T01:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T00:30:00.000Z"
  }, {
    "endTime" : "2023-11-30T01:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T00:45:00.000Z"
  }, {
    "endTime" : "2023-11-30T02:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T01:00:00.000Z"
  }, {
    "endTime" : "2023-11-30T18:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T17:00:00.000Z"
  }, {
    "endTime" : "2023-11-30T18:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T17:15:00.000Z"
  }, {
    "endTime" : "2023-11-30T18:30:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T17:30:00.000Z"
  }, {
    "endTime" : "2023-11-30T18:45:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T17:45:00.000Z"
  }, {
    "endTime" : "2023-11-30T19:00:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T18:00:00.000Z"
  }, {
    "endTime" : "2023-11-30T19:15:00.000Z",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-11-30T18:15:00.000Z"
  }, {

```

```

        "endTime" : "2023-11-30T19:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T18:30:00.000Z"
    }, {
        "endTime" : "2023-11-30T19:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T18:45:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:00:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:15:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:30:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:30:00.000Z"
    }, {
        "endTime" : "2023-11-30T20:45:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T19:45:00.000Z"
    }, {
        "endTime" : "2023-11-30T21:00:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T20:00:00.000Z"
    }, {
        "endTime" : "2023-11-30T21:15:00.000Z",
        "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
        "resources" : [ "0HnS700000002jAKAQ" ],
        "startTime" : "2023-11-30T20:15:00.000Z"
    }
    ],
    "territoryId" : "0HhS700000001DYKAY"
} ]
}

```

3. Parse the JSON response, and show only the available time slots on the page. Don't show the service resources to maintain their privacy.

Here's how a page showing the available time slots can look.

4. Write custom code to randomly select a service resource for the appointment based on the time slot that the user selects. This sample code automatically selects a service resource and stores it in `serviceResourceId` property.
5. Pass the list of service resources available for the selected time slot in `resources`.

On the next page in your app, you can show the appointment details for the user to review and create the appointment.

Create Service Appointments

A service appointment represents an appointment booked through Salesforce Scheduler. Make a POST request on the `service-appointments` Connect API to create the appointment.

1. Create a page where the user can review the appointment details and create the appointment. Here's how a Review Service Appointment page can look.



Note: To keep the service resource private, hide the resource's name on the review appointment page.

Review Service Appointment

General Information

Work Type Banking Account Ramsung Company Address 121 Spear Street Charlotte, VT 05445 United States Additional Information Engagement Channel Type In Person	Description Parent Record Ramsung Company Subject Comment
---	--

2. Link the Next button to a POST request on the [service-appointments](#) on page 156 Connect API to create the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

Set `IsAnonymousBooking` to `true` to indicate that the appointment is anonymous.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS700000001DYKAY",
    "parentRecordId": "001S7000001pFlJIAU",
    "schedStartTime": "2023-11-29T20:00:00.000Z",
    "schedEndTime": "2023-11-29T21:00:00.000Z",
    "street": "121 Spear Street",
    "city": "Charlotte",
    "state": "VT",
    "postalCode": "05445",
    "country": "United States",
    "engagementChannelTypeId": "0eFS70000004CG5MAM",
    "extendedFields": [ {
      "name": "IsAnonymousBooking",
      "value": "true"
    } ]
  }
}
```

```
    } ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS700000002jAKAQ",
      "isRequiredResource": true,
      "extendedFields" : []
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result" : {
    "assignedResourceIds" : [ "03rS700000000oMIAQ" ],
    "serviceAppointmentId" : "08pS700000001G3IAI"
  }
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

Set `IsAnonymousBooking` to `true` to indicate that the appointment is anonymous.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS700000001DYKAY",
    "schedStartTime" : "2023-11-29T22:15:00.000Z",
    "schedEndTime": "2023-11-29T23:15:00.000Z",
    "street": "121 Spear Street",
    "city": "Charlotte",
    "state": "VT",
    "postalCode": "05445",
    "country": "United States",
    "engagementChannelTypeId" : "0eFS700000004CG5MAM",
    "extendedFields" : [ {
      "name": "IsAnonymousBooking",
      "value": "true"
    } ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS700000002jGKAQ",
      "isRequiredResource": true,
      "extendedFields" : []
    }
  ],
  "lead": {
    "firstName": "Tom",
    "lastName": "Smith",
    "phone": "(555) 555-1234",
  }
}
```



```
{
  "email": "info@salesforce.com",
  "company": "MedLife, Inc.",
  "extendedFields" : []
}
```


Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result" : {
    "assignedResourceIds" : [ "03rS700000000oRIAQ" ],
    "parentRecordId" : "00QS7000000sfcnMAA",
    "serviceAppointmentId" : "08pS700000001G8IAI"
  }
}
```

Create a page to show confirmation when the service appointment is created successfully.

Here's how a sample confirmation page can look.

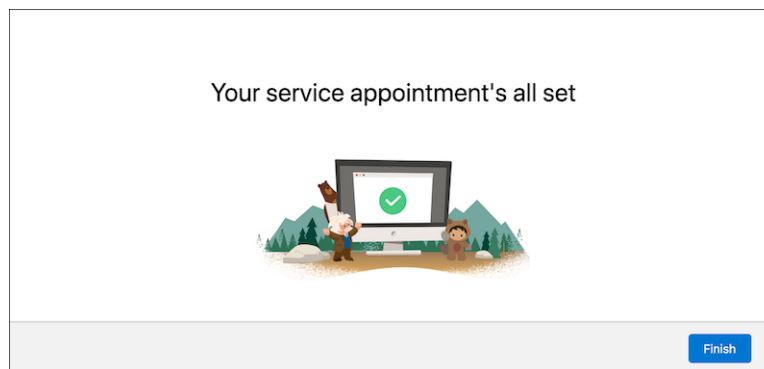

Schedule Anonymous Appointments with Appointment Distribution

Build a scheduling app by using Salesforce Scheduler APIs to book anonymous service appointments via phone calls and video conferences within a large, virtual service territory. For territories with too many associated resources, use Appointment Distribution to show only the least consumed resources.


Before you begin:

Before building the app, set up Salesforce Scheduler for your org. For more information, see [Set Up Salesforce Scheduler](#).

Appointment distribution helps to maintain balance and avoid situations where one resource is overloaded with all the meetings while others' calendars remain free.

About this task:

Here's a high-level overview of how to create an app to schedule anonymous appointments.

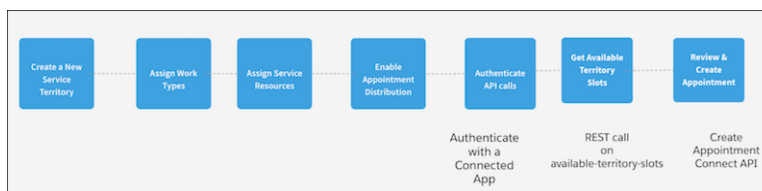

For more information on modifying Appointment Distribution, see *Modify an Anonymous Appointment*.

1. [Create a Service Territory](#)

Create a large, virtual service territory using Salesforce Scheduler and add service resources. Set the new territory as the secondary territory for service resources. You can assign a relatively large number of service resources to the territory. Use the territory exclusively for virtual appointments via phone calls and video conferences.

2. [Assign Service Territory to Work Types](#)

To use the new virtual service territory, assign the territory to work types in Salesforce Scheduler.

3. [Assign Service Resources](#)

To choose appointment candidates from the new virtual service territory, assign service resources to the territory in Salesforce Scheduler. Set this new territory as the secondary territory for each service resource.

4. [Enable Appointment Distribution](#)

Make resource selection for territories with relatively large numbers of resources easier by setting Appointment Distribution to show only a short list of least-consumed resources from your resource pool.

5. [Authenticate API Calls with Salesforce Scheduler APIs](#)

Use OAuth—the most secure SOAP and REST API call authentication method—to get an access token.

6. [Get Appointment Time Slots](#)

A time slot is a period in a day when an appointment can be scheduled. Use the `available-territory-slots` Connect API to fetch the consolidated availability of each service resource within the selected territory.

7. [Create Service Appointments](#)

A service appointment represents an appointment booked through Salesforce Scheduler. To create an appointment, make a POST request on the `service-appointments` Connect API.

Create a Service Territory

Create a large, virtual service territory using Salesforce Scheduler and add service resources. Set the new territory as the secondary territory for service resources. You can assign a relatively large number of service resources to the territory. Use the territory exclusively for virtual appointments via phone calls and video conferences.

For information on creating a service territory, see [Set Up Service Territories in Salesforce Scheduler](#).

Assign Service Territory to Work Types

To use the new virtual service territory, assign the territory to work types in Salesforce Scheduler.

For information on assigning service territories, see [Assign Service Territories to Work Types in Salesforce Scheduler](#).

Assign Service Resources

To choose appointment candidates from the new virtual service territory, assign service resources to the territory in Salesforce Scheduler. Set this new territory as the secondary territory for each service resource.

For information on assigning service resources to the new service territory, see [Assign Service Resources to Service Territories in Salesforce Scheduler](#).

Enable Appointment Distribution

Make resource selection for territories with relatively large numbers of resources easier by setting Appointment Distribution to show only a short list of least-consumed resources from your resource pool.

For information on enabling appointment distribution, see [Enable Appointment Distribution](#).

Authenticate API Calls with Salesforce Scheduler APIs

Use OAuth—the most secure SOAP and REST API call authentication method—to get an access token.

 **Note:** You can't modify an existing appointment via a guest user profile. You can use an integration user who has permissions to read and update only the required objects.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

Get Appointment Time Slots

A time slot is a period in a day when an appointment can be scheduled. Use the `available-territory-slots` Connect API to fetch the consolidated availability of each service resource within the selected territory.

Create a page in your app where you can show the available time slots based on the work type group and service territory.

Make a POST request on the `available-territory-slots` on page 147 Connect API by passing the required `workType` and `territoryIds` parameters.

Restrict the number of service resources returned by the request by passing a finite, integer value to the `resourceLimit` `ApptDistribution` parameter.

 **Note:** When appointment distribution is enabled, Salesforce Scheduler fetches and shows a list of appointment time slots based on the resource utilisation calculation frequency: monthly, parameter-based, or weekly. The Salesforce Scheduler uses the service resources' utilization score for a specific period to suggest time slots for the least occupied resources. For more information, see [How Appointment Distribution Works](#).

 **Tip:** In the custom app, you can hard code most of the parameters, including `territoryIds` and `resourceLimit` `ApptDistribution`. Set the `territoryIds` parameter to the ID of the new virtual territory that you created in the beginning of this procedure. If the new territory is assigned to multiple work types, you can let your end user select a value for `workType`.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/available-territory-slots
```

For an Existing User (Account)

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body.

You can also specify the `startTime` and `endTime` parameters with the request.

The preference is enforced when the [Enforce Account's Visiting Hours policy rule](#) is enabled.

Sample Request

```
{
  "accountId" : "001B000001McLhMIAV",
  "workType" : {
    "id": "0VS2x000000PVu5GAG"
  },
  "resourceLimitApptDistribution" : 10,
  "territoryIds" : [
    "0Hh2w000000XmoXCAS"
  ]
}
```

Sample Response

The API returns the available time slots and service resources based on resource utilization. The response returns only 10 least consumed resources, as specified by the `resourceLimitApptDistribution` parameter.

 **Note:** Setting a maximum number of resources you want to show for scheduling makes it possible to optimise performance for large territories, such as virtual or tele scenarios.

```
{
  "result" : {
    "territorySlots" : [ {
      "slots" : [ {
        "endTime" : "2021-05-24T17:00:00.000Z",
        "resources" : [ "0HnB0000000LVbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TayKAC", "0HnB0000000TavMQAS" ],
        "startTime" : "2021-05-24T16:00:00.000Z"
      }, {
        "endTime" : "2021-05-24T17:30:00.000Z",
        "resources" : [ "0HnB0000000Tav3KAC", "0HnB0000000TaozKAL",
"0HnB0000000TavMQAS", "0HnB0000000TaiOKCS", "0HnB0000000TacOLCM" ],
        "startTime" : "2021-05-24T16:30:00.000Z"
      }, {
        "endTime" : "2021-05-24T18:00:00.000Z",
        "resources" : [ "0HnB0000000Tav3KAC", "0HnB0000000TayKAC",
"0HnB0000000LVgfKBG", "0HnB0000000TayMQQS", "0HnB0000000TacOLCM" ],
        "startTime" : "2021-05-24T17:00:00.000Z"
      }, {
        "endTime" : "2021-05-24T18:30:00.000Z",
        "resources" : [ "0HnB0000000Tav3KAC", "0HnB0000000TayKAC",
"0HnB0000000LVgfKBG", "0HnB0000000TayMQQS", "0HnB0000000TacOLCM" ],
        "startTime" : "2021-05-24T17:30:00.000Z"
      }, {
        "endTime" : "2021-05-24T19:00:00.000Z",
        "resources" : [ "0HnB0000000LVbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TayKAC", "0HnB0000000TavMQAS" ],
        "startTime" : "2021-05-24T18:00:00.000Z"
      }, {
        "endTime" : "2021-05-24T19:30:00.000Z",
        "resources" : [ "0HnB0000000LVbfKAG", "0HnB0000000TavDKAS",
```

```

"0HnB0000000Tav3KAC", "0HnB0000000TauyKAC", "0HnB0000000TavMQAS" ],
    "startTime" : "2021-05-24T18:30:00.000Z"
  }, {
    "endTime" : "2021-05-24T20:00:00.000Z",
    "resources" : [ "0HnB0000000LvbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TauyKAC", "0HnB0000000TavMQAS" ],
    "startTime" : "2021-05-24T19:00:00.000Z"
  }],
  "territoryId" : "0Hh2w000000XmoXCAS"
} ]
}
}

```

For a Guest User (Lead)**Sample Request**

```

{
  "workType" : {
    "id": "0VS2x000000PVu5GAG"
  },
  "resourceLimitApptDistribution" : 10,
  "territoryIds" : [
    "0Hh2w000000XmoXCAS"
  ]
}

```

Sample Response

The API returns the available time slots and service resources based on resource utilization. The response returns only 10 least consumed resources, as specified by the `resourceLimitApptDistribution` parameter.



Note: Setting a maximum number of resources you want to show for scheduling makes it possible to optimise performance for large territories, such as virtual or tele scenarios.

```

{
  "result" : {
    "territorySlots" : [ {
      "slots" : [ {
        "endTime" : "2021-05-24T17:00:00.000Z",
        "resources" : [ "0HnB0000000LvbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TauyKAC", "0HnB0000000TavMQAS" ],
        "startTime" : "2021-05-24T16:00:00.000Z"
      }, {
        "endTime" : "2021-05-24T17:30:00.000Z",
        "resources" : [ "0HnB0000000Tav3KAC", "0HnB0000000TaozKAL",
"0HnB0000000TavMQAS", "0HnB0000000TaiOKCS", "0HnB0000000TacOLCM" ],
        "startTime" : "2021-05-24T16:30:00.000Z"
      }, {
        "endTime" : "2021-05-24T18:00:00.000Z",
        "resources" : [ "0HnB0000000Tav3KAC", "0HnB0000000TauyKAC",
"0HnB0000000LVgfkBKG", "0HnB0000000TayMQQS", "0HnB0000000TacOLCM" ],
        "startTime" : "2021-05-24T17:00:00.000Z"
      }, {
        "endTime" : "2021-05-24T18:30:00.000Z",

```

```

    "resources" : [ "0HnB0000000Tav3KAC", "0HnB0000000TavyKAC",
"0HnB0000000LVgfKBG", "0HnB0000000TayMQQS", "0HnB0000000TacOLCM" ],
    "startTime" : "2021-05-24T17:30:00.000Z"
  }, {
    "endTime" : "2021-05-24T19:00:00.000Z",
    "resources" : [ "0HnB0000000LVbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TavyKAC", "0HnB0000000TavMQAS" ],
    "startTime" : "2021-05-24T18:00:00.000Z"
  }, {
    "endTime" : "2021-05-24T19:30:00.000Z",
    "resources" : [ "0HnB0000000LVbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TavyKAC", "0HnB0000000TavMQAS" ],
    "startTime" : "2021-05-24T18:30:00.000Z"
  }, {
    "endTime" : "2021-05-24T20:00:00.000Z",
    "resources" : [ "0HnB0000000LVbfKAG", "0HnB0000000TavDKAS",
"0HnB0000000Tav3KAC", "0HnB0000000TavyKAC", "0HnB0000000TavMQAS" ],
    "startTime" : "2021-05-24T19:00:00.000Z"
  } ],
  "territoryId" : "0Hh2w000000XmoXCAS"
} ]
}
}

```

Parse the JSON response, and show only the available time slots on the page so that users can select a time slot for their appointment. To ensure privacy, don't show the service resources.

Here's how a page showing the available time slots can look.

Write custom code to select the least utilized resource or to randomly select a service resource for the appointment based on the time slot that the user selects.

This sample code automatically selects the least utilized resource from the list available for the selected time slot.

```
var serviceResourceId=resources[0]
```

This sample code automatically selects a service resource and stores it in `serviceResourceId`. Pass the list of service resources available for the selected time slot in `resources`.

```
var index = Math.floor(Math.random() * Math.floor(resources.length));  
var serviceResourceId=resources[index]
```

On the next page, you can show the appointment details for the user to review and create the appointment.

Create Service Appointments

A service appointment represents an appointment booked through Salesforce Scheduler. To create an appointment, make a POST request on the `service-appointments` Connect API.

Create a page where the user can review the appointment details and create the appointment. Here's how a Review Service Appointment page can look.

 **Note:** To keep the service resource private, hide the resource's name on the review appointment page.

Review Service Appointment

General Information

Work Type
Banking

Account
Ramsung Company

Address
121 Spear Street
Charlotte, VT 05445
United States

Additional Information

Engagement Channel Type
In Person

Description

Parent Record
Ramsung Company

Subject

Comment

Link the Next button to a POST request on the [service-appointments](#) on page 156 Connect API to create the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

Set `IsAnonymousBooking` to `true` to indicate that the appointment is anonymous.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0Hh2w000000XmoXCAS",
    "parentRecordId" : "001B000001McLhMIAV", //accountId
    "schedStartTime": "2021-05-24T15:30:00.000+0000",
    "schedEndTime": "2021-05-24T16:30:00.000+0000",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
    "postalCode": "94105",
    "country": "USA",
    "extendedFields" : [ {
      "name": "IsAnonymousBooking",
      "value": "true"
    } ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnB0000000LVbFKAG",
      "extendedFields" : []
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result" : {
    "assignedResourceIds" : [ "0HnB0000000LVbFKAG" ],
    "serviceAppointmentId" : "08pB0000000hvr6IAI"
  }
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

Set `IsAnonymousBooking` to `true` to indicate that the appointment is anonymous.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0Hh2w000000XmoXCAS",
    "schedStartTime": "2021-05-24T15:30:00.000+0000",
    "schedEndTime": "2021-05-24T16:30:00.000+0000",
    "street": "1 Market Street",
    "city": "San Francisco",
    "state": "CA",
```



```

    "postalCode": "94105",
    "country": "USA",
    "extendedFields" : [ {
      "name": "IsAnonymousBooking",
      "value": "true"
    } ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnB0000000LVbfKAG",
      "isRequiredResource": true,
      "isPrimaryResource": true,
      "extendedFields" : []
    }
  ],
  "lead": {
    "firstName": "Mark",
    "lastName": "Taylor",
    "phone": "012-345-6789",
    "email": "mtaylor@company.com",
    "company": "Company1",
    "extendedFields" : []
  }
}

```

Sample Response

The API returns the service appointment ID and the assigned service resources.


```

{
  "result" : {
    "assignedResourceIds" : [ "0HnB0000000LVbfKAG" ],
    "parentRecordId" : "00QB000000941OZMAY",
    "serviceAppointmentId" : "08pB0000000hvR1IAI"
  }
}

```

Create a page to show confirmation when the service appointment creation is completed.

Here's how a sample confirmation page can look.

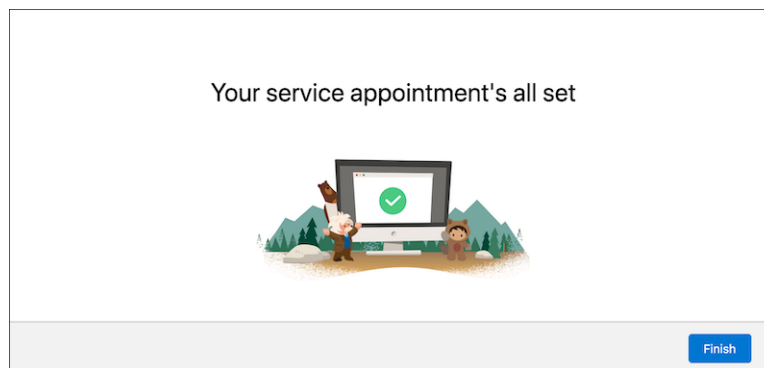


Schedule Appointments by Selecting Location First

This use case explains how you can build a scheduling app to have the service location selection first in your appointment scheduling experience using Salesforce Scheduler APIs.

If you prefer to have the service location selection first, unlike the regular appointment scheduling experience that comes with out-of-the-box scheduler templates, this approach is for you.

These steps provide a high-level overview of how you can build a scheduling app to have the service location selection first, which is explained in detail in the following sections.

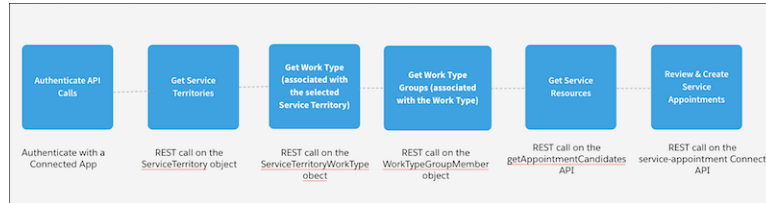

1. [Enable Maps and Location Services](#)
Salesforce Scheduler uses maps and location services to search for appointment locations (service territories)..
2. [Get Service Territories](#)
Display the available service territories on the first screen of your appointment scheduling app.
3. [Get Work Type Groups](#)
Display the work type groups for the appointment.
4. [Get Work Type](#)
Default to the work type that is associated with the service territory and work type group.
5. [Get Service Resources](#)
Retrieve the available service resources based on the selected work type group or work type, and service territory.
6. [Create Service Appointments](#)
The last step in the scheduling application is to show the service appointment details for the user to review and create the appointment.

Enable Maps and Location Services

Salesforce Scheduler uses maps and location services to search for appointment locations (service territories)..


For information on enabling maps and location services, see [Enable Maps and Location Services in Salesforce Scheduler](#).

Get Service Territories

Display the available service territories on the first screen of your appointment scheduling app.

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers.

Create a page where you can provide users an option to search for service territories. Here's how a Select Service Territory page can look.

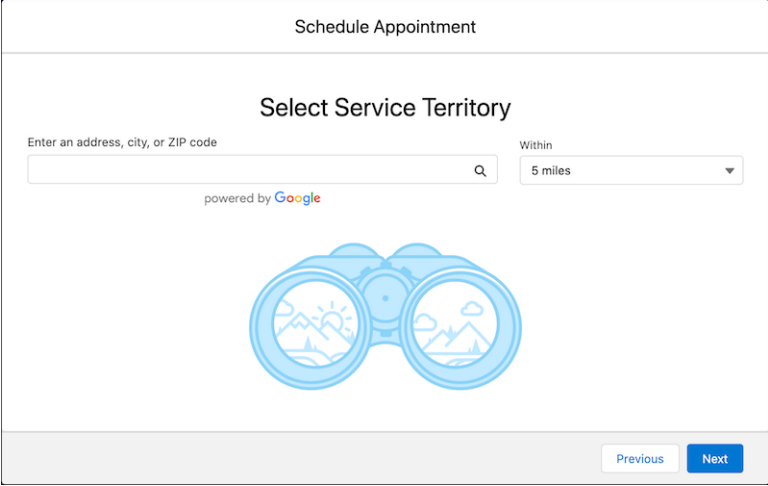

You can search for service territories based on the user-entered name, city, postal code, or state. You can also calculate the distance between two location values, such as between a service territory and the user's current location.

You can Retrieve records with locations within or outside of a certain radius with distance conditions in the WHERE clause of the query. For more information, see the WHERE clause section in [Location-Based SOQL Queries](#).

1. Use the `Query()` request on the `ServiceTerritory` object to retrieve a list of active service territories from your Salesforce org.

Sample Request

This sample REST API call uses the `Query()` request to retrieve service territories within a range of 1 mile from your current location. Default value is 5 miles.

For more information on using `Query()` request, see [Execute a SOQL Query](#).

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=
SELECT City,Country,Id,Name,State FROM ServiceTerritory WHERE DISTANCE(Address,
GEOLOCATION(17.4358411,78.3467857), 'mi') < 1
```

Sample Response

The request returns the service territory records.

```
{
  "totalSize": 4,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceTerritory",
        "url": "/services/data/v55.0/objects/ServiceTerritory/0Hhx000000012oOCAQ"
      },
      "City": "Hyderabad",
      "Country": "India",
      "Id": "0Hhx000000012oOCAQ",
      "Name": "Apollo Hyderabad",
      "State": "TG"
    },
    {
      "attributes": {
```

```

    "type": "ServiceTerritory",
    "url": "/services/data/v55.0/subjects/ServiceTerritory/0Hhx000000012oRCAQ"
  },
  "City": "Nanakaramguda",
  "Country": "India",
  "Id": "0Hhx000000012oRCAQ",
  "Name": "Somewhere",
  "State": "TG"
},
{
  "attributes": {
    "type": "ServiceTerritory",
    "url": "/services/data/v55.0/subjects/ServiceTerritory/0Hhx000000012oQCAQ"
  },
  "City": "Hyderabad",
  "Country": "India",
  "Id": "0Hhx000000012oQCAQ",
  "Name": "Partner Service Territory",
  "State": "TG"
},
{
  "attributes": {
    "type": "ServiceTerritory",
    "url": "/services/data/v55.0/subjects/ServiceTerritory/0Hhx000000012oSQAQ"
  },
  "City": "Hyderabad",
  "Country": "India",
  "Id": "0Hhx000000012oSQAQ",
  "Name": "JPMC Bank, Hyderabad",
  "State": "TG"
}
]
}

```

Parse the JSON response, and show the available service territories on the Select Service Territory page so that the user can select a service territory.

Here's how the service territories are listed based on the users' search.

Schedule Appointment

Select Service Territory

Enter an address, city, or ZIP code
Hyderabad, Telangana 500032, India

Within
5 miles

powered by Google

0.17 mi	Hours
Apollo Hyderabad Divyasree Orion Road Hyderabad, TG 500032 India	Sunday 12:00 AM - 11:00 PM Monday 12:00 AM - 11:00 PM Tuesday 12:00 AM - 11:00 PM Wednesday 12:00 AM - 11:00 PM Thursday 12:00 AM - 11:00 PM Friday 12:00 AM - 11:00 PM Saturday 12:00 AM - 11:00 PM
JPMC Bank, Hyderabad Divyasree Orion Road Hyderabad, TG 500032 India	Sunday 12:00 AM - 11:00 PM Monday 12:00 AM - 11:00 PM Tuesday 12:00 AM - 11:00 PM Wednesday 12:00 AM - 11:00 PM Thursday 12:00 AM - 11:00 PM Friday 12:00 AM - 11:00 PM Saturday 12:00 AM - 11:00 PM

Previous Next

On the next page in your app, you can show the work type groups.

Get Work Type Groups

Display the work type groups for the appointment.

A work type group represents a general appointment category or topic, such as a home loan or investment.

Create a page in your app where you can show the work type groups from your org.

1. Use the `Query()` request on the `ServiceTerritoryWorkType` object to retrieve the work types associated with the service territory selected on the Select Service Territory screen.

Sample Request

This sample REST API call uses the `Query()` request to retrieve the work type records.

For more information on using `Query()` request, see [Execute a SOQL Query](#).

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=
SELECT+Id,WorkTypeId,WorkType.Name+FROM+ServiceTerritoryWorkType+WHERE+ServiceTerritoryId+=+'0Hhx000000012oSCAQ'
```

Sample Response

The request returns the work type records.

```
{
  "totalSize": 2,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceTerritoryWorkType",
        "url":
"/services/data/v55.0/objects/ServiceTerritoryWorkType/0VEx00000001CTGGA2"
      },
      "Id": "0VEx00000001CTGGA2",
    }
  ]
}
```

```

    "WorkTypeId": "08qx000000014fvAAA",
    "WorkType": {
      "attributes": {
        "type": "WorkType",
        "url": "/services/data/v55.0/subjects/WorkType/08qx000000014fvAAA"
      },
      "Name": "WT 2"
    }
  },
  {
    "attributes": {
      "type": "ServiceTerritoryWorkType",
      "url":
"/services/data/v55.0/subjects/ServiceTerritoryWorkType/0VEx00000001Ag4GAE"
    },
    "Id": "0VEx00000001Ag4GAE",
    "WorkTypeId": "08qx000000014fnAAA",
    "WorkType": {
      "attributes": {
        "type": "WorkType",
        "url": "/services/data/v55.0/subjects/WorkType/08qx000000014fnAAA"
      },
      "Name": "WT 3"
    }
  }
]
}

```

2. Use the `Query()` request on the `WorkTypeGroupMember` object to retrieve the work type groups by work types retrieved in the previous step.

Sample Request

This sample REST API call uses the `Query()` request to retrieve work type groups.

For more information on using `Query()` request, see [Execute a SOQL Query](#).

```

https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=
SELECT Id,WorkTypeGroupId,WorkTypeId,WorkTypeGroup.Name FROM WorkTypeGroupMember WHERE
WorkTypeId in ('08qx000000014fnAAA','08qx000000014fvAAA')

```

 **Note:** You can use the `toLabel` method to translate the SOQL query results in the language of the user. For more information, see [Translate SOQL Query Results](#).

Sample Response

The request returns the work type group records.

```

{
  "totalSize": 2,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "WorkTypeGroupMember",
        "url": "/services/data/v55.0/subjects/WorkTypeGroupMember/0Wzx000000013tICAQ"
      }
    }
  ]
}

```

```

    },
    "Id": "0Wzx000000013tICAQ",
    "WorkTypeId": "08qx000000014fnAAA",
    "WorkTypeGroup": {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/v55.0/subjects/WorkTypeGroup/0VSx000000014DmGAI"
      },
      "Name": "WTG 2"
    }
  },
  {
    "attributes": {
      "type": "WorkTypeGroupMember",
      "url": "/services/data/v55.0/subjects/WorkTypeGroupMember/0Wzx000000013tHCAQ"
    },
    "Id": "0Wzx000000013tHCAQ",
    "WorkTypeId": "08qx000000014fvAAA",
    "WorkTypeGroup": {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/v55.0/subjects/WorkTypeGroup/0VSx000000014DkGAI"
      },
      "Name": "WTG 1"
    }
  }
]
}

```

Parse the JSON response, and display the work type groups on web page so that users can select a work type group for the appointment. Here's how that page can look.

Schedule Appointment

Default to the work type that is associated with the service territory selected on the Select Service Territory screen and the work type group selected on the Select Work Type Group screen.

Get Work Type

Default to the work type that is associated with the service territory and work type group.

A work type group represents a general appointment category or topic, such as a home loan or investment.

1. Use the `Query()` request on the `WorkTypeGroupMember` object to retrieve the work types associated with the work type group selected on the Select Work Type Group screen.

Sample Request

This sample REST API call uses the `Query()` request to retrieve the work types.

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=
SELECT+WorkTypeId,WorkType.Name+FROM+WorkTypeGroupMember+WHERE+WorkTypeGroupId+=+'OVSx000000014DmGAI'
```

Sample Response

The request returns the work type records.

```
{
  "totalSize": 2,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "WorkTypeGroupMember",
        "url": "/services/data/v55.0/objects/WorkTypeGroupMember/0Wzx000000013tICAQ"
      },
      "WorkTypeId": "08qx000000014fnAAA",
      "WorkType": {
        "attributes": {
          "type": "WorkType",
          "url": "/services/data/v55.0/objects/WorkType/08qx000000014fnAAA"
        },
        "Name": "WT 3"
      }
    },
    {
      "attributes": {
        "type": "WorkTypeGroupMember",
        "url": "/services/data/v55.0/objects/WorkTypeGroupMember/0Wzx000000013tJCAQ"
      },
      "WorkTypeId": "08qx000000014fwAAA",
      "WorkType": {
        "attributes": {
          "type": "WorkType",
          "url": "/services/data/v55.0/objects/WorkType/08qx000000014fwAAA"
        },
        "Name": "WT 4"
      }
    }
  ]
}
```



```

    }
  }
]
}

```

2. Use the `Query()` request on the `ServiceTerritoryWorkType` object by specifying the work type records retrieved in the previous step to default the work type based on the selected service territory and work type group.

Sample Request

This sample REST API call uses the `Query()` request to default the work type.

```

https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=
SELECT WorkTypeId, Name FROM ServiceTerritoryWorkType WHERE ServiceTerritoryId = '0h0000001252Q' AND WorkTypeId IN ('08qx0000001467AA', '08qx0000001467AA')

```

Sample Response

The request returns the work type records.

```

{
  "totalSize": 1,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceTerritoryWorkType",
        "url":
"/services/data/v55.0/subjects/ServiceTerritoryWorkType/0VEx00000001Ag4GAE"
      },
      "WorkTypeId": "08qx000000014fnAAA",
      "WorkType": {
        "attributes": {
          "type": "WorkType",
          "url": "/services/data/v55.0/subjects/WorkType/08qx000000014fnAAA"
        },
        "Name": "WT 3"
      }
    }
  ]
}

```

On the next page in your app, you can show the service resources and their availability.

Get Service Resources

Retrieve the available service resources based on the selected work type group or work type, and service territory.

A service resource is an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

Create a page in your app where you can show the available service resources based on the work type group or work type, and service territory.

1. Make a POST request on the [getAppointmentCandidates](#) on page 134 REST API by passing the required `workTypeGroupId` or `workTypeId`, and `territoryIds` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentCandidates
```

For an Existing User (Account)

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body. The preference is enforced when the Include Only Required Service Resources and Ignore Excluded Service Resources policy rules are enabled.

Sample Request

Using `workTypeGroupId`:

```
{
  "accountId": "001x0000005DLxpAAG",
  "startTime": "2022-04-19T10:30:00.000+0000",
  "endTime": "2022-04-19T10:40:00.000+0000",
  "workTypeGroupId": "0VSx000000014DmGAI",
  "territoryIds": [
    "0Hhx000000012oSCAQ"
  ]
}
```

Using `workTypeId`:

```
{
  "accountId" : "001x0000005DLxpAAG",
  "startTime" : "2022-04-19T10:30:00.000+0000",
  "endTime" : "2022-04-19T10:40:00.000+0000",
  "workType" : {
    "id" : "08qx000000014fnAAA"
  },
  "territoryIds" : ["0Hhx000000012oSCAQ"]
}
```

Sample Response

The API returns the service resources and their available time slots.

```
{
  "candidates": [
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GcCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GfCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
  ]
}
```

```

        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GbCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    },
    {
        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GwCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    },
    {
        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GyCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    },
    {
        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GuCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    },
    {
        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GtCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    },
    {
        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GsCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    },
    {
        "endTime": "2022-04-19T10:40:00.000+0000",
        "resources": [
            "0Hnx000000006GmCAI"
        ],
        "startTime": "2022-04-19T10:30:00.000+0000",
        "territoryId": "0Hhx000000012oSCAQ"
    }

```

```

    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GnCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006G1CAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006H4CAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006H2CAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006H3CAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    }
  ]
}

```

For a Guest User (Lead)

Sample Request

Using workTypeGroupId:

```

{
  "startTime": "2022-04-19T10:30:00.000+0000",
  "endTime": "2022-04-19T10:40:00.000+0000",
  "workTypeGroupId": "0VSx000000014DmGAI",
  "territoryIds": [
    "0Hhx000000012oSCAQ"
  ]
}

```

```
]
}
```

Using workTypeId:

```
{
  "startTime": "2022-04-19T10:30:00.000+0000",
  "endTime": "2022-04-19T10:40:00.000+0000",
  "workType": {
    "id": "08qx000000014fnAAA"
  },
  "territoryIds": [
    "0Hhx000000012oSCAQ"
  ]
}
```

Sample Response

The API returns the service resources and their available time slots.

```
{
  "candidates": [
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GcCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GfCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GbCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
      "resources": [
        "0Hnx000000006GwCAI"
      ],
      "startTime": "2022-04-19T10:30:00.000+0000",
      "territoryId": "0Hhx000000012oSCAQ"
    },
    {
      "endTime": "2022-04-19T10:40:00.000+0000",
```

```

    "resources": [
      "0Hnx000000006GyCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },
  {
    "endTime": "2022-04-19T10:40:00.000+0000",
    "resources": [
      "0Hnx000000006GuCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },
  {
    "endTime": "2022-04-19T10:40:00.000+0000",
    "resources": [
      "0Hnx000000006GtCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },
  {
    "endTime": "2022-04-19T10:40:00.000+0000",
    "resources": [
      "0Hnx000000006GsCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },
  {
    "endTime": "2022-04-19T10:40:00.000+0000",
    "resources": [
      "0Hnx000000006GmCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },
  {
    "endTime": "2022-04-19T10:40:00.000+0000",
    "resources": [
      "0Hnx000000006GnCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },
  {
    "endTime": "2022-04-19T10:40:00.000+0000",
    "resources": [
      "0Hnx000000006GlCAI"
    ],
    "startTime": "2022-04-19T10:30:00.000+0000",
    "territoryId": "0Hhx000000012oSCAQ"
  },

```

```
{
  "endTime": "2022-04-19T10:40:00.000+0000",
  "resources": [
    "0Hnx000000006H4CAI"
  ],
  "startTime": "2022-04-19T10:30:00.000+0000",
  "territoryId": "0Hhx000000012oSCAQ"
},
{
  "endTime": "2022-04-19T10:40:00.000+0000",
  "resources": [
    "0Hnx000000006H2CAI"
  ],
  "startTime": "2022-04-19T10:30:00.000+0000",
  "territoryId": "0Hhx000000012oSCAQ"
},
{
  "endTime": "2022-04-19T10:40:00.000+0000",
  "resources": [
    "0Hnx000000006H3CAI"
  ],
  "startTime": "2022-04-19T10:30:00.000+0000",
  "territoryId": "0Hhx000000012oSCAQ"
}
]
```

Parse the JSON response, and display the available service resources on web page so that users can select a service resource for the appointment. Here's how that page can look.

Schedule Appointment

Select Service Resource

Select the service resource for this service appointment

Service Resource Name	Role	Next Availability
☐ Conference Room		3/29/2022, 10:15 AM
☒ CCP 5		3/29/2022, 10:15 AM
☐ CCP 6		3/29/2022, 10:15 AM
☐ CCP Login 5		3/29/2022, 10:15 AM
☐ CCP Login 6		3/29/2022, 10:15 AM
☐ Doctor 4		3/29/2022, 10:15 AM
☐ Doctor 3		3/29/2022, 10:15 AM
☐ LEA 6		3/29/2022, 10:15 AM
☐ LEA 5		3/29/2022, 10:15 AM
☐ LPS User 5		3/29/2022, 10:15 AM
☐ Partner 6		3/29/2022, 10:15 AM
☐ Partner 5		3/29/2022, 10:15 AM
☐ Partner Login 6		3/29/2022, 10:15 AM

Previous

Next

When users select a resource, show the available time slots for the selected resource. Here's how a page showing the available time slots can look.

Schedule Appointment

> Manage Service Resources

Select Service Appointment Time

Required Service Resources (1)

CCP 5
Primary

Availability Calendar ⓘ [Skip Time Slot Selection](#)

March 27, 2022 - April 1, 2022

Time Zone:
(GMT+05:30) India Standard Time (Asia/Kolkata)

SUN 27	MON 28	TUE 29	WED 30	THU 31	FRI 1
		10:30 - 10:45 am 10:45 - 11:00 am	12:15 - 12:30 am 12:30 - 12:45 am	12:15 - 12:30 am 12:30 - 12:45 am	12:15 - 12:30 am 12:30 - 12:45 am

Previous Next

On the next page in your app, you can show the appointment details for the user to review and create the appointment.

Create Service Appointments

The last step in the scheduling application is to show the service appointment details for the user to review and create the appointment.

A service appointment represents an appointment booked through Salesforce Scheduler.

Create a page where the user can review the appointment details and create the appointment. Here's how a Review Service Appointment page can look.

Schedule Appointment

Review Service Appointment

Service Resource

Primary service resource
CCP 5

Required service resources

Optional service resources

General Information

Work Type
WTG 1

Description
Test appointment scheduling.

Account
test

Parent Record
test

Address
Disaster Orin Road

Subject

Previous Next

1. Link the Next button to a POST request on the [service-appointments](#) on page 156 Connect API to create the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

Set `status` to `Scheduled` to indicate that the appointment is scheduled.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0Hhx000000012oSCAQ",
    "parentRecordId": "001x00000005DLxpAAG",
    "workTypeId": "08qx000000014fnAAA",
    "schedStartTime": "2022-04-19T10:30:00.000+0000",
    "schedEndTime": "2022-04-19T10:40:00.000+0000",
    "additionalInformation": "Appointment Scheduling Custom App.",
    "appointmentType": "Testing Purpose",
    "extendedFields": [
      {
        "name": "status",
        "value": "Scheduled"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0Hnx0000000006GcCAI",
      "isRequiredResource": "true"
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rx00000001luxJAAQ"
    ],
    "serviceAppointmentId": "08px00000001toRAAQ"
  }
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

Set status to Scheduled to indicate that the appointment is scheduled.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0Hhx000000012oSCAQ",
    "workTypeId": "08qx000000014fnAAA",
    "schedStartTime": "2022-04-19T10:30:00.000+0000",
    "schedEndTime": "2022-04-19T10:40:00.000+0000",
    "additionalInformation": "Appointment Scheduling Custom App.",
    "appointmentType": "Testing Purpose",
    "extendedFields": [
      {
        "name": "status",
        "value": "Scheduled"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0Hnx000000006H4CAI",
      "isRequiredResource": "true"
    }
  ],
  "lead": {
    "email": "name@company.com",
    "firstName": "FName",
    "lastName": "LName",
    "company": "CompanyName"
  }
}
```


Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rx00000001luxOAAQ"
    ],
    "parentRecordId": "00Qx0000001cKPoEAM",
    "serviceAppointmentId": "08px00000001toWAAQ"
  }
}
```

Create a page to show confirmation when the service appointment is created successfully.

Here's how a sample confirmation page can look.

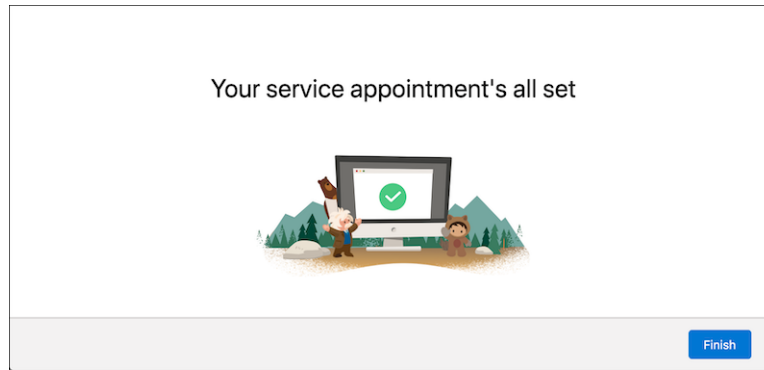

Modify an Anonymous Appointment

This use case explains how to change the service resource of an existing anonymous service appointment by using Salesforce Scheduler APIs.

Typically, anonymous appointments are scheduled when users who don't belong to your organization request for appointments. For example, a subscriber of your app requests for an appliance maintenance appointment from your service app. After a service appointment is scheduled by using the anonymous mechanism, the service resource for the appointment can mark themselves unavailable. In that scenario, as an administrator or an appointment orchestrator for your organization, ensure that you modify the anonymous service appointment and assign a different resource to the appointment.

 **Note:** For the procedure to be successful, ensure that each unavailable resource marks themselves as absent in Salesforce Scheduler. Otherwise, the API request to retrieve the list of service resources continues to include the resources that are currently unavailable or absent.

This flowchart provides an overview of the procedure:



1. [Authenticate with a Connected App](#)

The first step in an API-based integration is to connect to Salesforce and get an access token by using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

2. [Get Service Appointments](#)

The `AssignedResource` object represents a service resource who is assigned to a service appointment in Salesforce Scheduler. Retrieve service appointment IDs of all scheduled appointments associated with specific resources by using the `query` request on the `AssignedResource` object.

3. [Get Service Appointment Details](#)

A service appointment represents an appointment that's booked via Salesforce Scheduler. Use a GET method to fetch the details of a service appointment record.

4. [Get Available Resources](#)

Retrieve the resources that are available for an anonymous appointment.

5. [Update Service Appointments](#)

A service appointment represents an appointment that is booked via Salesforce Scheduler. To update the appointment, run a PATCH request on the `service-appointments` Connect API.

Authenticate with a Connected App

The first step in an API-based integration is to connect to Salesforce and get an access token by using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.



Note: It's not possible to modify an existing appointment via a guest user profile. You can use an integration user who has permissions to read and update only the required objects.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

Get Service Appointments

The `AssignedResource` object represents a service resource who is assigned to a service appointment in Salesforce Scheduler. Retrieve service appointment IDs of all scheduled appointments associated with specific resources by using the `query` request on the `AssignedResource` object.

Sample Request

This sample REST API call uses the `query` request to retrieve the anonymous service appointments that are associated with unavailable resources.

```
https://yourinstance.salesforce.com/services/anonymous/2017-01-01T00:00:00Z/2017-01-01T00:00:00Z?_source=unavailable
```

For more information, see [Execute a SOQL Query](#). Ensure that the filter falls within the query limits.

Sample Response

The method retrieves the list of anonymous appointments that are associated with specific resources.

```
{
  "totalSize" : 2,
  "done" : true,
```

```

"records" : [
  {
    "attributes" : {
      "type" : "AssignedResource",
      "url" : "/services/data/v53.0/subjects/AssignedResource/03rB0000000cBVOIA2"
    },
    "ServiceAppointmentId" : "08pB0000000aKeYIAU",
    "ServiceResourceId" : "0HnB0000000Tav3KAC"
  },
  {
    "attributes" : {
      "type" : "AssignedResource",
      "url" : "/services/data/v53.0/subjects/AssignedResource/03rB0000000cBVsIAM"
    },
    "ServiceAppointmentId" : "08pB0000000aKf2IAE",
    "ServiceResourceId" : "0HnB0000000Tav3KAC"
  }
]
}

```

Use a `collection` object to capture all appointment IDs that the GET request retrieved. If you call multiple GET requests, include in the `collection` object the appointment IDs that each request returned.. This task helps you create a list of service appointments that you must update with new resources.

Get Service Appointment Details

A service appointment represents an appointment that's booked via Salesforce Scheduler. Use a GET method to fetch the details of a service appointment record.

This task helps you retrieve additional details of each service appointment that you listed in the previous task.

Sample Request

Here's a sample GET request to retrieve the details of a service appointment.

```

https://yourinstance.salesforce.com/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKf2IAE

```

Sample Response

The request returns the details of an anonymous service appointment.

```

{
  "totalSize": 1,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceAppointment",
        "url": "/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKf2IAE"
      },
      "Id": "08pB0000000aKf2IAE",
      "SchedEndTime": "2021-10-25T18:30:00.000+0000",
      "SchedStartTime": "2021-10-25T17:30:00.000+0000",
      "ServiceTerritoryId": "0HhB0000000TaHOKA0",
      "WorkTypeId": "08qB0000000UF63IAG"
    }
  ]
}

```

```
    ]
  }
```

Use a `collection` object to capture all the details of service appointments.

Get Available Resources

Retrieve the resources that are available for an anonymous appointment.

A service resource represents an employee from your organization, such as a loan officer, investment adviser, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients. This task explains how to retrieve service resources that match various criteria such as work type group, territory, start time, and end time from the selected service appointment. Use the `getAppointmentCandidates` REST API to fetch the available service resources based on work type group and service territory.

Make a POST request on the `getAppointmentCandidates` REST API by passing the required `workTypeId`, `territoryIds`, `startTime`, and `endTime` parameters.

Use this URI for the request:

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentCandidates
```

Use this request body with the POST request:

```
{
  "startTime" : startTime,
  "endTime" : endTime,
  "territoryIds" : [territoryIds]
  "workType" :
    {
      "id": workTypeId
    }
}
```

This code snippet is an example request body:

```
{
  "startTime" : "2021-10-25T17:30:00.000+0000",
  "accountId" : "001B000001McLhMIAV",
  "territoryIds" : ["0HhB0000000TaHOKA0"],
  "workType" :
    {
      "id": "08qB0000000UF63IAG"
    }
}
```

The request returns a list of anonymous resources that match the criteria specified in the request body.

```
{
  "candidates": [
    {
      "endTime" : "2021-10-25T18:30:00.000+0000",
      "resources" : [ "0HnB0000000TavDKAS" ],
      "startTime" : "2021-10-25T17:30:00.000+0000",
      "territoryId" : "0HhB0000000TaHOKA0"
    }, {
```

```

    "endTime" : "2021-10-25T19:00:00.000+0000",
    "resources" : [ "0HnB0000000TavDKAS" ],
    "startTime" : "2021-10-25T18:00:00.000+0000",
    "territoryId" : "0HhB0000000TaHOKA0"
  }, {
    "endTime" : "2021-10-25T19:30:00.000+0000",
    "resources" : [ "0HnB0000000TavDKAS" ],
    "startTime" : "2021-10-25T18:30:00.000+0000",
    "territoryId" : "0HhB0000000TaHOKA0"
  }, {
    "endTime" : "2021-10-25T20:00:00.000+0000",
    "resources" : [ "0HnB0000000TavDKAS" ],
    "startTime" : "2021-10-25T19:00:00.000+0000",
    "territoryId" : "0HhB0000000TaHOKA0"
  } ]
}

```

Update Service Appointments

A service appointment represents an appointment that is booked via Salesforce Scheduler. To update the appointment, run a PATCH request on the `service-appointments` Connect API.

Ensure that you make a note of the service appointment IDs that you retrieved in the previous task.

Update service appointments to use new resources by using PATCH requests on the [service-appointments](#) on page 156 Connect API. Pass the `serviceResourceId` and `serviceAppointmentId` parameters with each request.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

Sample Request

In the input request body, pass the service appointment ID as `serviceAppointmentId` and service resource ID as `serviceResourceId`.

```

{
  "serviceAppointmentId": "08pB0000000aKf2IAE",
  "serviceAppointment": {
    "schedStartTime": "2021-10-25T17:30:00.000+0000",
    "schedEndTime": "2021-10-25T18:30:00.000+0000",
    "serviceTerritoryId": "0HhB0000000TaHOKA0"
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnB0000000TavDKAS",
      "isRequiredResource": true
    }
  ]
}

```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result" : {
    "assignedResourceIds" : [ "03rB0000000cBVxIAM" ],
    "serviceAppointmentId" : "08pB0000000aKf2IAE"
  }
}
```

The request modifies the service appointment with a new service resource.


Run the PATCH request for each service appointment ID that needs you want to modify.

Create a Single-Resource Appointment

This use case explains how you can build a scheduling website to allow users to book service appointments with a single resource using Salesforce Scheduler APIs.

Before you can use the scheduler developer resources to build the app, set up Salesforce Scheduler for your organization. For more information, see [Set Up Salesforce Scheduler](#).

Here are the high level steps building an external web site by using the Salesforce Scheduler APIs, which are outlined in detail later.

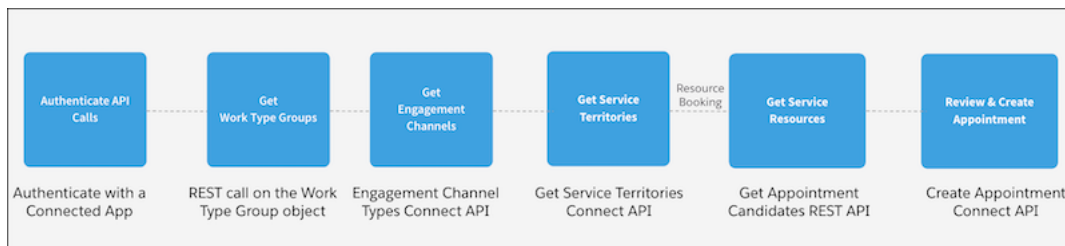

1. [Authenticate with a Connected App](#)

The OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls. Before you use Salesforce Scheduler for API-based integration, authenticate the API calls using OAuth.

2. [Get Work Type Groups](#)

A work type group represents a general appointment category or topic, such as a home loan or investment. Show your users your work type groups on the landing page by retrieving the list of work type groups from your Salesforce instance. Your users can select a work type group from the list while booking appointments.

3. [Get Engagement Channels](#)

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

4. [Get Service Territories](#)

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Show your users your available service territories on the next page on your website by retrieving a list of active service territories from your Salesforce instance. Your users can search for service territories based on user-entered name, city, postal code, or state. Users can also view the distance between two locations, such as between a service territory and the user's current location.

5. [Get Service Resources](#)

A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

6. [Create Service Appointments](#)

Show your users the details of a service appointment—an appointment booked through Salesforce Scheduler—so that users can review and create the appointment.

Authenticate with a Connected App

The OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls. Before you use Salesforce Scheduler for API-based integration, authenticate the API calls using OAuth.



Note: To build a custom appointment scheduling application using Salesforce Scheduler APIs for prospects or unauthenticated users, you must build it using a logged-in user. For example, an integration user or an administrator.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

Get Work Type Groups

A work type group represents a general appointment category or topic, such as a home loan or investment. Show your users your work type groups on the landing page by retrieving the list of work type groups from your Salesforce instance. Your users can select a work type group from the list while booking appointments.

1. Create a page to show your work type groups.
2. Use the `Query ()` request on the `WorkTypeGroup` object to retrieve the list of work type groups from your Salesforce instance.

Sample Request

```
https://yourInstance.salesforce.com/services/data/v66.0/query/?q=SELECT+Id,+Name+From+WorkTypeGroup  
+Where+isActive+=+true+ORDER+BY+NAME
```

Sample Response

The request returns the work type group records.

```
{  
  "totalSize": 3,  
  "done": true,  
  "records": [  
    {  
      "attributes": {  
        "type": "WorkTypeGroup",  
        "url": "/services/data/v57.0/objects/WorkTypeGroup/0VSS700000000sLOAQ"  
      },  
      "Id": "0VSS700000000sLOAQ",  
      "Name": "Wealth Management"  
    },  
    {  
      "attributes": {
```

```
    "type": "WorkTypeGroup",
    "url": "/services/data/v57.0/subjects/WorkTypeGroup/0VSS700000000sQOAQ"
  },
  "Id": "0VSS700000000sQOAQ",
  "Name": "Loans"
},
{
  "attributes": {
    "type": "WorkTypeGroup",
    "url": "/services/data/v57.0/subjects/WorkTypeGroup/0VSS700000000sVOAQ"
  },
  "Id": "0VSS700000000sVOAQ",
  "Name": "Banking"
}
]
}
```

3. Parse the JSON response, and display the work type groups on a page that you created.

Your users can select a work type group for the appointment from the page.

Get Engagement Channels

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

Before using engagement channels for scheduling appointments:

- Enable engagement channels in the Salesforce Scheduler Settings of your instance. See [Enable the Scheduling Appointments Using Engagement Channels Setting](#).
 - Set up engagement channels, including setting the required access and creating engagement channels. See [Engagement Channels](#).
 - Create the Shift Engagement Channel and Engagement Channel Work Type records for the applicable shifts.
 - Define Shift Rules in the scheduling policy. See [Define Shift Rules in Scheduling Policy](#).
1. Create a page to show the engagement channel types. Salesforce Scheduler shows service resources and resource time slots based on the channel that a user selects when creating an appointment.
 2. Make a GET request on the [engagement-channel-types](#) Connect API.

Sample Request

Filter the engagement channel types by the `workTypeGroupId` selected in the previous step.

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/engagement-channel-types?workTypeGroupIds=0VSS700000000sVOAQ
```



Note: You can filter the engagement channel type results by `workTypeGroupIds` or `workTypeIds`.

Sample Response

The request returns the engagement channels for the `workTypeGroupId` specified in the request.

```
{
  "result": {
    "engagementChannelTypes": [
      {
        "contactPointType": "InPerson",
```

```
{
  "id": "0eFS70000004CG5MAM",
  "name": "EngagementChannel1",
  "workTypeGroupIds": [
    "0VSS700000000sVOAQ"
  ],
  "workTypeIds": []
},
{
  "contactPointType": "Video",
  "id": "0eFS70000004CGFMA2",
  "name": "EngagementChannel3",
  "workTypeGroupIds": [
    "0VSS700000000sVOAQ"
  ],
  "workTypeIds": []
}
]
```

3. Parse the JSON response, and show the engagement channel types on the page that you created.

Your users can select an engagement channel type for the appointment from the page.

Get Service Territories

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Show your users your available service territories on the next page on your website by retrieving a list of active service territories from your Salesforce instance. Your users can search for service territories based on user-entered name, city, postal code, or state. Users can also view the distance between two locations, such as between a service territory and the user's current location.

1. Create a page for users to search for service territories.

Here's how a Select Service Territory page can look.

Schedule Appointment

Select Service Territory

Enter an address, city, or ZIP code

Within

powered by Google

2. To retrieve a list of active service territories from your Salesforce instance, use the `service-territories` Connect API request.

Sample Request

This sample REST API call uses the [service-territories](#) request to retrieve service territories within a range of 10 miles from your current location. The default value is 5 miles.

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling  
/service-territories?workTypeId=0VSS700000000sVOAQ
```

Sample Response

The request returns the service territory records.

```
{  
  "result": {  
    "serviceTerritories": [  
      {  
        "city": "Charlotte",  
        "country": "United States",  
        "id": "0HhS700000001DYKAY",  
        "name": "Spear Street Branch",  
        "operatingHoursId": "0OHS700000001HlOAI",  
        "postalCode": "05445",  
        "state": "VT",  
        "street": "121 Spear Street"  
      }  
    ]  
  }  
}
```

3. Parse the JSON response, and show the available service territories on a page that you created.

Your users can select a service territory for the appointment from the page.

Get Service Resources

A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

1. Create a page to show the available service resources.
2. Make a POST request on the [getAppointmentCandidates](#) REST API by passing the required `workTypeId` and `territoryIds` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/scheduling/getAppointmentCandidates
```

Sample Request

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body. The preference is enforced when the Include Only Required Service Resources and Ignore Excluded Service Resources policy rules are enabled. For more information, see [Add Service Resource Preferences to Accounts for Salesforce Scheduler](#).

```
{  
  "startTime": "2023-02-15T09:00:00.000+0000",  
  "endTime": "2023-02-15T19:00:00.000+0000",  
}
```

```
"accountId": "001S7000001pFlJIAU",
"workTypeGroupId": "0VSS700000000sVOAQ",
"territoryIds": [
  "0HhS700000001DYKAY"
],
"engagementChannelTypeIds": [
  "0eFS70000004CG5MAM"
]
}
```

Sample Response

The API returns the service resources available for the specified time slots.

```
{
  "candidates" : [ {
    "endTime" : "2023-02-15T18:00:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-02-15T17:00:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-02-15T18:15:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-02-15T17:15:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-02-15T18:30:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-02-15T17:30:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-02-15T18:45:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-02-15T17:45:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-02-15T19:00:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CG5MAM" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-02-15T18:00:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  } ]
}
```

3. Parse the JSON response, and show the actual service resources on a page.

Your users can select a service resource for the appointment from the page.

Create Service Appointments

Show your users the details of a service appointment—an appointment booked through Salesforce Scheduler—so that users can review and create the appointment.

1. Create a page where the user can review the appointment details and create the appointment.
2. Make a `POST` request on the [service-appointments](#) Connect API to create the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

To indicate that the appointment is scheduled, set `status` to `Scheduled`.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS700000001DYKAY",
    "parentRecordId": "001S7000001pFlJIAU",
    "engagementChannelTypeId": "0eFS70000004CG5MAM",
    "schedStartTime": "2023-02-15T17:00:00.000+0000",
    "schedEndTime": "2023-02-15T18:00:00.000+0000",
    "street": "121 Spear Street",
    "city": "Charlotte",
    "state": "VT",
    "postalCode": "05445",
    "country": "United States",
    "extendedFields": [
      {
        "name": "status",
        "value": "Scheduled"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS700000002jAKAQ",
      "isRequiredResource": true
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rS700000000hPIAQ"
    ],
    "serviceAppointmentId": "08pS7000000018wIAA"
  }
}
```

```
}  
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

To indicate that the appointment is scheduled, set `status` to `Scheduled`.

```
{  
  "serviceAppointment": {  
    "serviceTerritoryId": "0HhS700000001DYKAY",  
    "engagementChannelTypeId": "0eFS700000004CG5MAM",  
    "schedStartTime": "2023-02-15T17:00:00.000+0000",  
    "schedEndTime": "2023-02-15T18:00:00.000+0000",  
    "street": "121 Spear Street",  
    "city": "Charlotte",  
    "state": "VT",  
    "postalCode": "05445",  
    "country": "United States",  
    "extendedFields": [  
      {  
        "name": "status",  
        "value": "Scheduled"  
      }  
    ]  
  },  
  "assignedResources": [  
    {  
      "serviceResourceId": "0HnS700000002jAKAQ",  
      "isRequiredResource": true  
    }  
  ],  
  "lead": {  
    "firstName": "Mark",  
    "lastName": "Taylor",  
    "phone": "012-345-6789",  
    "email": "mtaylor@company.com",  
    "company": "Company1"  
  }  
}
```

Sample Response


The API returns the service appointment ID and the assigned service resources.

```
{  
  "result": {  
    "assignedResourceIds": [  
      "03rS700000000hUIAQ"  
    ],  
    "parentRecordId": "00QS70000000sfbOMAQ",  
    "serviceAppointmentId": "08pS70000000191IAA"  
  }  
}
```

```
}  
}
```

Create a page to show confirmation when the service appointment is created successfully.

Here's how a sample confirmation page can look.

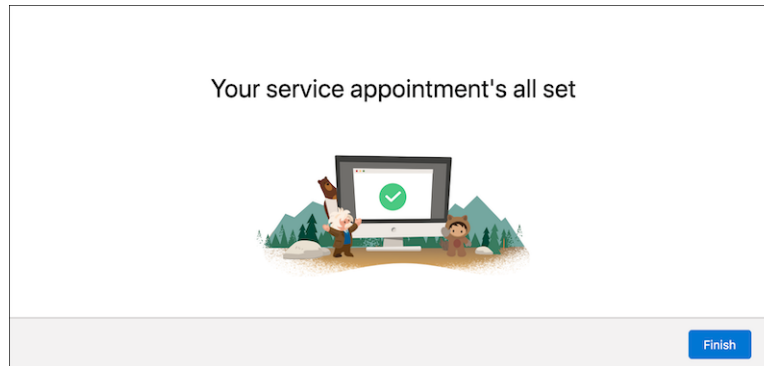


Modify a Service Appointment

Use Salesforce Scheduler APIs to modify a service appointment. This use case explains how you can change the engagement channel, service resource, time slot, or status of an existing appointment. However, you can also modify other details of the appointment in a similar fashion. For example, to change the service territory, use the `service-territories` Connect API.

This topic explains how you can modify an appointment using the custom application that you built for creating appointments.

Note: For the procedure to be successful, ensure that each unavailable resource marks themselves as absent in Salesforce Scheduler. Otherwise, the API request to retrieve the list of service resources continues to include the resources that are currently unavailable or absent.

These steps provide a high-level overview of how you can let users choose a different engagement channel type, service resource, or time slot for an existing service appointment.

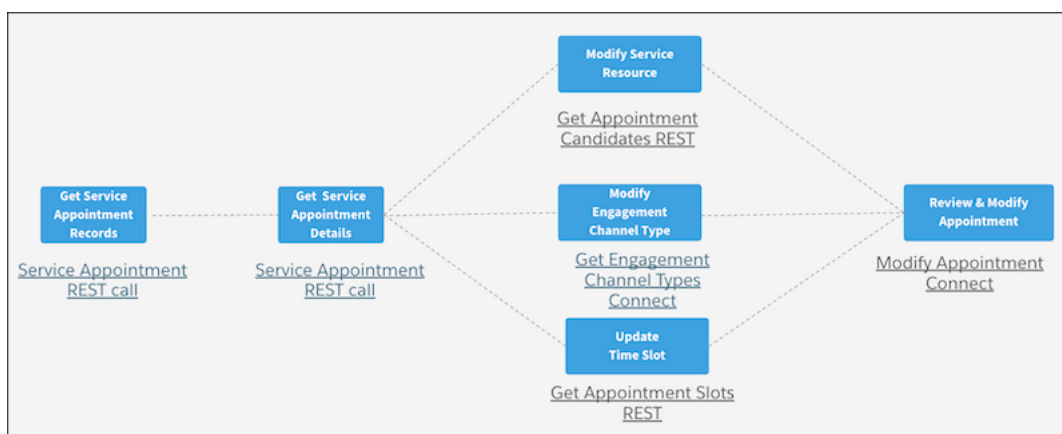

1. [Authenticate with a Connected App](#)

The OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls. Before you use Salesforce Scheduler for API-based integration, authenticate the API calls using OAuth.

2. [Get Service Appointments](#)

A service appointment represents an appointment booked through Salesforce Scheduler.

3. [Get Service Appointment Details](#)

A service appointment represents an appointment booked through Salesforce Scheduler.

4. [Change Appointment Details](#)

This section explains how you can show either the engagement channel types, service resources, or time slots page based on what the user chooses to change for the appointment.

5. [Update Service Appointments](#)

Show your users the details of a service appointment—an appointment modified through Salesforce Scheduler—so that users can review and update the appointment.

Authenticate with a Connected App

The OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls. Before you use Salesforce Scheduler for API-based integration, authenticate the API calls using OAuth.



Note: To build a custom appointment scheduling application using Salesforce Scheduler APIs for prospects or unauthenticated users, you must build it using a logged-in user. For example, an integration user or an administrator.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

Get Service Appointments

A service appointment represents an appointment booked through Salesforce Scheduler.

1. Create a page to show the service appointments.
2. Use the [Query \(\)](#) request on the ServiceAppointment object to retrieve the list of service appointments associated with an account.

Sample Request

```
https://yourInstance.salesforce.com/services/data/v66.0/query/?q=SELECT+AppointmentNumber,+Status,+SchedStartTime,+SchedEndTime,+ServiceTerritoryId,+WebTypeId+FROM+ServiceAppointment+WHERE+AccountId='+001S70000196IAA'
```

Sample Response

The method returns the available service appointments.

```
{
  "totalSize": 3,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "ServiceAppointment",
        "url": "/services/data/v57.0/subjects/ServiceAppointment/08pS70000000196IAA"
```

```

    },
    "AppointmentNumber": "SA-0003",
    "Status": "Scheduled",
    "SchedStartTime": "2023-03-15T16:00:00.000+0000",
    "SchedEndTime": "2023-03-15T17:00:00.000+0000",
    "ServiceTerritoryId": "0HhS700000001DYKAY",
    "WorkTypeId": null
  },
  {
    "attributes": {
      "type": "ServiceAppointment",
      "url": "/services/data/v57.0/subjects/ServiceAppointment/08pS7000000018wIAA"
    },
    "AppointmentNumber": "SA-0001",
    "Status": "Scheduled",
    "SchedStartTime": "2023-02-15T17:00:00.000+0000",
    "SchedEndTime": "2023-02-15T18:00:00.000+0000",
    "ServiceTerritoryId": "0HhS700000001DYKAY",
    "WorkTypeId": null
  },
  {
    "attributes": {
      "type": "ServiceAppointment",
      "url": "/services/data/v57.0/subjects/ServiceAppointment/08pS7000000019BIAQ"
    },
    "AppointmentNumber": "SA-0004",
    "Status": "Scheduled",
    "SchedStartTime": "2023-03-15T18:00:00.000+0000",
    "SchedEndTime": "2023-03-15T19:00:00.000+0000",
    "ServiceTerritoryId": "0HhS700000001DYKAY",
    "WorkTypeId": null
  }
]
}

```

3. Parse the JSON response, and show the service appointments on a page that you created.

Your users can select a service appointment to modify from the page.

Get Service Appointment Details

A service appointment represents an appointment booked through Salesforce Scheduler.

1. Create a page to show the details of a service appointment record that the user selects.
2. Make a `GET` request on the `ServiceAppointment` object.

Sample Request

Here's a sample `GET` request to retrieve the service appointment details.

```
https://yourInstance.salesforce.com/services/data/v66.0/subjects/ServiceAppointment/08pS7000000019BIAQ
```

Sample Response

The method returns the service appointment details.

```
{
  "attributes": {
    "type": "ServiceAppointment",
    "url": "/services/data/v57.0/objects/ServiceAppointment/08pS7000000019BIAQ"
  },
  "Id": "08pS7000000019BIAQ",
  "OwnerId": "005S70000000Ipe4IAC",
  "IsDeleted": false,
  "AppointmentNumber": "SA-0004",
  "CreatedDate": "2023-03-13T17:31:23.000+0000",
  "CreatedById": "005S70000000Ipe4IAC",
  "LastModifiedDate": "2023-03-13T17:31:23.000+0000",
  "LastModifiedById": "005S70000000Ipe4IAC",
  "SystemModstamp": "2023-03-13T17:31:28.000+0000",
  "LastViewedDate": "2023-03-13T17:31:23.000+0000",
  "LastReferencedDate": "2023-03-13T17:31:23.000+0000",
  "ParentRecordId": "001S7000001pFlJIAU",
  "ParentRecordType": "Account",
  "AccountId": "001S7000001pFlJIAU",
  "WorkTypeId": "08qS70000004DQsIAM",
  "ContactId": null,
  "Street": "121 Spear Street",
  "City": "Charlotte",
  "State": "VT",
  "PostalCode": "05445",
  "Country": "United States",
  "Latitude": 44.356843,
  "Longitude": -73.194897,
  "GeocodeAccuracy": "Block",
  "Address": {
    "city": "Charlotte",
    "country": "United States",
    "geocodeAccuracy": "Block",
    "latitude": 44.356843,
    "longitude": -73.194897,
    "postalCode": "05445",
    "state": "VT",
    "street": "121 Spear Street"
  },
  "Description": null,
  "EarliestStartTime": "2023-03-13T17:31:23.000+0000",
  "DueDate": "2023-03-20T17:31:23.000+0000",
  "Duration": null,
  "ArrivalWindowStartTime": "2023-03-15T18:00:00.000+0000",
  "ArrivalWindowEndTime": "2023-03-15T19:00:00.000+0000",
  "Status": "Scheduled",
  "SchedStartTime": "2023-03-15T18:00:00.000+0000",
  "SchedEndTime": "2023-03-15T19:00:00.000+0000",
  "ActualStartTime": null,
  "ActualEndTime": null,
  "ActualDuration": null,
}
```

```
"DurationType": "Hours",
"DurationInMinutes": null,
"ServiceTerritoryId": "0HhS700000001DYKAY",
"Subject": null,
"ParentRecordStatusCategory": null,
"StatusCategory": "Scheduled",
"ServiceNote": null,
"AppointmentType": null,
"Email": null,
"Phone": null,
"CancellationReason": null,
"AdditionalInformation": null,
"Comments": null,
"IsAnonymousBooking": false,
"IsOffsiteAppointment": false,
"ApptBookingInfoUrl": null,
"AppointmentInvitationId": null,
"EngagementChannelTypeId": "0eFS700000004CG5MAM"
}
```

3. Parse the JSON response, and show the service appointments details on the page that you created.

On the next page, you can let users to modify an engagement channel type, a service resource, or a time slot depending on what the user chooses to change.

Change Appointment Details

This section explains how you can show either the engagement channel types, service resources, or time slots page based on what the user chooses to change for the appointment.

[Change Engagement Channel Type](#)

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

[Change Service Resource](#)

A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

[Change Appointment Time](#)

A time slot represents a period in a day when an appointment can be scheduled.

Change Engagement Channel Type

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

Before using engagement channels for scheduling appointments:

- Enable engagement channels in the Salesforce Scheduler Settings of your instance. See [Enable the Scheduling Appointments Using Engagement Channels Setting](#).
- Set up engagement channels, including setting the required access and creating engagement channels. See [Engagement Channels](#).
- Create the Shift Engagement Channel and Engagement Channel Work Type records for the applicable shifts.
- Define Shift Rules in the scheduling policy. See [Define Shift Rules in Scheduling Policy](#).

1. Make a GET request to the [engagement-channel-types](#) API by passing the required `workTypeId` or `workTypeGroupId` parameter.

Sample Request

This sample API call uses the work type record representing the service territory to filter the engagement channel types.

```
https://yourInstance.salesforce.com/services/data/v66.0/
connect/scheduling/engagement-channel-types?workTypeIds=08qS70000004DQsIAM
```

Sample Response

The request returns the engagement channel types.

```
{
  "result" : {
    "engagementChannelTypes" : [ {
      "contactPointType" : "InPerson",
      "id" : "0eFS70000004CG5MAM",
      "name" : "EngagementChannel1",
      "workTypeGroupIds" : [ ],
      "workTypeIds" : [ "08qS70000004DQsIAM" ]
    }, {
      "contactPointType" : "Video",
      "id" : "0eFS70000004CGFMA2",
      "name" : "EngagementChannel3",
      "workTypeGroupIds" : [ ],
      "workTypeIds" : [ "08qS70000004DQsIAM" ]
    } ]
  }
}
```

2. Parse the JSON response, and show the engagement channel types on the page. Your users can select a engagement channel type for the appointment from the page.
3. Make a GET request to the [getAppointmentSlots](#) REST API to see if the appointment's original time slot is still available for the changed engagement channel type. Otherwise, show the available time slots for the selected engagement channel and allow your users to select a time slot. See [Change Appointment Time](#).

Change Service Resource

A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

1. Create a page to show the available service resources.
2. Make a POST request on the [getAppointmentCandidates](#) REST API by passing the required `workTypeId` and `territoryIds` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/scheduling/getAppointmentCandidates
```

Sample Request

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body. The preference is enforced when the Include Only Required Service Resources and Ignore Excluded Service Resources policy rules are enabled. For more information, see [Add Service Resource Preferences to Accounts for Salesforce Scheduler](#).

```
{
  "startTime": "2023-03-24T09:00:00.000+0000",
  "endTime": "2023-03-24T19:00:00.000+0000",
  "accountId": "001S7000001pFlJIAU",
  "workType": {
    "id": "08qS70000004DQsIAM"
  },
  "territoryIds": [
    "0HhS700000001DYKAY"
  ],
  "schedulingPolicyId": "2F0VrRM0000004CUV",
  "engagementChannelTypeIds": [
    "0eFS70000004CGFMA2"
  ]
}
```

Sample Response

The API returns the available time slots and service resources.

```
{
  "candidates" : [ {
    "endTime" : "2023-03-24T17:00:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T16:00:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T17:15:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T16:15:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T17:30:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T16:30:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T17:45:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T16:45:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T18:00:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T17:00:00.000+0000",
  }
]
```

```

    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T18:15:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T17:15:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T18:30:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T17:30:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T18:45:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T17:45:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-24T19:00:00.000+0000",
    "engagementChannelTypeIds" : [ "0eFS70000004CGFMA2" ],
    "resources" : [ "0HnS700000002jAKAQ" ],
    "startTime" : "2023-03-24T18:00:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  } ]
}

```

3. Parse the JSON response, and show the available resources on the page. Your users can select a service resource for the appointment from the page.
4. Retrieve the available time slots for the selected engagement channel type and service resource. See [Change Appointment Time](#). Your users can select a resource and a time slot for the appointment from the page.

Change Appointment Time

A time slot represents a period in a day when an appointment can be scheduled.

1. Create a page to show the available time slots for the resource associated with the appointment.
2. Make a POST request on the [getAppointmentSlots](#) on page 139 REST API by passing the required `workTypeGroupId` or `workTypeId` parameter along with the `territoryId` parameter.

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/scheduling/getAppointmentSlots
```

Sample Request

Using the `workTypeId` parameter.

```

{
  "workType": {
    "id": "08qS70000004DQsIAM"
  },
  "territoryIds": [

```

```
    "0HhS700000001DYKAY"
  ],
  "requiredResourceIds": [
    "0HnS700000002jAKAQ"
  ],
  "accountId": "001S7000001pFlJIAU",
  "schedulingPolicyId": "2F0VrRM0000004CUV",
  "engagementChannelTypeIds": [
    "0eFS70000004CGFMA2"
  ]
}
```

Using the `WorkTypeGroupId` parameter.

```
{
  "workTypeGroupId": "0VS2x0000008ZotGAE",
  "accountId": "001S7000001pFlJIAU",
  "schedulingPolicyId": "2F0VrRM0000004CUV",
  "territoryIds": [
    "0HhS700000001DYKAY"
  ],
  "requiredResourceIds": [
    "0HnS700000002jAKAQ"
  ],
  "engagementChannelTypeIds": [
    "0eFS70000004CGFMA2"
  ]
}
```

Sample Response

The API returns the available time slots for a resource.

```
{
  "timeSlots" : [ {
    "endTime" : "2023-03-26T17:55:00.000+0000",
    "remainingAppointments" : 1,
    "startTime" : "2023-03-26T17:30:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-03-30T16:55:00.000+0000",
    "remainingAppointments" : 1,
    "startTime" : "2023-03-30T16:30:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-04-02T16:55:00.000+0000",
    "remainingAppointments" : 1,
    "startTime" : "2023-04-02T16:30:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  }, {
    "endTime" : "2023-04-04T18:25:00.000+0000",
    "remainingAppointments" : 1,
    "startTime" : "2023-04-04T18:00:00.000+0000",
    "territoryId" : "0HhS700000001DYKAY"
  } ]
}
```


3. Parse the JSON response, and show the available time slots on the page.

Your users can select a time slot for the appointment from the page.

Update Service Appointments

Show your users the details of a service appointment—an appointment modified through Salesforce Scheduler—so that users can review and update the appointment.

1. Create a page where the user can review the appointment details and update the appointment.

Here's how a Review Service Appointment page can look.

2. Make a `PATCH` request to the `service-appointments` Connect API to modify the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/service-appointments
```

Sample Request

 **Note:** Specify the scheduling policy ID in which the shift is defined. Additionally, pass the parameters including the standard and custom fields that are not available in the input parameters list as extended fields. Edit access on these fields is required to update their values. For example, pass the `status` field as extended fields with its value set to `Canceled` to indicate that the appointment is canceled.

Update Service Resource and engagement channel type

```
{
  "serviceAppointmentId": "08ps7000000019BIAQ",
  "schedulingPolicyId": "2F0VrRM0000004CUV",
  "serviceAppointment": {
    "schedStartTime": "2023-03-24T18:00:00.000+0000",
    "schedEndTime": "2023-03-24T19:00:00.000+0000",
    "serviceTerritoryId": "0HhS700000001DYKAY",
    "engagementChannelTypeId": "0eFS70000004CGFMA2",
```

```

    "workTypeId": "08qS70000004DQsIAM"
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS700000002jAKAQ",
      "isRequiredResource": true,
      "extendedFields": []
    }
  ]
}

```

Update Time Slot

```

{
  "serviceAppointmentId": "08pS7000000019BIAQ",
  "serviceAppointment": {
    "schedStartTime": "2023-03-24T18:00:00.000+0000",
    "schedEndTime": "2023-03-24T19:00:00.000+0000",
  }
}

```

Update Appointment Status

```

{
  "serviceAppointmentId": "08pS7000000019BIAQ",
  "serviceAppointment": {
    "extendedFields": [{
      "name": "status",
      "value": "Canceled"
    }]
  }
}

```

Sample Response

The API returns the service appointment ID and the assigned service resources.


```

{
  "result": {
    "assignedResourceIds": [
      "03rS700000000heIAA"
    ],
    "serviceAppointmentId": "08pS7000000019BIAQ"
  }
}

```

3. Create a page to show confirmation when the service appointment is modified successfully.

Here's how a sample confirmation page can look.

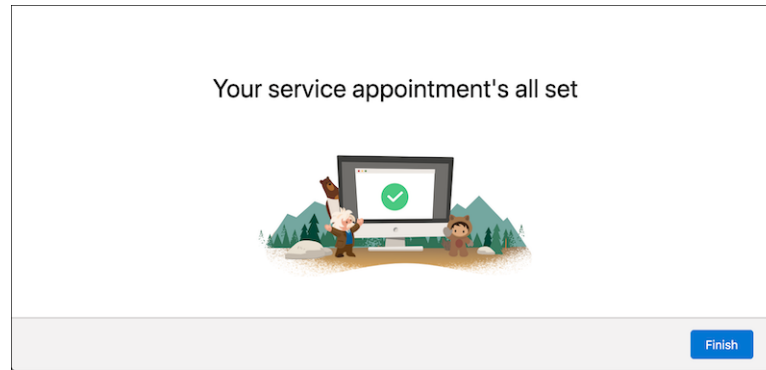


Create a Multi-Resource Appointment

Build a scheduling application using Salesforce Scheduler APIs to book a multi-resource service appointment. Multi-resource scheduling lets users create appointments that include more than one required service resource.

 **Note:** A multi-resource appointment can have a maximum of five required service resources: one primary required service resource plus four required service resources, including asset resources.

Before you can use the scheduler developer resources to build the app, set up Salesforce Scheduler for your organization. For more information, see [Set Up Salesforce Scheduler](#).

These steps provide a high-level overview of how you can build a multi-resource scheduling app, which is explained in detail in the following sections.

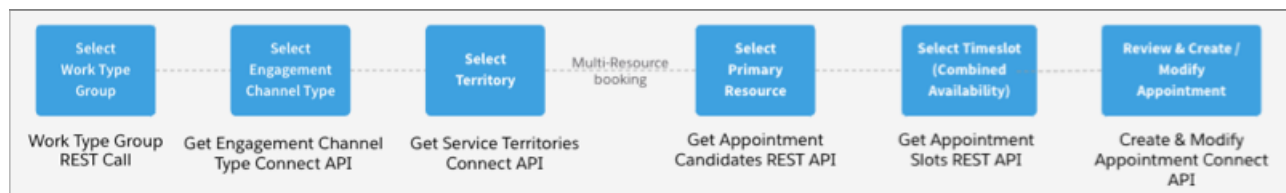

1. [Considerations for Multi-Resource Scheduling](#)

In multi-resource scheduling, a primary service resource anchors the appointment and must be marked required. Primary service resources are the only required resources whose skills are matched to the skill requirements for an appointment. Other required service resources are matched to appointments based on their availability and the primary resource's service territory.

2. [Enable Multi-Resource Scheduling](#)

Enable the Multi-Resource Scheduling setting to let users schedule groups of resources for customer appointments.

3. [Update Field Level Security for Multi-Resource Scheduling](#)

Update the field-level security settings for the Primary Resource field on the Assigned Resource object for user profiles that need to access multi-resource scheduling.

4. [Authenticate with a Connected App](#)

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

5. [Get Work Type Groups](#)

A work type group represents a general appointment category or topic, such as a home loan or investment. Use the `Query()` method on the `WorkTypeGroup` object to retrieve a list of work type groups.

6. [Get Engagement Channels](#)

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

7. [Get Service Territories](#)

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Use the `service-territories` Connect API to fetch a list of service territories based on a work type group or work type.

8. [Get Appointment Candidates](#)

A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients. Use the `getAppointmentCandidates` REST API to fetch the available service resources based on work type group and service territory.

9. [Get Appointment Time Slots](#)

A time slot represents a period in a day when an appointment can be scheduled. Use the `getAppointmentSlots` REST API to fetch the available time slots for a resource.

10. [Create Service Appointments](#)

A service appointment represents an appointment booked through Salesforce Scheduler. Make a POST request on the `service-appointments` Connect API to create the appointment.

Considerations for Multi-Resource Scheduling

In multi-resource scheduling, a primary service resource anchors the appointment and must be marked required. Primary service resources are the only required resources whose skills are matched to the skill requirements for an appointment. Other required service resources are matched to appointments based on their availability and the primary resource's service territory.

Here's how matching is done for different types of service resources when multi-resource scheduling is enabled.

Matches On	Primary Service Resource	Required Service Resource
Skill Requirements	Yes	No
Service Territory	Yes	Yes
Availability in Time Slots	Yes	Yes

Enable Multi-Resource Scheduling

Enable the Multi-Resource Scheduling setting to let users schedule groups of resources for customer appointments.

1. From Setup, in the Quick Find box, enter Salesforce Scheduler, and then select **Salesforce Scheduler Settings**.
2. Enable **Multi-Resource Scheduling**.
3. Save your changes.

Update Field Level Security for Multi-Resource Scheduling

Update the field-level security settings for the Primary Resource field on the Assigned Resource object for user profiles that need to access multi-resource scheduling.

1. From Setup, open **Object Manager**.
2. Click **Assigned Resource** to open it.
3. Click **Fields & Relationships**, and then select **Primary Resource**.
4. Click **Set Field-Level Security**.
5. Select the **Visible** checkbox for all profiles that need access to multi-resource scheduling in Salesforce Scheduler, including the System Administrator.
6. Save your changes.

Authenticate with a Connected App

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

 **Note:** To build a custom appointment scheduling application using Salesforce Scheduler APIs for prospects or unauthenticated users, you must build it using a logged-in user. For example, an integration user or an administrator.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

Get Work Type Groups

A work type group represents a general appointment category or topic, such as a home loan or investment. Use the `Query()` method on the `WorkTypeGroup` object to retrieve a list of work type groups.

1. Create a page in your app where you can show the work type groups from your org.
2. Use the `Query()` method to retrieve work type groups. For more information, see [Execute a SOQL Query](#).

Sample Request

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+Id,+Name+From+WorkTypeGroup+Where+isActive+=+true+ORDER+BY+NAME+DESC
```

You can use the `toLabel` method to translate the SOQL query results in the language of the user. For more information, see [Translate SOQL Query Results](#) on page 130.

Sample Response

The method returns the available work type groups from your org.

```
{
  "totalSize" : 3,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "WorkTypeGroup",
```

```

    "url" : "/services/data/v59.0/subjects/WorkTypeGroup/0VSS700000000sLOAQ"
  },
  "Id" : "0VSS700000000sLOAQ",
  "Name" : "Wealth Management"
}, {
  "attributes" : {
    "type" : "WorkTypeGroup",
    "url" : "/services/data/v59.0/subjects/WorkTypeGroup/0VSS700000000sQOAQ"
  },
  "Id" : "0VSS700000000sQOAQ",
  "Name" : "Loans"
}, {
  "attributes" : {
    "type" : "WorkTypeGroup",
    "url" : "/services/data/v59.0/subjects/WorkTypeGroup/0VSS700000000sVOAQ"
  },
  "Id" : "0VSS700000000sVOAQ",
  "Name" : "Banking"
} ]
}

```

3. Parse the JSON response, and display the work type groups on a page in your app so that users can select a work type group during appointment scheduling. Here's how that page can look.

On the next page in your app, you can provide users an option to search for service territories.

Get Engagement Channels

An engagement channel is a medium, such as Phone, Video, and In Person that service resources use to meet customers.

Before using engagement channels for scheduling appointments:

- Enable engagement channels in the Salesforce Scheduler Settings of your instance. See [Enable the Scheduling Appointments Using Engagement Channels Setting](#).

- Set up engagement channels, including setting the required access and creating engagement channels. See [Engagement Channels](#).
 - Create the Shift Engagement Channel and Engagement Channel Work Type records for the applicable shifts.
 - Define Shift Rules in the scheduling policy. See [Define Shift Rules in Scheduling Policy](#).
1. Create a page to show the engagement channel types. Salesforce Scheduler shows service resources and resource time slots based on the channel that a user selects when creating an appointment.
 2. Make a GET request on the [engagement-channel-types](#) Connect API.

Sample Request

Filter the engagement channel types by the `workTypeGroupId` selected in the previous step.

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/engagement-channel-types?workTypeGroupIds=0VSS700000000sVOAQ
```

 **Note:** You can filter the engagement channel type results by `workTypeGroupIds` or `workTypeIds`.

Sample Response

The request returns the engagement channels for the `workTypeGroupId` specified in the request.

```
{
  "result": {
    "engagementChannelTypes": [
      {
        "contactPointType": "InPerson",
        "id": "0eFS70000004CG5MAM",
        "name": "EngagementChannel1",
        "workTypeGroupIds": [
          "0VSS700000000sVOAQ"
        ],
        "workTypeIds": []
      },
      {
        "contactPointType": "Video",
        "id": "0eFS70000004CGFMA2",
        "name": "EngagementChannel3",
        "workTypeGroupIds": [
          "0VSS700000000sVOAQ"
        ],
        "workTypeIds": []
      }
    ]
  }
}
```

3. Parse the JSON response, and show the engagement channel types on the page that you created.

Your users can select an engagement channel type for the appointment from the page.

Get Service Territories

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Use the `service-territories` Connect API to fetch a list of service territories based on a work type group or work type.

1. Create a page where you can provide users an option to search for service territories.

Here's how a Select Service Territory page can look.

2. Make a GET request on the [service-territories](#) on page 162 Connect API by passing the user-entered search values and the selected work type group ID as the input parameters in the query string. You can also use a combination of the radius, latitude, longitude, sortBy, and sortOrder parameters to filter and sort the service territories.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-territories
```

Sample Request

This sample GET request specifies the query string on the service territories Connect API.

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-territories?workTypeGroupId=0VSS700000000SVQAQ&latitude=44.357422&longitude=-73.193952&radius=5&radiusUnit=mi&sortBy=Distance&sortOrder=asc
```

Sample Response

The API returns the available service territories based on the passed work type group ID and search criteria.

```
{
  "result": {
    "serviceTerritories": [
      {
        "city": "Charlotte",
        "country": "United States",
        "id": "0Hhs700000001DYKAY",
        "latitude": 44.357422,
        "longitude": -73.193952,
        "name": "Spear Street Branch",
        "operatingHoursId": "0OHS700000001H10AI",
        "postalCode": "05445",
        "state": "VT",
        "street": "121 Spear Street"
      }
    ]
  }
}
```


3. Parse the JSON response, and show the available service territories on the Select Service Territory page so that the user can select a service territory.

Here's a Select Service Territory page showing the available service territories.

Here's how the service territory details are displayed when the user selects a service territory.

On the next page in your app, you can show the available service resources so that the user can select a primary resource for the appointment.

Get Appointment Candidates

A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients. Use the `getAppointmentCandidates` REST API to fetch the available service resources based on work type group and service territory.

1. Create a page in your app where you can show the available service resources based on the work type group and service territory.
2. Make a POST request on the [getAppointmentCandidates](#) on page 134 REST API by passing the required `workTypeGroupId` and `territoryIds` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentCandidates
```

For an Existing User (Account)

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body. The preference is enforced when the Include Only Required Service Resources and Ignore Excluded Service Resources policy rules are enabled. See [Scheduling Policy Rules in Salesforce Scheduler](#).

Sample Request

```
{
  "startTime" : "2023-11-01T09:00:00.000+0000",
  "endTime" : "2023-11-25T19:00:00.000+0000",
  "accountId" : "001S7000001pFlJIAU",
  "workTypeGroupId" : "0VSS700000000sVOAQ",
  "territoryIds" : ["0Hhs700000001DYKAY"],
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ]
}
```

Sample Response

The API returns the available time slots and service resources.

```
{
  "candidates": [
    {
      "endTime": "2023-11-24T18:00:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0Hns700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:00:00.000+0000",
      "territoryId": "0Hhs700000001DYKAY"
    },
    {
      "endTime": "2023-11-24T18:15:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0Hns700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:15:00.000+0000",
      "territoryId": "0Hhs700000001DYKAY"
    },
    {
      "endTime": "2023-11-24T18:30:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0Hns700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:30:00.000+0000",
      "territoryId": "0Hhs700000001DYKAY"
    }
  ]
}
```

```

    "territoryId": "0HhS700000001DYKAY"
  },
  {
    "endTime": "2023-11-24T18:45:00.000+0000",
    "engagementChannelTypeIds": [
      "0eFS70000004CG5MAM"
    ],
    "resources": [
      "0HnS700000002jAKAQ"
    ],
    "startTime": "2023-11-24T17:45:00.000+0000",
    "territoryId": "0HhS700000001DYKAY"
  },
  {
    "endTime": "2023-11-24T19:00:00.000+0000",
    "engagementChannelTypeIds": [
      "0eFS70000004CG5MAM"
    ],
    "resources": [
      "0HnS700000002jAKAQ"
    ],
    "startTime": "2023-11-24T18:00:00.000+0000",
    "territoryId": "0HhS700000001DYKAY"
  },
  {
    "endTime": "2023-11-24T19:15:00.000+0000",
    "engagementChannelTypeIds": [
      "0eFS70000004CG5MAM"
    ],
    "resources": [
      "0HnS700000002jAKAQ"
    ],
    "startTime": "2023-11-24T18:15:00.000+0000",
    "territoryId": "0HhS700000001DYKAY"
  },
  {
    "endTime": "2023-11-24T19:30:00.000+0000",
    "engagementChannelTypeIds": [
      "0eFS70000004CG5MAM"
    ],
    "resources": [
      "0HnS700000002jAKAQ"
    ],
    "startTime": "2023-11-24T18:30:00.000+0000",
    "territoryId": "0HhS700000001DYKAY"
  }
]

```

For a Guest User (Lead)

Sample Request

```

{
  "startTime" : "2023-11-01T09:00:00.000+0000",

```

```

    "endTime" : "2023-11-25T19:00:00.000+0000",
    "workTypeGroupId" : "0VSS700000000sVOAQ",
    "territoryIds" : ["0HhS700000001DYKAY"],
    "engagementChannelTypeIds": [
      "0eFS70000004CG5MAM"
    ]
  }
}

```

Sample Response

The API returns the available time slots and service resources.

```

{
  "candidates": [
    {
      "endTime": "2023-11-24T18:00:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0HnS700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:00:00.000+0000",
      "territoryId": "0HhS700000001DYKAY"
    },
    {
      "endTime": "2023-11-24T18:15:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0HnS700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:15:00.000+0000",
      "territoryId": "0HhS700000001DYKAY"
    },
    {
      "endTime": "2023-11-24T18:30:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0HnS700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:30:00.000+0000",
      "territoryId": "0HhS700000001DYKAY"
    },
    {
      "endTime": "2023-11-24T18:45:00.000+0000",
      "engagementChannelTypeIds": [
        "0eFS70000004CG5MAM"
      ],
      "resources": [
        "0HnS700000002jAKAQ"
      ],
      "startTime": "2023-11-24T17:45:00.000+0000",
      "territoryId": "0HhS700000001DYKAY"
    }
  ]
}

```

```

        "startTime": "2023-11-24T17:45:00.000+0000",
        "territoryId": "0HhS700000001DYKAY"
    },
    {
        "endTime": "2023-11-24T19:00:00.000+0000",
        "engagementChannelTypeIds": [
            "0eFS70000004CG5MAM"
        ],
        "resources": [
            "0HnS700000002jAKAQ"
        ],
        "startTime": "2023-11-24T18:00:00.000+0000",
        "territoryId": "0HhS700000001DYKAY"
    },
    {
        "endTime": "2023-11-24T19:15:00.000+0000",
        "engagementChannelTypeIds": [
            "0eFS70000004CG5MAM"
        ],
        "resources": [
            "0HnS700000002jAKAQ"
        ],
        "startTime": "2023-11-24T18:15:00.000+0000",
        "territoryId": "0HhS700000001DYKAY"
    },
    {
        "endTime": "2023-11-24T19:30:00.000+0000",
        "engagementChannelTypeIds": [
            "0eFS70000004CG5MAM"
        ],
        "resources": [
            "0HnS700000002jAKAQ"
        ],
        "startTime": "2023-11-24T18:30:00.000+0000",
        "territoryId": "0HhS700000001DYKAY"
    }
]
}

```

3. Parse the JSON response, and show the available service resources on the page so that the user can select a primary service resource.
Here's how a Select Service Resource page can look.

Schedule Appointment

Select Service Resource

Select the service resource for this service appointment

Service Resource Name	Role	Next Availability
☐ Stanley McBride		6/22/2021, 8:30 PM
☐ John Doe		6/22/2021, 8:30 PM
☐ Hermoine Sherman		6/22/2021, 8:30 PM
☐ Felix Vasquez		6/22/2021, 8:30 PM
☐ MeetingRoom		6/22/2021, 8:30 PM

Previous

Next

Here's how a page can look when the user selects a primary service resource.

Schedule Appointment

Select Service Resource

Select the service resource for this service appointment

Service Resource Name	Role	Next Availability
☒ Stanley McBride		6/23/2021, 8:30 PM
☐ John Doe		6/23/2021, 8:30 PM
☐ Hermoine Sherman		6/23/2021, 8:30 PM
☐ Felix Vasquez		6/23/2021, 8:30 PM
☐ MeetingRoom		6/23/2021, 8:30 PM

Previous

Next

On the next page in your app, show the selected primary resource. You can also show the other service resources, including assets, so that users can add them as required resources. Then, show the consolidated time slots for all the selected resources.

Get Appointment Time Slots

A time slot represents a period in a day when an appointment can be scheduled. Use the `getAppointmentSlots` REST API to fetch the available time slots for a resource.

1. Create a page in your app to show the selected primary resource, other required resources, including assets, and the consolidated time slots for the primary service resource and required resources that users select.

Here's how a page can look.

2. When the user selects one or more required resources, refresh the available time slots by making a POST request to the [getAppointmentSlots](#) on page 139 REST API and passing the selected required resources along with the `workTypeGroupId` and `territoryId` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentSlots
```

Sample Request

```
{
  "startTime" : "2023-11-30T09:00:00.000+0000",
  "endTime" : "2023-12-01T23:30:00.000+0000",
  "accountId" : "001S7000001pFlJIAU",
  "workTypeGroupId" : "0VSS700000000sVOAQ",
  "territoryIds" : ["0HhS700000001DYKAY"],
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "primaryResourceId" : "0HnS700000002jAKAQ",
  "requiredResourceIds" : ["0HnS700000002jKKAQ"]
}
```

Sample Response

The API returns the time slots where the selected primary resource and required resources are available for the multi-resource appointment.

```
{
  "timeSlots": [
```

```
{
  "endTime": "2023-11-30T18:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T17:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-11-30T19:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T18:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-11-30T20:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T19:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-11-30T21:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T20:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-11-30T22:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T21:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-11-30T23:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T22:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
}
```



```
{
  "endTime": "2023-12-01T00:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-11-30T23:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-12-01T01:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-12-01T00:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
},
{
  "endTime": "2023-12-01T02:00:00.000+0000",
  "engagementChannelTypeIds": [
    "0eFS70000004CG5MAM"
  ],
  "remainingAppointments": 1,
  "startTime": "2023-12-01T01:00:00.000+0000",
  "territoryId": "0HhS700000001DYKAY"
}
]
```

3. Parse the JSON response, and show the available time slots for the selected resources.

Here's how a Select Service Appointment Time page can look.

Schedule Appointment

Select Service Appointment Time

Required Service Resources (3) [Manage](#)

Stanley McB...
Primary

MeetingRoom
Required

Felix Vasquez
Required

Availability Calendar

22 June 2021 - 25 June 2021 [<](#) [>](#) [Today](#)

Time Zone: (GMT+05:30) India Standard Time (Asia)

TUE 22	WED 23	THU 24	FRI 25
8:30 - 9:30 pm	12:00 - 1:00 am	11:00 - 12:00 am	11:00 - 12:00 am
9:00 - 10:00 pm	12:30 - 1:30 am	11:30 - 12:30 am	11:30 - 12:30 am

Manage Service Resources [×](#)

Stanley McBride
Primary - Required [Change](#)

Add Service Resource

Search by name or role...

2 Added Required (2/4)

MeetingRoom
Required

Felix Vasquez
Required

[Previous](#) [Next](#)

 **Note:** A multi-resource appointment can have a maximum of five required service resources: one primary required service resource plus four required service resources, including asset resources.


On the next page in your app, you can show the appointment details for the user to review and create the appointment.

Create Service Appointments

A service appointment represents an appointment booked through Salesforce Scheduler. Make a POST request on the `service-appointments` Connect API to create the appointment.

1. Create a page where the user can review the appointment details and create the appointment.

Here's how a Review Service Appointment page can look.

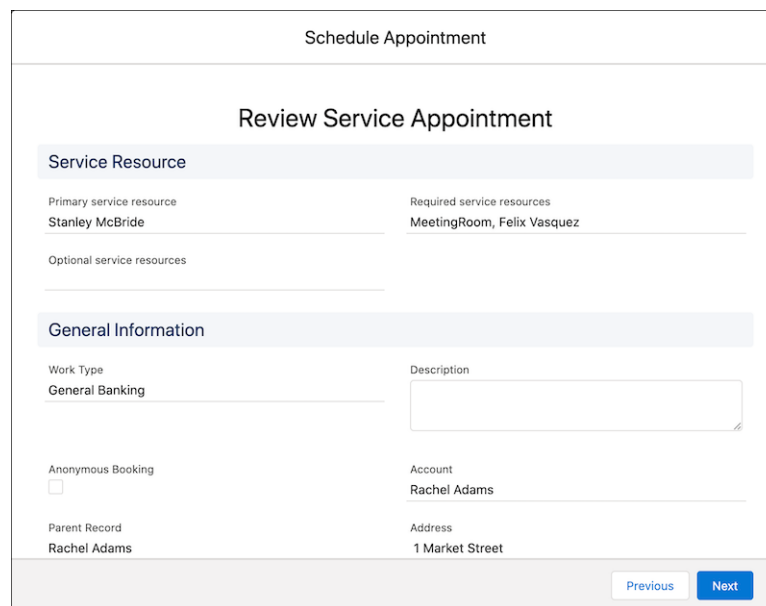

2. Link the Next button to a POST request on the [service-appointments](#) on [page 156](#) Connect API to create the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

Set `status` to `Scheduled` to indicate that the appointment is scheduled.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS700000001DYKAY",
    "parentRecordId" : "001S7000001pFlJIAU",
    "schedStartTime" : "2023-11-30T17:00:00.000+0000",
    "schedEndTime": "2023-11-30T18:00:00.000+0000",
```

```
    "street": "121 Spear Street",
    "city": "Charlotte",
    "state": "VT",
    "postalCode": "05445",
    "country": "United States",
    "engagementChannelTypeId" : "0eFS70000004CG5MAM",
    "extendedFields" : [{
      "name": "status",
      "value": "Scheduled"
    }]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS700000002jAKAQ",
      "isRequiredResource": true,
      "isPrimaryResource": true,
      "extendedFields" : []
    }, {
      "serviceResourceId": "0HnS700000002jKKAQ",
      "isRequiredResource": true,
      "isPrimaryResource": false,
      "extendedFields" : []
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rS700000000ogIAA",
      "03rS700000000ohIAA"
    ],
    "serviceAppointmentId": "08pS700000001GIIAY"
  }
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

Set status to Scheduled to indicate that the appointment is scheduled.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS700000001DYKAY",
    "schedStartTime" : "2023-11-30T17:00:00.000+0000",
    "schedEndTime": "2023-11-30T18:00:00.000+0000",
    "street": "121 Spear Street",
    "city": "Charlotte",
    "state": "VT",
    "postalCode": "05445",
```

```

    "country": "United States",
    "engagementChannelTypeId" : "0eFS70000004CG5MAM",
    "extendedFields" : [{
      "name": "status",
      "value": "Scheduled"
    }]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS700000002jAKAQ",
      "isRequiredResource": true,
      "isPrimaryResource": true,
      "extendedFields" : []
    }, {
      "serviceResourceId": "0HnS700000002jKKAQ",
      "isRequiredResource": true,
      "isPrimaryResource": false,
      "extendedFields" : []
    }
  ],
  "lead": {
    "firstName": "Philip",
    "lastName": "Taylor",
    "phone": "012-345-6789",
    "email": "pmtaylor@company.com",
    "company": "Philip&Taylor Company",
    "extendedFields" : []
  }
}

```

Sample Response

The API returns the service appointment ID and the assigned service resources.


```

{
  "result": {
    "assignedResourceIds": [
      "03rS700000000oqIAA",
      "03rS700000000orIAA"
    ],
    "parentRecordId": "00QS7000000sfcxMAA",
    "serviceAppointmentId": "08pS700000001GSIAX"
  }
}

```

Create a page to show confirmation when the service appointment is created successfully.

Here's how a sample confirmation page can look.

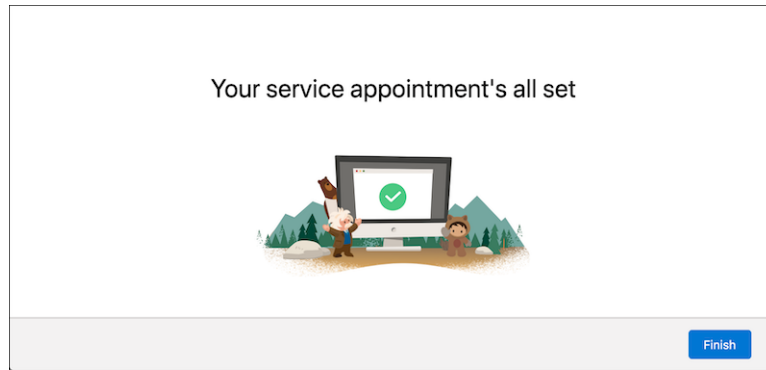

Modify a Multi-Resource Service Appointment

Use Salesforce Scheduler APIs to modify a multi-resource service appointment. This use case explains how you can change the secondary service resources or the time slot of an existing multi-resource appointment.

This topic explains how you can modify a multi-resource appointment by using the custom application that you built for creating appointments.


A multi-resource service appointment includes more than one service resource, with one service resource set as the primary resource. Modifying the resources of a multi-resource service appointment presents an additional challenge. The time slot of such an appointment must match the availability of the resources from a particular work type group within a service territory.

This use case is applicable when a secondary resource of a multi-resource appointment marks themselves absent. In that scenario, the appointment must be updated with an available resource. The absent resources, however, must ensure to mark themselves as absent in Salesforce Scheduler. Otherwise, the API request to retrieve the list of service resources continues to include the resources that are currently unavailable or absent.

The steps in this section provide a high-level overview of how you can let users choose different service resources or an alternate time slot for an existing multi-resource service appointment.

The use case provides the steps to modify the secondary resources. You can't modify the primary resource by using the steps provided in this section. To modify the primary resource of a multi-resource appointment, you must delete the original appointment first. Then, create a new appointment with an available service resource set as the primary resource.

 **Note:** Multi-resource appointments do not work when the concurrent scheduling feature is enabled. Make sure the concurrent scheduling feature is disabled in Salesforce Scheduler.

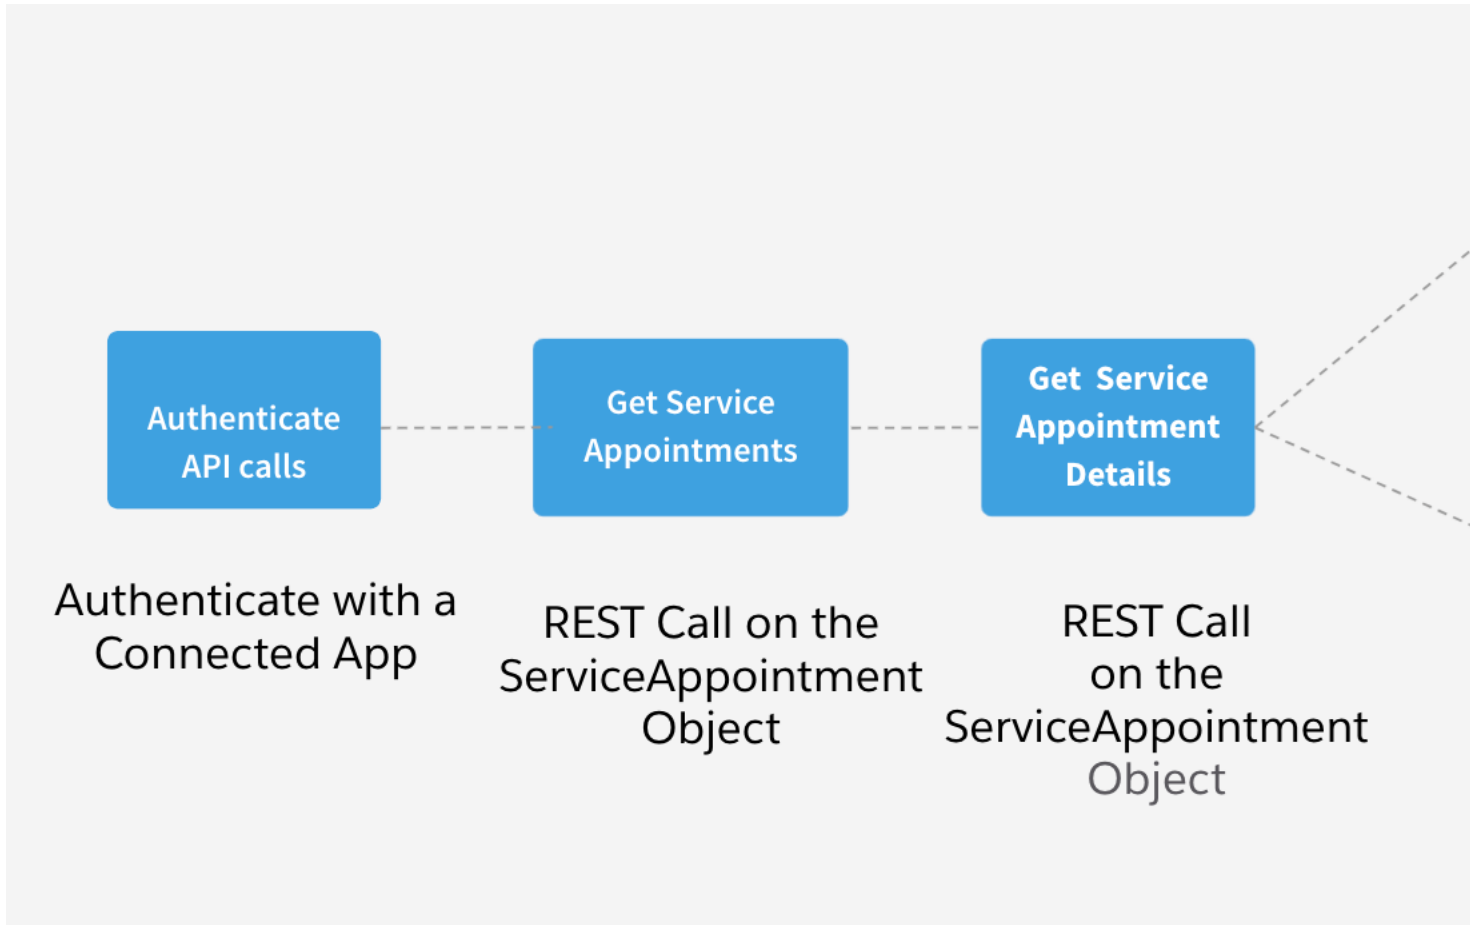

[Authenticate with Salesforce Scheduler APIs](#)

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

[Get Service Appointments](#)

A service appointment represents an appointment booked through Salesforce Scheduler. Use the `query` request on the `ServiceAppointment` object to retrieve a list of service appointments.

[Get Service Appointment Details](#)

A service appointment represents an appointment booked through Salesforce Scheduler. Use the GET method on the Service Appointment object to fetch the details of a service appointment record.

[Change Appointment Details](#)

This section explains how you can show either the service resources or time slots page based on what the user chooses to change for the appointment. Depending on the requirement, you can choose one of the two options.

[Update Service Appointments](#)

A service appointment represents an appointment booked through Salesforce Scheduler. Make a PATCH request on the `service-appointments` Connect API to update a multi-resource service appointment.

Authenticate with Salesforce Scheduler APIs

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

 **Note:** It's not possible to modify an existing appointment via a guest user profile. You can use an integration user who has permissions to read and update only the required objects.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

Get Service Appointments

A service appointment represents an appointment booked through Salesforce Scheduler. Use the `query` request on the `ServiceAppointment` object to retrieve a list of service appointments.

Create a page where you can show the service appointments for a logged in user.

Sample Request

This sample REST API call uses the `query` resource to retrieve service appointments.

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+AppointmentNumber,+Id,+Status,+SchedStartTime,+SchedEndTime,+ServiceTerritoryId,+WorkTypeId+FROM+ServiceAppointment+WHERE+AccountId+=+'001B000001MhMIA'
```

For more information, see [Execute a SOQL Query](#).

Sample Response

The method returns the available service appointments.

```
{
  "totalSize" : 5,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "ServiceAppointment",
      "url" : "/services/data/v53.0/objects/ServiceAppointment/08pB0000000aKe4IAE"
    },
    "AppointmentNumber" : "SA-41906",
    "Id" : "08pB0000000aKe4IAE",
    "Status" : "Scheduled",
    "SchedStartTime" : "2021-10-25T15:00:00.000+0000",
    "SchedEndTime" : "2021-10-25T16:00:00.000+0000",
    "ServiceTerritoryId" : "0HhB0000000TakhKAC",
    "WorkTypeId" : null
  }, {
    "attributes" : {
      "type" : "ServiceAppointment",
      "url" : "/services/data/v53.0/objects/ServiceAppointment/08pB0000000aKesIAE"
    },
    "AppointmentNumber" : "SA-41911",
    "Id" : "08pB0000000aKesIAE",
    "Status" : "Scheduled",
    "SchedStartTime" : "2021-10-25T15:00:00.000+0000",
    "SchedEndTime" : "2021-10-25T16:00:00.000+0000",
    "ServiceTerritoryId" : "0HhB0000000TaHOKA0",
```

```

    "WorkTypeId" : null
  }, {
    "attributes" : {
      "type" : "ServiceAppointment",
      "url" : "/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKexIAE"
    },
    "AppointmentNumber" : "SA-41912",
    "Id" : "08pB0000000aKexIAE",
    "Status" : "Scheduled",
    "SchedStartTime" : "2021-10-22T16:30:00.000+0000",
    "SchedEndTime" : "2021-10-22T18:00:00.000+0000",
    "ServiceTerritoryId" : "0HhB0000000TakhKAC",
    "WorkTypeId" : null
  }, {
    "attributes" : {
      "type" : "ServiceAppointment",
      "url" : "/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKf2IAE"
    },
    "AppointmentNumber" : "SA-41913",
    "Id" : "08pB0000000aKf2IAE",
    "Status" : "Scheduled",
    "SchedStartTime" : "2021-10-25T17:30:00.000+0000",
    "SchedEndTime" : "2021-10-25T18:30:00.000+0000",
    "ServiceTerritoryId" : "0HhB0000000TaHOKA0",
    "WorkTypeId" : "08qB0000000UF63IAG"
  }, {
    "attributes" : {
      "type" : "ServiceAppointment",
      "url" : "/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKf7IAE"
    },
    "AppointmentNumber" : "SA-41914",
    "Id" : "08pB0000000aKf7IAE",
    "Status" : "Scheduled",
    "SchedStartTime" : "2021-10-22T15:00:00.000+0000",
    "SchedEndTime" : "2021-10-22T15:45:00.000+0000",
    "ServiceTerritoryId" : "0HhB0000000TakhKAC",
    "WorkTypeId" : null
  } ]
}

```

Parse the JSON response, and display the service appointments on a page in your app so that users can select an appointment record to modify.

Here's how that page can look.

	Appointment Number ↑	Status	Arrival Window Start	Arrival Window End
1	☐ SA-0005	None	5/22/2020, 9:10 AM	5/22/2020, 9:40 AM
2	☐ SA-0006	None	6/1/2020, 10:00 AM	6/1/2020, 10:25 AM
3	☐ SA-0007	None	6/15/2020, 10:00 AM	6/15/2020, 10:25 AM
4	☐ SA-0009	None	7/20/2020, 10:00 AM	7/20/2020, 10:25 AM
5	☐ SA-0010	Canceled	10/2/2020, 2:00 PM	10/2/2020, 2:25 PM
6	☐ SA-0011	Canceled	10/2/2020, 2:00 PM	10/2/2020, 2:25 PM
7	☐ SA-0012	Canceled	9/9/2020, 10:00 AM	9/9/2020, 10:25 AM
8	☐ SA-0013	None	4/21/2021, 10:00 AM	4/21/2021, 10:25 AM
9	☐ SA-0014	None	4/15/2021, 10:30 AM	4/15/2021, 10:55 AM
10	☐ SA-0015	None		

On the next page, you can provide users an option to select a service appointment to modify.

Get Service Appointment Details

A service appointment represents an appointment booked through Salesforce Scheduler. Use the GET method on the Service Appointment object to fetch the details of a service appointment record.

Create a page where you can show the details of a multi-resource service appointment record that the user selects.

Sample Request

Here's a sample GET request to retrieve the service appointment details.

```
https://yourinstance.salesforce.com/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKf7IAE
```

Sample Response

The method returns the service appointment details.

```
{
  "totalSize" : 1,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "ServiceAppointment",
      "url" : "/services/data/v53.0/subjects/ServiceAppointment/08pB0000000aKf7IAE"
    },
    "Id" : "08pB0000000aKf7IAE",
    "SchedEndTime" : "2021-10-22T15:45:00.000+0000",
    "SchedStartTime" : "2021-10-22T15:00:00.000+0000",
    "ServiceTerritoryId" : "0HhB0000000TakhKAC",
    "WorkTypeId" : "08qB0000000Tf1FIAS"
  } ]
}
```

Parse the JSON response, and display the service appointments details on a page so that the user can change the multi-resource service appointment as needed.

On the next page, you can show the user an option to select a different service resource of an existing multi-resource appointment.

Change Appointment Details

This section explains how you can show either the service resources or time slots page based on what the user chooses to change for the appointment. Depending on the requirement, you can choose one of the two options.

Change Appointment Candidates

If the assigned resources mark themselves absent, use the `query` request on the `ServiceTerritoryMember` object to show the list of alternative resources.

Change Appointment Time Slots

A time slot represents a period in a day when an appointment takes place. a multi-resource service appointment can be modified. To show the alternative time slots for the assigned resources, use the `getAppointmentSlots` REST API.

Change Appointment Candidates

If the assigned resources mark themselves absent, use the `query` request on the `ServiceTerritoryMember` object to show the list of alternative resources.

Create a page in your app where you can show the available service resources based on the service territory.

This sample REST API call uses the `query` request to retrieve the alternate resources.

Resource URI

```
https://yourinstance.salesforce.com/services/data/v53.0/query/?sObject=ServiceTerritoryMember&effectiveStartDate=2021-10-22T15:00:00.000+0000&effectiveEndDate=2021-10-22T15:00:00.000+0000&serviceResourceId=0HnB0000000TbgFKAS&serviceTerritoryId=0HhB0000000TakhKACC
```

Sample Response

The API returns the available time slots and service resources.

```
{
  "totalSize" : 55,
  "done" : true,
  "records" : [
    {
      "attributes" : {
        "type" : "ServiceTerritoryMember",
        "url" : "/services/data/v53.0/subjects/ServiceTerritoryMember/0HuB0000000TalUKAS"
      },
      "EffectiveStartDate" : "2021-10-22T15:00:00.000+0000",
      "EffectiveEndDate" : null,
      "ServiceResourceId" : "0HnB0000000TbgFKAS",
      "ServiceTerritoryId" : "0HhB0000000TakhKACC"
    }, {
      "attributes" : {
        "type" : "ServiceTerritoryMember",
        "url" : "/services/data/v53.0/subjects/ServiceTerritoryMember/0HuB0000000TaleKAC"
      },
      "EffectiveStartDate" : "2021-10-22T15:00:00.000+0000",
      "EffectiveEndDate" : null,
      "ServiceResourceId" : "0HnB0000000TbgDKAS",
      "ServiceTerritoryId" : "0HhB0000000TakhKAC"
    }, {
      "attributes" : {
        "type" : "ServiceTerritoryMember",
        "url" : "/services/data/v53.0/subjects/ServiceTerritoryMember/0HuB0000000TaloKAC"
      },
      "EffectiveStartDate" : "2021-10-22T15:00:00.000+0000",
      "EffectiveEndDate" : null,
      "ServiceResourceId" : "0HnB0000000TbgjKAC",
      "ServiceTerritoryId" : "0HhB0000000TakhKAC"
    }
  ]
}
```

Parse the JSON response, and show the available service resources on the page so that the user can select a primary service resource.

Here's how a **Select Service Resource** page can look.

Schedule Appointment

Select Service Resource

Select the service resource for this service appointment

Service Resource Name	Role	Next Availability
☐ Stanley McBride		6/22/2021, 8:30 PM
☐ John Doe		6/22/2021, 8:30 PM
☐ Hermoine Sherman		6/22/2021, 8:30 PM
☐ Felix Vasquez		6/22/2021, 8:30 PM
☐ MeetingRoom		6/22/2021, 8:30 PM

Previous

Next

Here's how a page can look when the user selects a primary service resource.

Schedule Appointment

Select Service Resource

Select the service resource for this service appointment

Service Resource Name	Role	Next Availability
☒ Stanley McBride		6/23/2021, 8:30 PM
☐ John Doe		6/23/2021, 8:30 PM
☐ Hermoine Sherman		6/23/2021, 8:30 PM
☐ Felix Vasquez		6/23/2021, 8:30 PM
☐ MeetingRoom		6/23/2021, 8:30 PM

Previous

Next

On the next page in your app, show the selected primary resource. You can also show the other service resources, including assets, so that users can add them as required resources. Then, show the consolidated time slots for all the selected resources.

Change Appointment Time Slots

A time slot represents a period in a day when an appointment takes place. a multi-resource service appointment can be modified. To show the alternative time slots for the assigned resources, use the `getAppointmentSlots` REST API.

Create a page in your app to show the selected primary resource, other required resources, including assets, and the consolidated time slots for the primary service resource and required resources that users select. Here's how a page can look.

The screenshot shows a 'Schedule Appointment' interface. The main section is titled 'Select Service Appointment Time'. It displays 'Required Service Resources (1)' with a primary resource 'Stanley McBride'. Below this is an 'Availability Calendar' for '21 June 2021 - 24 June 2021' with a time zone of '(GMT+05:30) India Standard Time (Asia)'. The calendar displays time slots for Monday 21st, Tuesday 22nd, Wednesday 23rd, and Thursday 24th. On the right, there is a 'Manage Service Resources' panel showing the primary resource and an 'Add Service Resource' section with a search bar. At the bottom, there are 'Previous' and 'Next' buttons.

When the user selects one or more required resources, refresh the available time slots by making a POST request to the [getAppointmentSlots](#) on page 139 REST API and passing the selected required resources along with the `workTypeGroupId` and `territoryId` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentSlots
```

Sample Request

```
{
  "startTime" : "2021-10-04T17:00:00.000+0000",
  "endTime" : "2021-10-04T18:00:00.000+0000",
  "workTypeId" : {
    "08qB0000000Tf1FIAS"
  },
  "accountId" : "001B000001McLhMIAV",
  "territoryIds" : ["0HhB0000000TaHOKA0"],
  "primaryResourceId" : "0HnB0000000TavDKAS",
  "requiredResourceIds" : ["0HnB0000000DynTKAS", "0HnB0000000Tav3KAC"]
}
```

Sample Response

The API returns the time slots where the selected primary resource and required resources are available for the multi-resource service appointment.

```
{
  "timeSlots" : [ {
    "endTime" : "2021-10-04T18:00:00.000+0000",
    "startTime" : "2021-10-04T17:00:00.000+0000",
    "territoryId" : "0HhB0000000TaHOKA0"
  }
]
```


```

    }, {
      "endTime" : "2021-10-04T19:00:00.000+0000",
      "startTime" : "2021-10-04T17:00:00.000+0000",
      "territoryId" : "0HhB0000000TaHOKA0"
    }, {
      "endTime" : "2021-10-04T20:00:00.000+0000",
      "startTime" : "2021-10-04T17:30:00.000+0000",
      "territoryId" : "0HhB0000000TaHOKA0"
    }, {
      "endTime" : "2021-10-04T18:00:00.000+0000",
      "startTime" : "2021-10-04T17:00:00.000+0000",
      "territoryId" : "0HhB0000000TaHOKA0"
    }, {
      "endTime" : "2021-10-04T18:30:00.000+0000",
      "startTime" : "2021-10-04T17:30:00.000+0000",
      "territoryId" : "0HhB0000000TaHOKA0"
    }, {
      "endTime" : "2021-10-04T18:00:00.000+0000",
      "startTime" : "2021-10-04T17:00:00.000+0000",
      "territoryId" : "0HhB0000000TaHOKA0"
    }
  ]
}

```

Parse the JSON response, and show the available time slots for the selected resources. Here's how a Select Service Appointment Time page can look.

 **Note:** A multi-resource appointment can have a maximum of five required service resources: one primary required service resource plus four required service resources, including asset resources.

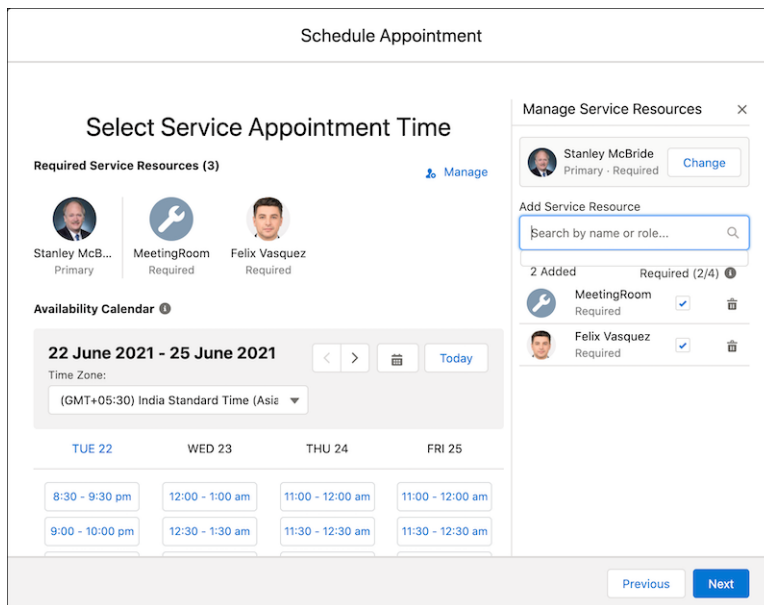

On the next page in your app, you can show the appointment details for the user to review and create the appointment.

Update Service Appointments

A service appointment represents an appointment booked through Salesforce Scheduler. Make a PATCH request on the `service-appointments` Connect API to update a multi-resource service appointment.

Create a page where the user can review the appointment details and create the appointment. Here's how a Review Service Appointment page can look.

Review Service Appointment

Service Resource

Required service resource
Stanley McBride

Optional service resources
Search Service Resources...

General Information

Work Type
General Banking

Description

Anonymous Booking
☐

Account
Adams Household

Parent Record
Adams Household

Address
1 Market Street
San Francisco 94105
CA
United States

Previous Next

Link the Next button to a PATCH request on the `service-appointments` on page 156 Connect API to update the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

Sample Request


Update Service Resource

```
{
  "serviceAppointmentId": "08pB0000000aJKhIAM",
  "serviceAppointment": {
    "schedStartTime": "2021-10-04T17:00:00.000+0000",
    "schedEndTime": "2021-10-04T18:00:00.000+0000",
    "serviceTerritoryId": "0HhB0000000TaHOKA0"
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnB0000000TavDKAS",
      "isRequiredResource": true,
      "isPrimaryResource": true
    },
    {
      "serviceResourceId": "0HnB0000000DynTKAS",
      "isRequiredResource": true,
      "isPrimaryResource": false
    }
  ]
}
```

```
1  
}
```

Create a page to show confirmation when the service appointment is modified successfully.

Here's how a sample confirmation page can look.

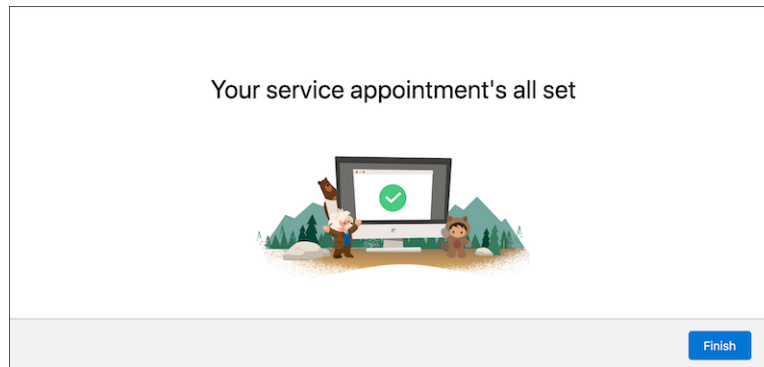

Create a Concurrent Appointment

This use case explains how to build a concurrent appointment scheduling application using Salesforce Scheduler APIs.


Let's think of a situation where you need to schedule multiple appointments within the same time slot. For example, a doctor's office can let several patients book a Monday 1:00 PM to 3:00 PM appointment. So what can you do in this "case"?

Salesforce Scheduler can help you in this "case". Let's drill down on what all we need to accomplish this.

Salesforce Scheduler provides you with the concurrent scheduling feature that makes it easy to schedule multiple service appointments in the same time slot. An event is created for each service appointment.

 **Note:** A concurrent time slot can have a minimum of 2 and a maximum of 1000 appointments.

These steps provide a high-level overview of how you can build a concurrent scheduling app, which is explained in detail in the following sections.

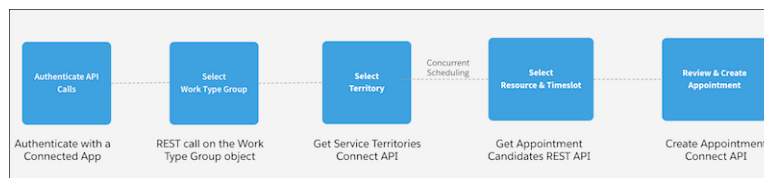

Before you can use the scheduler developer resources to build the concurrent scheduling app, set up Salesforce Scheduler for your organization. For more information, see [Set Up Salesforce Scheduler](#).

[Enable and Configure Concurrent Scheduling](#)

You must enable concurrent scheduling to let users schedule multiple service appointments in the same time slot. Also, there are some things to keep in mind when you implement concurrent scheduling.

[Assign Concurrent Operating Hours to Service Territory Members](#)

Concurrent time slots are applicable only to service territory members. Assign operating hours to a service territory member using the Operating Hours field on the respective record page.

[Authenticate with a Connected App](#)

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

[Get Work Type Groups](#)

After authentication, you need to show the work type groups for the user to select. A work type group represents a general appointment category or topic, such as a home loan or investment.

[Get Service Territories](#)

Get a service territory based on the work type group that is selected in the previous step. A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers.

[Get Work Types](#)

Get the correct work type record that represents the work type group and service territory that are selected in the previous step.

[Get Appointment Candidates](#)

Get a list of service resources based on the work type group or work type, and service territory that are selected in the previous step. A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

[Create Service Appointments](#)

The last step in the concurrent scheduling application is to show the service appointment details for the user to review and create the appointment. A service appointment represents an appointment booked through Salesforce Scheduler.

Enable and Configure Concurrent Scheduling

You must enable concurrent scheduling to let users schedule multiple service appointments in the same time slot. Also, there are some things to keep in mind when you implement concurrent scheduling.

For more information, see [Enable and Configure Concurrent Scheduling](#) in Salesforce Scheduler Help.

Assign Concurrent Operating Hours to Service Territory Members

Concurrent time slots are applicable only to service territory members. Assign operating hours to a service territory member using the Operating Hours field on the respective record page.



Note: If you don't assign operating hours to a service territory member, it automatically uses its service territory's operating hours. And if you don't assign operating hours to a work type, it's considered to be always available.

1. On a service territory member record page, edit the Operating Hours field.
2. Select a set of operating hours from the list.
3. Save your changes.

On the first page in your app, you must provide users an option to select a work type group for the appointment.

Authenticate with a Connected App

The first step in an API-based integration is to connect to Salesforce and get an access token using OAuth. OAuth access token authentication is the most secure way to authenticate SOAP and REST API calls.

 **Note:** To build a custom appointment scheduling application using Salesforce Scheduler APIs for prospects or unauthenticated users, you must build it using a logged-in user. For example, an integration user or an administrator.

If you are working in a Salesforce organization that has a Developer Edition, an Enterprise Edition, or above, verify that you have the API Enabled permission. This permission is enabled by default. This permission allows you to access any Salesforce API.

When you have this permission, you can connect to Salesforce and authenticate. Then make a request to REST or Connect API and check the response. For more information, see [Connect REST API Quick Start](#).

Get Work Type Groups

After authentication, you need to show the work type groups for the user to select. A work type group represents a general appointment category or topic, such as a home loan or investment.

Create a page in your app where you can show the work type groups from your org. Use the `Query()` method on the `WorkTypeGroup` object to retrieve a list of work type groups.

Sample Request

This sample REST API call uses the `Query()` request to retrieve work type groups. For more information, see [Execute a SOQL Query](#).

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+Id,+Name+From+WorkTypeGroup+Where+isActive+=+true+ORDER+BY+NAME
```

You can use the `toLabel` method to translate the SOQL query results in the language of the user. For more information, see [Translate SOQL Query Results](#) on page 130.

Sample Response

The request returns the available work type groups from your org.

```
{
  "totalSize": 6,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/vXX.X/subjects/WorkTypeGroup/0VSB0000000L6XeOAK"
      },
      "Id": "0VSB0000000L6XeOAK",
      "Name": "General Banking Group"
    },
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/vXX.X/subjects/WorkTypeGroup/0VSB0000000L6XyOAK"
      },
      "Id": "0VSB0000000L6XyOAK",
      "Name": "Insurance Management"
    },
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/vXX.X/subjects/WorkTypeGroup/0VSB0000000L71HOAS"
      },
      "Id": "0VSB0000000L71HOAS",
```

```

    "Name": "Investments"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/vXX.X/subjects/WorkTypeGroup/0VSB0000000L6Y3OAK"
    },
    "Id": "0VSB0000000L6Y3OAK",
    "Name": "Loan Planning"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/vXX.X/subjects/WorkTypeGroup/0VSB0000000TbhWOAS"
    },
    "Id": "0VSB0000000TbhWOAS",
    "Name": "LSConcurrent Work Type Group"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/vXX.X/subjects/WorkTypeGroup/0VSB0000000L6Y4OAK"
    },
    "Id": "0VSB0000000L6Y4OAK",
    "Name": "Wealth Planning"
  }
]
}

```

Parse the JSON response, and display the work type groups on a page in your app so that users can select a work type group for the appointment. Here's how that page can look.

Schedule Appointment

Insurance Management

Investments

Loan Planning

LS Work Type Group

LSConcurrent Work Type Group

New Bank Account

Service Issue


Previous
Next

On the next page in your app, you can provide users an option to search for service territories.

Get Service Territories

Get a service territory based on the work type group that is selected in the previous step. A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers.

Create a page where you can provide users an option to search for service territories. Here's how a Select Service Territory page can look.

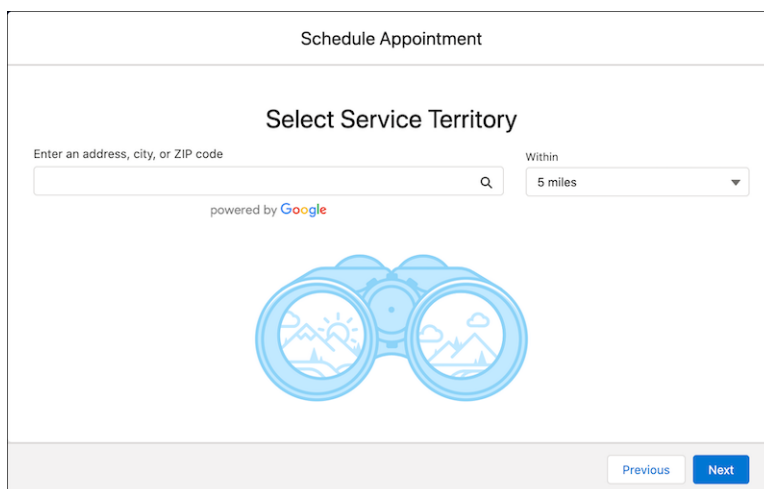

Make a GET request on the [service-territories](#) on page 162 Connect API by passing the user-entered search values and the selected work type group ID as the input parameters in the query string. You can also use a combination of the radius, latitude, longitude, sortBy, and sortOrder parameters to filter and sort the service territories.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-territories
```

Sample Request

Here's a sample GET request with the query string on the service territories Connect API.

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-territories?workTypeGroupId=0VSB0000000TbhWOAS
```

Sample Response

The API returns the available service territories based on the passed work type group ID and search criteria.

```
{
  "result" : {
    "serviceTerritories" : [ {
      "city" : "San Francisco",
      "country" : "United States",
      "id" : "0HhB00000001P0PKAU",
      "latitude" : 37.794928,
      "longitude" : -122.394514,
      "name" : "LSConcurrent Service Territory",
      "operatingHoursId" : "0OHB0000000LWkUOAW",
      "postalCode" : "90011",
      "state" : "CA",
      "street" : "2 Market Street"
    }
  ]
}
```

```
} ]  
}  
}
```

Parse the JSON response, and show the available service territories on the Select Service Territory page so that the user can select a service territory.

Here's a Select Service Territory page showing the available service territories.

Schedule Appointment

Select Service Territory

Enter an address, city, or ZIP code

market

Within 5 miles

- Market Harborough
UK
- Market Hall
Verlengde Nieuwstraat, Rotterdam, Netherlands
- Market Drayton
UK
- Market Square
Knoxville, TN, USA

Previous Next

Here's how the service territory details are displayed when the user selects a service territory.

Schedule Appointment

Select Service Territory

Enter an address, city, or ZIP code

Market Street, San Francisco, CA, USA

Within 5 miles

powered by Google

2.09 mi

LSConcurrent Service Territory

2 Market Street
San Francisco 90011
CA
United States

Hours	
Monday	8:00 AM - 6:00 PM
Tuesday	8:00 AM - 6:00 PM
Wednesday	8:00 AM - 6:00 PM
Thursday	8:00 AM - 6:00 PM
Friday	8:00 AM - 6:00 PM

Previous Next

After you get a work type group and service territory for the appointment, you must get a work type that is associated with both the work type group and service territory you have selected in the previous steps.

Get Work Types

Get the correct work type record that represents the work type group and service territory that are selected in the previous step.

A work type represents a type of work to be performed in Salesforce Scheduler. A work type is a template representing an appointment topic (work type group) with an appointment location (service territory). It defines key appointment parameters such as appointment duration, preparation and wrap-up buffers, and availability timings.

1. Use the `Query ()` request on the `WorkTypeGroupMember` object to retrieve a work type for the work type group selected in the Get Work Type Groups step.

Sample Request

This sample REST API call uses the `Query ()` request retrieve work type records that are associated with the selected work type group.

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+Id,Name,
WorkTypeGroupId,WorkTypeId+FROM+WorkTypeGroupMember+WHERE+WorkTypeGroupId+=+'0VSB0000000TbhWOAS'
```

Sample Response

The request returns the work type records.

```
{
  "totalSize" : 2,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "WorkTypeGroupMember",
      "url" : "/services/data/v53.0/objects/WorkTypeGroupMember/0WzB0000000TbZcKAK"
    },
    "Id" : "0WzB0000000TbZcKAK",
    "Name" : "00000047",
    "WorkTypeGroupId" : "0VSB0000000TbhWOAS",
    "WorkTypeId" : "08qB00000002ocgIAA"
  }, {
    "attributes" : {
      "type" : "WorkTypeGroupMember",
      "url" : "/services/data/v53.0/objects/WorkTypeGroupMember/0WzB0000000Tbm5KAC"
    },
    "Id" : "0WzB0000000Tbm5KAC",
    "Name" : "00000048",
    "WorkTypeGroupId" : "0VSB0000000TbhWOAS",
    "WorkTypeId" : "08qB0000000UF63IAG"
  } ]
}
```

2. Use the `Query ()` request on the `ServiceTerritoryWorkType` object to filter the correct work type for the selected service territory selected in the Get Service Territories step.

Sample Request

This sample REST API call uses the `Query ()` request to find the correct work type for the selected service territory.

```
https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=SELECT+Id,Name,
ServiceTerritoryId,WorkTypeId+FROM+ServiceTerritoryWorkType+WHERE+WorkTypeId+=+'08qB00000002ocgIAA'+AND+
ServiceTerritoryId+=+'0HhB00000001P0PKAU'
```

Sample Response

The request returns the work type records.

```
{
  "totalSize" : 1,
  "done" : true,
```

```
"records" : [ {  
  "attributes" : {  
    "type" : "ServiceTerritoryWorkType",  
    "url" :  
    "/services/data/v53.0/subjects/ServiceTerritoryWorkType/0VEB0000000TbbrOAC"  
  },  
  "Id" : "0VEB0000000TbbrOAC",  
  "Name" : "00000063",  
  "ServiceTerritoryId" : "0HhB00000001P0PKAU",  
  "WorkTypeId" : "08qB00000002ocgIAA"  
} ]  
}
```

On the next page in your app, you can show the service resources and their availability.

Get Appointment Candidates

Get a list of service resources based on the work type group or work type, and service territory that are selected in the previous step. A service resource represents an employee from your organization, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist, who attends appointments with clients.

Create a page in your app where you can show the available service resources based on the work type group or work type, and service territory.

Make a POST request on the [getAppointmentCandidates](#) on page 134 REST API by passing the required `workTypeGroupId` or `workTypeId`, and `territoryIds` parameters.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentCandidates
```

For an Existing User (Account)

To consider an existing user's preferred visiting hours, pass `accountId` in the input request body. The preference is enforced when the Include Only Required Service Resources and Ignore Excluded Service Resources policy rules are enabled.

Sample Request

Using `workTypeGroupId`:

```
{  
  "accountId" : "001B000001McLhMIAV",  
  "startTime" : "2021-10-29T08:00:00.000+0000",  
  "endTime" : "2021-10-29T18:00:00.000+0000",  
  "allowConcurrentScheduling" : true,  
  "workTypeGroupId" : "0VSB0000000TbhWOAS",  
  "territoryIds" : ["0HhB00000001P0PKAU"]  
}
```

Using `workTypeId`:

```
{  
  "accountId" : "001B000001McLhMIAV",  
  "startTime" : "2021-10-29T08:00:00.000+0000",  
  "endTime" : "2021-10-29T18:00:00.000+0000",  
}
```

```
{
  "allowConcurrentScheduling" : true,
  "workType" : {
    "id" : "08qB000000002ocgIAA"
  },
  "territoryIds" : ["0HhB000000001P0PKAU"]
}
```

Sample Response

The API returns the available time slots and service resources.

```
{
  "candidates" : [ {
    "endTime" : "2021-10-29T16:00:00.000+0000",
    "resources" : [ "0HnB000000001SJxKAM" ],
    "startTime" : "2021-10-29T15:00:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T16:30:00.000+0000",
    "resources" : [ "0HnB000000001SJxKAM" ],
    "startTime" : "2021-10-29T15:30:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:00:00.000+0000",
    "resources" : [ "0HnB000000001SJxKAM" ],
    "startTime" : "2021-10-29T16:00:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:30:00.000+0000",
    "resources" : [ "0HnB000000001SJxKAM" ],
    "startTime" : "2021-10-29T16:30:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T18:00:00.000+0000",
    "resources" : [ "0HnB000000001SJxKAM" ],
    "startTime" : "2021-10-29T17:00:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T16:00:00.000+0000",
    "resources" : [ "0HnB000000001SOUKA2" ],
    "startTime" : "2021-10-29T15:00:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T16:30:00.000+0000",
    "resources" : [ "0HnB000000001SOUKA2" ],
    "startTime" : "2021-10-29T15:30:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:00:00.000+0000",
    "resources" : [ "0HnB000000001SOUKA2" ],
    "startTime" : "2021-10-29T16:00:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:30:00.000+0000",
    "resources" : [ "0HnB000000001SOUKA2" ],
    "startTime" : "2021-10-29T16:30:00.000+0000",
    "territoryId" : "0HhB000000001P0PKAU"
  }
]
```

```

    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T16:30:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T18:00:00.000+0000",
    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T17:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  } ]
}

```

For a Guest User (Lead)

Sample Request

Using workTypeGroupId:

```

{
  "startTime" : "2021-10-13T08:00:00.000+0000",
  "endTime" : "2021-10-13T18:00:00.000+0000",
  "allowConcurrentScheduling" : true,
  "workTypeGroupId" : "0VSB0000000TbhWOAS",
  "territoryIds" : ["0HhB00000001P0PKAU"],
}

```

Using workTypeId:

```

{
  "accountId" : "001B000001McLhMIAV",
  "startTime" : "2021-10-29T08:00:00.000+0000",
  "endTime" : "2021-10-29T18:00:00.000+0000",
  "allowConcurrentScheduling" : true,
  "workType" : {
    "id" : "08qB00000002ocgIAA"
  },
  "territoryIds" : ["0HhB00000001P0PKAU"]
}

```

Sample Response

The API returns the available time slots and service resources.

```

{
  "candidates" : [ {
    "endTime" : "2021-10-29T16:00:00.000+0000",
    "resources" : [ "0HnB00000001SJxKAM" ],
    "startTime" : "2021-10-29T15:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T16:30:00.000+0000",
    "resources" : [ "0HnB00000001SJxKAM" ],
    "startTime" : "2021-10-29T15:30:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:00:00.000+0000",

```



```

    "resources" : [ "0HnB00000001SJxKAM" ],
    "startTime" : "2021-10-29T16:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:30:00.000+0000",
    "resources" : [ "0HnB00000001SJxKAM" ],
    "startTime" : "2021-10-29T16:30:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T18:00:00.000+0000",
    "resources" : [ "0HnB00000001SJxKAM" ],
    "startTime" : "2021-10-29T17:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T16:00:00.000+0000",
    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T15:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T16:30:00.000+0000",
    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T15:30:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:00:00.000+0000",
    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T16:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T17:30:00.000+0000",
    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T16:30:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  }, {
    "endTime" : "2021-10-29T18:00:00.000+0000",
    "resources" : [ "0HnB00000001SOUKA2" ],
    "startTime" : "2021-10-29T17:00:00.000+0000",
    "territoryId" : "0HhB00000001P0PKAU"
  } ]
}

```

Parse the JSON response, and show the available resources on the page so that the user can select a resource for the appointment. Here's how a page showing the available service resources can look.

Schedule Appointment

Select Service Resource

Select the service resource for this service appointment

Service Resource Name	Role	Next Availability
☐ Han Solo		11/10/2021, 8:30 PM
☒ LSConcurrent Training Room		11/10/2021, 8:30 PM

[Previous](#) [Next](#)

When users select a resource, show the available time slots for the selected resource. Here's how a page showing the available time slots can look.

Schedule Appointment

Select Service Appointment Time

Required Service Resources (1) [Manage](#)

LSConcurrent Trainin...
Primary

Availability Calendar [Skip Time Slot Selection](#)

10 October 2021 - 15 October 2021 [<](#) [>](#) [Today](#)

Time Zone: (GMT+05:30) India Standard Time (Asia/Kolkata)

SUN 10	MON 11	TUE 12	WED 13	THU 14	FRI 15
	8:30 - 10:30 pm	10:00 - 12:00 am	8:30 - 10:30 pm	10:00 - 12:00 am	8:30 - 10:30 pm
	9:00 - 11:00 pm	10:30 - 12:30 am	9:00 - 11:00 pm	10:30 - 12:30 am	9:00 - 11:00 pm

[Previous](#) [Next](#)

On the next page in your app, you can show the appointment details for the user to review and create the appointment.

Create Service Appointments

The last step in the concurrent scheduling application is to show the service appointment details for the user to review and create the appointment. A service appointment represents an appointment booked through Salesforce Scheduler.

Create a page where the user can review the appointment details and create the appointment. Here's how a Review Service Appointment page can look.

Link the Next button to a POST request on the [service-appointments](#) on page 156 Connect API to create the service appointment.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

Set `status` to `Scheduled` to indicate that the appointment is scheduled.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhB00000001P0PKAU",
    "parentRecordId": "001B0000018vs9fIAA",
    "workTypeId": "08qB00000002ocgIAA",
    "schedStartTime": "2021-10-29T16:00:00.000+0000",
    "schedEndTime": "2021-10-29T17:00:00.000+0000",
    "additionalInformation": "Concurrent Booking",
    "appointmentType": "Training Purpose",
    "extendedFields": [ {
      "name": "status",
      "value": "Scheduled"
    } ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnB00000001SJxKAM",
      "isRequiredResource": "true"
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result" : {
    "assignedResourceIds" : [ "03rB0000000cBZ6IAM" ],
    "serviceAppointmentId" : "08pB0000000aKjMIAU"
  }
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

Set `status` to `Scheduled` to indicate that the appointment is scheduled.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0HhB00000001POPKAU",
    "schedStartTime" : "2021-10-29T16:00:00.000+0000",
    "schedEndTime": "2021-10-29T17:00:00.000+0000",
    "workTypeId" : "08qB00000002ocgIAA",
    "additionalInformation" : "Concurrent Booking",
    "appointmentType" : "Training Purpose",
    "extendedFields" : [ {
      "name": "status",
      "value": "Scheduled"
    } ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnB00000001SJxKAM",
      "isRequiredResource" : "true"
    }
  ],
  "lead": {
    "email" : "name@company.com",
    "firstName" : "FName",
    "lastName" : "LName",
    "company" : "CompanyName"
  }
}
```


Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result" : {
    "assignedResourceIds" : [ "03rB0000000cBAFIA2" ],
    "parentRecordId" : "00QB0000000ASst5MAH",
    "serviceAppointmentId" : "08pB0000000aKIgIAM"
  }
}
```

Create a page to show confirmation when the service appointment is created successfully.

Here's how a sample confirmation page can look.

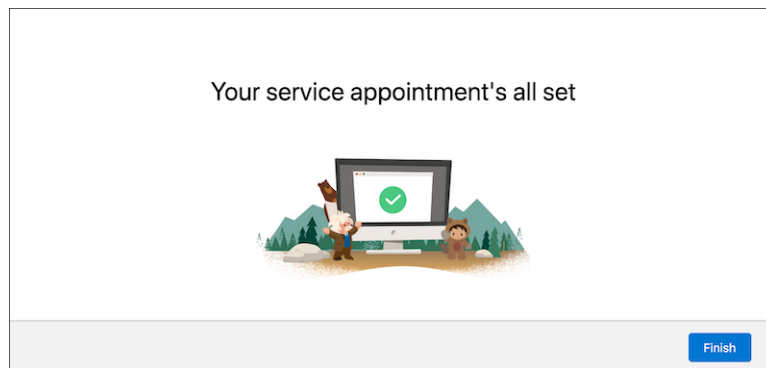

Schedule Appointments by Using Sharing Availability


This use case describes how to create an external website by using the Salesforce Scheduler APIs that your users can use to book appointments using the invitation URL.

Service resources or their assistants can share the period during which they're available for appointment booking. They can define and share the appointment criteria with the users by creating an invitation URL. Users can book an appointment by going to the invitation URL. The URL takes users to the first week that the service resource is available.

- A wealth manager (contractor) can generate an appointment invitation URL and add the URL to their signature. Prospective clients can use this URL to book appointments.
- An equity portfolio manager (contractor) wants to share their availability three months in the future with an existing client (authenticated consumer) for portfolio review. The equity portfolio manager can generate a URL with a start date that's three months from the current date, and then share the URL with the client.

Note: To book appointments using an invitation URL, users need access to the invitation record, service territory, work type or work type group, and service resources that are associated with the invitation URL. Admins can provide the required read-only access to the records by using the sharing settings or Apex sharing.

Here are the high-level steps for building an external website by using the Salesforce Scheduler APIs, which are outlined in detail later.

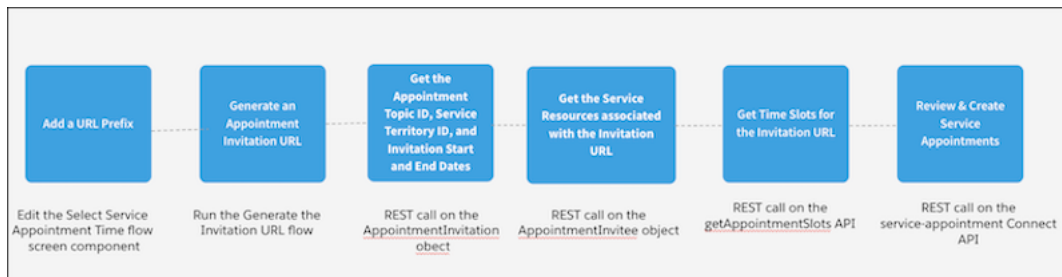

1. Configure Invitation URLs to Open on External Websites

Admins can add a URL prefix to an invitation URL to directly open the invitation on an external website.

2. [Generate an Appointment Invitation URL](#)

Only admins can generate invitation URLs. Share the invitation URLs with your users so that the users can use the URLs to quickly book appointments.

3. [Retrieve the Invitation Key](#)

Retrieve the unique invitation key from the invitation URL that the user clicks. The invitation URL has two components: the invitation URL prefix and the invitation key. The invitation key is an auto-generated unique identifier.

4. [Get the Appointment Invitation Details](#)

An appointment invitation has information that users can use for booking appointments. Use the `Query()` request to run Salesforce Query Language (SOQL) on the `AppointmentInvitation` object to retrieve the appointment invitation details, such as the appointment invitation ID, appointment topic ID (work type group ID), appointment topic type, service territory ID, availability start date, and availability end date.

5. [Get the Appointment Invitee Details](#)

An appointment invitee has information about the participant and the resources required for creating an appointment invitation URL. Use the `Query()` request to run Salesforce Query Language (SOQL) on the `AppointmentInvitee` object to retrieve the appointment invitee details, such as the service territory ID, appointment topic ID, service resource ID, and available booking start and end dates, which you need for retrieving the calendar availability for the invitation URL. You can also retrieve additional details that you need when creating an appointment, such as whether the resources are primary or required.

6. [Show Calendar Availability](#)

A time slot is a period in a day when an appointment can be scheduled. Use the `getAppointmentSlots` API to retrieve the calendar availability of the service resources associated with the appointment invitation.

7. [Book Service Appointments](#)

A service appointment is an appointment booked through Salesforce Scheduler. Use the `service-appointments` API to create an appointment.

Configure Invitation URLs to Open on External Websites

Admins can add a URL prefix to an invitation URL to directly open the invitation on an external website.

1. Set up your website in the Invitation URL Prefix flow attribute.

For more information, see [Flow Screen Component: Select Service Appointment Time](#).

The screenshot shows the Salesforce Flow Builder interface for the 'Generate Appointment Invitation' flow. The flow is currently in the 'Select Service Appointment Time' step. The 'Invitation URL Prefix' attribute is highlighted with a red box, and a tooltip indicates that this is the prefix of the appointment invitation URL. The flow attributes include:

- Invitation Flow Type: {!GlobalConstant.False}
- InvitationGeneration
- InvitationURLPrefix: {!InvitationURLPrefix}
- Is Hide Skip: {!GlobalConstant.False}
- Number of Resources to Show (Appointment Distribution): Enter value or search resources...
- Parent Record ID: Enter value or search resources...
- Resource Availability End Date: {!AppointmentInvitation.BookingEndDa}
- Resource Availability Start Date: {!AppointmentInvitation.BookingStartD}

2. Prefix the invitation URL with your website's domain address in the `https://YourSiteDomain/SiteURL` format.

After you prefix the invitation URL in the flow, activate the flow and generate the appointment invitation URL.

Generate an Appointment Invitation URL

Only admins can generate invitation URLs. Share the invitation URLs with your users so that the users can use the URLs to quickly book appointments.

For more information on how to generate appointment invitations URLs, see [Generate an Appointment Invitation URL](#).

When a user clicks the invitation URL to book an appointment, capture the invitation key from the appointment URL to fetch the appointment details.

Retrieve the Invitation Key

Retrieve the unique invitation key from the invitation URL that the user clicks. The invitation URL has two components: the invitation URL prefix and the invitation key. The invitation key is an auto-generated unique identifier.

1. Capture the invitation key from the invitation URL.

For example, if the invitation URL is

`https://YourSiteDomain/SiteURL/f482d103-4792-40ac-864a-57db0c13161b`, the invitation key is `f482d103-4792-40ac-864a-57db0c13161b`.

After you capture the invitation key, fetch the invitation appointment details by using the key.

Get the Appointment Invitation Details

An appointment invitation has information that users can use for booking appointments. Use the `Query()` request to run Salesforce Query Language (SOQL) on the `AppointmentInvitation` object to retrieve the appointment invitation details, such as the appointment invitation ID, appointment topic ID (work type group ID), appointment topic type, service territory ID, availability start date, and availability end date.

For a complete list of `AppointmentInvitation` object fields, see [AppointmentInvitation](#).

1. Make a `Query()` request on the `AppointmentInvitation` object.

Sample REST API Request



Note: To ensure that the invitation URL is active, set the value of the `IsActive` query parameter to true.

```
https://yourInstance.salesforce.com//services/data/vXX.X/query/?q=
SELECT+AppointmentTopicId,AppointmentTopicType,BookingEndDate,BookingStartDate,
Id,ServiceTerritoryId+FROM+AppointmentInvitation+
WHERE+InvitationIdentifier+=+'f482d103-4792-40ac-864a-57db0c13161b'+AND+IsActive+=+true
```

Sample Response

```
{
  "totalSize" : 1,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "AppointmentInvitation",
      "url" : "/services/data/v55.0/subjects/AppointmentInvitation/1S8x000000000oHCAQ"
```

```

    },
    "AppointmentTopicId" : "0VSx00000002Uh4GAE",
    "AppointmentTopicType" : "WorkTypeGroup",
    "BookingEndDate" : "2022-06-30",
    "BookingStartDate" : "2022-06-14",
    "Id" : "1S8x000000000oHCAQ",
    "ServiceTerritoryId" : "0Hhx00000002LzGCAU"
  } ]
}

```

2. Parse the response to save the values.

You need these values to fetch the invitation availability time slots.

After you fetch the invitation details, retrieve the service resources associated with the invitation URL.

Get the Appointment Invitee Details

An appointment invitee has information about the participant and the resources required for creating an appointment invitation URL. Use the `Query()` request to run Salesforce Query Language (SOQL) on the `AppointmentInvitee` object to retrieve the appointment invitee details, such as the service territory ID, appointment topic ID, service resource ID, and available booking start and end dates, which you need for retrieving the calendar availability for the invitation URL. You can also retrieve additional details that you need when creating an appointment, such as whether the resources are primary or required.

For a complete list of `AppointmentInvitee` object fields, see [AppointmentInvitee](#).

1. Make a `Query()` request on the `AppointmentInvitee` object.

Sample REST API Request

```

https://yourInstance.salesforce.com/services/data/vXX.X/query/?q=
SELECT+AppointmentInvitationId,Id,IsPrimaryResource,IsRequiredResource,
Name,ParticipantServiceResourceId+FROM+AppointmentInvitee+
WHERE+AppointmentInvitationId+=+'1S8x000000000oHCAQ'

```

Sample Response

```

{
  "totalSize" : 1,
  "done" : true,
  "records" : [ {
    "attributes" : {
      "type" : "AppointmentInvitee",
      "url" : "/services/data/v55.0/subjects/AppointmentInvitee/0y6x000000000pFAAQ"
    },
    "AppointmentInvitationId" : "1S8x000000000oHCAQ",
    "Id" : "0y6x000000000pFAAQ",
    "IsPrimaryResource" : true,
    "IsRequiredResource" : true,
    "Name" : "AITE-0247",
    "ParticipantServiceResourceId" : "0Hnx000000007d7CAA"
  } ]
}

```

2. Parse the response to save the values.

You need these values to fetch the invitation availability time slots.

After you fetch the appointment invitation and appointment invitee details, create a page on your website to show the calendar availability of the service resources associated with the invitation.

Show Calendar Availability

A time slot is a period in a day when an appointment can be scheduled. Use the `getAppointmentSlots` API to retrieve the calendar availability of the service resources associated with the appointment invitation.

Before making an API request to retrieve the invitation time slots, create a page on your website that shows the calendar availability of the service resources associated with the appointment invitation. The calendar availability is determined by the service territory ID, the work type group ID, and the service resource IDs that you obtained previously.

 **Note:** Ensure that the calendar shows only the available time slots for the selected resource between the shared invitation start and end dates.

1. To fetch the calendar availability for an appointment invitation, make a POST request on the `getAppointmentSlots` REST API.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/scheduling/getAppointmentSlots
```

Sample Request

This sample calls the `getAppointmentSlots` API by passing the work type group ID, territory IDs, resource IDs, and invitation booking start and end dates.

 **Note:** The `workTypeGroupId` field is required.

```
{
  "startTime": "2022-06-14T00:00:00.000Z",
  "endTime": "2022-06-30T00:00:00.000Z",
  "workTypeGroupId": "0VSx00000002Uh4GAE",
  "territoryIds": [
    "0Hhx00000002LzGCAU"
  ],
  "requiredResourceIds": [
    "0Hnx000000007d7CAA"
  ]
}
```

Sample Response

The request returns the calendar availability for the service resources associated with the invitation.

```
{
  "timeSlots": [
    {
      "endTime": "2022-06-14T02:15:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-14T01:15:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-14T02:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-14T01:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    }
  ]
}
```

```

    },
    {
      "endTime": "2022-06-14T12:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-14T11:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-14T12:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-14T11:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-15T02:15:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-15T01:15:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-15T02:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-15T01:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-15T12:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-15T11:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-15T12:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-15T11:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-16T01:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-16T00:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-16T02:00:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-16T01:00:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-17T12:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-17T11:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    }
  ]
}

```

```

    },
    {
      "endTime": "2022-06-17T12:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-17T11:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-18T01:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-18T00:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-18T02:00:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-18T01:00:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-20T02:15:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-20T01:15:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-21T03:15:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-21T02:15:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-21T03:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-21T02:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-25T07:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-25T06:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-27T12:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-27T11:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-27T12:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-27T11:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    }
  ],
  {
    "endTime": "2022-06-27T12:45:00.000+0000",
    "remainingAppointments": 1,
    "startTime": "2022-06-27T11:45:00.000+0000",
    "territoryId": "0Hhx00000002LzGCAU"
  }
]

```

```

    },
    {
      "endTime": "2022-06-28T02:15:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-28T01:15:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-28T02:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-28T01:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-28T02:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-28T01:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-29T12:15:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-29T11:15:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-29T12:30:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-29T11:30:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    },
    {
      "endTime": "2022-06-29T12:45:00.000+0000",
      "remainingAppointments": 1,
      "startTime": "2022-06-29T11:45:00.000+0000",
      "territoryId": "0Hhx00000002LzGCAU"
    }
  ]
}

```

2. Parse the response and show the time slots on your relevant website page so that users can choose an appointment time.
Create another page on your website to show the appointment details for users to review and book a selected appointment.

Book Service Appointments

A service appointment is an appointment booked through Salesforce Scheduler. Use the `service-appointments` API to create an appointment.

1. On your website, create a page with a Create button on which you can show the appointment details for the user to review and book the appointment.
2. Link the Create button to a POST request on the [service-appointments](#) Connect API.

Resource URI

```
https://yourInstance.salesforce.com/services/data/vXX.X/connect/scheduling/service-appointments
```

For an Account User

Sample Request

This sample calls the `service-appointments` API to create the appointment record for an account user.



Note: The `parentRecordId` field is required. Pass the account ID as `parentRecordId` in the input request body.

```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0Hhx00000002LzGCAU",
    "parentRecordId": "001x00000005SEqZAAW",
    "schedStartTime": "2022-06-29T11:30:00.000+0000",
    "schedEndTime": "2022-06-29T12:30:00.000+0000",
    "additionalInformation": "Sharing availability use case using APIs.",
    "appointmentType": "Book Test Appointment1",
    "extendedFields": [
      {
        "name": "status",
        "value": "Scheduled"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0Hnx000000007d7CAA",
      "isRequiredResource": "true"
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rx0000000252jAAA"
    ],
    "serviceAppointmentId": "08px000000023bdAAA"
  }
}
```

For a Guest User

Sample Request

This sample calls the `service-appointments` API to create the appointment record for a guest user.

 **Note:** The `lead` field is required. Pass the guest user details, including the first name, last name, email address, and phone number as `lead` in the input request body.


```
{
  "serviceAppointment": {
    "serviceTerritoryId": "0Hhx00000002LzGCAU",
    "schedStartTime": "2022-06-29T11:30:00.000+0000",
    "schedEndTime": "2022-06-29T12:30:00.000+0000",
    "additionalInformation": "Sharing availability use case using APIs.",
    "appointmentType": "Book Test Appointment1",
    "extendedFields": [
      {
        "name": "status",
        "value": "Scheduled"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0Hnx000000007d7CAA",
      "isRequiredResource": "true"
    }
  ],
  "lead": {
    "email": "Test@company.com",
    "firstName": "FirstName",
    "lastName": "LastName",
    "company": "CompanyName"
  }
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rx0000000252oAAA"
    ],
    "parentRecordId": "00Qx0000001cLwwEAE",
    "serviceAppointmentId": "08px000000023biAAA"
  }
}
```

3. If the service appointment creation is successful, then show the user a confirmation message.
Here's a sample confirmation page.

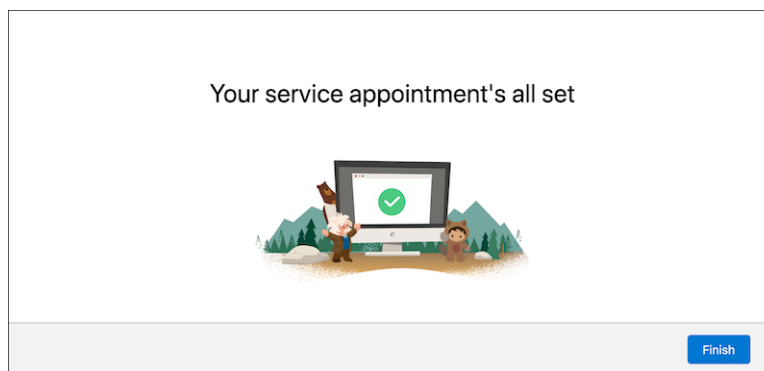

Schedule Appointments with a Dummy Resource and Reassign to Actual Resources

Learn how to create concurrent appointments by using a dummy resource and to reassign the appointments to actual resources later in scenarios where appointments are scheduled before actual resources can be assigned. For example, a wealth management advisory desk that accepts 50 or more appointments for various time slots between 10:00 AM and 5:00 PM. The desk can reassign these appointments to the actual resources only two days before the appointment date. Or, a call center whose resources are assigned randomly in real time, but can schedule 50 appointments for various time slots in a day.

EDITIONS

Salesforce Scheduler is available for an extra cost in Lightning Experience.

Available in: **Enterprise**, **Performance**, and **Unlimited** Editions

1. [Set Up Salesforce Scheduler](#)

Set up Salesforce Scheduler for your org. Assign permissions and object access for your users. Update related lists and tab visibility. Configure Salesforce Scheduler settings for multi resource scheduling, concurrent scheduling, multiple time zone selection, and map and location services. If necessary, set up Asset Scheduling for Salesforce Scheduler.

2. [Book Concurrent Appointments with Dummy Resource](#)

Use the concurrent scheduling feature of Salesforce Scheduler to easily schedule multiple service appointments in the same time slot. An event is created for each service appointment. Create concurrent appointments by using the dummy resource for the various time slots available for the day.

3. [Modify Appointments to Reassign to Actual Resources](#)

Retrieve and show the service appointments scheduled against the dummy resource. Branch managers or administrators can reassign the retrieved appointments to the actual resources.

Set Up Salesforce Scheduler

Set up Salesforce Scheduler for your org. Assign permissions and object access for your users. Update related lists and tab visibility. Configure Salesforce Scheduler settings for multi resource scheduling, concurrent scheduling, multiple time zone selection, and map and location services. If necessary, set up Asset Scheduling for Salesforce Scheduler.

[Create Service Territories](#)

Create service territories, such as branch locations, to represent your branch or call center, to organize your service resources, and to ensure that the service resources are assigned to appointments near the home branch.

Create Service Resources

Create service resources—individual users who can attend customer appointments—so that you can assign appointments to users. You can create a dummy resource, such as `DummyResource1`, `Agent1`, or `Agent2` that users can schedule appointments with, and then create actual resources to whom these appointments can be assigned later.

Enable Concurrent Scheduling

Enable concurrent scheduling so that users can use the dummy resource to schedule multiple appointments within the same time slot.

Assign Concurrent Operating Hours to the Dummy Resource

Assign operating hours to a service territory member by using the Operating Hours field on the respective member record page. Concurrent time slots are applicable only to service territory members. Assign concurrent time slots to the dummy resource so that only the dummy resource is visible when creating an appointment with concurrent scheduling.

Configure Scheduling Policy to Enforce Operating Hours

Use a scheduling policy to enforce one or more rules to find the best service resources for appointments. Apply a scheduling policy to your scheduling process to ensure that an appointment meets the criteria that the policy rules define. Create a scheduling policy for the dummy resource who has set up operating hours. Ensure that the resource is present only when creating an appointment.

Assign Regular Shifts to Actual Resources

Service resources can set up and update their frequently changing work hours by using shifts. Service resources can set up shifts for different work hours for the same service territory, for hours beyond the service territory's operating hours, and even for multiple service territories. Shifts can also be used to assign service resources for periods that follow a flexible pattern. For example, different working hours at the same service territory or availability of the same service resource at different service territories.

Configure Scheduling Policy to Enforce Shifts

Use a scheduling policy to enforce one or more rules to find the best service resources for appointments. Apply a scheduling policy to your scheduling process to ensure that an appointment meets the criteria that the policy rules define. Create a scheduling policy for the actual resources who have created working hours by using shifts. Ensure that the resources are present only during appointment reassignment.

Create Service Territories

Create service territories, such as branch locations, to represent your branch or call center, to organize your service resources, and to ensure that the service resources are assigned to appointments near the home branch.

For more information on setting up service territories, see [Set Up Service Territories in Salesforce Scheduler](#).

1. On the Service Territories tab, click **New**.
2. Enter a name, such as `ServiceTerritory1`, and a description for your territory.
3. To enable adding members to the territory or relating the territory to appointments, activate the new service territory.

Create Service Resources

Create service resources—individual users who can attend customer appointments—so that you can assign appointments to users. You can create a dummy resource, such as `DummyResource1`, `Agent1`, or `Agent2` that users can schedule appointments with, and then create actual resources to whom these appointments can be assigned later.

For more information on setting up service resources, see [Set Up Service Resources in Salesforce Scheduler](#).

1. From the App Launcher, find and open the Salesforce Scheduler Setup app.
2. On the Service Resources tab, click **New**.
3. Select a user and enter a resource name—typically, the user's name.

4. To enable assigning the resource to appointments, activate the resource.
5. For resource type, select **Technician**.
6. Save your changes.

After a service resource is created, assign the resource to a service territory, and then add skills of the resource.

Enable Concurrent Scheduling

Enable concurrent scheduling so that users can use the dummy resource to schedule multiple appointments within the same time slot. For information on what to keep in mind when you implement concurrent scheduling, see [Enable and Configure Concurrent Scheduling](#).

1. From Setup, in the Quick Find box, enter *Salesforce Scheduler*, and then select **Salesforce Scheduler Settings**.
2. Enable concurrent scheduling.

Assign Concurrent Operating Hours to the Dummy Resource

Assign operating hours to a service territory member by using the Operating Hours field on the respective member record page. Concurrent time slots are applicable only to service territory members. Assign concurrent time slots to the dummy resource so that only the dummy resource is visible when creating an appointment with concurrent scheduling.

For more information, see [Assign Operating Hours to Service Territory Members](#).

1. On a service territory member record page, edit the Operating Hours field.
2. Select a set of operating hours from the dropdown list.
3. Save your changes.

Configure Scheduling Policy to Enforce Operating Hours

Use a scheduling policy to enforce one or more rules to find the best service resources for appointments. Apply a scheduling policy to your scheduling process to ensure that an appointment meets the criteria that the policy rules define. Create a scheduling policy for the dummy resource who has set up operating hours. Ensure that the resource is present only when creating an appointment.

For more information, see [Enfore Scheduling Policies in Salesforce Scheduler](#).

1. From Setup, in the Quick Find box, enter *Scheduling Policies*, and then select **Scheduling Policies**.
2. Click **New**.
3. Enter a name for your custom scheduling policy, and then deselect the **Use service territory member's shift** rule.
This rule considers service territory member's operating hours when determining the availability of service resources for appointments.
4. Save your changes.

Assign Regular Shifts to Actual Resources

Service resources can set up and update their frequently changing work hours by using shifts. Service resources can set up shifts for different work hours for the same service territory, for hours beyond the service territory's operating hours, and even for multiple service territories. Shifts can also be used to assign service resources for periods that follow a flexible pattern. For example, different working hours at the same service territory or availability of the same service resource at different service territories.

1. Create and assign regular shifts to the actual resources and your service territory.
For more information, see [Create Shifts in Salesforce Scheduler](#).

Now filter the resources available for appointment reassignment based on the shifts defined in the scheduling policy.

Configure Scheduling Policy to Enforce Shifts

Use a scheduling policy to enforce one or more rules to find the best service resources for appointments. Apply a scheduling policy to your scheduling process to ensure that an appointment meets the criteria that the policy rules define. Create a scheduling policy for the actual resources who have created working hours by using shifts. Ensure that the resources are present only during appointment reassignment.

For more information, see [Enfore Scheduling Policies in Salesforce Scheduler](#).

1. From Setup, in the Quick Find box, enter *Scheduling Policies*, and then select **Scheduling Policies**.
2. Click **New**.
3. Enter a name for your custom scheduling policy, and then select the **Use service territory member's shift** rule.
This rule considers service territory members' shifts when determining the availability of service resources for appointments.
4. Save your changes.


Book Concurrent Appointments with Dummy Resource

Use the concurrent scheduling feature of Salesforce Scheduler to easily schedule multiple service appointments in the same time slot. An event is created for each service appointment. Create concurrent appointments by using the dummy resource for the various time slots available for the day.



Note: A concurrent time slot can have 2 to 1,000 appointments.

Here's a high-level overview of how to build a concurrent scheduling app.

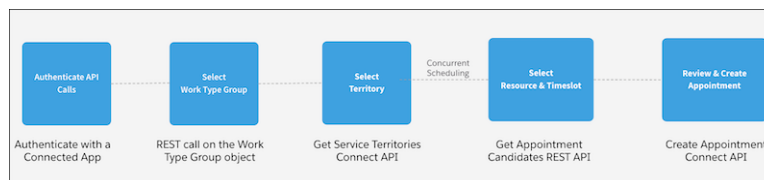

Get Work Type Groups

A work type group represents a general appointment category or topic, such as a home loan or investment. Show your users your work type groupson the landing page of your app by retrieving the list of work type groups from your Salesforce instance. Your users can select a work type group from the list while booking appointments.

Get Service Territories

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Show your users your available service territorieson the next page on your website by retrieving a list of active service territories from your Salesforce instance. Your users can search for service territories based on user-entered name, city, postal code, or state. Users can also view the distance between two locations, such as between a service territory and the user's current location.

Get Dummy Service Resource

Show your users the dummy resource and its availability based on the selected work type group and service territory.

[Create Service Appointments](#)

Show your users the details of a service appointment—an appointment booked through Salesforce Scheduler—so that users can review and create the appointment.

Get Work Type Groups

A work type group represents a general appointment category or topic, such as a home loan or investment. Show your users your work type groupson the landing page of your app by retrieving the list of work type groups from your Salesforce instance. Your users can select a work type group from the list while booking appointments.

1. Create a page to show your work type groups.
2. To retrieve the list of work type groups from your Salesforce instance, use the `Query()` request on the `WorkTypeGroup` object.

Sample Request

```
https://yourInstance.salesforce.com/services/data/v66.0/query/?q=
SELECT+Id,+Name+From+WorkTypeGroup+Where+isActive+=+true+ORDER+BY+NAME
```

Sample Response

The request returns the work type group records.

```
{
  "totalSize": 13,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009NdOAI"
      },
      "Id": "0VSS700000009NdOAI",
      "Name": "Create Account"
    },
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009YmOAI"
      },
      "Id": "0VSS700000009YmOAI",
      "Name": "Parent 1"
    },
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000004DuiOAE"
      },
      "Id": "0VSS700000004DuiOAE",
      "Name": "Parent topic Create"
    },
    {
      "attributes": {
        "type": "WorkTypeGroup",
        "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009YwOAI"
      },
    }
```

```

    "Id": "0VSS700000009YwOAI",
    "Name": "test"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009Z1OAI"
    },
    "Id": "0VSS700000009Z1OAI",
    "Name": "test 32"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000004DunOAE"
    },
    "Id": "0VSS700000004DunOAE",
    "Name": "test 32"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009ZaOAI"
    },
    "Id": "0VSS700000009ZaOAI",
    "Name": "Virtual WTG"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000004DvWOAU"
    },
    "Id": "0VSS700000004DvWOAU",
    "Name": "WorkTypeGrp1"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009TvOAI"
    },
    "Id": "0VSS700000009TvOAI",
    "Name": "Work_Type_Group_48368"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",
      "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009TqOAI"
    },
    "Id": "0VSS700000009TqOAI",
    "Name": "Work_Type_Group_67304"
  },
  {
    "attributes": {
      "type": "WorkTypeGroup",

```

```
    "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009ZVOAY",
  },
  "Id": "0VSS700000009ZVOAY",
  "Name": "Work_Type_Group_96227"
},
{
  "attributes": {
    "type": "WorkTypeGroup",
    "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009O7OAI"
  },
  "Id": "0VSS700000009O7OAI",
  "Name": "WTG Block Time"
},
{
  "attributes": {
    "type": "WorkTypeGroup",
    "url": "/services/data/v56.0/subjects/WorkTypeGroup/0VSS700000009Z6OAI"
  },
  "Id": "0VSS700000009Z6OAI",
  "Name": "ytre"
}
]
}
```

3. Parse the JSON response, and display the work type groups on a page that you created. Your users can select a work type group for the appointment.

Get Service Territories

A service territory represents a branch or office location where your service resources (appointment attendees) operate from or meet customers. Show your users your available service territories on the next page on your website by retrieving a list of active service territories from your Salesforce instance. Your users can search for service territories based on user-entered name, city, postal code, or state. Users can also view the distance between two locations, such as between a service territory and the user's current location.

1. Create a page for users to search for service territories.

Here's how a Select Service Territory page can look.

Schedule Appointment

Select Service Territory

Enter an address, city, or ZIP code

Q

Within

5 miles

powered by Google



Previous

Next

2. To retrieve a list of active service territories from your Salesforce instance, use the `service-territories` Connect API request.

Sample Request

This sample REST API call uses the [service-territories](#) request to retrieve service territories within a range of 10 miles from your current location. The default value is 5 miles.

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling  
/service-territories?workTypeId=0VSS70000004DvWOAU
```

Sample Response

The request returns the service territory records.

```
{  
  "result": {  
    "serviceTerritories": [  
      {  
        "city": "Hyderabad",  
        "country": "India",  
        "id": "0HhS70000004F9zKAE",  
        "name": "ServiceTerritory1",  
        "operatingHoursId": "0OHS70000004FIxOAM",  
        "postalCode": "500032",  
        "state": "TG"  
      }  
    ]  
  }  
}
```

3. Parse the JSON response, and show the available service territories on a page that you created. Your users can select a service territory for the appointment.

Get Dummy Service Resource

Show your users the dummy resource and its availability based on the selected work type group and service territory.

1. Create a page to show your users dummy service resources.
2. Make a POST request on the [getAppointmentCandidates](#) REST API by passing the required `workTypeId` and `territoryIds` parameters. Set `allowConcurrentScheduling` to `true` to get concurrent time slots for the dummy resource.



Note: Specify the operating hour scheduling policy ID to show only the dummy resource who's defined with operating hours for concurrent scheduling. See [Configure Scheduling Policy to Enforce Operating Hours](#).

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/scheduling/getAppointmentCandidates
```

Sample Request

```
{  
  "startTime": "2022-10-01T00:00:00.000Z",  
  "endTime": "2022-10-08T20:00:00.000Z",  
  "allowConcurrentScheduling": true,  
}
```

```
"schedulingPolicyId": "0VrS7000000004XKAQ",
"filterByResources": [
  "0HnS700000004EFyKAM"
],
"workTypeGroupId": "0VSS700000004DvWOAU",
"territoryIds": [
  "0HhS700000004F9zKAE"
]
}
```

Sample Response

The API returns the service resources and available time slots.

```
{
  "candidates": [
    {
      "endTime": "2022-10-03T16:30:00.000+0000",
      "resources": [
        "0HnS700000004EFyKAM"
      ],
      "startTime": "2022-10-03T16:00:00.000+0000",
      "territoryId": "0HhS700000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T17:00:00.000+0000",
      "resources": [
        "0HnS700000004EFyKAM"
      ],
      "startTime": "2022-10-03T16:30:00.000+0000",
      "territoryId": "0HhS700000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T17:30:00.000+0000",
      "resources": [
        "0HnS700000004EFyKAM"
      ],
      "startTime": "2022-10-03T17:00:00.000+0000",
      "territoryId": "0HhS700000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T18:00:00.000+0000",
      "resources": [
        "0HnS700000004EFyKAM"
      ],
      "startTime": "2022-10-03T17:30:00.000+0000",
      "territoryId": "0HhS700000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T18:30:00.000+0000",
      "resources": [
        "0HnS700000004EFyKAM"
      ],
      "startTime": "2022-10-03T18:00:00.000+0000",
      "territoryId": "0HhS700000004F9zKAE"
    }
  ]
}
```

```

    },
    {
      "endTime": "2022-10-03T19:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-03T18:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T19:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-03T19:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T20:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-03T19:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T20:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-03T20:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T21:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-03T20:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T21:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-03T21:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-03T22:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],

```



```

    "startTime": "2022-10-03T21:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-03T22:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-03T22:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-03T23:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-03T22:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-03T23:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-03T23:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T00:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-03T23:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T00:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T00:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T01:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T00:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T01:30:00.000+0000",
    "resources": [

```

```

        "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T01:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T02:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T01:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T02:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T02:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T03:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T02:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T03:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T03:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T04:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T03:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T16:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T16:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {

```

```

    "endTime": "2022-10-04T17:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T16:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T17:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T17:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T18:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T17:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T18:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T18:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T19:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T18:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T19:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T19:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-04T20:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T19:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  }

```

```

    },
    {
      "endTime": "2022-10-04T20:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-04T20:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-04T21:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-04T20:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-04T21:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-04T21:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-04T22:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-04T21:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-04T22:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-04T22:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-04T23:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-04T22:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-04T23:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],

```

```

    "startTime": "2022-10-04T23:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T00:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-04T23:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T00:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-05T00:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T01:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-05T00:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T01:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-05T01:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T02:00:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-05T01:30:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T02:30:00.000+0000",
    "resources": [
      "0HnS70000004EFyKAM"
    ],
    "startTime": "2022-10-05T02:00:00.000+0000",
    "territoryId": "0HhS70000004F9zKAE"
  },
  {
    "endTime": "2022-10-05T03:00:00.000+0000",
    "resources": [

```

```

        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-05T02:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-05T03:30:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-05T03:00:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    },
    {
      "endTime": "2022-10-05T04:00:00.000+0000",
      "resources": [
        "0HnS70000004EFyKAM"
      ],
      "startTime": "2022-10-05T03:30:00.000+0000",
      "territoryId": "0HhS70000004F9zKAE"
    }
  ]
}

```

3. Parse the JSON response, and show the dummy resource on a page that you created. Your users can select the dummy resource for the appointment.

On the next page, you can show the appointment details for the user to review and create the appointment.

Create Service Appointments

Show your users the details of a service appointment—an appointment booked through Salesforce Scheduler—so that users can review and create the appointment.

1. Create a page where the user can review the appointment details and create the appointment.
2. Make a POST request on the [service-appointments](#) Connect API to create the service appointment.



Note: Specify the operating hour scheduling policy ID to show only the dummy resource who's defined with operating hours for concurrent scheduling. See [Configure Scheduling Policy to Enforce Operating Hours](#).

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/service-appointments
```

For an Existing User (Account)

Sample Request

Pass the account ID as `parentRecordId` in the input request body.

```

{
  "schedulingPolicyId": "0VrS7000000004XKAQ",
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS70000004F9zKAE",
    "parentRecordId": "001S7000002br8YIAQ",
    "schedStartTime": "2022-10-03T16:30:00.000+0000",

```

```
    "schedEndTime": "2022-10-03T17:00:00.000+0000",
    "additionalInformation": "Schedule concurrent appointment with a dummy
resource",
    "appointmentType": "Use case purpose."
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS70000004EFyKAM",
      "isRequiredResource": "true"
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rS700000003zrIAA"
    ],
    "serviceAppointmentId": "08pS700000000CxEIAU"
  }
}
```

For a Guest User (Lead)

Sample Request

Pass the required lead details in the input request body.

```
{
  "schedulingPolicyId": "0VrS7000000004XKAQ",
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS70000004F9zKAE",
    "schedStartTime": "2022-10-03T16:30:00.000+0000",
    "schedEndTime": "2022-10-03T17:00:00.000+0000",
    "additionalInformation": "Schedule concurrent appointment with a dummy
resource",
    "appointmentType": "Use case purpose."
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS70000004EFyKAM",
      "isRequiredResource": "true"
    }
  ],
  "lead": {
    "firstName": "Patient1",
    "lastName": "Test",
    "email": "test1@company.com",
    "company": "Test Club"
  }
}
```


Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rS700000003zrIAA"
    ],
    "parentRecordId": "00QRM000004seHz2AI",
    "serviceAppointmentId": "08pRM0000004vdvYAA"
  }
}
```

Create a page to show confirmation when the service appointment is created successfully.

Here's how a sample confirmation page can look.

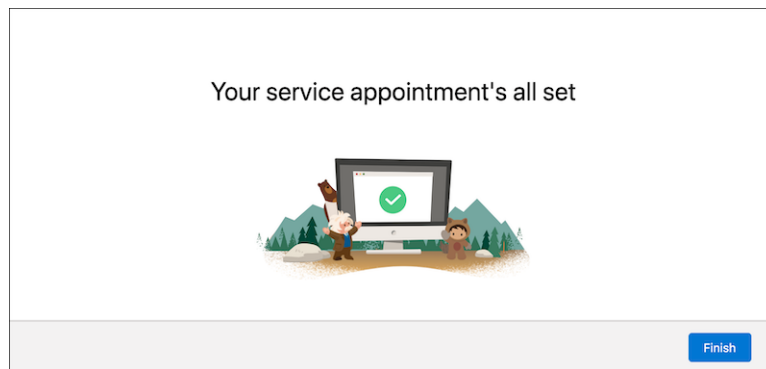

Modify Appointments to Reassign to Actual Resources

Retrieve and show the service appointments scheduled against the dummy resource. Branch managers or administrators can reassign the retrieved appointments to the actual resources.

[Get Service Appointments Assigned to the Dummy Resource](#)

Show your users the service appointments—appointments booked through Salesforce Scheduler—scheduled against the dummy resource by retrieving the list of service appointments. Branch managers or administrators can reassign the appointments to the actual resources.

[Get Actual Service Resources](#)

Retrieve the actual service resources—an employee from your company, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist who attends appointments with clients—based on the work type group and service territory that's assigned to a service appointment. Business managers or administrators can then assign an available service resource to an appointment.

[Update Service Appointments](#)

Show the details of service appointments—appointments booked through Salesforce Scheduler—on a page of your app so that business managers or administrators can review and update appointments.

Get Service Appointments Assigned to the Dummy Resource

Show your users the service appointments—appointments booked through Salesforce Scheduler—scheduled against the dummy resource by retrieving the list of service appointments. Branch managers or administrators can reassign the appointments to the actual resources.

For the list of AppointmentInvitation object fields, see [ServiceAppointment](#).

1. Create a page to show the service appointments scheduled against the dummy resource.
2. To retrieve the list of service appointments, make a [Query\(\)](#) request on the ServiceAppointment object.
 - To choose additional columns from the ServiceAppointment object, such as lead and parent record IDs, modify the query.
 - To see upcoming appointments first, sort appointments by start time ascending.
 - To avoid past appointments, add *where currentTime is greater than start time*.

Sample REST API Request

```
https://yourInstance.salesforce.com/services/data/v66.0/query/?q=
SELECT ServiceAppointmentId, ServiceResourceId, ServiceAppointment.SchedEndTime, ServiceAppointment.SchedStartTime, ServiceAppointment.ServiceTerritoryId, ServiceAppointment.Id
FROM AssignedResource WHERE ServiceResourceId = '0HnS700000004EFyKAM' ORDER BY createdDate+DESC limit+5
```

Sample Response

```
{
  "totalSize": 5,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "AssignedResource",
        "url": "/services/data/v56.0/objects/AssignedResource/03rS70000000401IAA"
      },
      "ServiceAppointmentId": "08pS700000000CxOIAU",
      "ServiceResourceId": "0HnS700000004EFyKAM",
      "ServiceAppointment": {
        "attributes": {
          "type": "ServiceAppointment",
          "url": "/services/data/v56.0/objects/ServiceAppointment/08pS700000000CxOIAU"
        },
        "SchedEndTime": "2022-10-03T17:00:00.000+0000",
        "SchedStartTime": "2022-10-03T16:30:00.000+0000",
        "ServiceTerritoryId": "0HhS700000004F9zKAE",
        "Id": "08pS700000000CxOIAU"
      }
    },
    {
      "attributes": {
        "type": "AssignedResource",
        "url": "/services/data/v56.0/objects/AssignedResource/03rS7000000003zwIAA"
      },
      "ServiceAppointmentId": "08pS700000000CxJIAU",
      "ServiceResourceId": "0HnS700000004EFyKAM",
      "ServiceAppointment": {
        "attributes": {
          "type": "ServiceAppointment",

```

```

        "url": "/services/data/v56.0/subjects/ServiceAppointment/08pS70000000CxJIAU"
    },
    "SchedEndTime": "2022-10-03T17:00:00.000+0000",
    "SchedStartTime": "2022-10-03T16:30:00.000+0000",
    "ServiceTerritoryId": "0HhS700000004F9zKAE",
    "Id": "08pS70000000CxJIAU"
  },
},
{
  "attributes": {
    "type": "AssignedResource",
    "url": "/services/data/v56.0/subjects/AssignedResource/03rS700000003zrIAA"
  },
  "ServiceAppointmentId": "08pS70000000CxEIAU",
  "ServiceResourceId": "0HnS700000004EFyKAM",
  "ServiceAppointment": {
    "attributes": {
      "type": "ServiceAppointment",
      "url": "/services/data/v56.0/subjects/ServiceAppointment/08pS70000000CxEIAU"
    },
    "SchedEndTime": "2022-10-03T17:00:00.000+0000",
    "SchedStartTime": "2022-10-03T16:30:00.000+0000",
    "ServiceTerritoryId": "0HhS700000004F9zKAE",
    "Id": "08pS70000000CxEIAU"
  }
},
{
  "attributes": {
    "type": "AssignedResource",
    "url": "/services/data/v56.0/subjects/AssignedResource/03rS700000004D3WIAU"
  },
  "ServiceAppointmentId": "08pS700000004F3xIAE",
  "ServiceResourceId": "0HnS700000004EFyKAM",
  "ServiceAppointment": {
    "attributes": {
      "type": "ServiceAppointment",
      "url": "/services/data/v56.0/subjects/ServiceAppointment/08pS700000004F3xIAE"
    },
    "SchedEndTime": "2022-10-03T17:00:00.000+0000",
    "SchedStartTime": "2022-10-03T16:30:00.000+0000",
    "ServiceTerritoryId": "0HhS700000004F9zKAE",
    "Id": "08pS700000004F3xIAE"
  }
},
{
  "attributes": {
    "type": "AssignedResource",
    "url": "/services/data/v56.0/subjects/AssignedResource/03rS700000003zmIAA"
  },
  "ServiceAppointmentId": "08pS70000000Cx9IAE",
  "ServiceResourceId": "0HnS700000004EFyKAM",

```

```

    "ServiceAppointment": {
      "attributes": {
        "type": "ServiceAppointment",
        "url": "/services/data/v56.0/objects/ServiceAppointment/08pS70000000Cx9IAE"
      },
      "SchedEndTime": "2022-10-03T17:00:00.000+0000",
      "SchedStartTime": "2022-10-03T16:30:00.000+0000",
      "ServiceTerritoryId": "0HhS700000004F9zKAE",
      "Id": "08pS70000000Cx9IAE"
    }
  }
]
}

```

3. Parse the JSON response, and show the service appointments on a page that you created. Branch managers or administrators can reassign the appointments to the actual resources.

Get Actual Service Resources

Retrieve the actual service resources—an employee from your company, such as a loan officer, investment advisor, doctor, nurse practitioner, or retail store specialist who attends appointments with clients—based on the work type group and service territory that's assigned to a service appointment. Business managers or administrators can then assign an available service resource to an appointment.

1. Make a POST request on the [getAppointmentCandidates](#) REST API by passing the required `workTypeGroupId` and `territoryIds` parameters.



Note: Specify the shift's scheduling policy ID to show only the actual resources who have set regular working hours with shifts. For more information, see [Configure Scheduling Policy to Enforce Shifts](#).

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/scheduling/getAppointmentCandidates
```

Sample Request

```

{
  "startTime": "2022-10-01T17:00:00.000+0000",
  "endTime": "2022-10-08T18:00:00.000+0000",
  "workTypeGroupId": "0VSS700000004DvWOAU",
  "schedulingPolicyId": "0VrS700000004CEhKAM",
  "territoryIds": [
    "0HhS700000004F9zKAE"
  ]
}

```

Sample Response

The API returns the service resources available for the specified time slots.

```

{
  "candidates": [
    {
      "endTime": "2022-10-01T17:30:00.000+0000",
      "resources": [
        "0HhS700000007xwKAA"
      ]
    }
  ]
}

```

```

    ],
    "startTime": "2022-10-01T17:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T18:00:00.000+0000",
    "resources": [
      "0HnS7000000007xwKAA"
    ],
    "startTime": "2022-10-01T17:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T18:30:00.000+0000",
    "resources": [
      "0HnS7000000007xwKAA"
    ],
    "startTime": "2022-10-01T18:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T19:00:00.000+0000",
    "resources": [
      "0HnS7000000007xwKAA"
    ],
    "startTime": "2022-10-01T18:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T19:30:00.000+0000",
    "resources": [
      "0HnS7000000007xwKAA"
    ],
    "startTime": "2022-10-01T19:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T20:00:00.000+0000",
    "resources": [
      "0HnS7000000007xwKAA"
    ],
    "startTime": "2022-10-01T19:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T20:30:00.000+0000",
    "resources": [
      "0HnS7000000007xwKAA"
    ],
    "startTime": "2022-10-01T20:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T21:00:00.000+0000",

```

```

    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T20:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T21:30:00.000+0000",
    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T21:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T22:00:00.000+0000",
    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T21:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T22:30:00.000+0000",
    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T22:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T23:00:00.000+0000",
    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T22:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-01T23:30:00.000+0000",
    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T23:00:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },
  {
    "endTime": "2022-10-02T00:00:00.000+0000",
    "resources": [
      "0HnS700000007xwKAA"
    ],
    "startTime": "2022-10-01T23:30:00.000+0000",
    "territoryId": "0HhS700000004F9zKAE"
  },

```

```
{
  "endTime": "2022-10-02T00:30:00.000+0000",
  "resources": [
    "0HnS700000007xwKAA"
  ],
  "startTime": "2022-10-02T00:00:00.000+0000",
  "territoryId": "0HhS700000004F9zKAE"
}
```

2. Parse the JSON response, and show the actual service resources on a page. Business managers or administrators can select an actual resource for the appointment.

Update Service Appointments

Show the details of service appointments—appointments booked through Salesforce Scheduler—on a page of your app so that business managers or administrators can review and update appointments.

To modify appointments, the branch manager or administrator who's reassigning service appointments need these user permissions.

- Read, Create, and Edit on service appointments
 - Read on accounts, contacts, operating hours, service resources, service territories, work types, and work type groups
1. Create a page to review the appointment details and update the service appointment.
 2. To modify a service appointment, link the Next button to a `PATCH` request on the [service-appointments](#) Connect API.

Resource URI

```
https://yourInstance.salesforce.com/services/data/v66.0/connect/scheduling/service-appointments
```

Sample Request

Pass the appointment ID as `serviceAppointmentId` and the resource ID of the actual resource as `serviceResourceId` in the request. To indicate that the appointment is scheduled, set `status` to `Scheduled`.

```
{
  "schedulingPolicyId": "0VrS700000004CEhKAM",
  "serviceAppointmentId": "08pS700000000CxOIAU",
  "serviceAppointment": {
    "serviceTerritoryId": "0HhS700000004F9zKAE",
    "extendedFields": [
      {
        "name": "status",
        "value": "Scheduled"
      }
    ]
  },
  "assignedResources": [
    {
      "serviceResourceId": "0HnS7000000007xwKAA",
      "isRequiredResource": "true"
    }
  ]
}
```

Sample Response

The API returns the service appointment ID and the assigned service resources.

```
{
  "result": {
    "assignedResourceIds": [
      "03rS70000000406IAA"
    ],
    "serviceAppointmentId": "08pS70000000CxOIAU"
  }
}
```

3. For each service appointment ID that you want to modify, run the `PATCH` request.

Assign active resources to all customers by modifying the appointments booked against the dummy resource. Usually, Business Location Manager or the person who assigns actual resources performs the modification.

 **Important:** Ensure that the total number of dummy appointments doesn't exceed the total number of available resources for a time slot. Otherwise, when modifying appointments, one requires to update the time slots based on availability. To avoid these scenarios, configure the Concurrent Scheduling Max appointment slots to around 60–80% of total resource capacity.

The request modifies the service appointment with a new service resource.

CHAPTER 13 Integrate Salesforce Scheduler with External Calendars

In this chapter ...

- [Apex Classes for External Calendars](#)
- [Platform Events for External Calendars](#)

Salesforce Scheduler provides developer resources that you can use to write appointments directly to, and read events from, external calendars.

For example, use the `LxScheduler.ServiceResourceScheduleHandler` Apex interface to write a custom Apex class to read external calendar events. Then, associate the Apex class with Salesforce Scheduler flows or API calls through the Read External System Events scheduling policy rule. To write appointments to external calendars, first enable the Publish Appointments as Platform Events setting, and subscribe to the new `AppointmentSchedulingEvent` platform event to receive event notifications when users create, modify, or delete appointments. Then, use an API to write the platform events to an external calendar.

The subsequent topics in this section list the provided developer resources for your reference. For detailed instructions about how to use these resources to integrate Salesforce Scheduler with external calendars, see these topics in Salesforce Scheduler help.

SEE ALSO:

[Salesforce Help: Check External Calendars to Determine Resource Availability](#)

[Salesforce Help: Write Salesforce Scheduler Appointments to External Calendars](#)

Apex Classes for External Calendars

The LxScheduler namespace provides an interface and classes for integrating Salesforce Scheduler with external calendars and determine the availability of service resources.

The following are the apex interface and classes available for external calendar within the Salesforce Scheduler platform.

[ServiceResourceScheduleHandler Interface](#)

Allows an implementing class to check external calendar events to find already booked time slots for the requested service resources. This interface is part of Salesforce Scheduler.

[ServiceAppointmentRequestInfo Class](#)

Represents the list of parameters that are passed to the ServiceResourceScheduleHandler interface. This class is implemented internally by Apex.

[ServiceResourceInfo Class](#)

Contains information about a service resource.

[ServiceResourceSchedule Class](#)

Use this class to pass results from your implemented Apex class to the ServiceResourceScheduleHandler interface methods.

[UnavailableTimeslot Class](#)

Use this class to pass the unavailable time slots to the LxScheduler.ServiceResourceSchedule class. Timezones that differ across operating hours are handled and results are always returned in UTC.

ServiceResourceScheduleHandler Interface

Allows an implementing class to check external calendar events to find already booked time slots for the requested service resources. This interface is part of Salesforce Scheduler.

Namespace

[LxScheduler](#)

Usage

The `LxScheduler.ServiceResourceScheduleHandler` interface is called by Salesforce Scheduler APIs.

To implement this interface, you must first declare a class with the `implements` keyword as follows:

```
public class ServiceResourceScheduleHandlerImpl implements
LxScheduler.ServiceResourceScheduleHandler{ }
```

Next, your class must provide an implementation for the following method:

```
public static List<LxScheduler.ServiceResourceSchedule>
getUnavailableTimeslots(LxScheduler.ServiceAppointmentRequestInfo requestInfo){
    //Your code here
}
```

The implemented method must be declared as `global` or `public`.

[ServiceResourceScheduleHandler Methods](#)

[ServiceResourceScheduleHandler Example Implementation](#)

ServiceResourceScheduleHandler Methods

The following are methods for `ServiceResourceScheduleHandler`.

[getUnavailableTimeslots\(var1\)](#)

Passes the required information to get unavailable time slots from an external system. The implementation of this method returns the `lxscheduler.ServiceResourceSchedule` class.

getUnavailableTimeslots(var1)

Passes the required information to get unavailable time slots from an external system. The implementation of this method returns the `lxscheduler.ServiceResourceSchedule` class.

Signature

```
public List<lxscheduler.ServiceResourceSchedule>
getUnavailableTimeslots(lxscheduler.ServiceAppointmentRequestInfo var1)
```

Parameters

`var1`

Type: `lxscheduler.ServiceAppointmentRequestInfo`

Represents the list of parameters that are passed to the `ServiceResourceScheduleHandler` interface.

Return Value

Type: `List<lxscheduler.ServiceResourceSchedule>`

ServiceResourceScheduleHandler Example Implementation

This is an example implementation of the `lxscheduler.ServiceResourceScheduleHandler` interface.

```
/**
 * Implement interface lxscheduler.ServiceResourceScheduleHandler
 * This class is called when fetching service resources and time slots through Salesforce
 * Scheduler API.*/
Public class ServiceResourceScheduleHandlerImpl implements
lxscheduler.ServiceResourceScheduleHandler{

    // The main interface method.
    public static List<lxscheduler.ServiceResourceSchedule>
getUnavailableTimeslots(lxscheduler.ServiceAppointmentRequestInfo requestInfo){
    //Request info values.
    List<lxscheduler.ServiceResourceInfo>
serviceResources=requestInfo.getServiceResources();
    DateTime startDate=requestInfo.getStartDate();
    DateTime endDate=requestInfo.getEndDate();
```

```

        List<lxscheduler.ServiceResourceSchedule> resourceUnavailability = new
List<lxscheduler.ServiceResourceSchedule>();
        Set<lxscheduler.UnavailableTimeslot> unavailabilityIntervals = new
Set<lxscheduler.UnavailableTimeslot>();

        //This is a dummy response. Implement your own business logic to connect to your
internal or external systems.
        for (Integer i = 0; i < 5; i++) {
            //Set the unavailability intervals of a service resource.
            unavailabilityIntervals.add(new
lxscheduler.UnavailableTimeslot(startDate.addMinutes(15*i),startDate.addMinutes(15*(i+1))));

        }

        for (lxscheduler.ServiceResourceInfo ServiceResource:serviceResources) {
            //Set the unavailability of Service resource.
            resourceUnavailability.add(new
lxscheduler.ServiceResourceSchedule(serviceResource.getServiceResourceId(),unavailabilityIntervals));

        }

        return resourceUnavailability;
    }
}

```

This example shows how to set a sample test mock using the `lxscheduler.ServiceResourceScheduleHandler` interface.

```

@Test
private class ServiceResourceScheduleHandlerImplTest {
    static testMethod void getUnavailableTimeslotsTest() {

        //Initializing the test execution with mock values. Change it according to the
implementation.
        //In case of non-test execution, the lxscheduler.ServiceAppointmentRequestInfo
instance will automatically initialize.

        //Mock values for lxscheduler.ServiceResourceInfo
        String userId = '005D2000000I1N6IAK';
        String userName = 'someuser@example.com';
        String email = 'someuser@example.com';
        String serviceResourceId = '0HnD20000004C9bKAE';
        List<String> territoryIds = new List<String>();
        String resourceType = 'T';
        lxscheduler.ServiceResourceInfo serviceResInfo = new
lxscheduler.ServiceResourceInfo(userId, userName, email,
                                serviceResourceId, territoryIds,
resourceType);

        //Mock values for lxscheduler.ServiceAppointmentRequestInfo
        DateTime startDate = System.now();
        DateTime endDate = System.now();
        List<lxscheduler.ServiceResourceInfo> serviceResources = new

```

```

List<lxscheduler.ServiceResourceInfo>();
    serviceResources.add(serviceResInfo);
    String schedulingPolicyId = '0VrD20000004C9S';
    String workTypeGroupId = '0VSD20000004C930AE';
    String accountId = '001D2000002pkXwIAI';
    String primaryResourceId = '0HnD20000004C9bKAE';
    String workTypeId = '08qD20000004C9XIAU';
    String correlationId = 'SOME_ID';

    lxscheduler.ServiceAppointmentRequestInfo mockRequestInfo = new
lxscheduler.ServiceAppointmentRequestInfo(startDate, endDate, serviceResources,
                                         schedulingPolicyId,
workTypeGroupId, accountId,
                                         primaryResourceId,
workTypeId, correlationId);

    ServiceResourceScheduleHandlerImpl.getUnavailableTimeslots(mockRequestInfo);
}
}

```

ServiceAppointmentRequestInfo Class

Represents the list of parameters that are passed to the ServiceResourceScheduleHandler interface. This class is implemented internally by Apex.

Namespace

[LxScheduler](#)

[ServiceAppointmentRequestInfo Constructors](#)

[ServiceAppointmentRequestInfo Methods](#)

ServiceAppointmentRequestInfo Constructors

The following are constructors for ServiceAppointmentRequestInfo.

[ServiceAppointmentRequestInfo\(startDate, endDate, ServiceResources, SchedulingPolicyId, workTypeGroupId, accountId, primaryResourceId, workTypeId, correlationId\)](#)

Creates a new instance of the `lxscheduler.ServiceAppointmentRequestInfo` class using the specified start date, end date, service resources, scheduling policy, work type group, account ID, primary resource, work type, and correlation.

ServiceAppointmentRequestInfo(startDate, endDate, ServiceResources, SchedulingPolicyId, workTypeGroupId, accountId, primaryResourceId, workTypeId, correlationId)

Creates a new instance of the `lxscheduler.ServiceAppointmentRequestInfo` class using the specified start date, end date, service resources, scheduling policy, work type group, account ID, primary resource, work type, and correlation.

Signature

```
public ServiceAppointmentRequestInfo(Datetime startDate, Datetime endDate,
List<lxscheduler.ServiceResourceInfo> ServiceResources, String SchedulingPolicyId,
String workTypeGroupId, String accountId, String primaryResourceId, String workTypeId,
String correlationId)
```

Parameters

startDate

Type: Datetime

The start date and time for which unavailable time slots are requested.

endDate

Type: Datetime

The end date and time for which unavailable time slots are requested.

ServiceResources

Type: List<lxscheduler.ServiceResourceInfo>

The list of requested service resources for the unavailable time slots.

SchedulingPolicyId

Type: String

The ID of the scheduling policy .

workTypeGroupId

Type: String

The work type group ID.

accountId

Type: String

The account ID of an existing user.

primaryResourceId

Type: String

The ID of the primary service resource.

workTypeId

Type: String

The work type ID.

correlationId

Type: String

A unique identifier for a service appointment request.

ServiceAppointmentRequestInfo Methods

The following are methods for `ServiceAppointmentRequestInfo`.

[getAccountId\(\)](#)

Returns the account ID of the customer if the API request contains one.

getCorrelationId()

Returns a unique identifier for a request.

getEndDate()

Returns the end date and time for which unavailable time slots are requested.

getPrimaryResourceId()

Returns the ID of the primary service resource.

getSchedulingPolicyId()

Returns the ID of the scheduling policy that the API request contains.

getServiceResources()

Returns the list of requested service resources for the unavailable time slots.

getStartDate()

Returns the start date and time for which unavailable time slots are requested.

getWorkTypeGroupId()

Returns the work type group ID if the API request contains one.

getWorkTypeId()

Returns the work type ID if the API request contains one.

getAccountId()

Returns the account ID of the customer if the API request contains one.

Signature

```
public String getAccountId()
```

Return Value

Type: String

getCorrelationId()

Returns a unique identifier for a request.

Signature

```
public String getCorrelationId()
```

Return Value

Type: String

getEndDate()

Returns the end date and time for which unavailable time slots are requested.

Signature

```
public Datetime getEndDate()
```

Return Value

Type: Datetime

getPrimaryResourceId()

Returns the ID of the primary service resource.

Signature

```
public String getPrimaryResourceId()
```

Return Value

Type: String

getSchedulingPolicyId()

Returns the ID of the scheduling policy that the API request contains.

Signature

```
public String getSchedulingPolicyId()
```

Return Value

Type: String

getServiceResources()

Returns the list of requested service resources for the unavailable time slots.

Signature

```
public List<lxscheduler.ServiceResourceInfo> getServiceResources()
```

Return Value

Type: List<lxscheduler.ServiceResourceInfo>

getStartDate()

Returns the start date and time for which unavailable time slots are requested.

Signature

```
public Datetime getStartDate()
```

Return Value

Type: Datetime

getWorkTypeGroupId()

Returns the work type group ID if the API request contains one.

Signature

```
public String getWorkTypeGroupId()
```

Return Value

Type: String

getWorkTypeId()

Returns the work type ID if the API request contains one.

Signature

```
public String getWorkTypeId()
```

Return Value

Type: String

ServiceResourceInfo Class

Contains information about a service resource.

Namespace

[LxScheduler](#)

[ServiceResourceInfo Constructors](#)

[ServiceResourceInfo Methods](#)

ServiceResourceInfo Constructors

The following are constructors for `ServiceResourceInfo`.

[ServiceResourceInfo\(userId, userName, email, serviceResourceId, territoryIds, resourceType\)](#)

Creates a new instance of the `lxscheduler.ServiceResourceInfo` class using the specified service resource details.

ServiceResourceInfo(*userId*, *userName*, *email*, *serviceResourceId*, *territoryIds*, *resourceType*)

Creates a new instance of the `lxscheduler.ServiceResourceInfo` class using the specified service resource details.

Signature

```
public ServiceResourceInfo(String userId, String userName, String email, String serviceResourceId, List<String> territoryIds, String resourceType)
```

Parameters

userId

Type: String

The user ID of the service resource.

userName

Type: String

The user name of the service resource.

email

Type: String

The email ID of the service resource.

serviceResourceId

Type: String

The ID of the service resource.

territoryIds

Type: List<String>

A list of requested service territories for the service resource.

resourceType

Type: String

The type of the service resource such as Technician or Asset.

ServiceResourceInfo Methods

The following are methods for `ServiceResourceInfo`.

[getEmail\(\)](#)

Returns the email ID of the service resource.

[getResourceType\(\)](#)

Returns the type of the service resource such as Technician or Asset.

[getServiceResourceId\(\)](#)

Returns the ID of the service resource.

[getTerritoryIds\(\)](#)

Returns a list of requested service territories for the service resource.

getUserId()

Returns the user ID of the service resource.

getUserName()

Returns the user name of the service resource.

getEmail()

Returns the email ID of the service resource.

Signature

```
public String getEmail()
```

Return Value

Type: String

getResourceType()

Returns the type of the service resource such as Technician or Asset.

Signature

```
public String getResourceType()
```

Return Value

Type: String

getServiceResourceId()

Returns the ID of the service resource.

Signature

```
public String getServiceResourceId()
```

Return Value

Type: String

getTerritoryIds()

Returns a list of requested service territories for the service resource.

Signature

```
public List<String> getTerritoryIds()
```

Return Value

Type: List<String>

getUserId()

Returns the user ID of the service resource.

Signature

```
public String getUserId()
```

Return Value

Type: String

getUserName()

Returns the user name of the service resource.

Signature

```
public String getUserName()
```

Return Value

Type: String

ServiceResourceSchedule Class

Use this class to pass results from your implemented Apex class to the ServiceResourceScheduleHandler interface methods.

Namespace

[LxScheduler](#)

[ServiceResourceSchedule Constructors](#)

[ServiceResourceSchedule Properties](#)

ServiceResourceSchedule Constructors

The following are constructors for `ServiceResourceSchedule`.

[ServiceResourceSchedule\(serviceResourceId, unavailableTimeslots\)](#)

Creates a new instance of `LxScheduler.ServiceResourceSchedule` class.

ServiceResourceSchedule(serviceResourceId, unavailableTimeslots)

Creates a new instance of `LxScheduler.ServiceResourceSchedule` class.

Signature

```
public ServiceResourceSchedule(String serviceResourceId,  
Set<Ixscheduler.UnavailableTimeslot> unavailableTimeslots)
```

Parameters

serviceResourceId

Type: String

Record ID of the service resource.

unavailableTimeslots

Type: Set<Ixscheduler.UnavailableTimeslot>

An instance of Ixscheduler.UnavailableTimeslot class.

ServiceResourceSchedule Properties

The following are properties for `ServiceResourceSchedule`.

[`serviceResourceId`](#)

Record ID of the service resource.

[`unavailableTimeslots`](#)

An instance of Ixscheduler.UnavailableTimeslot class.

`serviceResourceId`

Record ID of the service resource.

Signature

```
public String serviceResourceId {get; set;}
```

Property Value

Type: String

`unavailableTimeslots`

An instance of Ixscheduler.UnavailableTimeslot class.

Signature

```
public Set<Ixscheduler.UnavailableTimeslot> unavailableTimeslots {get; set;}
```

Property Value

Type: Set<Ixscheduler.UnavailableTimeslot>

UnavailableTimeslot Class

Use this class to pass the unavailable time slots to the `lxscheduler.ServiceResourceSchedule` class. Timezones that differ across operating hours are handled and results are always returned in UTC.

Namespace

[LxScheduler](#)

[UnavailableTimeslot Constructors](#)

[UnavailableTimeslot Properties](#)

UnavailableTimeslot Constructors

The following are constructors for `UnavailableTimeslot`.

[UnavailableTimeslot\(timeMin, timeMax\)](#)

Creates an instance of `lxscheduler.UnavailableTimeslot` class.

UnavailableTimeslot(timeMin, timeMax)

Creates an instance of `lxscheduler.UnavailableTimeslot` class.

Signature

```
public UnavailableTimeslot (Datetime timeMin, Datetime timeMax)
```

Parameters

timeMin

Type: `Datetime`

Start time of an unavailable time slot.

timeMax

Type: `Datetime`

End time of an unavailable time slot.

UnavailableTimeslot Properties

The following are properties for `UnavailableTimeslot`.

[timeMax](#)

End time of an unavailable time slot.

[timeMin](#)

Start time of an unavailable time slot.

timeMax

End time of an unavailable time slot.

Signature

```
public Datetime timeMax {get; set;}
```

Property Value

Type: Datetime

timeMin

Start time of an unavailable time slot.

Signature

```
public Datetime timeMin {get; set;}
```

Property Value

Type: Datetime

Platform Events for External Calendars

Use the AppointmentSchedulingEvent to notify subscribers when an appointment schedule is added, updated, or deleted.

The following is the platform event object available within the Salesforce Scheduler platform.

[AppointmentSchedulingEvent](#)

Notifies subscribers when an appointment schedule is added, updated, or deleted. This object is available in API version 50.0 and later.

SEE ALSO:

[Platform Events Developer Guide](#)

AppointmentSchedulingEvent

Notifies subscribers when an appointment schedule is added, updated, or deleted. This object is available in API version 50.0 and later.

Supported Calls

```
describeSObjects()
```

Special Access Rules

AppointmentSchedulingEvent is available as part of Salesforce Scheduler.

Supported Subscribers

Subscriber	Supported?
Apex Triggers	✓
Flows	
Processes	
Pub/Sub API	✓
Streaming API (CometD)	✓

Subscription Channel

/event/AppointmentSchedulingEvent

Event Delivery Allocation Enforced

Yes

Fields

Field	Details
AssignedResourceFields	Type AsgnRsrcApptSchdEvent[] Properties Nillable Description The assigned resources associated with the appointment.
ChangeType	Type string Properties Nillable Description The operation that caused the change. For example: CREATE, UPDATE, DELETE.
CorrelationId	Type string Properties Nillable

Field	Details
	Description The universally unique identifier (UUID) that correlates the appointment with the platform event.
EventUuid	Type string Properties Nillable Description A universally unique identifier (UUID) that identifies a platform event message. This field is available in API version 52.0 and later.
ReplayId	Type string Properties Nillable Description Represents an ID value that is populated by the system and refers to the position of the event in the event stream. Replay ID values aren't guaranteed to be contiguous for consecutive events. A subscriber can store a replay ID value and use it on resubscription to retrieve missed events that are within the retention window.
ServiceAppointmentFields	Type SvcApptSchdEvent[] Properties Nillable Description The service appointments associated with the appointment.

Example

This example event message is for a new appointment with two assigned resources.

```
{
  "schema": "Zog7FKcPWV9DeEIEVHsoug",
  "payload": {
    "CreatedById": "005xx000001X7dlAAC",
    "ChangeType": "CREATE",
    "ServiceAppointmentFields": {
      "ParentRecordId": "001RM000003rwkfYAA",
      "ContactId": "003RM000006EpajYAC",
      "Status": "None",
      "AdditionalInformation": "Sample additional information",
      "ServiceTerritoryId": "0Hhxx0000004mu4",
    }
  }
}
```



```

    "Comments": "Sample comment",
    "Email": "abc@example.com",
    "Address": "1 Market Street San Francisco CA 94105 United States",
    "WorkTypeId": "08qxx0000004C92",
    "WorkTypeBlockTimeBeforeAppointment": 30,
    "WorkTypeBlockTimeAfterAppointment": 1,
    "WorkTypeBlockTimeBeforeUnit": "minutes",
    "WorkTypeBlockTimeAfterUnit": "hours",
    "ServiceAppointmentId": "08pxx0000005Ip6",
    "ScheduledEndTime": "2020-02-28T00:45:00.000Z",
    "Subject": "Apply for Privileged Customer Card",
    "AppointmentType": "null",
    "StatusCategory": "None",
    "DurationInMinutes": 60,
    "Phone": "4155551212",
    "ScheduledStartTime": "2020-02-27T23:45:00.000Z"
  },
  "AssignedResourceFields": [
    {
      "IsPrimaryResource": true,
      "ServiceResourceUserName": "Rachel Adams",
      "ServiceResourceUserId": "005xx000001X7d1",
      "AssignedResourceId": "03rxx0000004gLc",
      "ServiceResourceId": "0Hnxx0000004C92",
      "ServiceResourceUserEmail": "ra@example.com",
      "IsRequiredResource": true
    },
    {
      "IsPrimaryResource": false,
      "ServiceResourceUserName": "Andrew Collins",
      "ServiceResourceUserId": "005xx000001XPN1",
      "AssignedResourceId": "03rxx0000004gNE",
      "ServiceResourceId": "0Hnxx0000006z8q",
      "ServiceResourceUserEmail": "ac@example.com",
      "IsRequiredResource": false
    }
  ],
  "CreateDate": "2020-02-25T01:57:39.936Z",
  "CorrelationId": "d7c0bbGiUObLF6BD3NaG"
},
"event": {
  "replayId": 3
}
}

```

[AsgnRsrcApptSchdEvent](#)

Represents the assigned resources that are part of various platform events. This object is included in a streamed notification received on the channels for the parent platform events. You can't subscribe to the AsgnRsrcApptSchdEvent channel directly. This object is available in API version 50.0 and later.

[SvcApptSchdEvent](#)

Represents the service appointment event. This object is included in a streamed notification received on the channels for the parent platform events. You can't subscribe to the SvcApptSchdEvent channel directly. This object is available in API version 50.0 and later.

AsgnRsrcApptSchdEvent

Represents the assigned resources that are part of various platform events. This object is included in a streamed notification received on the channels for the parent platform events. You can't subscribe to the AsgnRsrcApptSchdEvent channel directly. This object is available in API version 50.0 and later.

Supported Calls

`describeSObjects()`

Parent Platform Events

- [AppointmentSchedulingEvent](#)
- [ServiceAppointmentEvent](#)

Fields

Field	Details
AssignedResourceId	Type string Properties Nillable Description ID of the assigned resource.
ChangedFields	Type complexvalue Properties Nillable Description A list of fields that changed.
EventUuid	Type string Properties Nillable Description A universally unique identifier (UUID) that identifies a platform event message. This field is available in API version 52.0 and later.
IsPrimaryResource	Type boolean Properties Defaulted on create

Field	Details
	Description Indicates whether the resource is primary.
IsRequiredResource	Type boolean Properties Defaulted on create Description Indicates whether the resource is required.
ServiceResourceId	Type string Properties Nillable Description ID of the service resource assigned to the event.
ServiceResourceUserEmail	Type string Properties Nillable Description Email of the service resource user assigned to the event.
ServiceResourceUserId	Type string Properties Nillable Description ID of the user record associated with the service resource assigned to the event.
ServiceResourceUserName	Type string Properties Nillable Description Username as per the user record associated with the service resource assigned to the event.

Example

This example shows the assigned resources associated with the event.

```
{
  "IsPrimaryResource": true,
  "ServiceResourceUserName": "Rachel Adams",
  "ServiceResourceUserId": "005xx000001X7d1",
  "AssignedResourceId": "03rxx0000004gLc",
  "ServiceResourceId": "0Hnxx0000004C92",
  "ServiceResourceUserEmail": "ra@example.com",
  "IsRequiredResource": true
}
```

SvcApptSchdEvent

Represents the service appointment event. This object is included in a streamed notification received on the channels for the parent platform events. You can't subscribe to the SvcApptSchdEvent channel directly. This object is available in API version 50.0 and later.

Supported Calls

describeSObjects()

Parent Platform Events

- AppointmentSchedulingEvent
- ServiceAppointmentEvent

Fields

Field	Details
AdditionalInformation	Type string Properties Nillable Description Additional information about the service appointment.
Address	Type string Properties Nillable Description The address of the service appointment.
AppointmentType	Type string

Field	Details
	Properties Nillable Description The service appointment type.
ChangedFields	Type complexvalue Properties Nillable Description List of fields that changed.
Comments	Type string Properties Nillable Description Comments about the service appointment.
ContactId	Type string Properties Nillable Description ID of the contact associated with the service appointment.
DurationInMinutes	Type double Properties Nillable Description The duration of the service appointment in minutes.
Email	Type string Properties Nillable Description The email associated with the service appointment.
EventUuid	Type string

Field	Details
	Properties Nillable Description A universally unique identifier (UUID) that identifies a platform event message. This field is available in API version 52.0 and later.
ParentRecordId	Type string Properties Nillable Description ID of the parent record associated with the service appointment.
Phone	Type string Properties Nillable Description The phone number associated with the service appointment.
ScheduledEndTime	Type dateTime Properties Nillable Description The scheduled end time of the service appointment.
ScheduledStartTime	Type dateTime Properties Nillable Description The scheduled start time of the service appointment.
ServiceAppointmentId	Type string Properties Nillable Description ID of the service appointment.

Field	Details
ServiceTerritoryId	Type string Properties Nillable Description ID of the service territories associated with the service appointment.
Status	Type string Properties Nillable Description The status of the service appointment.
StatusCategory	Type string Properties Nillable Description The status category of the service appointment.
Subject	Type string Properties Nillable Description The subject of the service appointment.
WorkTypeBlockTimeAfterAppointment	Type int Properties Nillable Description The period of time occurring after the appointment that is typically blocked for this work type.
WorkTypeBlockTimeAfterUnit	Type string Properties Nillable

Field	Details
	Description The unit of the period specified for WorkTypeBlockTimeAfterAppointment. Values include hour and minute.
WorkTypeBlockTimeBeforeAppointment	Type int Properties Nillable Description The period of time occurring before the appointment that is typically blocked for this work type.
WorkTypeBlockTimeBeforeUnit	Type string Properties Nillable Description The unit of the period specified for WorkTypeBlockTimeBeforeAppointment. Values include hour and minute.
WorkTypeId	Type string Properties Nillable Description ID of the work type associated with the service appointment.

Example

This example shows the service appointment fields associated with the event.

```
{
  "ParentRecordId": "001RM000003rwkfYAA",
  "ContactId": "003RM000006EpajYAC",
  "Status": "None",
  "AdditionalInformation": "Sample additional information",
  "ServiceTerritoryId": "0Hhxx0000004mu4",
  "Comments": "Sample comment",
  "Email": "abc@example.com",
  "Address": "1 Market Street San Francisco CA 94105 United States",
  "WorkTypeId": "08qxx0000004C92",
  "WorkTypeBlockTimeBeforeAppointment": 30,
  "WorkTypeBlockTimeAfterAppointment": 1,
  "WorkTypeBlockTimeBeforeUnit": "minutes",
  "WorkTypeBlockTimeAfterUnit": "hours",
```



```
"ServiceAppointmentId": "08pxx0000005Ip6",  
"ScheduledEndTime": "2020-02-28T00:45:00.000Z",  
"Subject": "Apply for Chase Sapphire Preferred Card",  
"AppointmentType": "null",  
"StatusCategory": "None",  
"DurationInMinutes": 60,  
"Phone": "4157286216",  
"ScheduledStartTime": "2020-02-27T23:45:00.000Z"  
}
```

INDEX

C

Classes

 Ixscheduler.ServiceAppointmentRequestInfo [404](#)

 Ixscheduler.ServiceResourceInfo [408](#)

 Ixscheduler.ServiceResourceSchedule [411](#)

 Ixscheduler.UnavailableTimeslot [413](#)

Connect in Apex [218](#)

ConnectAPI [218](#)

I

Interfaces

 Ixscheduler.ServiceResourceScheduleHandler [401](#)

L

Ixscheduler

 namespace [227](#)

Ixscheduler.ServiceAppointmentRequestInfo

 classes [404](#)

Ixscheduler.ServiceResourceInfo

 classes [408](#)

Ixscheduler.ServiceResourceSchedule

 classes [411](#)

Ixscheduler.ServiceResourceScheduleHandler

 interfaces [401](#)

Ixscheduler.UnavailableTimeslot

 classes [413](#)

N

Namespaces

 Ixscheduler [227](#)