

# Lists

# "Lists are everywhere."




-Steve Jobs

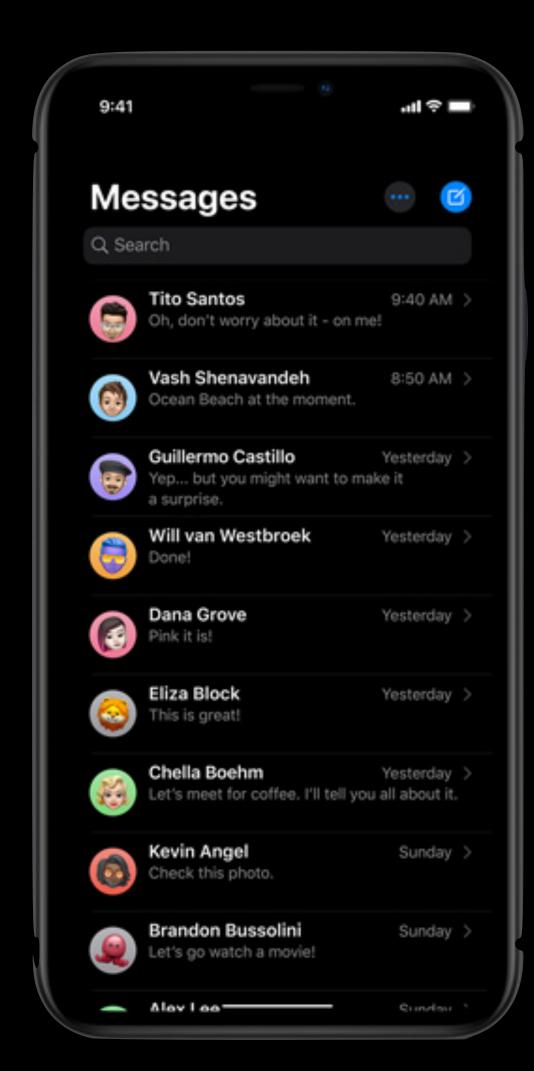

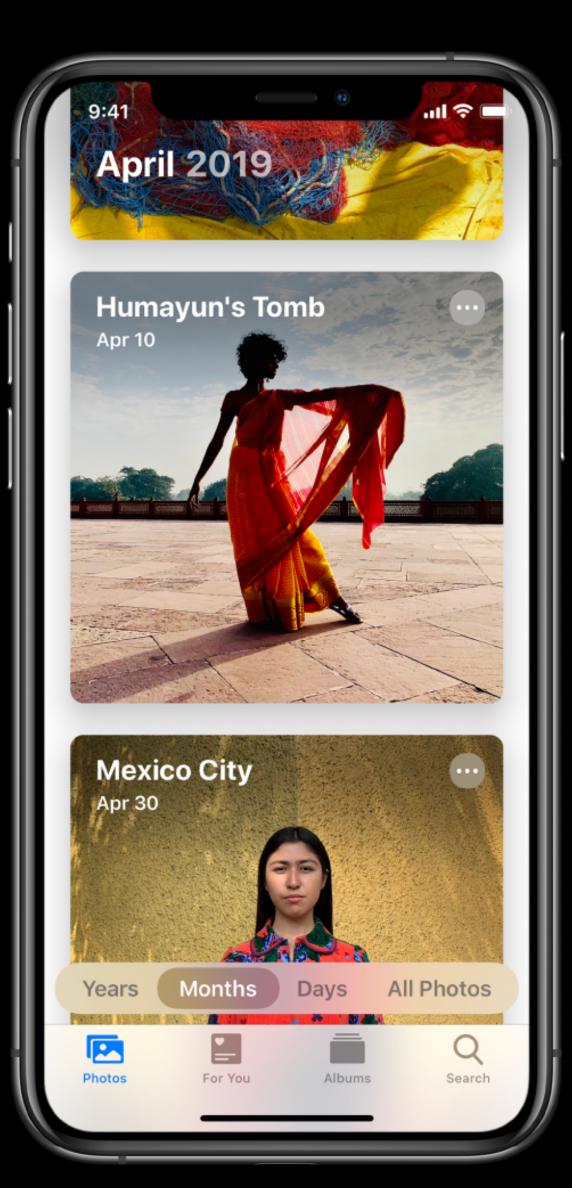



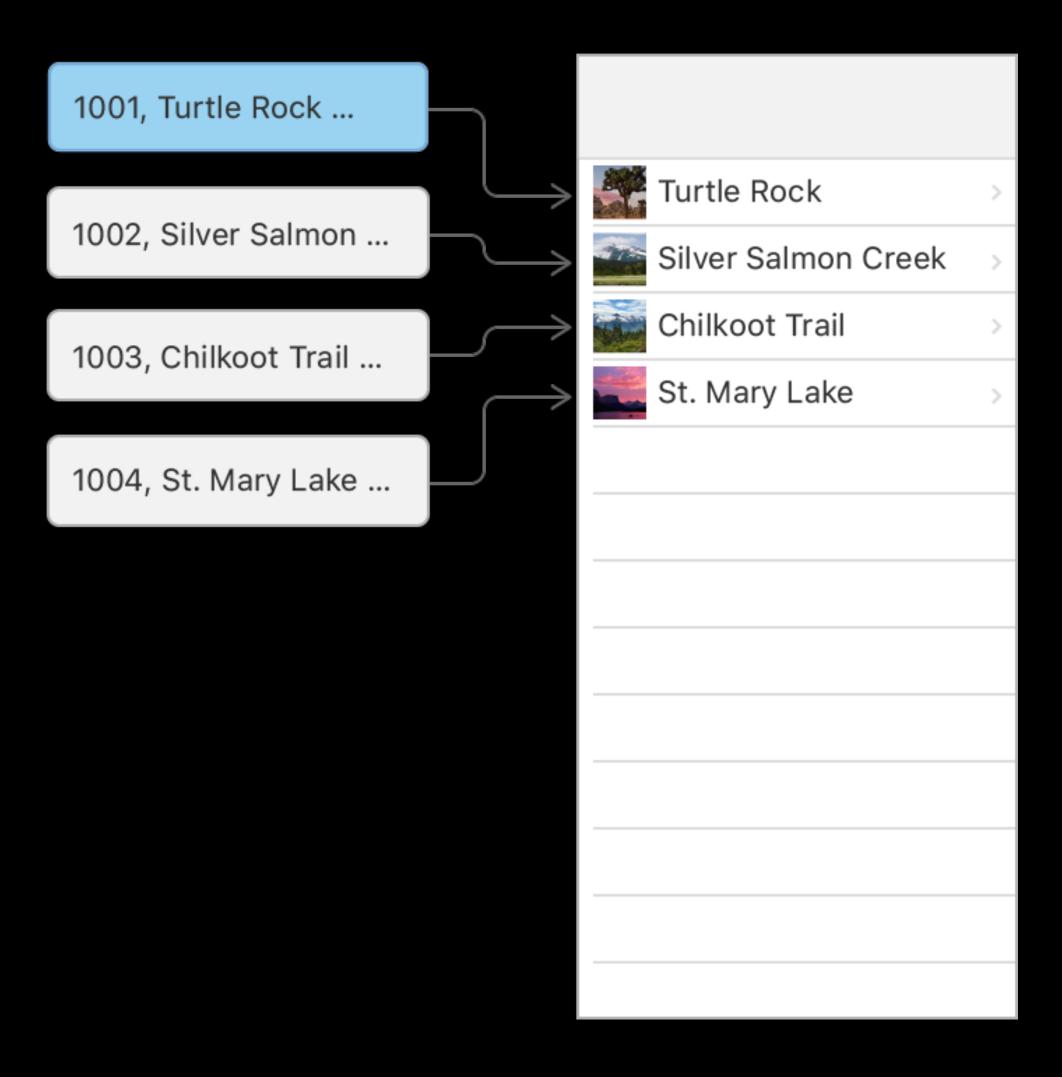



Model de donnée Struct

```
struct Album: Identifiable {
   var id = UUID()
   var name: String
}
```



Source Données Tableau



List

```
struct ContentView: View {
  var albums = [
                  Album(name: "1999"),
                  Album(name: "Desire"),
                  Album(name: "Hello Sunshine")
  var body: some View {
    List(albums) { album in
      Text(album_name)
```

1999

Desire

Hello Sunshine

List

```
struct ContentView: View {
  var albums = [
                  Album(name: "1999"),
                  Album(name: "Desire"),
                  Album(name: "Hello Sunshine")
  var body: some View {
    List(albums) { album in
      Text(album_name)
```

1999

Desire

Hello Sunshine

List

```
struct ContentView: View {
  var albums = [
                  Album(name: "1999"),
                   Album(name: "Desire"),
                  Album(name: "Hello Sunshine")
  var body: some View {
    List(albums) { album in
      Text(album.name)
                   En Swift: for album in albums
```

1999

Desire

Hello Sunshine

#### ForEach

1999 Desire Hello Sunshine