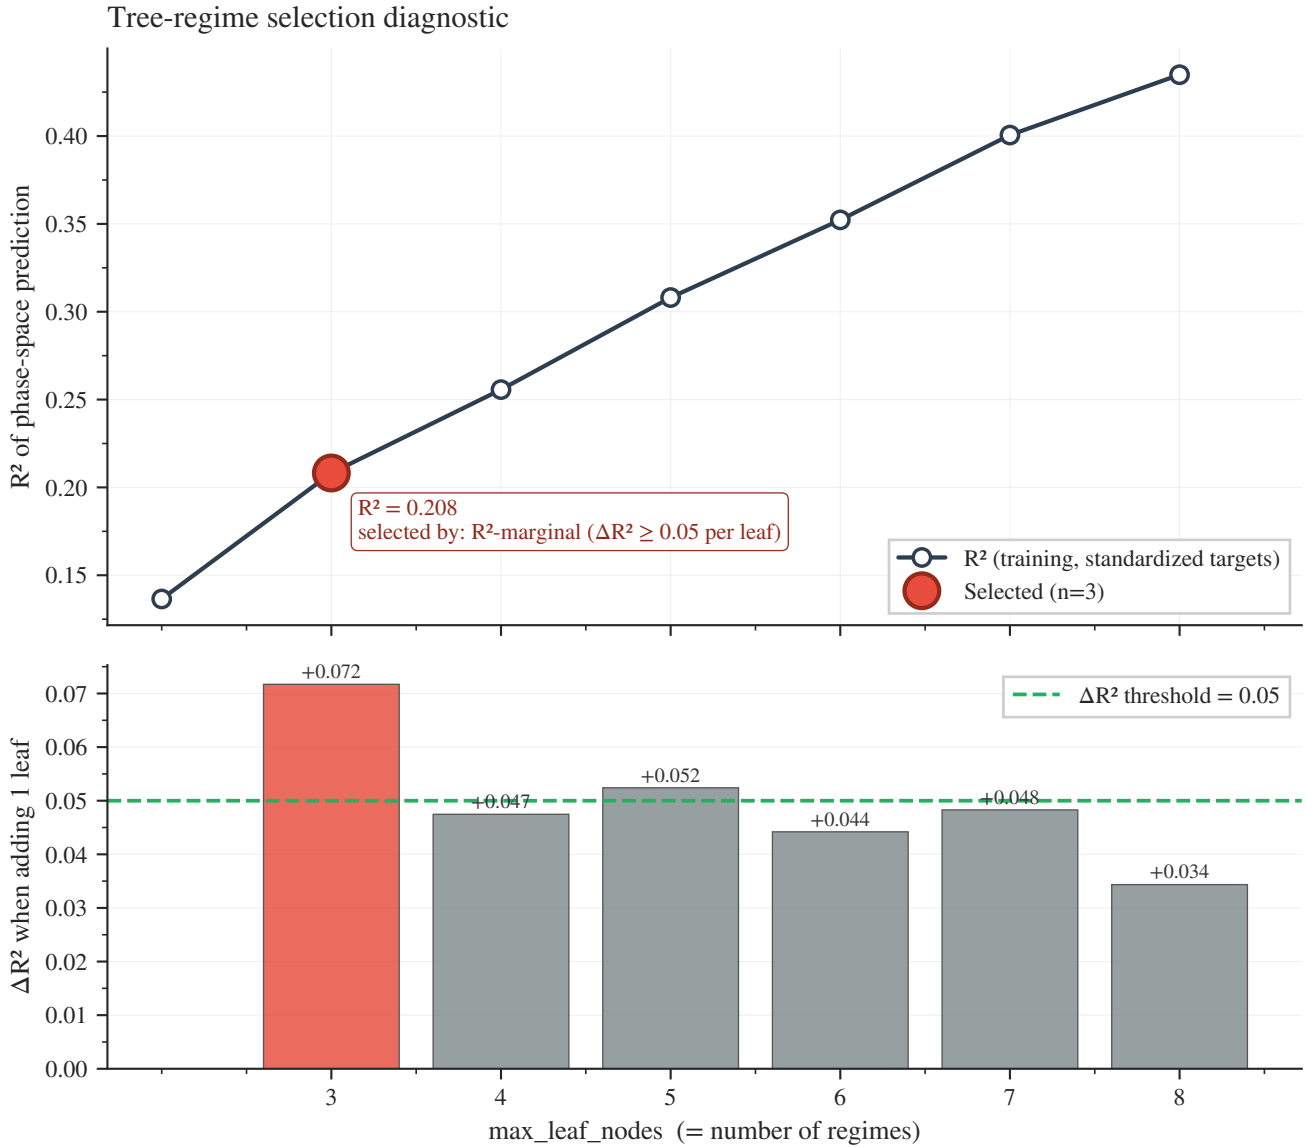

Note: training R² is computed on standardized (ΔδD, ΔH O) targets so the two output dimensions contribute equally. Residual unexplained variance reflects the intentionally coarse decision-tree partition of the nonlinear 15D-to-2D forward map.