

1. GET-metodi

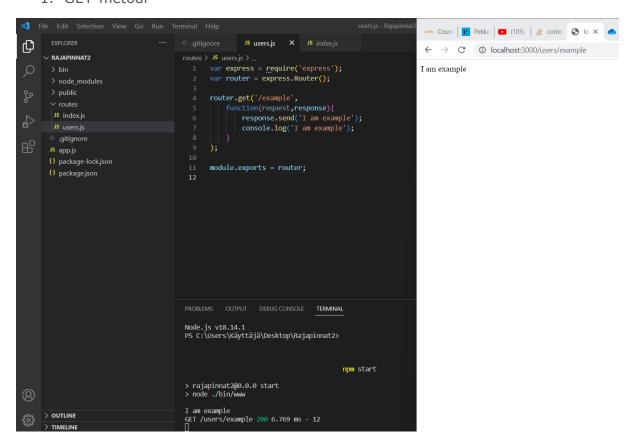

2. GET-metodi yhdellä parametrilla

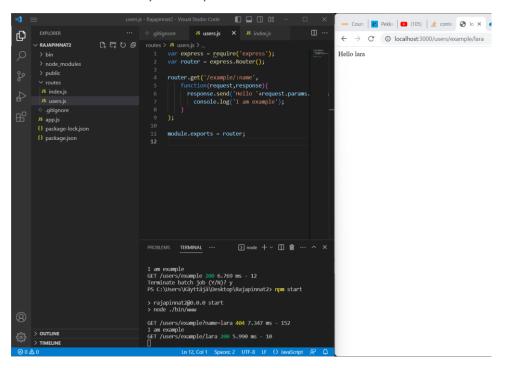

3. GET-metodi kahdella parametrilla

4. POST-metodi

```
users.js - Rajapinnat2 - Visual Studio Code
                                                                                                 □ ...
                                                        JS users.js X JS index.js

∨ RAJAPINNAT2

                                         var express = require('express');
 > bin
                                              var router = express.Router();
                                              router.post('/',
                                                   function(request, response){
                                                     response.send(request.body.fname+' '
                                                       console.log(request.body);
 .gitignore
 {} package-lock.json
                                              module.exports = router;
 {} package.json
                                        PROBLEMS TERMINAL ···
                                                                     ∑ node + ∨ □ · · · · · ×
                                        [Object: null prototype] { fname: 'Lara', lname: 'Laamanen
                                       }
POST /users 200 34.800 ms - 35
Terminate batch job (Y/N)? y
PS C:\Users\Käyttäjä\Desktop\Rajapinnat2> npm start
                                        > rajapinnat2@0.0.0 start
> node ./bin/www
                                        [Object: null prototype] { fname: 'Lara', lname: 'Laamanen
```

