


# **ИНСТРУМЕНТЫ**

**веб-разработчика**

**Миша Ларченко / 29 июня 2020**


**для любой работы необходим  
подходящий инструмент**

# Редактор

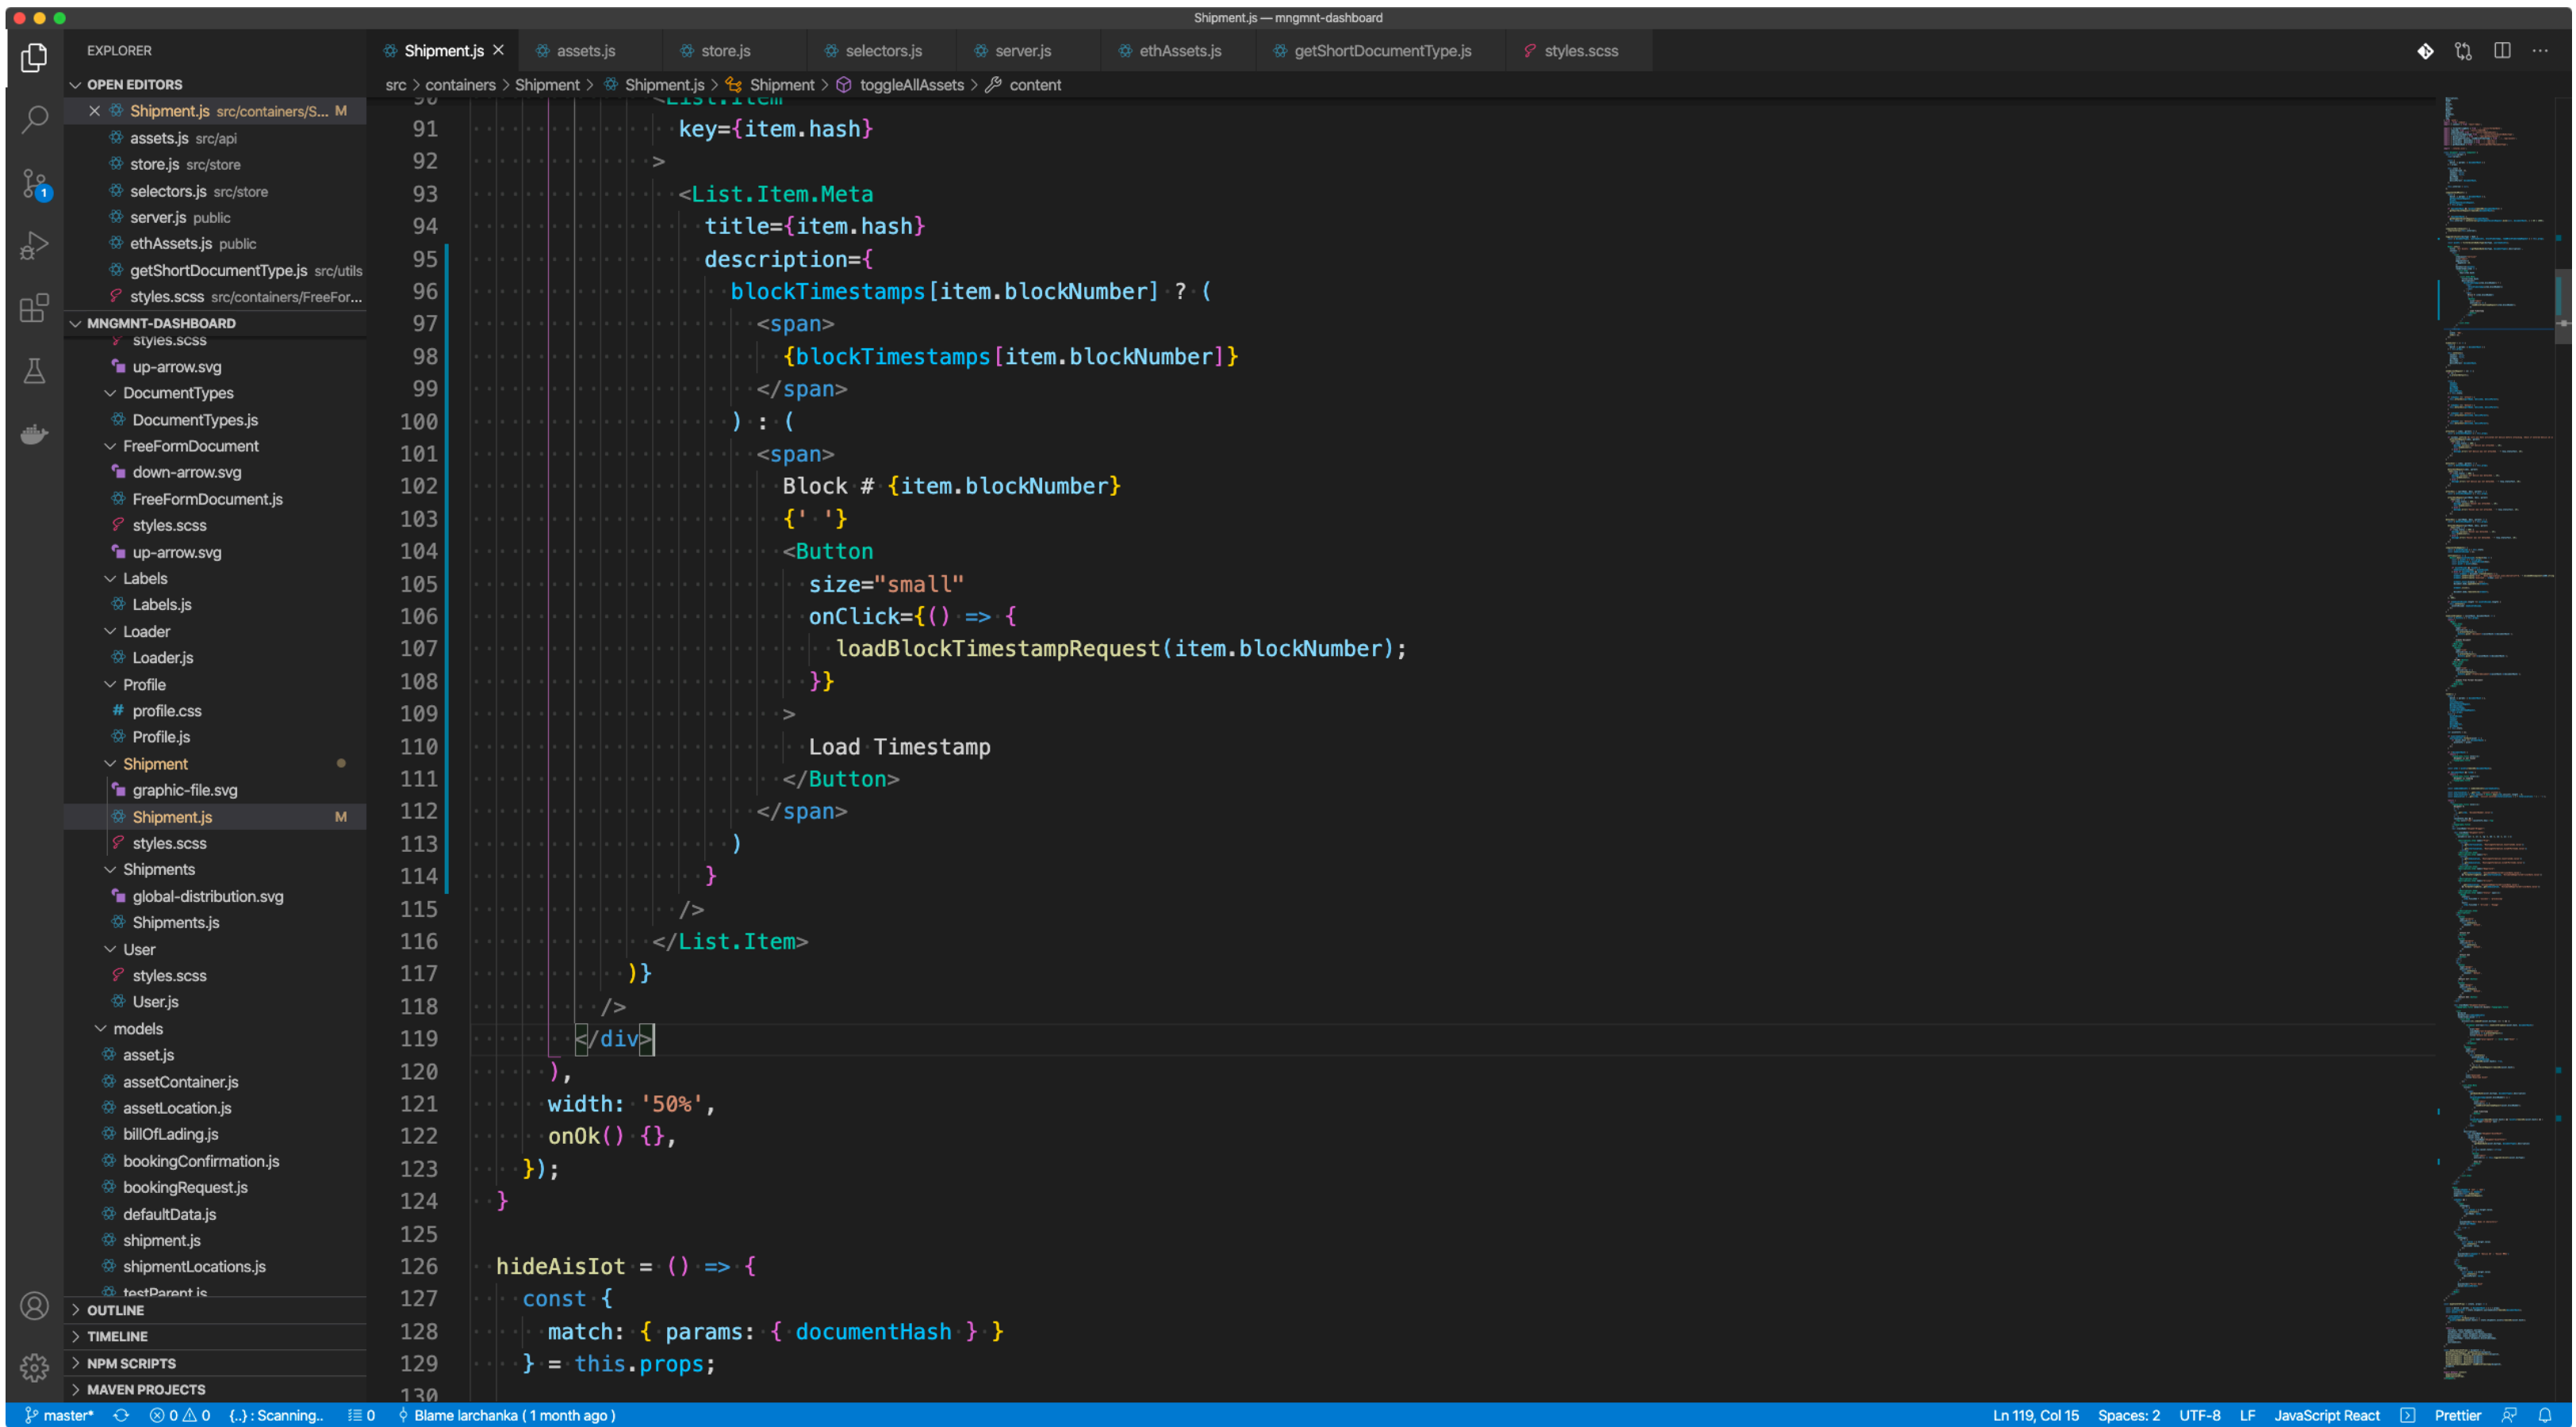

<https://code.visualstudio.com/>

# Редактор

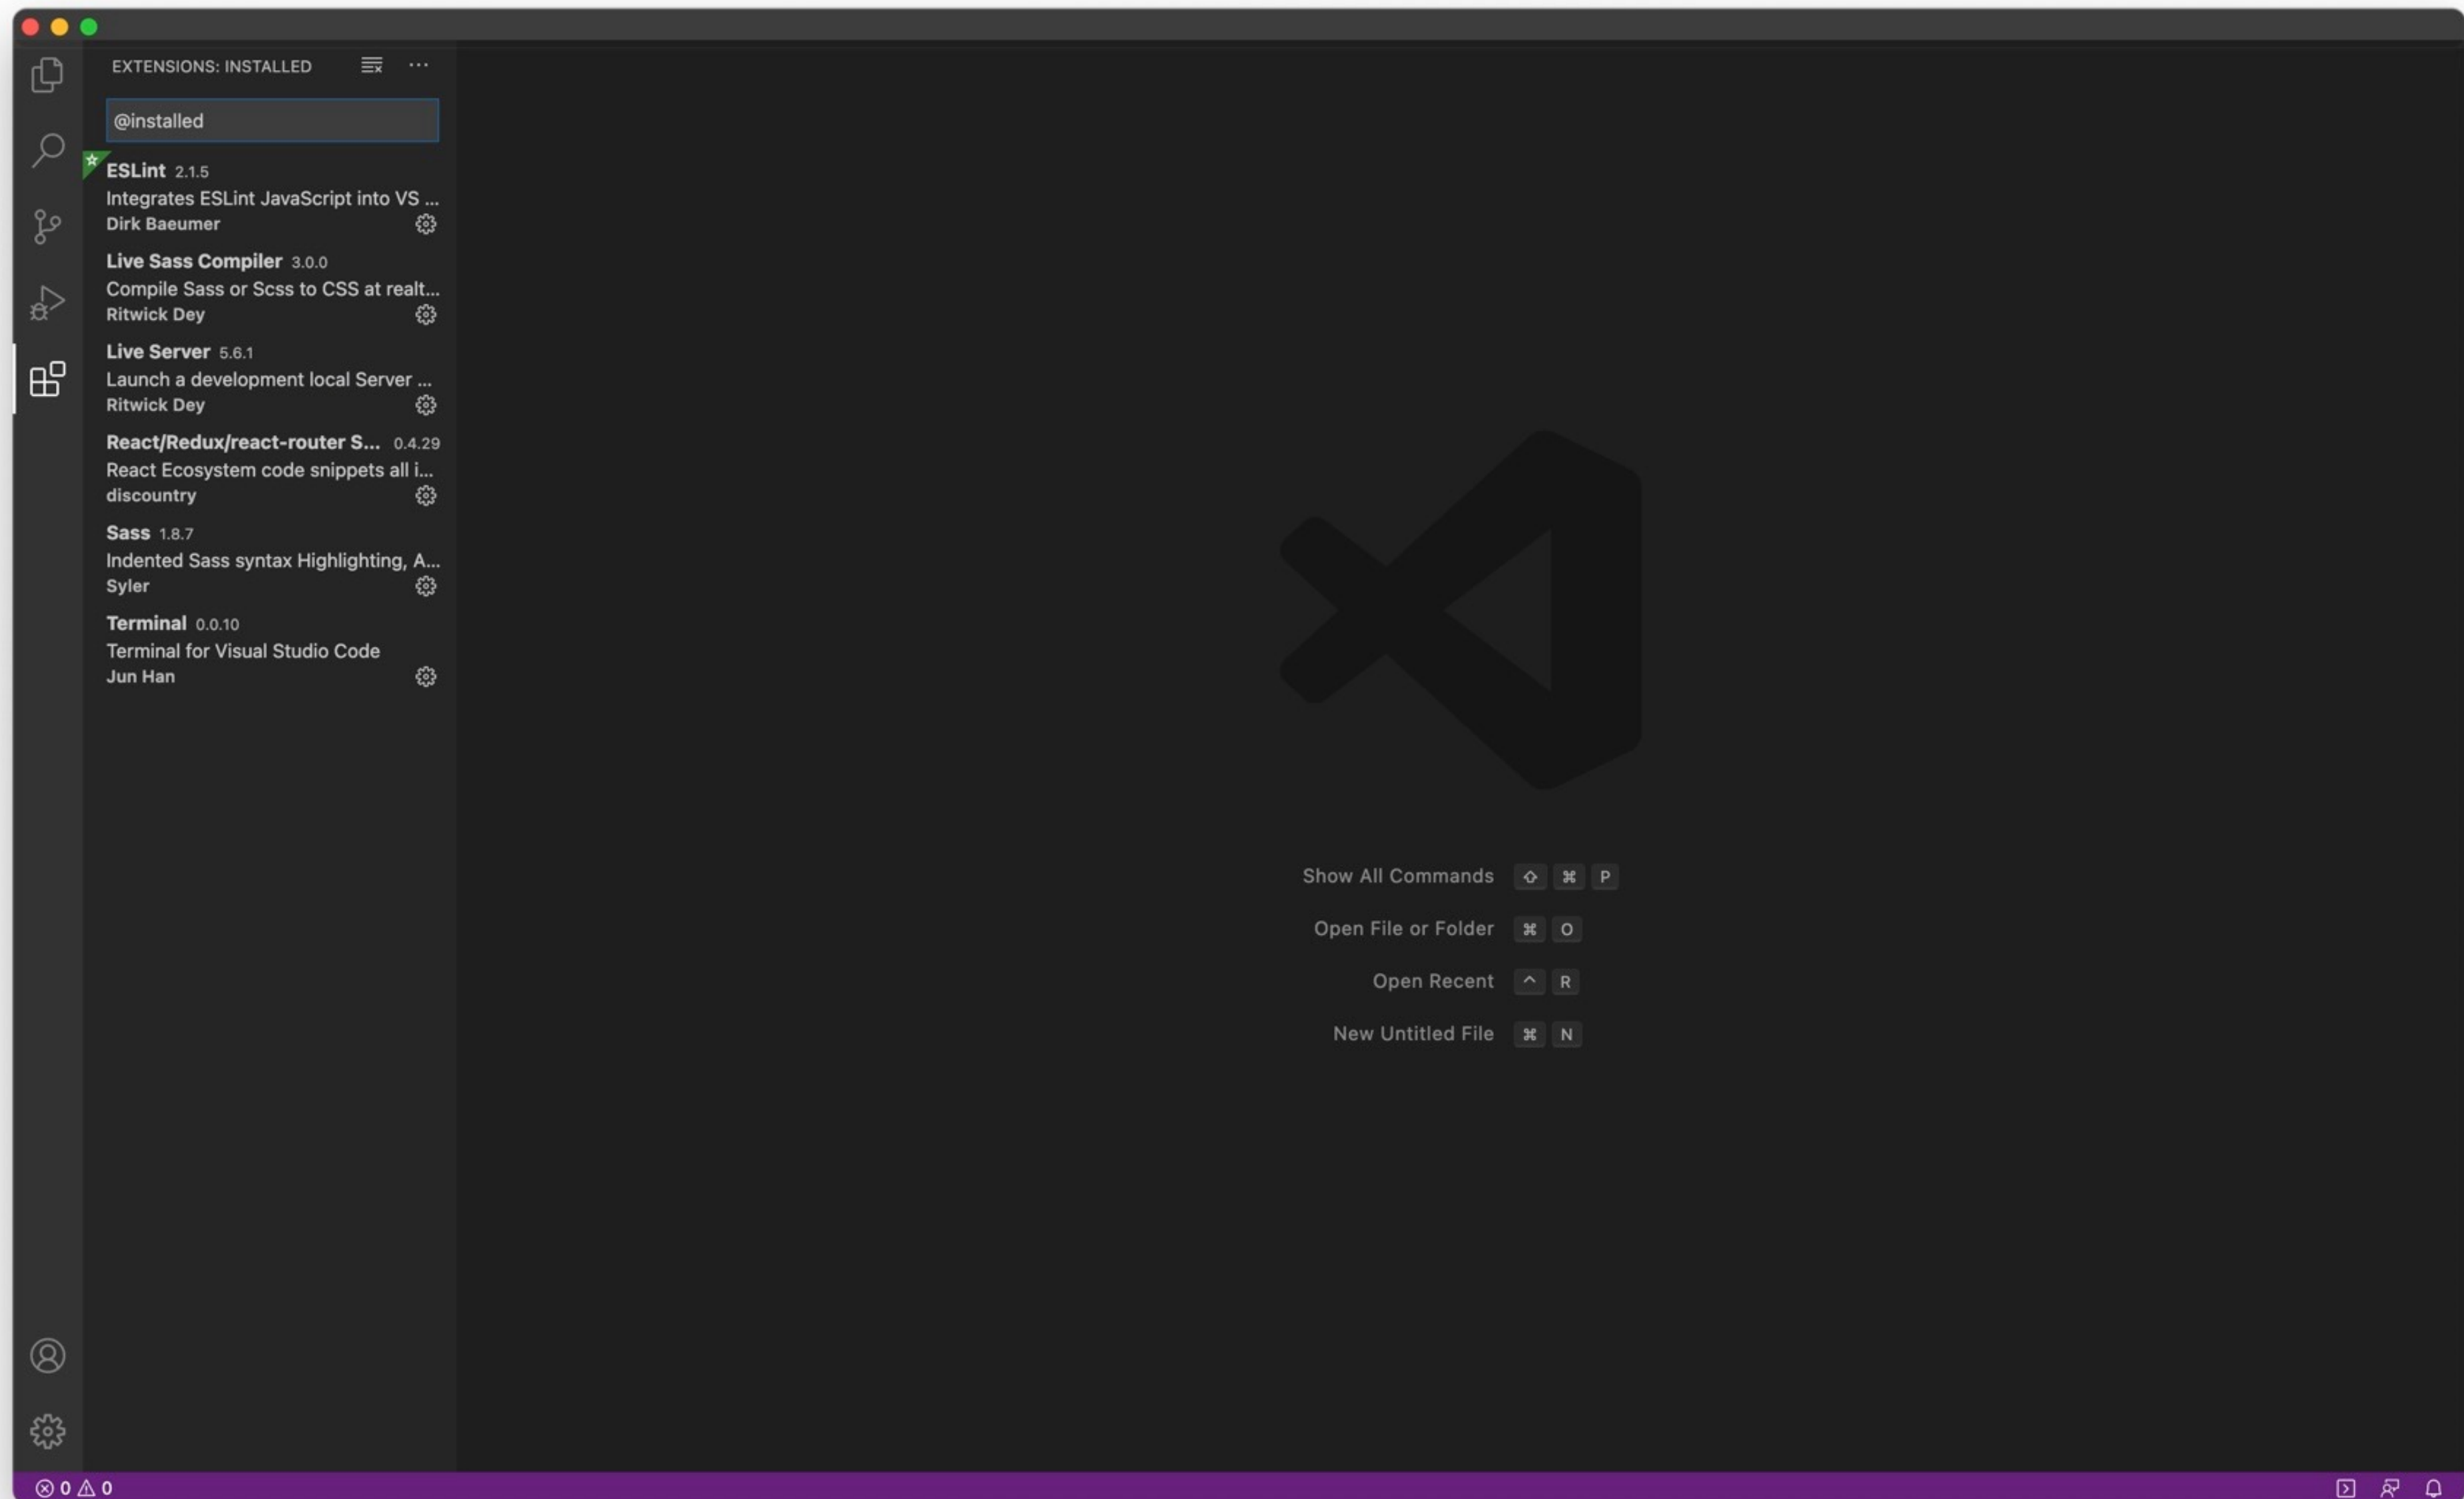

# Редактор



<https://emmet.io/>

# Редактор



## CSS

CSS module uses fuzzy search to find unknown abbreviations, e.g. `ov:h` == `ov-h` == `ovh` == `oh`.

If abbreviation wasn't found, it is transformed into property name: `foo-bar` → `foo-bar: |;`

You can prefix abbreviations with hyphen to produce vendor-prefixed properties: `-foo`

### Visual Formatting

pos	position: <b>relative</b> ;
pos:s	position:static;
pos:a	position:absolute;
pos:r	position:relative;
pos:f	position:fixed;
t	top: ;
t:a	top:auto;
r	right: ;
r:a	right:auto;
b	bottom: ;
b:a	bottom:auto;
l	left: ;
l:a	left:auto;
z	z-index: ;
z:a	z-index:auto;
fl	float: <b>left</b> ;
fl:n	float:none;
fl:l	float:left;
fl:r	float:right;
cl	clear: <b>both</b> ;
cl:n	clear:none;

### Background

bg	background: <b>#000</b> ;
bg+	background: <b>#fff</b> url( ) <b>0 0 no-repeat</b> ;
bg:n	background:none;
bgc	background-color: <b>#fff</b> ;
bgc:t	background-color:transparent;
bg i	background-image:url( );
bg i:n	background-image:none;
bgr	background-repeat: ;
bgr:n	background-repeat:no-repeat;
bgr:x	background-repeat:repeat-x;
bgr:y	background-repeat:repeat-y;
bgr:sp	background-repeat:space;
bgr:rd	background-repeat:round;
bga	background-attachment: ;
bga:f	background-attachment:fixed;
bga:s	background-attachment:scroll;
bgp	background-position: <b>0 0</b> ;
bgpx	background-position-x: ;
bgpy	background-position-y: ;
bgbk	background-break: ;
bgbbk	background-break:break-before;

### Others

!	!important
@f	@font-face { font-family: ; src:url( ); }
@f+	@font-face { font-family: <b>FontName</b> ; src: url(' <b>FileName</b> .eot'); src: url(' <b>FileName</b> .eot?#iefix') format('embedded-opentype'), url(' <b>FileName</b> .woff') format('woff'), url(' <b>FileName</b> .ttf') format('truetype'), url(' <b>FileName</b> .svg# <b>FontName</b> ') format('svg'); font-style: <b>normal</b> ; font-weight: <b>normal</b> ; }
@i, @import	@import url( );
@kf	@-webkit-keyframes <b>identifier</b> { <b>from</b> {   }  <b>to</b> {   } } @-o-keyframes <b>identifier</b> { <b>from</b> {   }  <b>to</b> {   } } @-moz-keyframes <b>identifier</b> { <b>from</b> {   }  <b>to</b> {   } } @keyframes <b>identifier</b> { <b>from</b> {   }  <b>to</b> {   } }

# ESLint



```
7 import './styles/MapBox.css';
8
9 const TOKEN = `${config.MapBox_Token}`;
10 const navStyle = {
11   position: 'absolute',
12   bottom: '50px',
13   right: '10px',
14   padding: '10px',
15 };
16 class Maps extends (property) React.Component<any, any, any> {
17   constructor(props) {
18     super(props);
19     this.state = {
20       viewport: {
21         latitude: this.props.lat,
22         longitude: this.props.lon,
23         zoom: this.props.zoom,
24         zoomControl: true,
25         doubleClickZoom: false,
26         width: this.props.width,
27         height: this.props.height,
28       },
29       cityLen: this.props.cityLen,
30       markers: this.props.markers,
31     };
32   }
33
34   changepitch=() => {
35     const pitch = this.state.viewport;
```

```
readonly props: Readonly<P> & Readonly<{ children?: ReactNode }>;
(property) React.Component<any, any, any>.props: Readonly<any> & Readonly<{
  children?: React.ReactNode;
}>
Must use destructuring props assignment eslint(react/destructuring-assignment)
Peek Problem (⌘F8) Quick Fix... (⌘.)
```



# ESLint



```
const anakinSkywalker = 'Anakin Skywalker';
const lukeSkywalker = 'Luke Skywalker';

// bad
const obj = {
  episodeOne: 1,
  twoJediWalkIntoACantina: 2,
  lukeSkywalker,
  episodeThree: 3,
  mayTheFourth: 4,
  anakinSkywalker,
};

// good
const obj = {
  lukeSkywalker,
  anakinSkywalker,
  episodeOne: 1,
  twoJediWalkIntoACantina: 2,
  episodeThree: 3,
  mayTheFourth: 4,
};
```

<https://github.com/airbnb/javascript>

<https://github.com/airbnb/css>

## Bad

```
.avatar{
  border-radius:50%;
  border:2px solid white; }
.no, .nope, .not_good {
  // ...
}
#lol-no {
  // ...
}
```


## Good

```
.avatar {
  border-radius: 50%;
  border: 2px solid white;
}

.one,
.selector,
.per-line {
  // ...
}
```



# Терминал

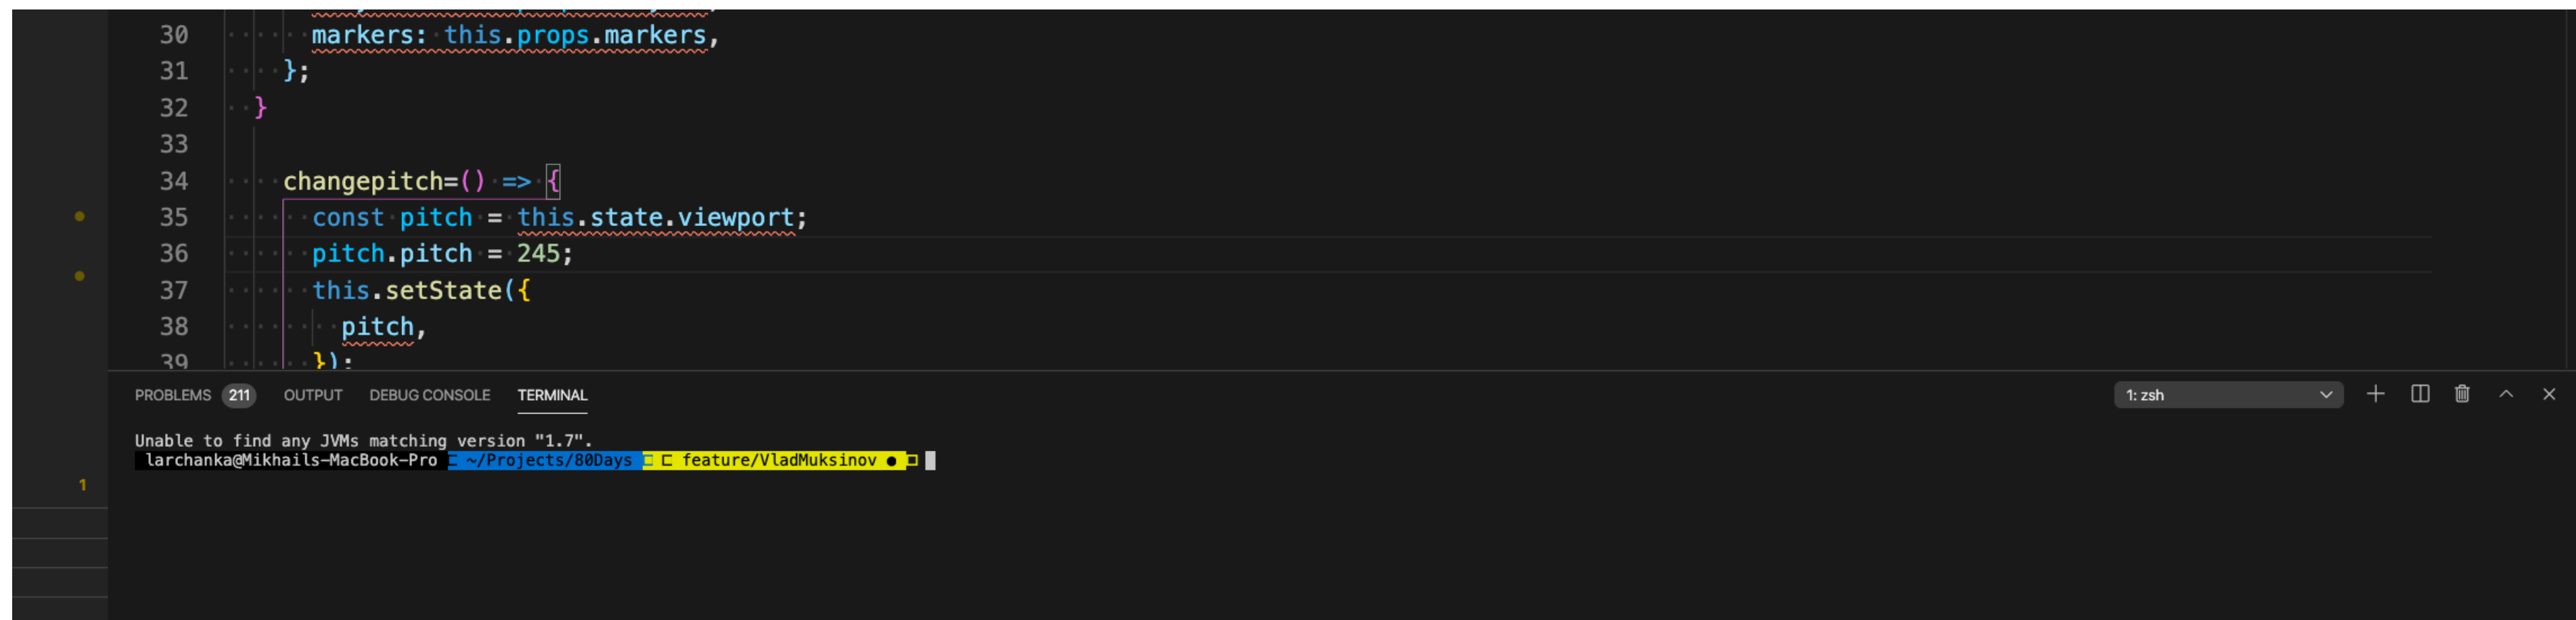

The image shows a screenshot of a code editor interface, likely Visual Studio Code, with a dark theme. The editor is displaying a JavaScript file with the following code:

```
30     markers: this.props.markers,  
31   };  
32 }  
33  
34   changePitch={() => {  
35     const pitch = this.state.viewport;  
36     pitch.pitch = 245;  
37     this.setState({  
38       pitch,  
39     });  
  }
```

Below the code editor, there is a panel with tabs for "PROBLEMS", "OUTPUT", "DEBUG CONSOLE", and "TERMINAL". The "TERMINAL" tab is active, showing a message: "Unable to find any JVMs matching version "1.7"." followed by a command prompt: "larchanka@Mikhaels-MacBook-Pro ~/Projects/80Days C feature/VladMuksinov". The terminal window has a title bar that says "1: zsh".

# Терминал

```
larchanka — larchanka@Mikhails-MacBook-Pro — ~ — -zsh — 110x33
Last login: Tue Jun 23 17:59:43 on console
Unable to find any JVMs matching version "1.7".
larchanka@Mikhails-MacBook-Pro [?] [?] [?]
```

```
Administrator: Windows PowerShell
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Try the new cross-platform PowerShell https://aka.ms/pscore6

PS C:\Windows\system32> Get-Command -Module PSWindowsUpdate


CommandType      Name                                     Version      Source
-----
Alias             Clear-WUJob                             2.1.1.2      PSWindowsUpdate
Alias             Download-WindowsUpdate                 2.1.1.2      PSWindowsUpdate
Alias             Get-WUInstall                         2.1.1.2      PSWindowsUpdate
Alias             Get-WUList                             2.1.1.2      PSWindowsUpdate
Alias             Hide-WindowsUpdate                     2.1.1.2      PSWindowsUpdate
Alias             Install-WindowsUpdate                  2.1.1.2      PSWindowsUpdate
Alias             Show-WindowsUpdate                     2.1.1.2      PSWindowsUpdate
Alias             UnHide-WindowsUpdate                   2.1.1.2      PSWindowsUpdate
Alias             Uninstall-WindowsUpdate                 2.1.1.2      PSWindowsUpdate
Cmdlet            Add-WUServiceManager                   2.1.1.2      PSWindowsUpdate
Cmdlet            Enable-WURemoting                       2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WindowsUpdate                       2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WUApiVersion                       2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WUHistory                           2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WUInstallerStatus                   2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WUJob                               2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WULastResults                       2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WURebootStatus                     2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WUServiceManager                   2.1.1.2      PSWindowsUpdate
Cmdlet            Get-WUSettings                           2.1.1.2      PSWindowsUpdate
Cmdlet            Invoke-WUJob                           2.1.1.2      PSWindowsUpdate
Cmdlet            Remove-WindowsUpdate                   2.1.1.2      PSWindowsUpdate
Cmdlet            Remove-WUServiceManager                 2.1.1.2      PSWindowsUpdate
Cmdlet            Set-PSMUSettings                       2.1.1.2      PSWindowsUpdate
Cmdlet            Set-WUSettings                           2.1.1.2      PSWindowsUpdate
Cmdlet            Update-WUModule                         2.1.1.2      PSWindowsUpdate

PS C:\Windows\system32>
```


```
File Edit View Search Terminal Help
wiki@ubuntu: ~/Desktop/text
wiki@ubuntu:~/Desktop$ cd text
wiki@ubuntu:~/Desktop/text$ cat > sample.txt
```




# Терминал

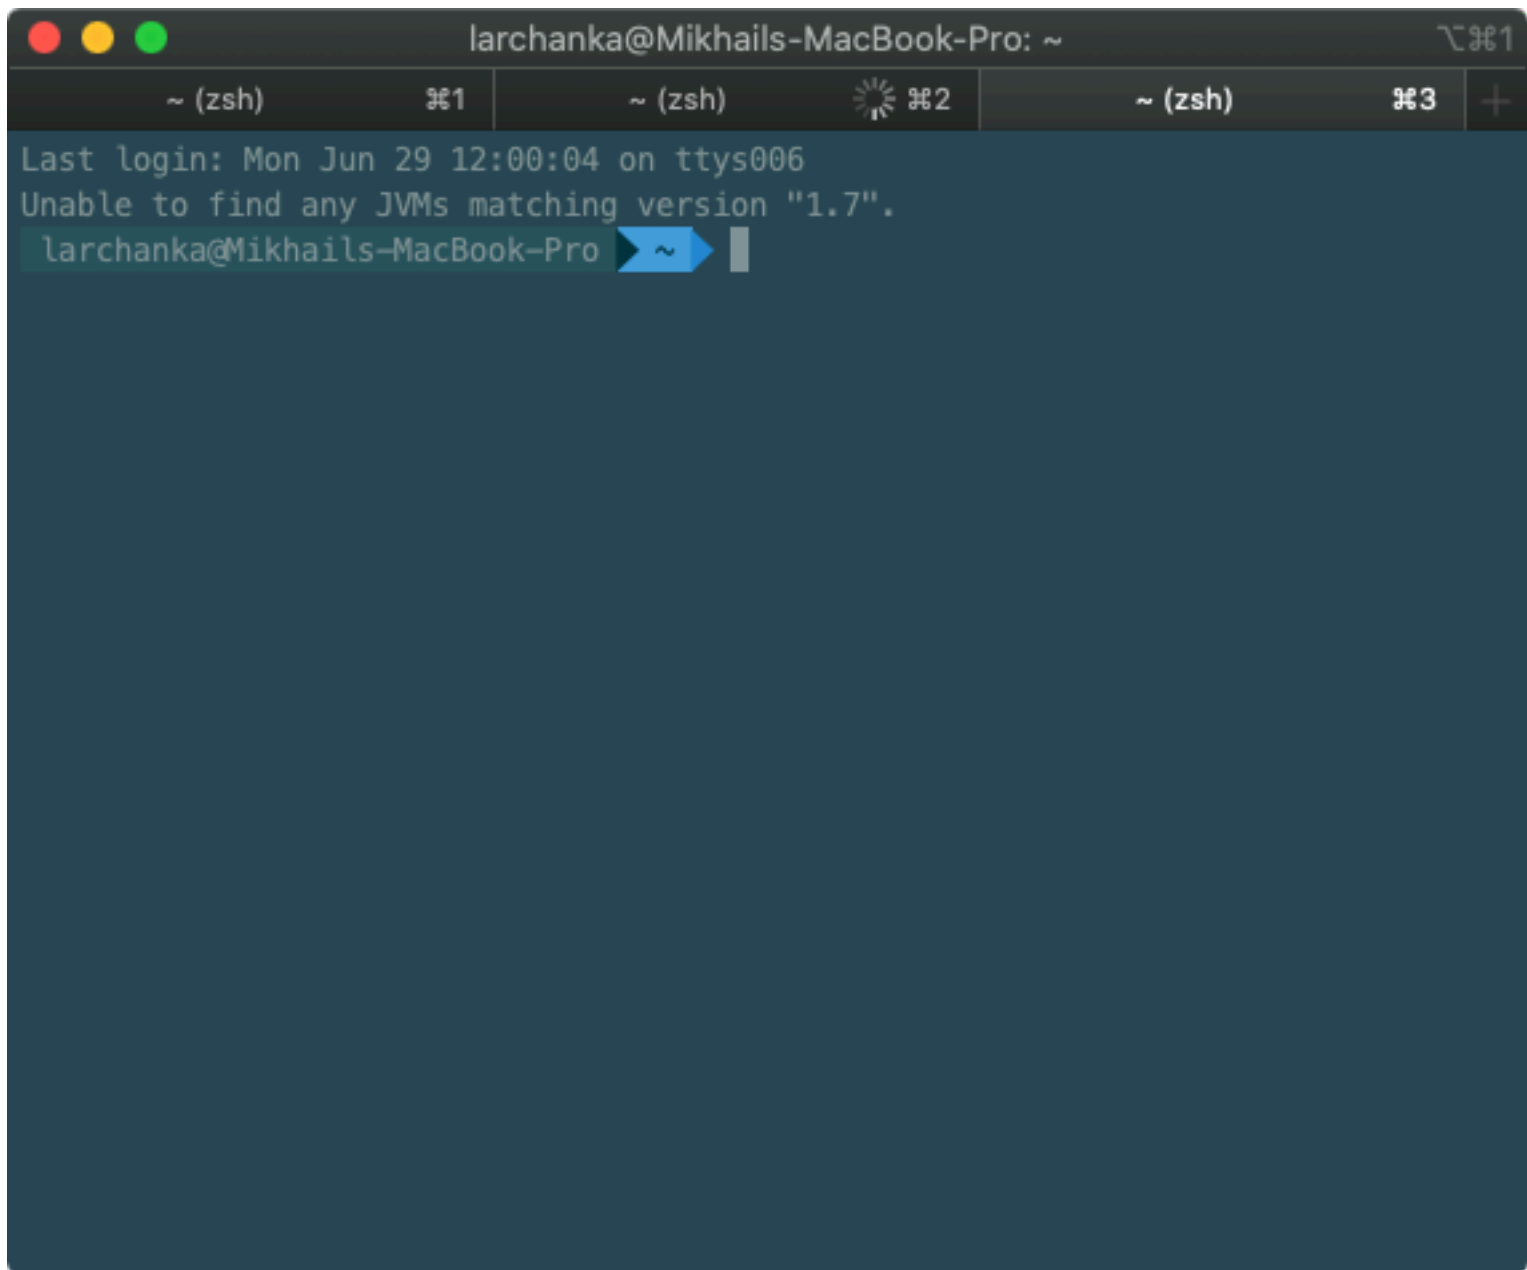

<https://www.itehm2.com/>

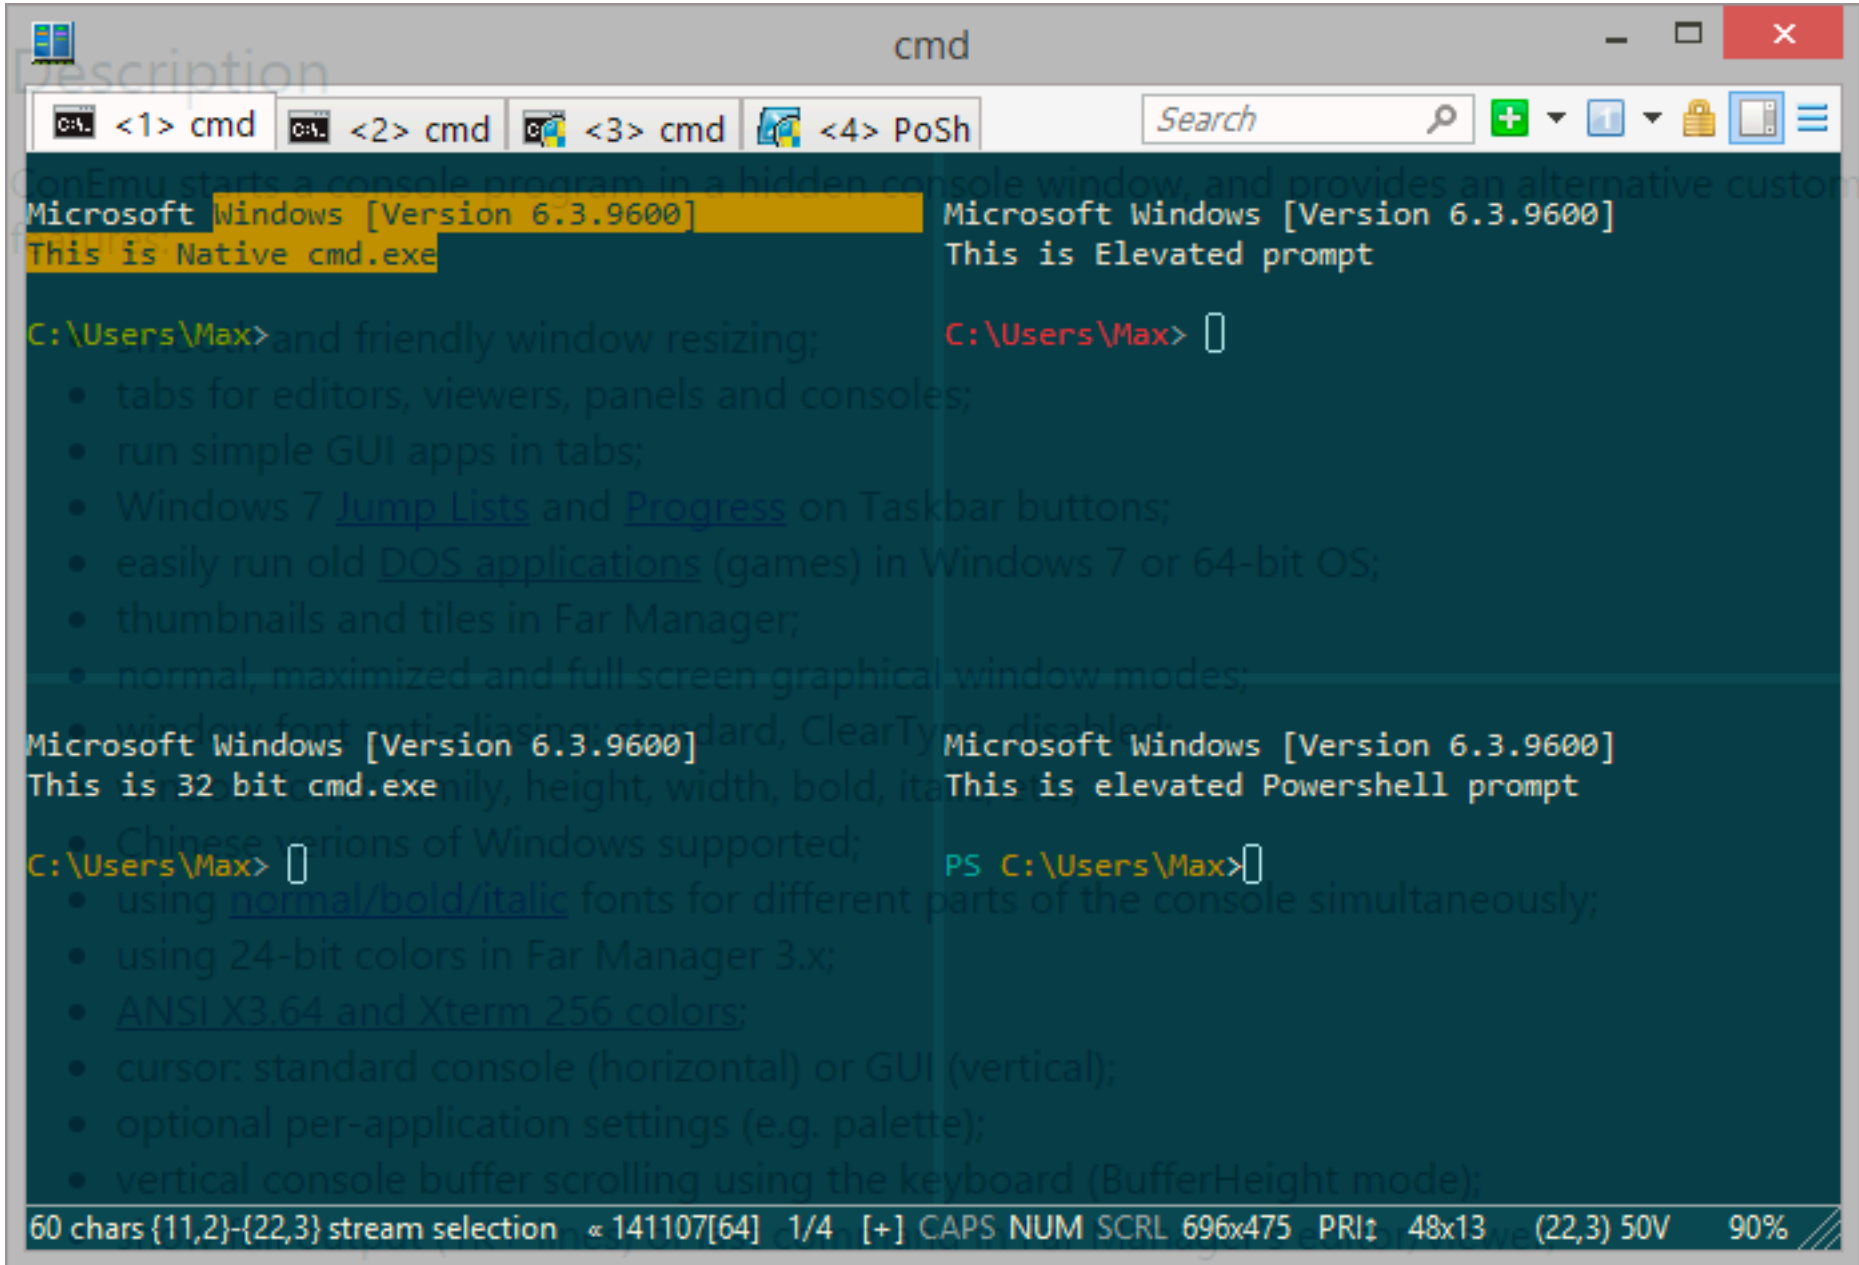

<https://conemu.github.io/>

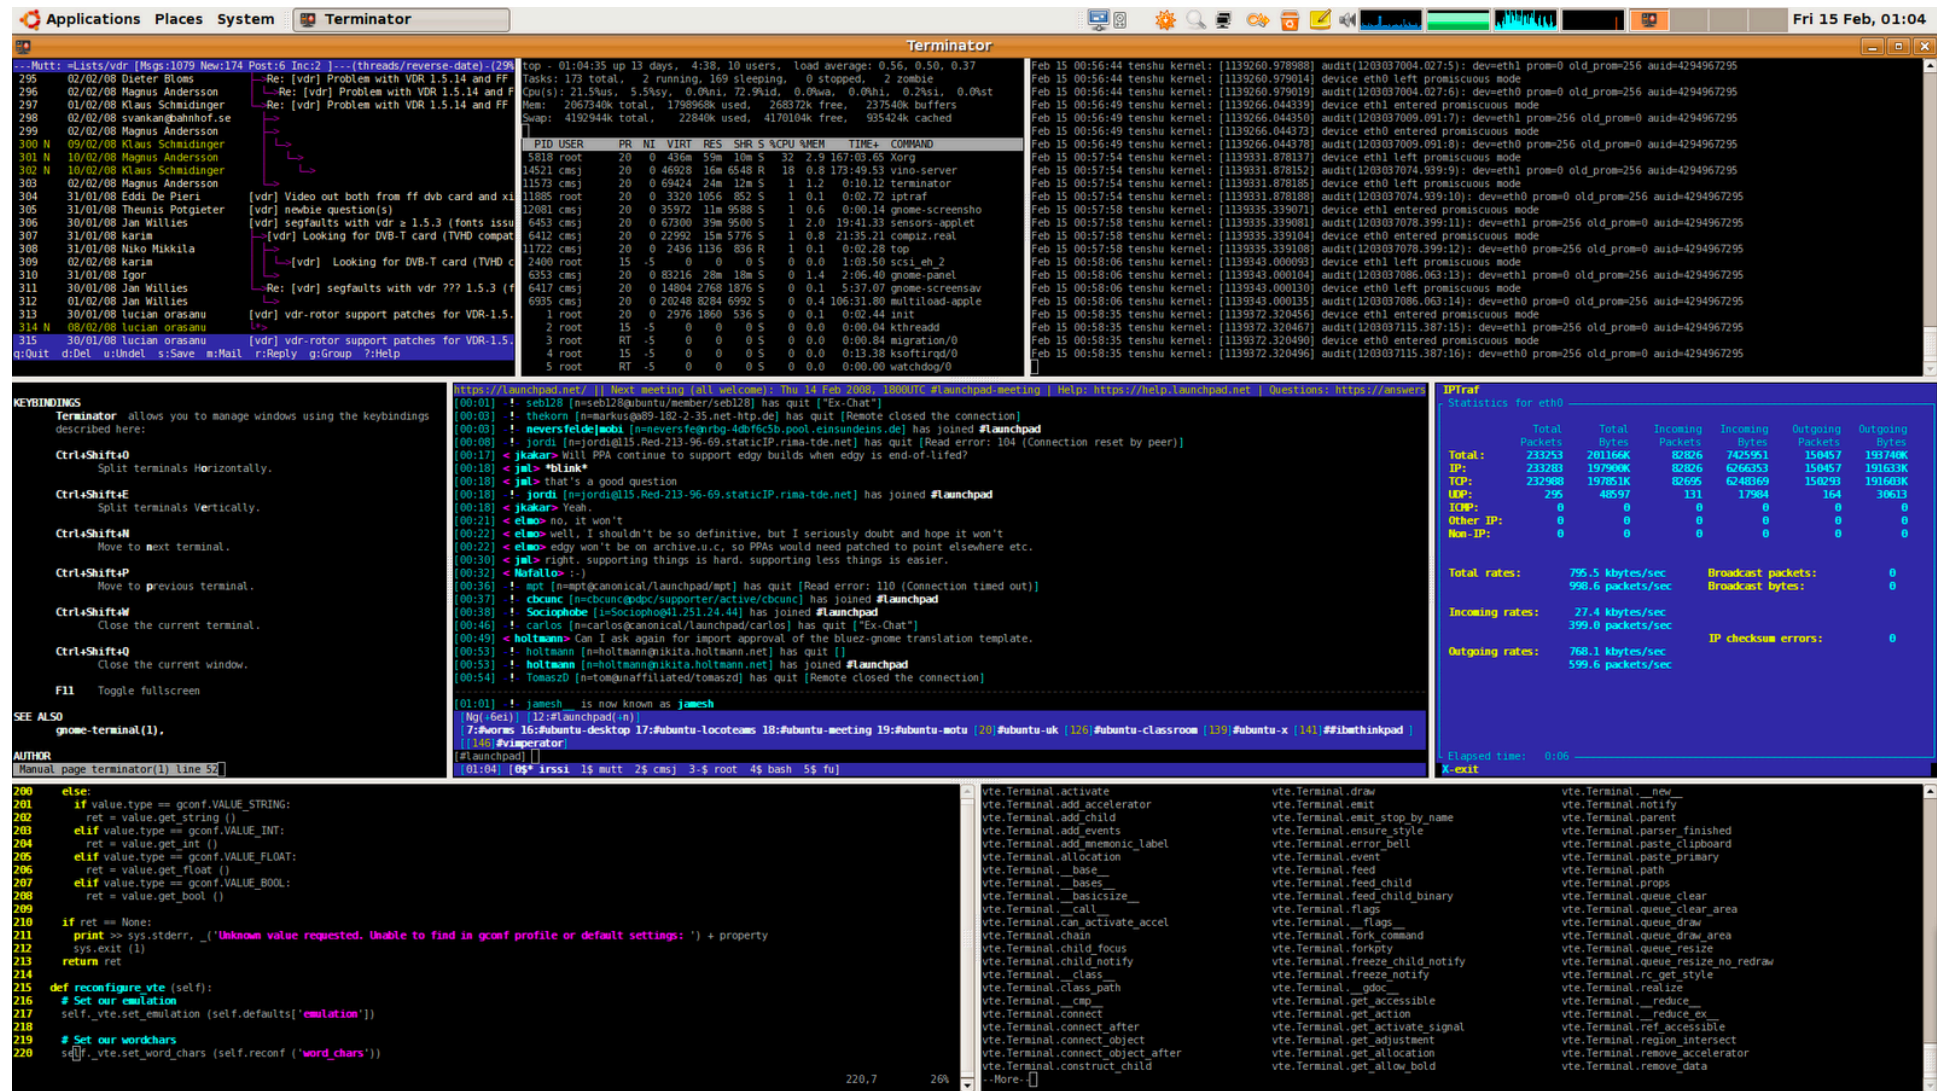

<https://gnometerminator.blogspot.com/p/introduction.html>

# Git





Current Repository  
desktop

Current Branch  
esc-pr #3972

Fetch origin  
Last fetched 3 minutes ago

Changes

History

Appease linter  
iAmWillShepherd committed a day ago

Add event handler to dropdown com...  
iAmWillShepherd and Markus Olsson...

Move escape behavior to correct co...  
iAmWillShepherd and Markus Olsson...

Remove event handler from the bran...  
iAmWillShepherd and Markus Olsson...

Merge branch 'master' into esc-pr  
iAmWillShepherd committed a day ago

Merge pull request #4044 from des...  
Neha Batra committed a day ago

Merge pull request #4070 from desk..  
Brendan Forster committed 2 days ago

bump to beta3  
Brendan Forster committed 2 days ago

Merge pull request #4057 from desk..  
Brendan Forster committed 2 days ago

Merge pull request #4067 from desk..  
Brendan Forster committed 2 days ago

Release to 1.1.0-beta2  
Neha Batra committed 2 days ago

Add event handler to dropdown component  
iAmWillShepherd and Markus Olsson committed c79e71c 1 changed file

Co-Authored-By: Markus Olsson <niik@users.noreply.github.com>

app/src/ui/t.../dropdown.tsx

		@@ -145,6 +145,10 @@ export class ToolbarDropdown extends React.Component<
145	145	this.state = { clientRect: null }
146	146	}
147	147	
	148	+ private get isOpen() {
	149	+   return this.props.dropdownState === 'open'
	150	+ }
	151	+
148	152	private dropdownIcon(state: DropdownState): OcticonSym
149	153	bol {
150	154	// @TODO: Remake triangle octicon in a 12px version,
		// right now it's scaled badly on normal dpi monitor
		s.
		@@ -249,6 +253,13 @@ export class ToolbarDropdown extends React.Component<
249	253	}
250	254	}
251	255	
	256	+ private onFoldoutKeyDown = (event:
		React.KeyboardEvent<HTMLInputElement>) => {
	257	+   if (!event.defaultPrevented && this.isOpen &&
		event.key === 'Escape') {
	258	+     event.preventDefault()
	259	+     this.props.onDropdownStateChanged('closed', 'keybo
		ard')

https://desktop.github.com/

# sFTP

