REACT

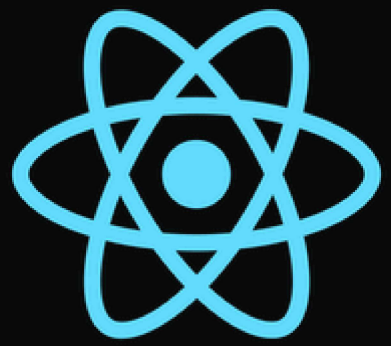

PART 2: EVENTS, CONDITIONAL RENDERING & LIST RENDERING

EVENT HANDLING 🤖

1. create an event handling function
2. attach the event handler to the event (e.g. `onClick` attribute)
3. define the logic inside the event handler

```
import React from 'react';

function App() {
  const handleClick = () => {
    console.log('Button clicked!');
  }

  return (
    <div>
      <button onClick={handleClick}>Click me</button>
    </div>
  );
}

export default App;
```

MINI EXERCISE 🎓

- Create a form with an input field and submit button.
- Handle the form submission event and display the value entered in the input field.

CONDITIONAL RENDERING

display variable content (depending on conditions)

💡 # 1: IF STATEMENT

```
render() {
    if (this.props.isLoggedIn) {
        return <div>Welcome, User!</div>;
    } else {
        return <div>Please log in.</div>;
    }
}
```

💡 # 2: TENARY OPERATOR

```
render() {
    return (
        <div>
{this.props.isLoggedIn ? (
    <div>Welcome, User!</div>
) : (
    <div>Please log in.</div>
)}
        </div>
    );
}
```

💡 # 3: && OPERATOR

```
render() {
    return (
        <div>
{this.props.isLoggedIn && <div>Welcome, User!</div>}
        </div>
    );
}
```

Only without an else statement!

VARIATIONS ON THESE IDEAS?

- using a functional component ✅
- let conditions depend on state ✅
- exchange whole components depending on a condition ✅

HANDS ON! 👷

1. Template together
2. Exercises alone

LIST RENDERING

provide data in an JS array:

```
const myLittleFarm = ['🐔', '🐄', '🐷', '🐑'];
```

LIST RENDERING

use map to map myLittleFarm to JSX:

```
const animalList = myLittleFarm.map(animal => <li>{animal}</li>);
```

return:

```
return <ul>{animalList}</ul>;
```

```
Warning: Each child in a list should have a unique “key” prop.
```

WHY KEYS ARE NEEDED?

https://dev.to/sanjampreetsingh/what-happens-when-you-dont-provide-keys-in-reactjs-278h

OKAY THEN... 🔑

```
const FarmComponent = () => {
    const myLittleFarm = ['🐔', '🐄', '🐖', '🐑'];

    return (
        <div>
<h2>My Little Farm</h2>
<ul>
    {myLittleFarm.map((animal, index) => (
        <li key={index}>{animal}</li>
    ))}
</ul>
        </div>
    );
};
```

index(= numerical position) is automatically provided by map-function! 😎

EVEN BETTER ✨

```
const myLittleFarm = [
  { id: 1, animal: '🐔' },
  { id: 2, animal: '🐄' },
  { id: 3, animal: '🐖' },
  { id: 4, animal: '🐑' },
];
```

EVEN BETTER ✨

```
return (
  <div>
    <h2>My Little Farm</h2>
    <ul>
      {myLittleFarm.map((farmAnimal) => (
        <li key={farmAnimal.id}>{farmAnimal.animal}</li>
      ))}
    </ul>
  </div>
);
```

HANDS ON! 👷