

Husky: A Functional Library for C++

Ayo Fapohunda (oaf2119@columbia.edu)

Larissa Passos (ln2307@columbia.edu)

Vinicius Cousseau (vd2299@columbia.edu)

Abstract

Project object was to write higher order functions for C++11/14 that extend the current STL, in order to enable better functional programming, showing how it compares to other libraries/languages.

Show that C++11/14 provides much better resources for functional-style programming.

Time needed:

Q&A:

(Slide will be hidden)

Outline



- Functional programming context
- Previous approaches in imperative languages (C++)
- Our Design
- Comparisons
- Our results


Functional Programming

What is functional programming?

- Programming paradigm
- Mathematical functions
- Avoids side-effects
- Abstractions

Contrast to imperative programming

- Subroutines

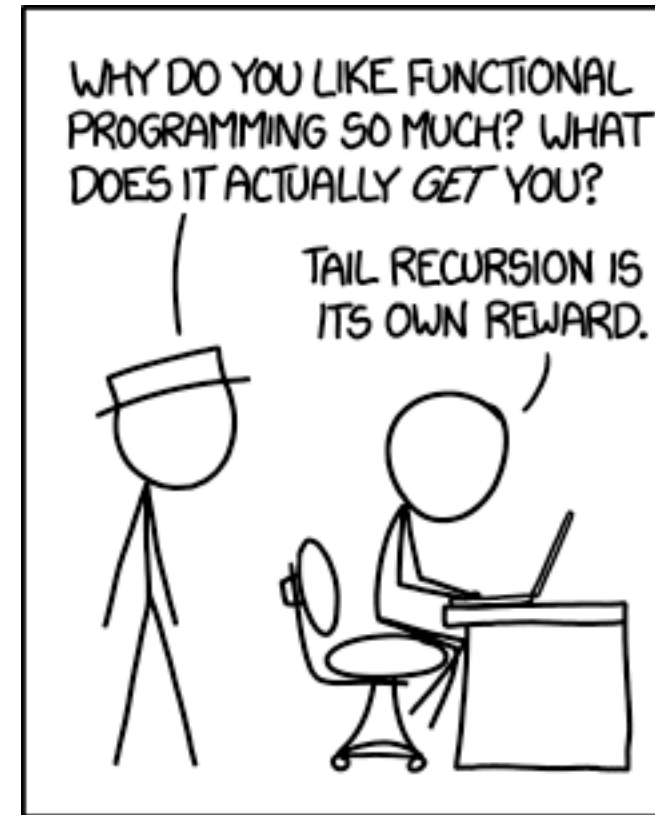

Quicksort

```
// lo is the index of the leftmost element of the subarray
// hi is the index of the rightmost element of the subarray (inclusive)
partition(A, lo, hi)
    pivotIndex := choosePivot(A, lo, hi)
    pivotValue := A[pivotIndex]
    // put the chosen pivot at A[hi]
    swap A[pivotIndex] and A[hi]
    storeIndex := lo
    // Compare remaining array elements against pivotValue = A[hi]
    for i from lo to hi-1, inclusive
        if A[i] <= pivotValue
            swap A[i] and A[storeIndex]
            storeIndex := storeIndex + 1
    swap A[storeIndex] and A[hi] // Move pivot to its final place
    return storeIndex
```

```
quicksort(A, lo, hi):
    if lo < hi:
        p := partition(A, lo, hi)
        quicksort(A, lo, p - 1)
        quicksort(A, p + 1, hi)
```

“Quicksort”

```
quicksort [] = []
```

```
quicksort (p:xs) = (quicksort lesser) ++ [p] ++  
  (quicksort greater)
```

```
  where
```

```
    lesser = filter (< p) xs
```

```
    greater = filter (>= p) xs
```

“Quicksort”

```
qs (a:as) = qs [x | x <- as, x <= a] ++ [a]  
          ++ qs [ x | x <- as, x > a]
```

Comparison Targets

Existing libraries: FC++ (2000) and FTL (~2014)

Other languages: Haskell, Python

Criteria

Husky Design

~50 Functions based on Haskell Prelude

General structure

Tests, tests, tests...

Husky Design

```
#include <iostream>
#include <string>
#include "husky.h"

using namespace husky;
using namespace std;

auto caps = [](char c) { return (c >= 65 && c <= 90); };

int main() {
    string str = "HelloUSweetKoalaYou";
    string s = filter(str, caps);
    cout << s << endl;
    return 0;
}
```

HUSKY

Testing Suite

OS X 10.10.3

- 2.3 GHz intel i7 quad-core
- 16gb RAM 1600Mhz DDR3
- Clang++

Input vectors of

- int
- std::string
- Record { int, std::string }

Average of 3 iterations for each input vector, 100k – 500k

Additional Considerations


Less Functions

Timing in Haskell

Lack of proper documentation/tutorials (FC++ and FTL)


Results

Integers 500,000 units

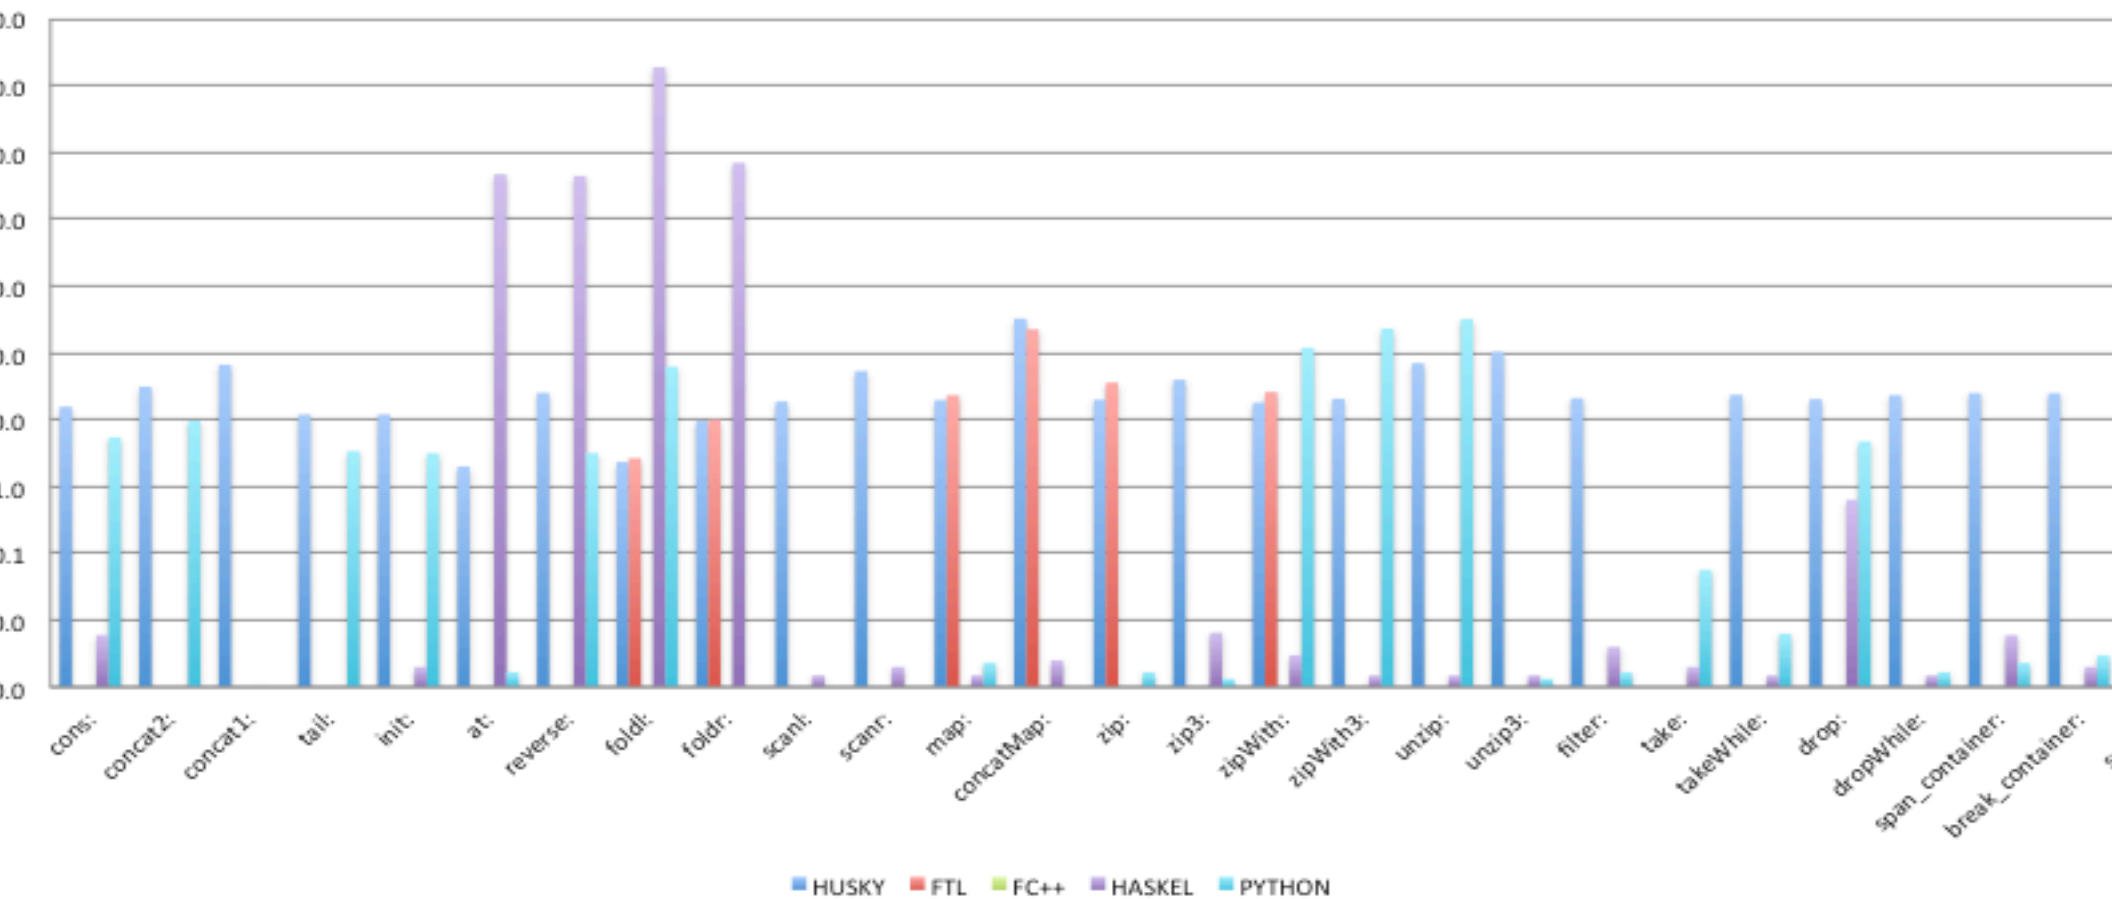


Results

Records 500,000 units

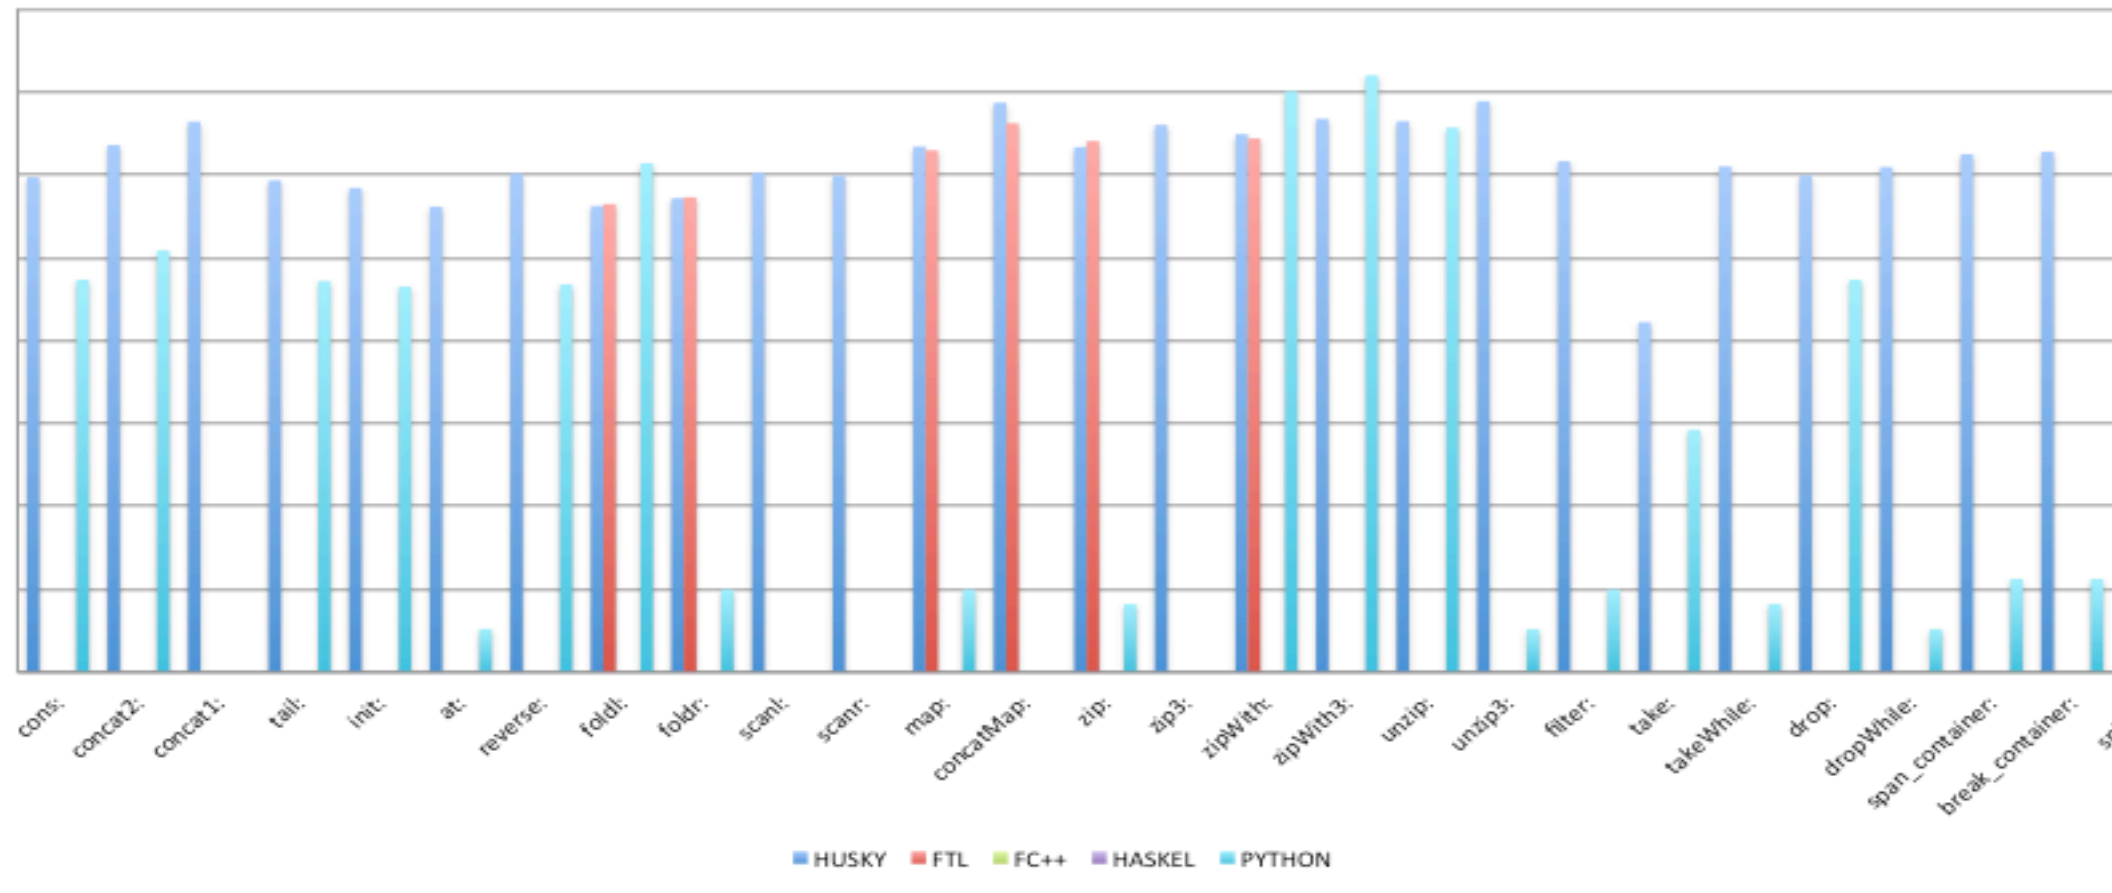

Results

Strings 500,000 units

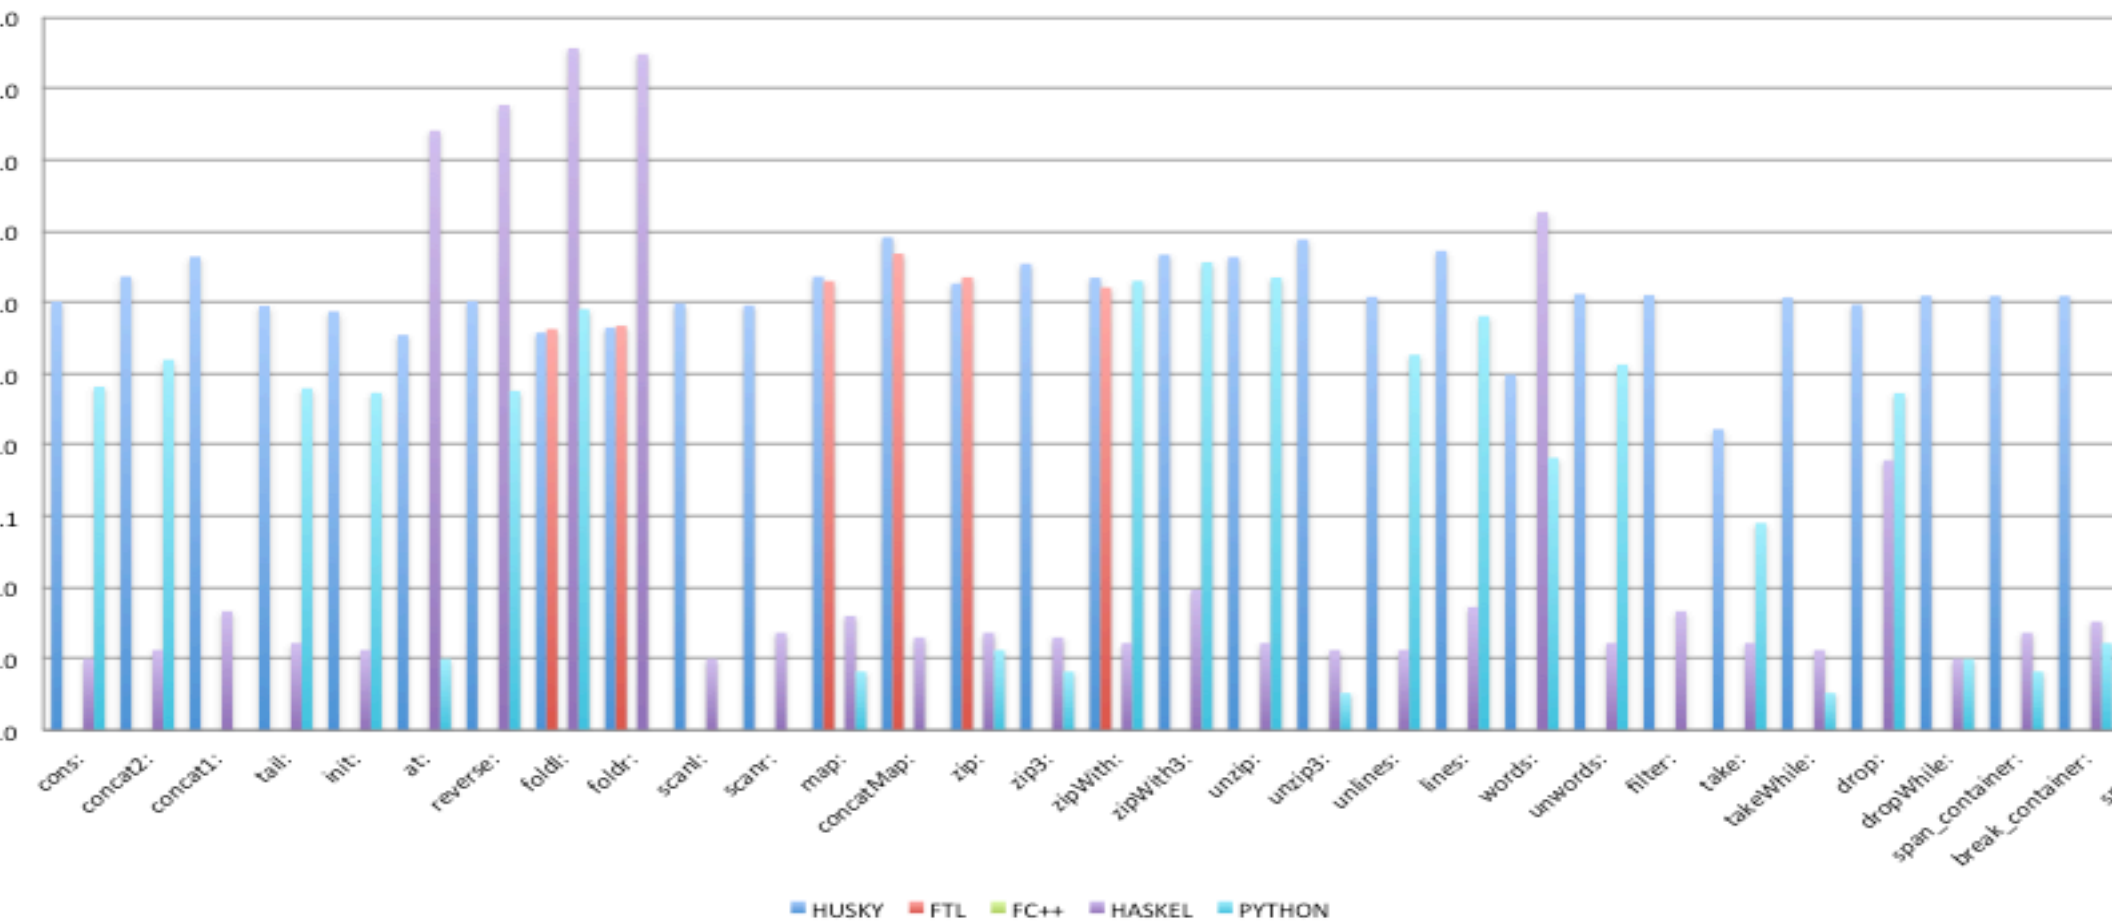

Additional Testing Suite

Windows 8.1 64-bit

- 16 Gb RAM
- 2.5 GHz i7
- g++

Input vectors of ints, size 100k


Test Example

/ Long lists create long recursions of destructors that blow the
/ stack. So we have an iterative destructor. It is quite tricky to
/ get right. The danger is that, when "bypassing" a node to be
/ unlinked and destructed, that node's 'next' pointer is, in fact, a
/ List object, whose destructor will be called. As a result, as you
/ bypass a node, you need to see if its refC is down to 1, and if
/ so, mutate its next pointer so that when its destructor is called,
/ it won't cause a recursive cascade.

Long lists ~ 130k elements

Results

Husky vs FC++ integers 100,000 units

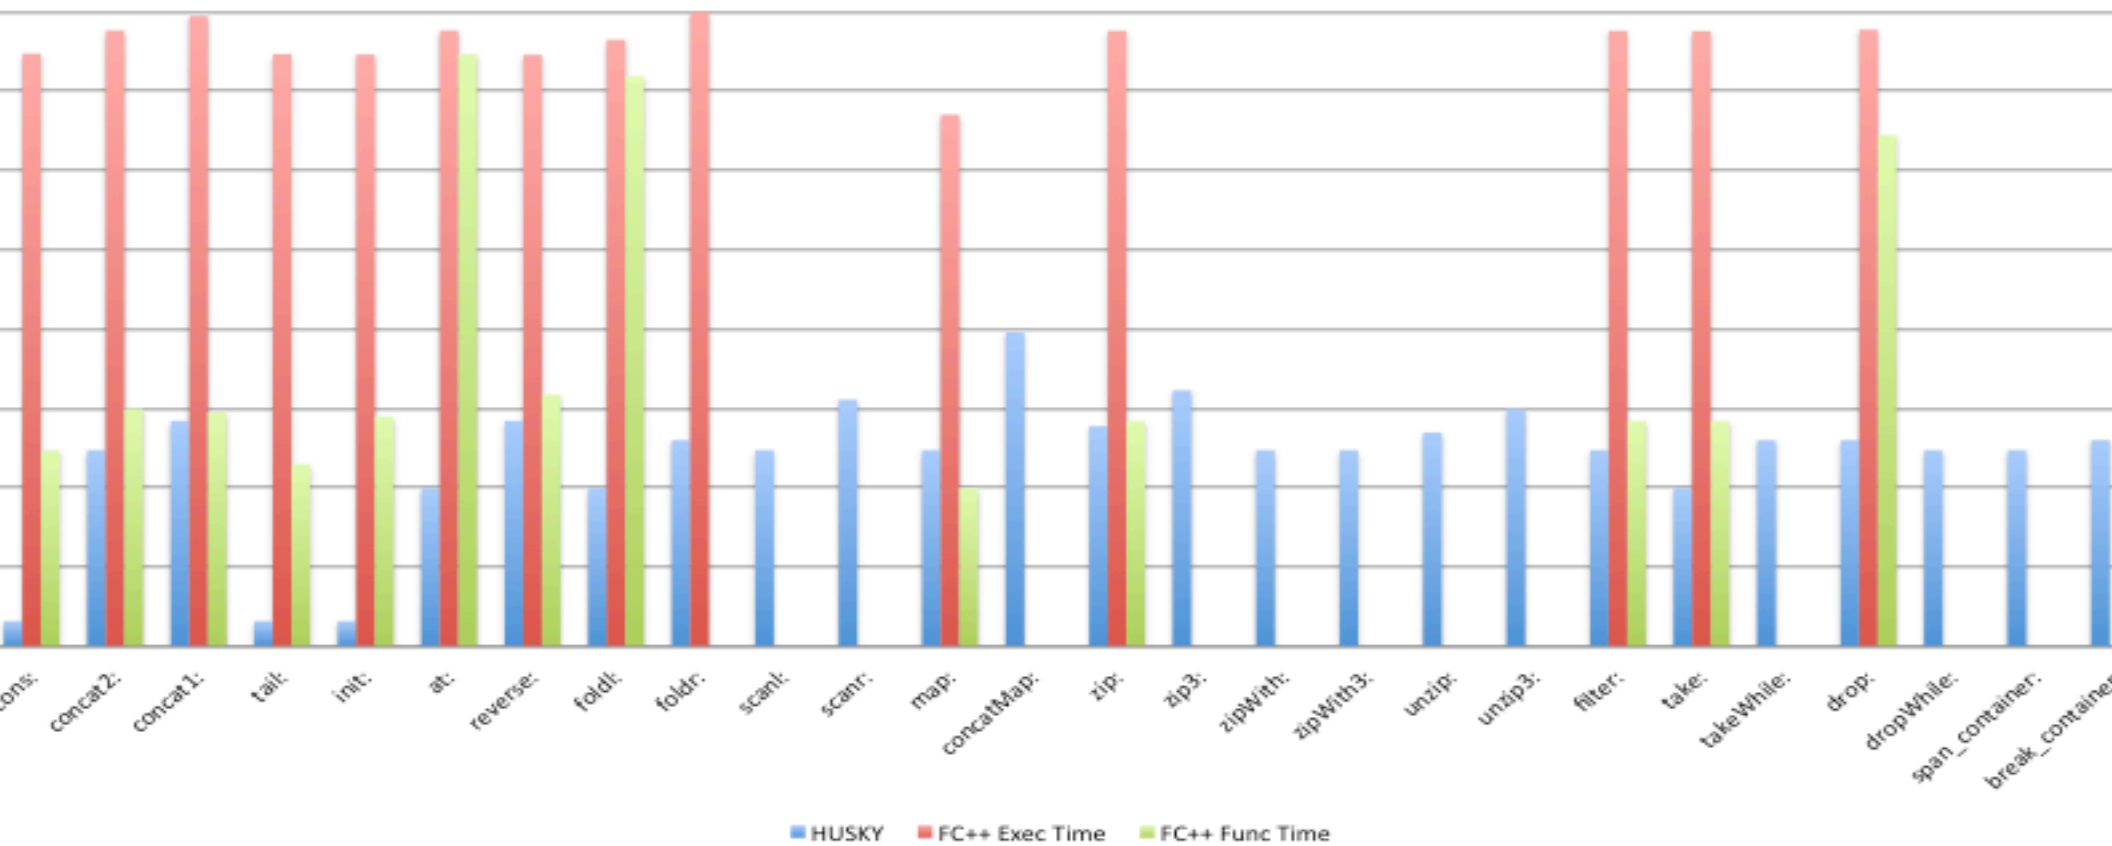

Results

Results for Integers

N = 100000	HUSKY	FC++ Func Time	Husky % faster
cons:	0.02	3.0	14286%
concat2:	3.00	10.0	333%
concat1:	7.00	9.0	129%
tail:	0.02	2.0	9524%
init:	0.02	8.0	38095%
at:	1.00	292030.0	29203000%
reverse:	7.00	15.0	214%
foldl:	1.00	154705.0	15470500%
map:	3.00	1.0	33%
zip:	6.00	7.0	117%
filter:	3.00	7.0	233%
take:	1.00	7.0	700%
drop:	4.00	28018.0	700450%

Results

Integers 500,000 elements

N = 500000	HUSKY	FTL	Husky % faster
foldl:	2.3	2.7	114%
foldr:	9.7	10.0	103%
map:	19.7	23.3	119%
concatMap:	326.7	225.0	69%
zip:	20.0	36.0	180%
zipWith:	18.0	26.0	144%

Records 500,000 elements

N = 500000	HUSKY	FTL	Husky % faster
foldl:	42.0	44.3	106%
foldr:	52.3	53.7	103%
map:	219.0	197.3	90%
concatMap:	743.3	419.0	56%
zip:	216.0	255.3	118%
zipWith:	308.7	274.3	89%

Strings 500,000 elements

N = 500000	HUSKY	FTL	Husky % faster
foldl:	37.7	42.3	112%
foldr:	44.3	47.0	106%
map:	230.0	198.7	86%
concatMap:	822.7	483.0	59%
zip:	184.0	225.0	122%
zipWith:	222.0	161.7	73%

Summation

Comprehensive higher order functional library

Extension of STL

More intuitive way to code

Performs better than our main benchmarks (FC++ & FTL)

Far more and far better documentation/tutorials (FC++ & FTL)

Acknowledgements

FTL : <https://github.com/beark/ftl>

FC++ : <http://cgi.di.uoa.gr/~smaragd/fc++/>


Final Considerations

C++14 extending even more!

(1.2) Currying, Lazy Evaluation ?

Final Considerations

ln2307@columbia.edu
oaf2119@columbia.edu
vd2299@columbia.edu

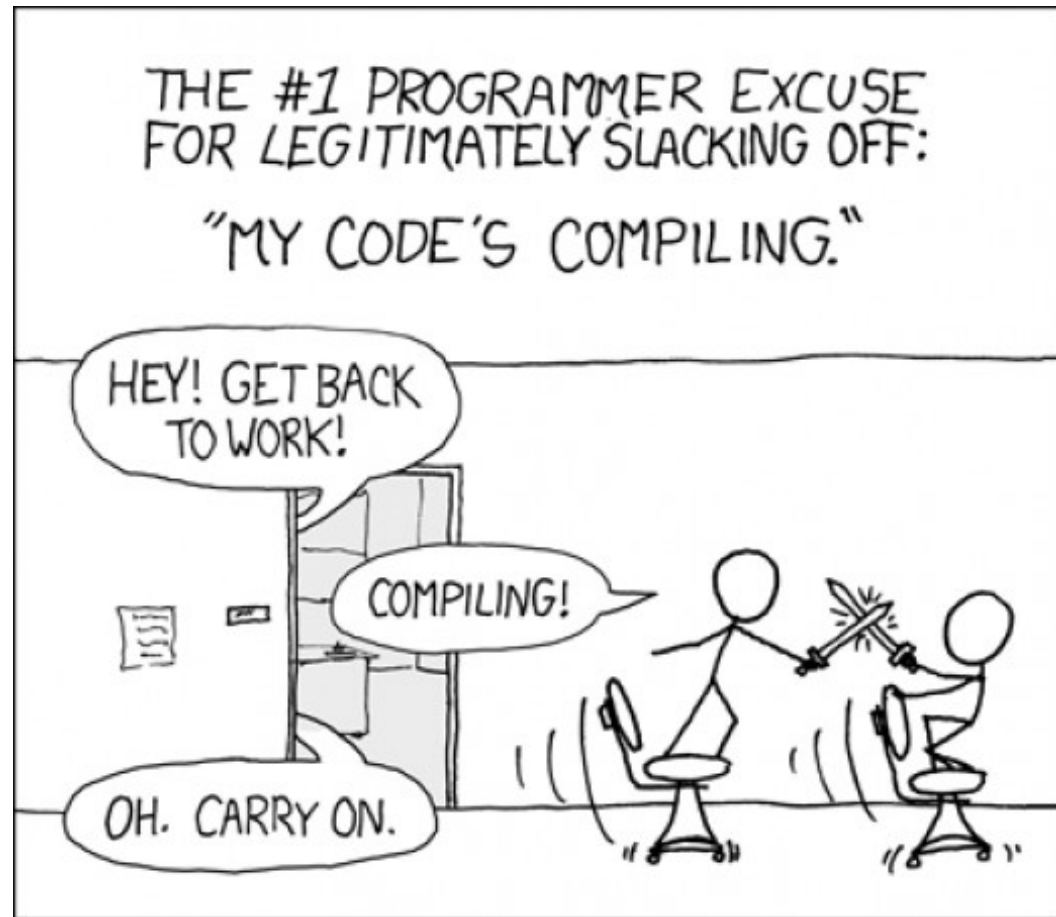

References

Husky will be available at <https://github.com/larissapassos/Husky>

More about functional programming:

- <https://wiki.haskell.org/Introduction>
- <http://learnyouahaskell.com/>