

Predicting pH from SERS Data

Zhang Yichi

August 2014

1 Introduction

Blood tests are often used in health care to determine physiological and biochemical states of patients. But using the traditional way, we need to draw blood from patients first and it does take some time to have some tests on it.

Recently, the chemists found that gold nanoshells can be used as intracellular sensors based on surface-enhanced Raman scattering (SERS) and these materials exhibit low toxicity to the cells of interest. This is a very good property since we can just put the nanoshell into the blood vessel of patients and measure redox potential or pH values of patients' blood instantly.

So when given the spectrum, the problem is how to predict the pH value. We have tried four regression methods, that is principal component regression (PCR), partial least squared regression (PLSR), lasso regression and kernel regression, on the data.

2 Data

There are 120 samples in the dataset by 2 chips. For each chip, there are 5 replications for 12 pH values, that is 60 samples. The spectrum is a 1044 dimension vector for each sample, and each dimension represents a Raman intensity for a Raman shift.

There are 2 datasets we have got for experiments. The first dataset we used was produced with the order that pH value is increasing. We have found in the dataset that the intensity is lower and lower when the pH value is greater than 7 as shown in Figure 1.

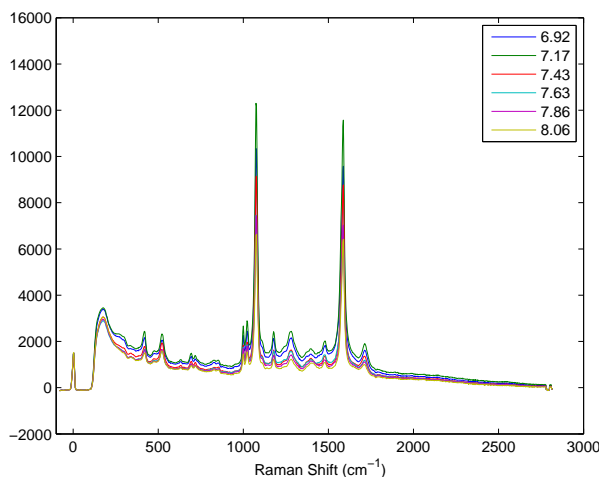


Figure 1: The mean spectrum for different pH values in the first dataset

However, the chemists have told us that the intensity is lower and lower maybe due to the systematic loss of nanoparticles through time.

Thus, we got a another set of data with pH values measured in a randomized order produced by chemists. The experiments and analyses below are based on the randomized dataset.

2.1 Raw Data

As for the raw data, we plot the 5 replications in one plot for each pH values as shown in Figure 2.

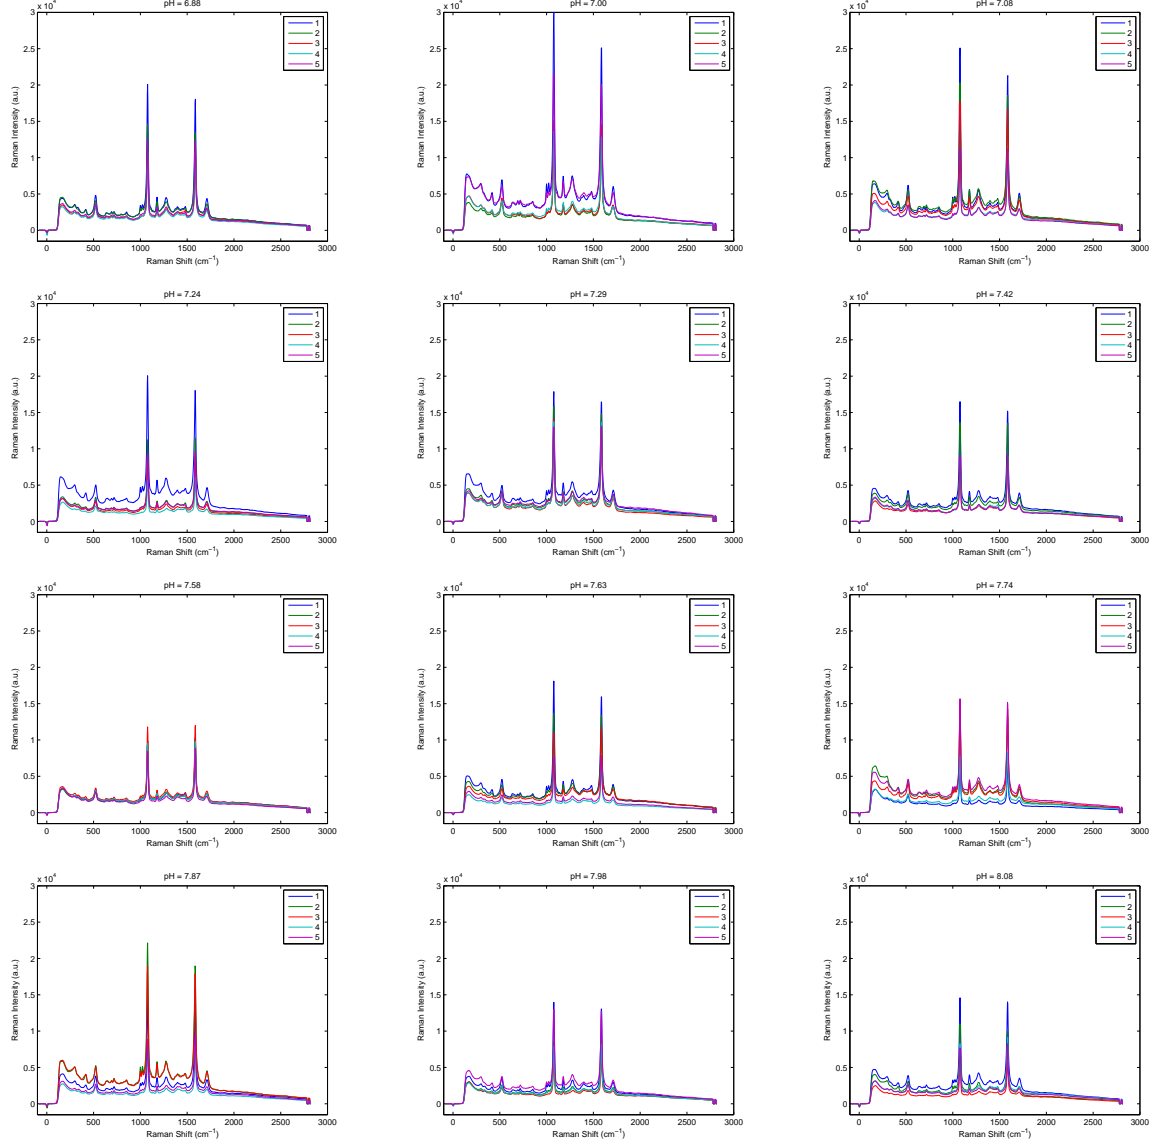


Figure 2: Plots for each pH values of raw data

We can find that when the pH value is increasing, not like in the previous dataset, the peak isn't lower and lower as the pH value is increasing all the time.

Meanwhile, we can find that for some pH values, the curves look dramatically different for the same pH value. Suggested by chemists, normalization is a good way to avoid such variation. The method we used is normalizing the total area under the curve.

2.2 Normalization

As mentioned in previous section, I have normalized the total area under the curve for every spectrum as shown in Figure 3.

As we can see from the figure that the normalization does eliminate the differences among samples of the same pH value.

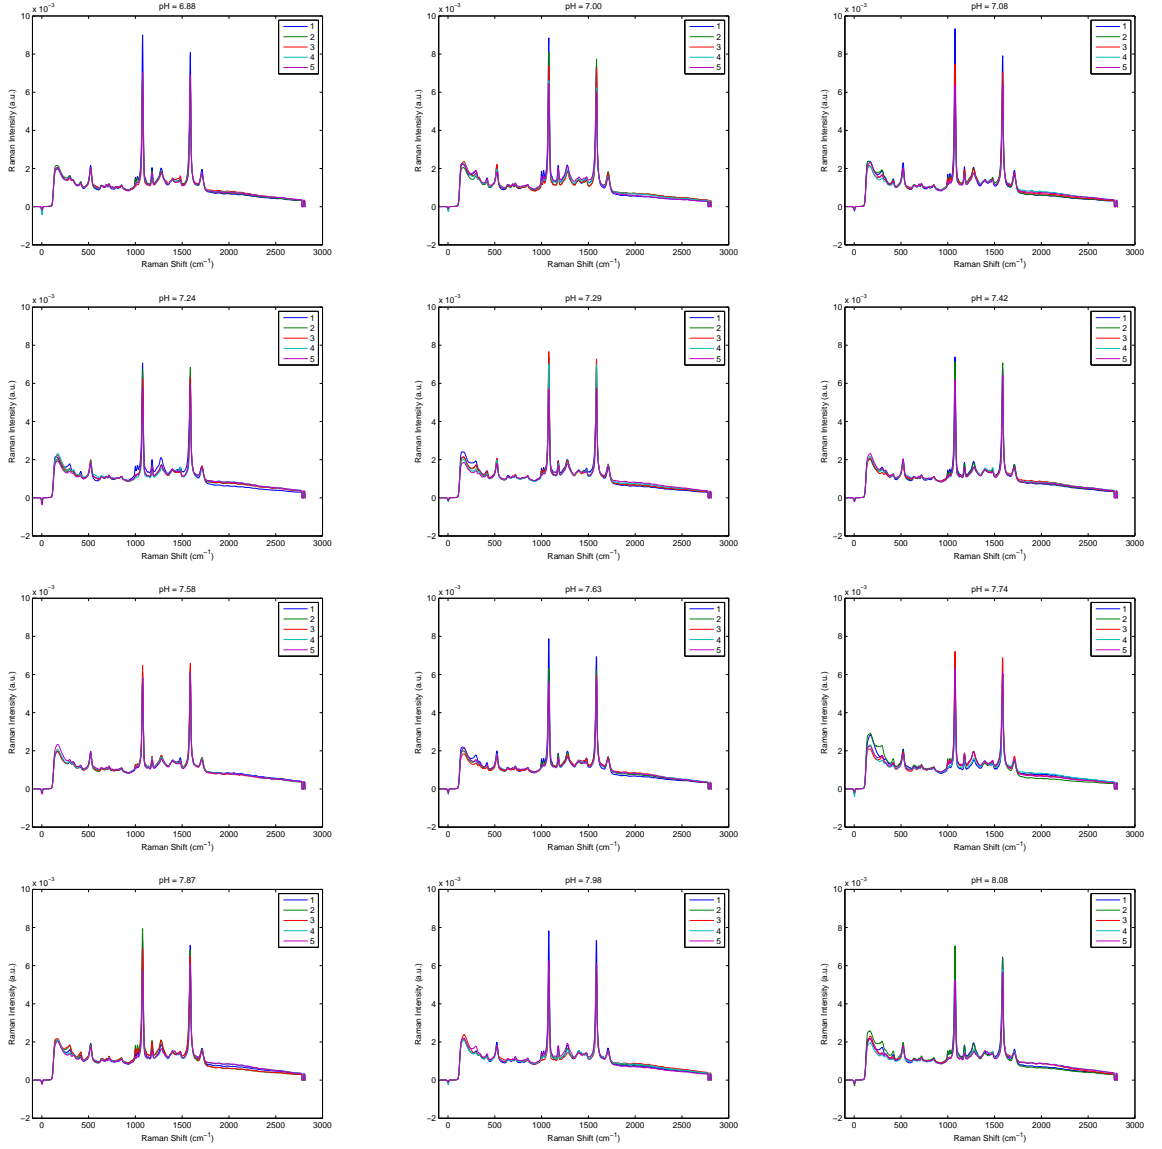


Figure 3: Plots for each pH values of data after normalization

3 Methods

There are only 60 samples. Since the number of sample is very small, we'll use cross validation to judge which method is better.

For cross validation, we divide samples into 5 folds. For each fold, there are not two samples with the same pH value. Every time, we use 4 folds for training and 1 fold for testing, and use standardized mean squared error (SMSE), mean absolute error (MAE) and coefficient of determination (R^2) for evaluation.

$$\text{SMSE} = \frac{\sum_{i=1}^n (y_i - \hat{y}_i)^2}{n} \quad (1)$$

$$\text{MAE} = \frac{1}{n} \sum_{i=1}^n |y_i - \hat{y}_i| \quad (2)$$

$$R^2 = 1 - \frac{\sum_{i=1}^n (y_i - \hat{y}_i)^2}{\sum_{i=1}^n (y_i - \bar{y})^2} = 1 - \text{SMSE} \quad (3)$$

3.1 Linear Regression

The basic method of regression is linear regression. The simplest linear model is one that involves a linear combination of the spectrum

$$f(\mathbf{x}, \mathbf{v}) = v_0 + v_1 x_1 \dots + v_D x_D, \quad (4)$$

where $\mathbf{x} = (x_1, \dots, x_D)^T$ and here D is 1044 in our dataset. The key property of this model is that it is a linear function of the parameter v_0, v_1, \dots, v_D .

However, it may be not possible for all the points representing all the spectra in the training data to be all on the same plane. So what we're going to do is to minimize

$$J(\mathbf{v}) = \sum_{i=1}^m (f(\mathbf{x}_i, \mathbf{v}) - y_i)^2, \quad (5)$$

which minimizes the total difference between the predicted pH value and the observed pH value. Here, \mathbf{x}_i is a vector representing i -th spectrum in our dataset, and y_i is a scalar representing the pH value corresponding to i -th spectrum. This leads to a closed-form expression for the estimated value

$$\hat{\mathbf{v}} = (\mathbf{X}^T \mathbf{X})^{-1} \mathbf{X}^T \mathbf{y}. \quad (6)$$

As the dimension of the spectrum is 1044 dimensions and the number of samples is only 60, it's not possible to directly use the method mentioned above, and there are two methods mentioned below which can handle this situation.

3.1.1 Principal Component Regression

Principal component regression (PCR) is a regression analysis technique that is based on principal component analysis (PCA) [1].

PCA is a statistical procedure that uses an orthogonal transformation to convert a set of observations of possibly correlated variables into a set of values of linearly uncorrelated variables called principal components. The number of principal components we used is less than the number of original variables. This transformation is defined in such a way that the first principal component has the largest possible variance, and each succeeding component in turn has the highest variance possible under the constraint that it is orthogonal to the preceding components.

Using the PCA first can make the dimension of spectrum less than 60, and then we can use traditional linear regression on the data.

3.1.2 Partial Least Squares Regression

Partial least squares regression (PLSR) [2] is a statistical method that bears some relation to principal components regression. Instead of finding hyperplanes of minimum variance between the response and independent variables, it finds a linear regression model by projecting the predicted variables and the observable variables to a new space.

As PLS considers not only the spectra but also the pH values corresponding to them, PLSR has better performance in a lot of cases than PCR.

3.2 Lasso Regression

Lasso regression [3] is a regularized version of linear regression which can avoid over-fitting. It minimizes

$$J(\mathbf{v}) = \sum_{i=1}^m (f(\mathbf{x}_i, \mathbf{v}) - y_i)^2 + \alpha \|\mathbf{v}\|. \quad (7)$$

Here, α is an important parameter to control the intensity of regularization. The larger α is, more numbers of values in vector \mathbf{v} will be equal to 0 or nearly 0.

3.3 Kernel Regression

Kernel regression is quite a different method from the methods mentioned above.

Before introducing it, we'll introduce a method for classification called k -NN. In this method, for every new sample to be classified, we choose first k nearest samples for it and count which class most of the samples belong to. Normally, we choose Euclidean distance to calculate nearest samples.

And for regression, we cannot only count. We should combine the pH values of its neighbours together by

$$f_{\text{KR}}(\mathbf{x}) = \frac{\sum_{i=1}^n y_i k(\mathbf{x}, \mathbf{x}_i)}{\sum_{i=1}^n k(\mathbf{x}, \mathbf{x}_i)}. \quad (8)$$

Here, \mathbf{x} represents current spectrum and \mathbf{x}_i represents the i -th spectrum in training set. We use Gaussian kernel for the weight of each pH values, and we can then predict the pH value for spectrum in testing set.

3.4 Gaussian Process Regression

Gaussian process regression [6]

4 Results

4.1 Principal Component Regression

As for PCR, we only consider the result on the data after normalization.

We can see the result predicted by PCR in Figure 4. And the SMSE is 0.100806.

The visualization of linear regression parameter \mathbf{v} is shown in Figure 5.

4.2 Partial Least Squares Regression

As we expected, this method has better performance than PCR, with SMSE 0.082091.

The result predicted by PLSR is shown in Figure 6.

The visualization of linear regression parameter \mathbf{v} is shown in Figure 7.

As we can see, the curve is not that smooth like that of \mathbf{v} for PCR and thus it's not easy for further analysis on it. So we try lasso regression in the next section to make the curve smoother.

4.3 Lasso Regression

To make the curve smoother for further analysis and avoid the potential over-fitting problem, lasso regression is used to replace the linear regression in PCR and PLSR.

Figure 8 shows the change of SMSE as the parameter α of lasso regression is increasing. As we can see in the figure, both the SMSE of PCR and PLSR are increasing. That means there are no over-fitting in the two regression methods before, and smoothing the curve of \mathbf{v} is not a good way to improve the performance of those methods.

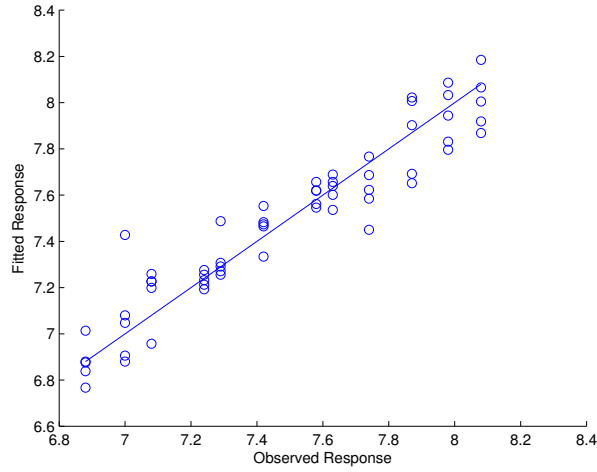


Figure 4: PCR with 10 principal components

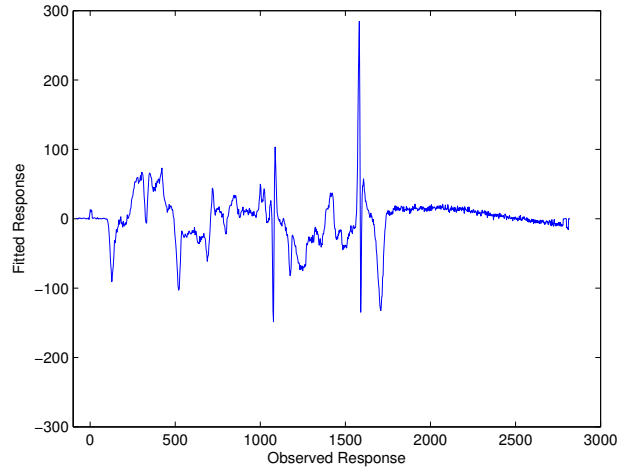


Figure 5: Plot of mean of \mathbf{v} for PCR with 10 components

Moreover, we can find that the SMSE of PLSR increases much faster than that of PCR. As we know from the visualization of \mathbf{v} shown before, the curve of \mathbf{v} for PCR is much smoother than that of PLSR, so the $\alpha\|\mathbf{v}\|$ part of the cost function may not affect the performance of PCR that much as α is increasing.

4.4 Kernel Regression

4.5 Gaussian Process Regression

5 Conclusions

References

- [1] Ian Jolliffe. *Principal component analysis*. Wiley Online Library, 2005.
- [2] Paul Geladi and Bruce R Kowalski. Partial least-squares regression: a tutorial. *Analytica chimica acta*, 185:1–17, 1986.

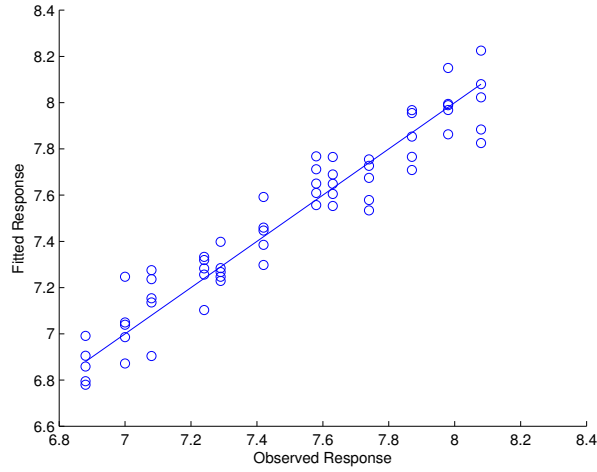


Figure 6: PLSR with 14 principal components

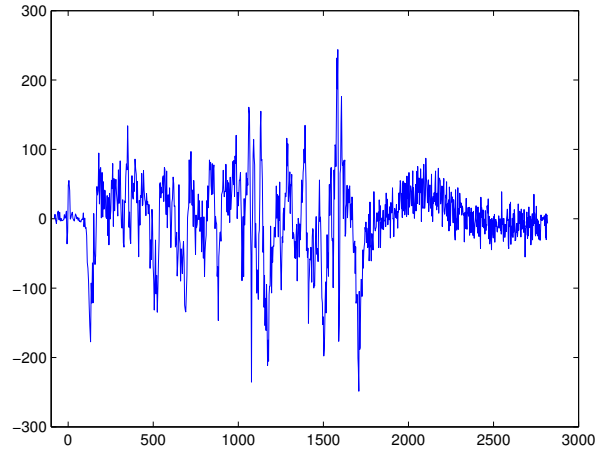


Figure 7: Plot of mean of \mathbf{v} for PLSR with 14 components

- [3] Robert Tibshirani. Regression shrinkage and selection via the lasso. *Journal of the Royal Statistical Society. Series B (Methodological)*, pages 267–288, 1996.
- [4] Corinna Cortes and Vladimir Vapnik. Support-vector networks. *Machine learning*, 20(3):273–297, 1995.
- [5] Harris Drucker, Chris JC Burges, Linda Kaufman, Alex Smola, and Vladimir Vapnik. Support vector regression machines. *Advances in neural information processing systems*, 9:155–161, 1997.
- [6] Carl Edward Rasmussen and Christopher K. I. Williams. *Gaussian processes for machine learning*. MIT Press, 2006.

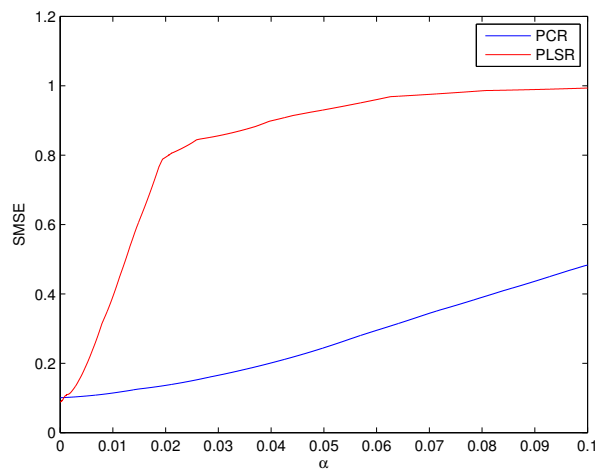


Figure 8: The relationship between SMSE and α