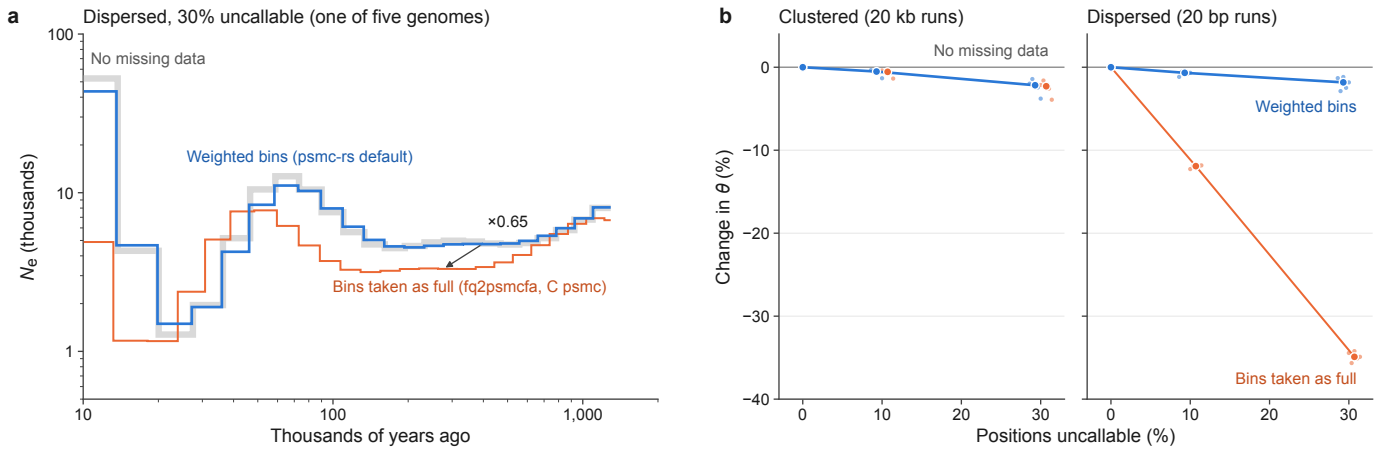
a
Dispersed, 30% uncallable (one of five genomes)
No missing data
Weighted bins (psmc-rs default)
×0.65
Bins taken as full (fq2psmcfa, C psmc)
N_e (thousands)
100
10
1
10
100
1,000
Thousands of years ago
b
Clustered (20 kb runs)
Dispersed (20 bp runs)
No missing data
Weighted bins
Bins taken as full
Change in θ (%)
0
−10
−20
−30
−40
0
10
20
30
Positions uncallable (%)