

# An Evaluation of Uninformed and Informed Search Algorithms on the k-puzzle Problem\*

Dalis Chan<sup>1</sup>, Johanna<sup>2</sup>, Sean Low Chen Yi<sup>3</sup>, and Law Ann Liat, Larry<sup>4</sup>

<sup>1</sup> INSERT DALIS MATRIC NUMBER

<sup>2</sup> INSERT JOHANNA MATRIC NUMBER

<sup>3</sup> INSERT SEAN MATRIC NUMBER

<sup>4</sup> A0189883A

**Abstract.** K-puzzle is often used as test problems for new search algorithms in artificial intelligence [3, p71]. This paper evaluates the use of iterative deepening search (IDS) and  $A^*$  search. Since  $A^*$  search uses heuristic functions to guide its search, this paper also evaluates the heuristic functions euclidean distance, manhattan distance, and linear conflict.

## 1 Problem Specification

1. **State:** For  $k \in \{3, 4, 5\}$ , a  $k \times k$  matrix  $M$  with each entry  $m_{i,j}$  being a unique integer from  $\{0, 1, \dots, 8\}$  where 0 represents the blank tile.
2. **Initial State:** Puzzle can start in any state  $s$ .
3. **Actions or  $Actions(s)$ :** Let  $m_{k,l} \in M$  denote the blank tile and  $m_{i,j} \in M$  denote the tile **adjacent** to the blank tile  $m_{k,l}$ . Actions are movements of the adjacent tile  $m_{i,j}$  towards the blank tile  $m_{k,l}$ . For example, the action *Left* moves the adjacent tile  $m_{k,l+1} \in M$  to the blank tile  $m_{k,l}$ .
4. **Transition Model or  $Result(s,a)$ :**  $Result(s,a)$  swaps the pair of tiles specified in action  $a$  in the current state  $s$  and returns this new state  $s'$ .
5. **Goal State:**

$$M_{goal} = \begin{bmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \\ 7 & 8 & 0 \end{bmatrix}$$

6. **Path Cost:** Every step cost  $c(s, a, s') = 1$ , and the path cost is the summation of the step costs from the initial state to the goal state.

## 2 Technical Analysis of the Selected Algorithms and Heuristics

### 2.1 Rule to Check if k-puzzle is Solvable

**Definition.** A pair of tiles form an *inversion* if the values on tiles are in the reverse order of their appearance in the goal state.

---

\* Supported by Prof Yair Zick and Prof Daren Ler.

**Rules [1].** Let  $M$  denote a  $k \times k$  matrix,  $m_{i,j}$  denote a blank tile in  $M$ , and  $n_i$  denote the number of inversions in the initial state  $M_{initial}$ . Puzzle is solvable if ...

1.  $k$  is odd and  $n_i$  is even
2.  $k$  is even,
  - (a)  $n_i$  is odd and  $m_{i,j}$  is on an even row from the bottom (ie  $j$  is odd).
  - (b)  $n_i$  is even and  $m_{i,j}$  is on an odd row from the bottom (ie  $j$  is even).

## 2.2 Uninformed Search

1. **Implementation:** Graph-based IDS. Step costs are equal, thus it is optimal. Furthermore, since the search space is large and the depth of the solution is not known, IDS is preferred [3, p90].
2. **Correctness:** Branching factor  $b = 4$  is finite, thus IDS is complete [3, p88-90].
3. **Time Complexity:**  $O(b^d)$  [3, p88-90].
4. **Space Complexity:**  $O(bd)$  [3, p88-90].

## 2.3 Informed Search

1. **Implementation:** Graph-based  $A^*$  search. It improves on greedy best first search (ie  $f(n) = h(n)$ ) as it avoids expanding paths that are already expensive (ie  $f(n) = g(n) + h(n)$ ).
2. **Correctness:** Since the search space is finite,  $A^*$  search will be complete.
3. **Time Complexity:**  $O(b^{h^*(s_0) - h(s_0)})$  [3, p93-99].
4. **Space Complexity:**  $O(b^m)$  [3, p93-99].

## 2.4 $h_1$ : Euclidean Distance

**Definition.** Euclidean Distance heuristic is defined as the straight line distance between the tiles from their goal position [2].

**Prove for Consistency.** Euclidean distance is a form general triangle inequality, given that the euclidean distance from start state  $S$  to end state  $G$  (1 side of the triangle) cannot be longer than the sum of the 2 sides ( the actual distance from  $S$  to middle state  $N$  and the euclidean distance from  $N$  to  $G$ ) as the euclidean distance from  $S$  to  $G$  is already the shortest path. Since general triangle inequality fulfills the definition of consistency [3, p95], euclidean distance is consistent.

## 2.5 $h_2$ : Manhattan Distance

**Definition.** Manhattan Distance heuristic is defined as the sum of the distance of the tiles from their goal positions [3, p103] . Note that this sum only includes horizontal and vertical distances as *Actions* do not allow the diagonal movements.

**Prove for Consistency.** Prove for consistency can be found in appendix A.

## 2.6 $h_3$ : Linear Conflict

## 3 Experimental Setup

1. **Number of Nodes Generated:** Time Complexity
2. **Size of Frontier:** Space Complexity
3. Plot puzzle difficulty or multiple iterations for the same puzzle difficulty against time/space complexity

## 4 First Section

### 4.1 A Subsection Sample

Please note that the first paragraph of a section or subsection is not indented. The first paragraph that follows a table, figure, equation etc. does not need an indent, either.

Subsequent paragraphs, however, are indented.

**Sample Heading (Third Level)** Only two levels of headings should be numbered. Lower level headings remain unnumbered; they are formatted as run-in headings.

*Sample Heading (Fourth Level)* The contribution should contain no more than four levels of headings. Table 1 gives a summary of all heading levels.

**Table 1.** Table captions should be placed above the tables.


Heading level	Example	Font size and style
Title (centered)	<b>Lecture Notes</b>	14 point, bold
1st-level heading	<b>1 Introduction</b>	12 point, bold
2nd-level heading	<b>2.1 Printing Area</b>	10 point, bold
3rd-level heading	<b>Run-in Heading in Bold.</b> Text follows	10 point, bold
4th-level heading	<i>Lowest Level Heading.</i> Text follows	10 point, italic

Displayed equations are centered and set on a separate line.

$$x + y = z \tag{1}$$

Please try to avoid rasterized images for line-art diagrams and schemas. Whenever possible, use vector graphics instead (see Fig. 1).

**Theorem 1.** *This is a sample theorem. The run-in heading is set in bold, while the following text appears in italics. Definitions, lemmas, propositions, and corollaries are styled the same way.*

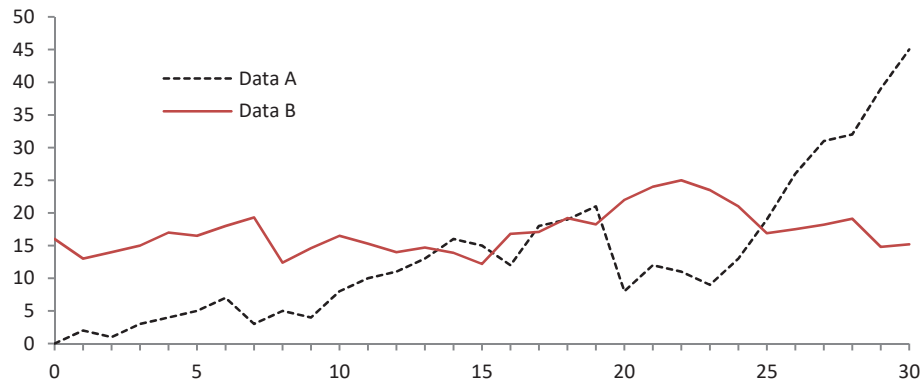

**Fig. 1.** A figure caption is always placed below the illustration. Please note that short captions are centered, while long ones are justified by the macro package automatically.

*Proof.* Proofs, examples, and remarks have the initial word in italics, while the following text appears in normal font.

For citations of references, we prefer the use of square brackets and consecutive numbers. Citations using labels or the author/year convention are also acceptable. The following bibliography provides a sample reference list with entries for journal articles [1], an LNCS chapter [2], a book [3], proceedings without editors [4], and a homepage [5]. Multiple citations are grouped [1,2,3], [1,3,4,5].

## References

1. Goel, A.: How to check if an instance of 15 puzzle is solvable?
2. Rosalind: Euclidean distance, <http://rosalind.info/glossary/euclidean-distance/>
3. Stuart Russell, Peter Norvig: Artificial Intelligence: A Modern Approach. Pearson Educaiton, Inc., 3 edn.

## References

1. Author, F.: Article title. Journal **2**(5), 99–110 (2016)
2. Author, F., Author, S.: Title of a proceedings paper. In: Editor, F., Editor, S. (eds.) CONFERENCE 2016, LNCS, vol. 9999, pp. 1–13. Springer, Heidelberg (2016). <https://doi.org/10.1007/1234567890>
3. Author, F., Author, S., Author, T.: Book title. 2nd edn. Publisher, Location (1999)
4. Author, A.-B.: Contribution title. In: 9th International Proceedings on Proceedings, pp. 1–2. Publisher, Location (2010)
5. LNCS Homepage, <http://www.springer.com/lncs>. Last accessed 4 Oct 2017

## A Prove for Manhattan Distance Consistency

To prove that Manhattan Distance is consistent.

*Proof.* Proof by Cases

1.  $|h(n') - h(n)| = 1$  ( $\because c(n, a, n') = 1$ , any node  $n'$  is 1 step away from node  $n$ )
2. Case 1:  $h(n') = h(n) + 1$   
 (a)  $h(n) \leq h(n) + 1 + 1 \implies h(n) \leq h(n') + c(n, a, n')$
3. Case 2:  $h(n') = h(n) - 1$   
 (a)  $h(n) \leq h(n) - 1 + 1 \implies h(n) \leq h(n') + c(n, a, n')$
4. For both cases of  $h(n')$ ,  $h(n)$  is consistent. ( $\bullet$ )