

EXERCISE – 10

Execute and display the results of the following commands in Kali Linux Operating System:

1. free command
2. sort command
3. history command

Aim

To execute and display the results of the free, sort, and history commands in Kali Linux.


1. FREE COMMAND

Command:

free

Use:

Used to display the system's memory usage.

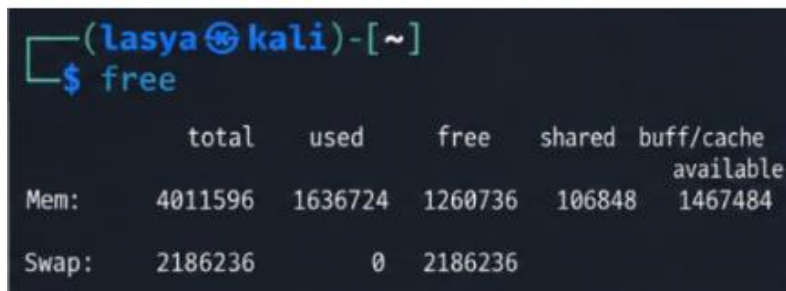

```
(lasya@kali)-[~]  
$ free  
  
              total        used        free      shared  buff/cache  
             available  
Mem:           4011596     1636724     1260736       106848       1467484  
Swap:          2186236              0       2186236
```


2. SORT COMMAND

Command:

sort fruits.txt

Use:

Used to arrange the contents of a file in alphabetical order.

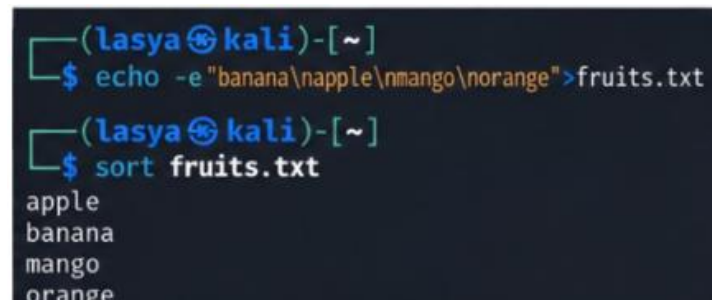

```
(lasya@kali)-[~]  
$ echo -e "banana\napple\nmango\norange">fruits.txt  
  
(lasya@kali)-[~]  
$ sort fruits.txt  
apple  
banana  
mango  
orange
```

3. HISTORY COMMAND

Command:

history

Use:

Used to display the previously executed commands in the terminal.

```
(lasya@kali)-[~]
$ history
1  touch test.txt
2  rm test.txt
3  ls
4  ls
5  touch test.txt
6  ls
7  rm test.txt
8  ls
9  users
10 kali
11 tree
12 touch test.txt
13 ls
14 rm test.txt
15 ls
16 users
17 tree
18 echo "welcome to ethical hacking lab">sample.txt
```

```
(lasya@kali)-[~]
$ history
19  less sample.txt
20  more sample.txt
21  vi sample.txt
22  tree
23  echo -e "line 1\nline 2\nline 3\nline
4\nline 5\nline 6\nline 7\nline 8\nline 9\n
\nline 10"> sample.txt
24  head sample.txt
25  tail sample.txt
26  ls
27  echo "welcome to ethical hacking
lab">sample.txt
28  cat sample.txt
29  mkdir ethicalhacking
30  ls
31  uptime
32  date
33  touch old.txt
34  mv old.txt new.txt
35  ls
36  touch sample.txt
37  wget https://example.com
38  ls
39  pwd
40  cd documents
41  pwd
42  cd ~
43  touch original.txt
44  cp original.txt copy.txt
45  ls
46  nmap -sv 127.0.0.1
47  nmap_sv 127.0.0.1
48  nmap -sv 127.0.0.1
49  nmap -A 127.0.0.1
50  sudo nmap -0 127.0.0.1
51  nmap -T2 127.0.0.1
52  nmap -T3 127.0.0.1
53  nmap -T3 127.0.0.1
55  echo -e"banana\napple\nmango\norange">fruits.txt
56  sort fruits.txt
```

```
(lasya@kali)-[~]
$ nmap -T2 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 08:46 +0530
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000052s latency).
All 1000 scanned ports on localhost (127.0.0.1)
are in ignored states.
Not shown: 1000 closed tcp ports (reset)

Nmap done: 1 IP address (1 host up) scanned in 406.66 seconds
```

```
(lasya@kali)-[~]
$ nmap -T3 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 08:55 +0530
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000010s latency).
All 1000 scanned ports on localhost (127.0.0.1)
are in ignored states.
Not shown: 1000 closed tcp ports (reset)

Nmap done: 1 IP address (1 host up) scanned in 0.05 seconds
```

```
(lasya@kali)-[~]
$ sudo nmap -0 127.0.0.1
[sudo] password for lasya:
/usr/lib/nmap/nmap: unrecognized option '-0'

See the output of nmap -h for a summary of options.
```

Result

Thus, the free, sort, and history commands were successfully executed in Kali Linux and their results were displayed.