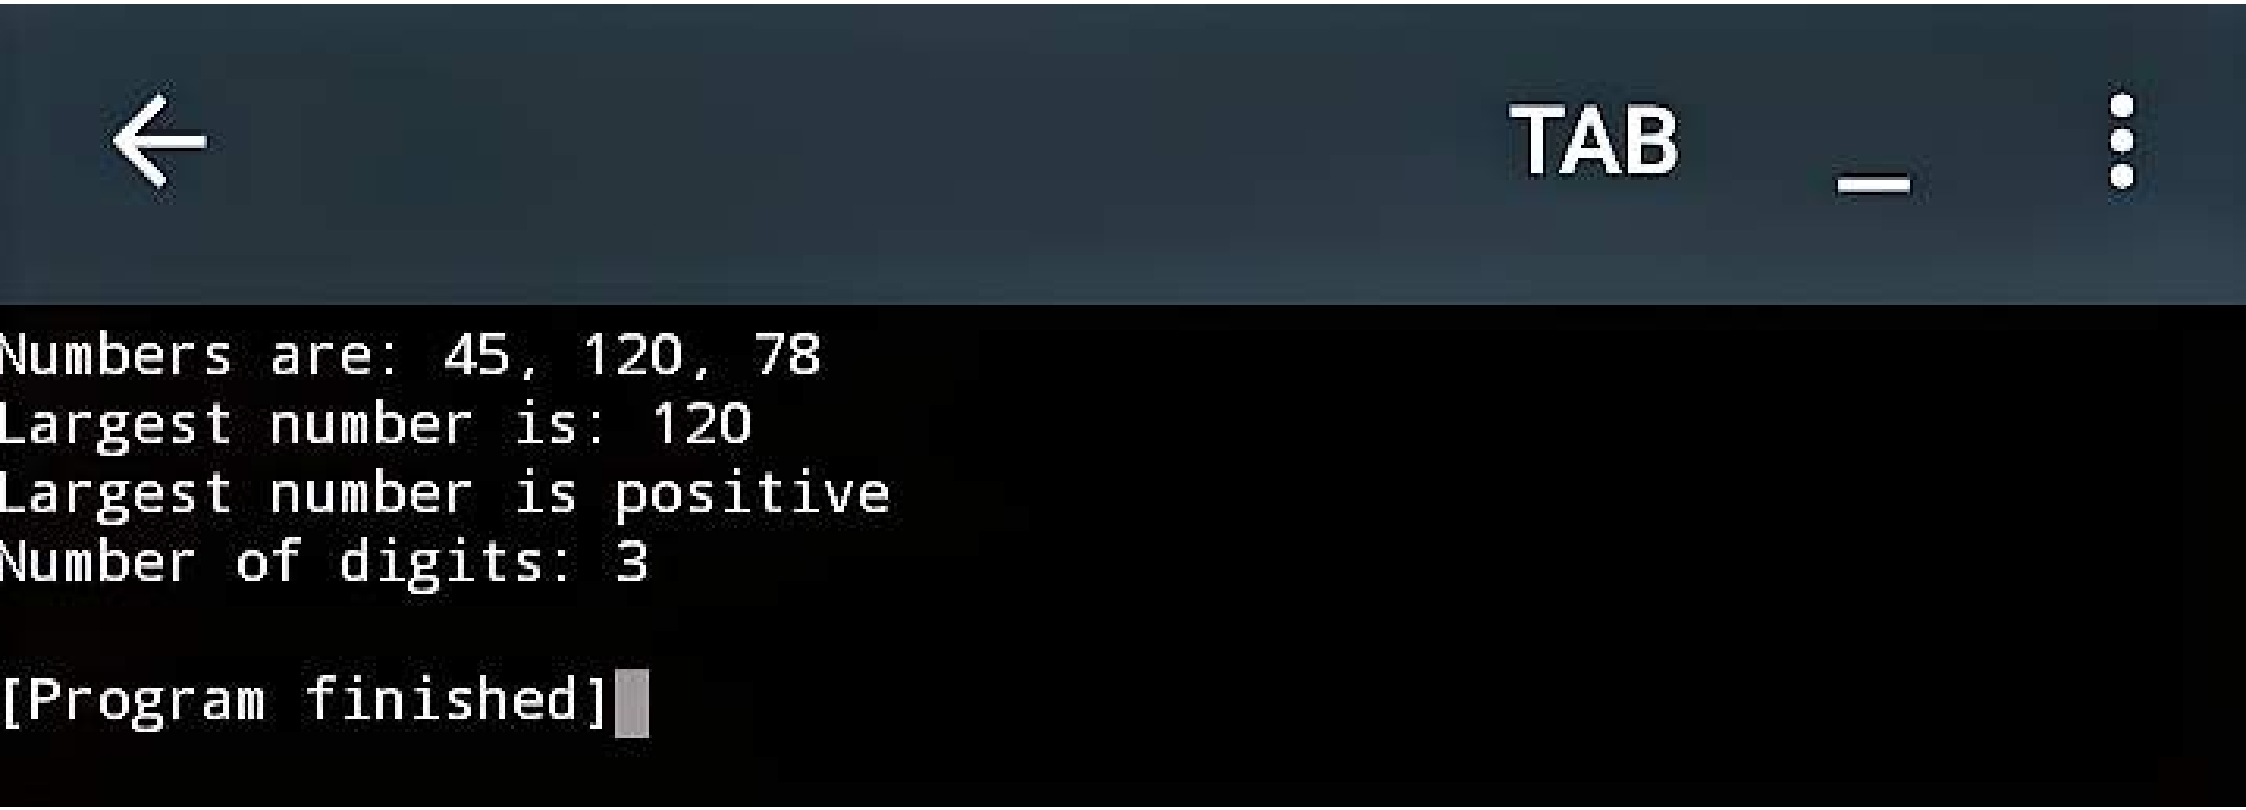

TAB
Numbers are: 45, 120, 78
Largest number is: 120
Largest number is positive
Number of digits: 3
[Program finished]

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    int num1 = 45;
    int num2 = 120;
    int num3 = 78;
    int largest;
    int count = 0;

    cout << "Numbers are: " << num1 << ", " << num2 << ", " << num3 << endl;

    // Part 1: Find Largest using nested if..else
    if (num1 >= num2)
    {
        if (num1 >= num3)
        {
            largest = num1;
        }
        else
        {
            largest = num3;
        }
    }
    else
    {
        if (num2 >= num3)
        {
            largest = num2;
        }
        else
        {
            largest = num3;
        }
    }
```

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    int number = 10;

    cout << "Entered number is: " << number << endl;

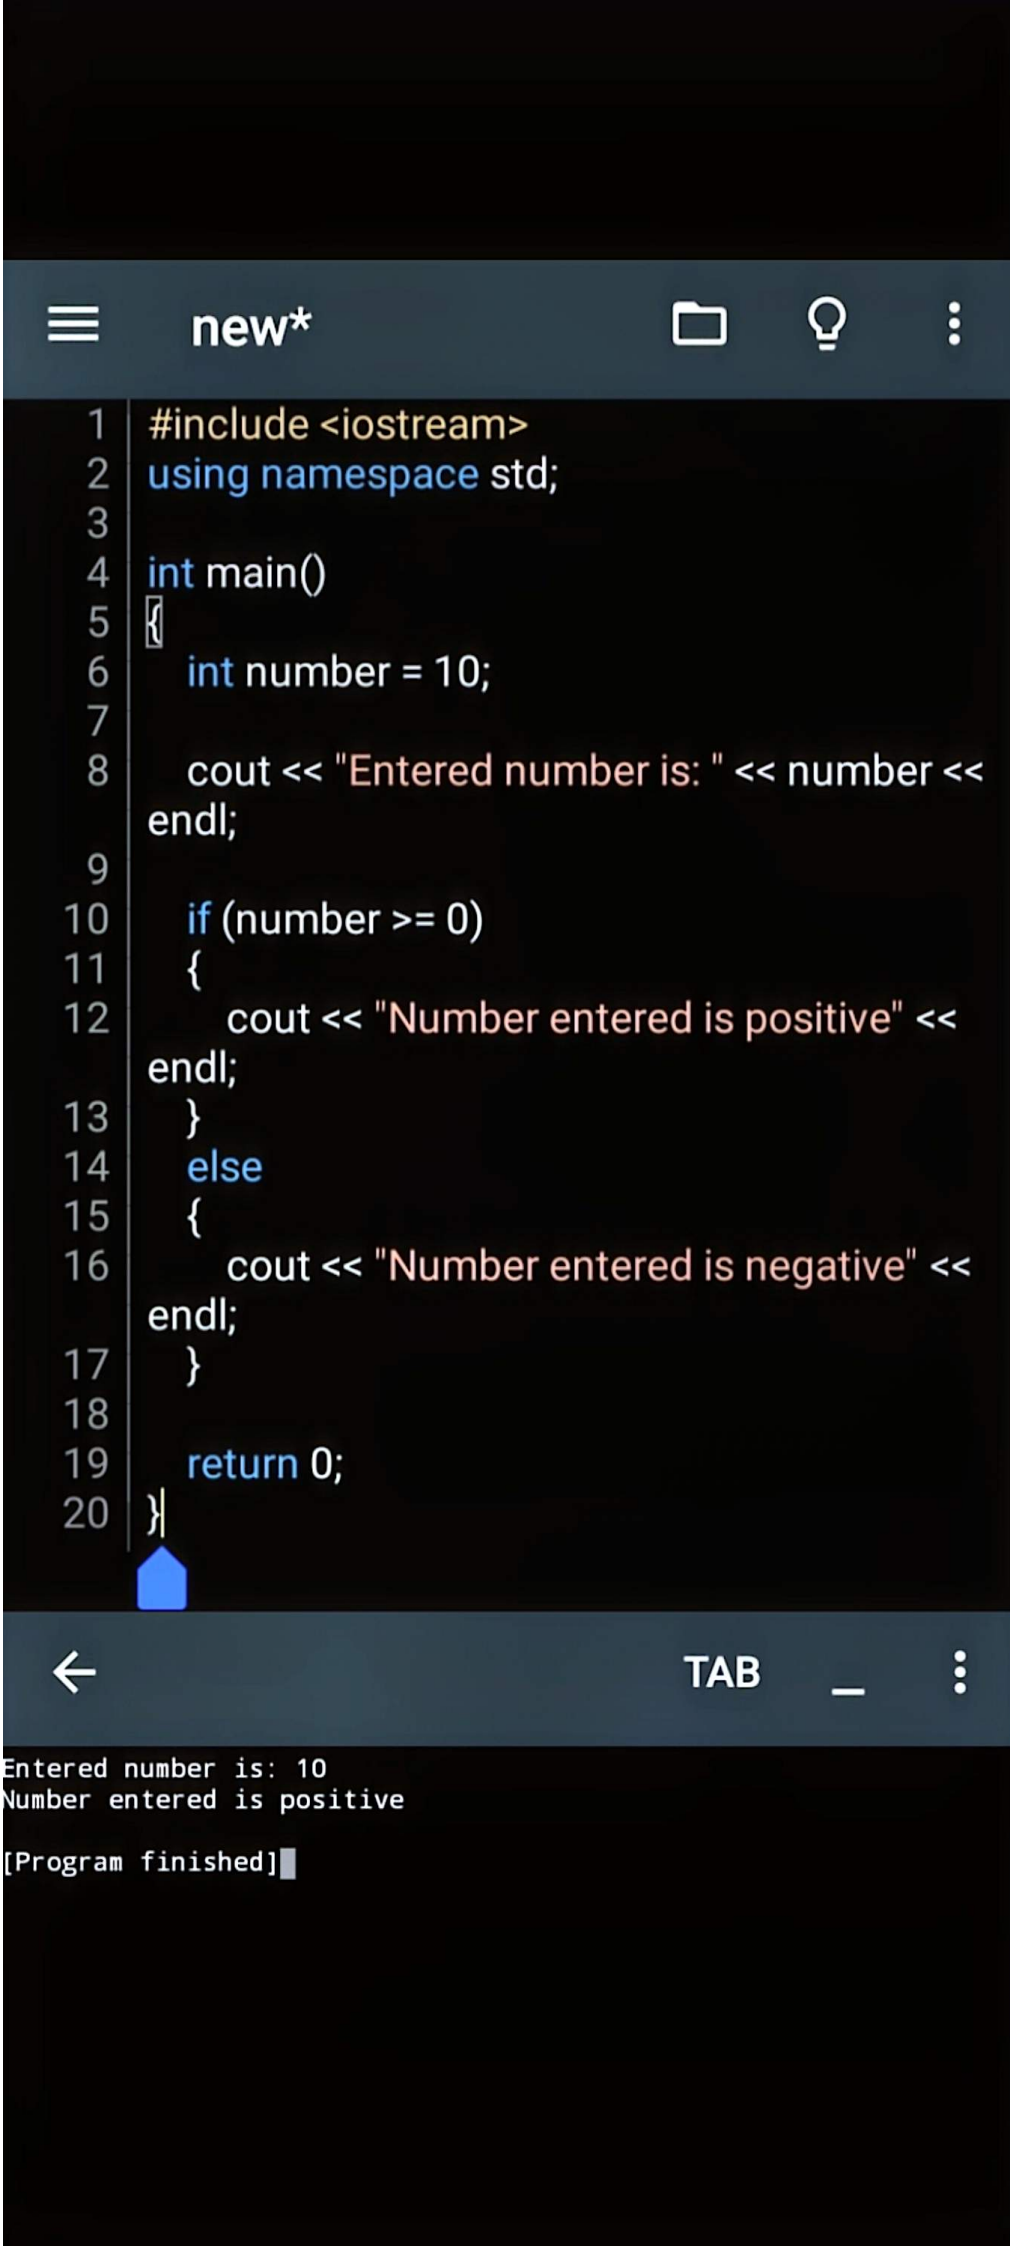
    if (number >= 0)
    {
        cout << "Number entered is positive" << endl;
    }
    else
    {
        cout << "Number entered is negative" << endl;
    }

    return 0;
}
```

TAB

```
Entered number is: 10
Number entered is positive

[Program finished]
```


new*
TAB
1 #include <iostream>
2 using namespace std;
3
4 int main()
5 {
6 int number = 10;
7
8 cout << "Entered number is: " << number << endl;
9
10 if (number >= 0)
11 {
12 cout << "Number entered is positive" << endl;
13 }
14 else
15 {
16 cout << "Number entered is negative" << endl;
17 }
18
19 return 0;
20 }
Entered number is: 10
Number entered is positive
[Program finished]

new*

```cpp
#include <iostream>
using namespace std;

int main()
{
    int mark = 85;
    char grade;

    cout << "Entered Mark is: " << mark << endl;

    if (mark >= 75)
    {
        grade = 'A';
    }
    else if (mark < 75 && mark >= 60)
    {
        grade = 'B';
    }
    else if (mark < 60 && mark >= 45)
    {
        grade = 'C';
    }
    else
    {
        grade = 'D';
    }

    cout << "Your Grade is: " << grade << endl;

    return 0;
}
```

TAB

```
Entered Mark is: 85
Your Grade is: A

[Program finished]
```

Assignment

Lab: 4

Task: 1 positive/Negative

```
# include <iostream>
using namespace std;
int main()
{
    int number = 10;
    cout << "Entered number is : " << number << endl;
    if (number >= 0 )
    {
     cout << " Number entered is positive" << endl;
    }
    else
    {
     cout << " Number Entered is negative" <<
endl;
    }
    return 0;
}
```

output:

Enter a number: 5
output: Number is positive
Input: Enter number: -2
output: Number is negative or positive.



Task: 2
positive, Negative or Zero.

```
# include<iostream>
using namespace std;
int main (){
  int num;
cout<< "Enter a number";
cin >> number
if (num>0){
 cout << "positive"; }
else if (num<0){
cout << "Negative"}
else{
    cout<< "Zero"; }
return 0;
}
```

output:

- Enter a number: 10
  positive
- Enter a number: -7
  Negative
- Enter a number: 0
  Zero

Task: 3 Grade system

```
# include <iostream>
using namespace std;
    int main (){
  int mark;
cout<< "Enter marks";
cin >>  marks;
if(mark >=75){
cout<<"Grade A";}
else if (mark>66){
 cout<<"Grade B";
else if (mark>=45){
cout << "Grade (";}
else{
    cout << Grade D;}
return 0;
}
```

output:

- Enter marks : 80
  Grade A
- Enter marks : 65
  Grade B
- Enter marks : 50
  Grade C
- Enter marks : 30
  Grade D

PiXel
PREMIUM PAPER

Task: 4 largest num+ positive check+ Digital Count.

```
# include <iostream>
using namespace std;
int main() {
int num, digital = 0
cout << "Enter a number";
cin >> num
if (num > 0) {
int temp = num;
if (temp == 0) {
digital = 1; }
else {
while (temp > 0) {
temp = temp / 10;
digits ++ ; }
cout << "Number is positive and has" << digits << "digits" << endl
else {
cout << "Number is not paritive" endl; }
```

output:

Enter number: -10

number is not positive