

Paper Title

First Author

Department

Institution

City, Country

first.last@example.com

Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

ACM Reference Format:

First Author. 2026. Paper Title. In *Proceedings of full-conference-name (short-conference-name)*. ACM, New York, NY, USA, 8 pages. <https://doi.org/10.1145/9999997.9999999>

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultrices et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

short-conference-name, City, Country

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YYYY/MM

<https://doi.org/10.1145/9999997.9999999>

parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa. TODO!

The remainder of the paper starts with a presentation of related work (Section 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Section 3). The paper closes with a conclusion and an outlook on future work (Section 4).

2 Related Work

Winery [2] is a graphical **modeling** tool. The whole idea of TOSCA is explained by Binz et al. [1].

To search for related work, ScienceOS¹ can be used; it stores data in the EU and backs its answers with citations, which you still have to read and check yourself. Writing hints for student theses are given in the open-access book *Student Thesis Projects*². More hints are given in *Writing for Computer Science*³.

3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\`).

Running text seldom needs a hard line break.

¹<https://www.scienceos.ai/>

²<https://vdf.ch/product/student-thesis-projects-en.html>

³<https://doi.org/10.1007/978-1-4471-6639-9>

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. Andrew Stacey gives a long motivation for that in the section “Line Wrapping” of his *Document Revision System*⁴.

Corresponding L^AT_EX code of ./paper.tex

```

578 %U0000
579 One sentence per line.
580 This rule is important for the usage of version control
    ↳ systems.
581 A new line is generated with a blank line.
582 As you would do in Word:
583 New paragraphs are generated by pressing enter.
584 In LaTeX, this does not lead to a new paragraph as LaTeX
    ↳ joins subsequent lines.
585 To start a new paragraph, press enter twice.
586 This leads to an empty line.
587 In word, there is the functionality to press shift and
    ↳ enter.
588 This leads to a hard line break.
589 The text starts at the beginning of a new line.
590 In LaTeX, you can do that by using two backslashes (\
    ↳ \textbackslash\textbackslash).
591 \\
592 Running text seldom needs a hard line break.
593
594 Please do \textit{not} use two backslashes for new
    ↳ paragraphs.
595 For instance, this sentence belongs to the same
    ↳ paragraph, whereas the last one started a new
    ↳ one.
596 Andrew Stacey gives a long motivation for that in the
    ↳ section \enquote{Line Wrapping} of his \href{
    ↳ https://loopspace.mathforge.org/HowDidIDoThat/
    ↳ TeX/VCS/#section.3}{\emph{Document Revision
    ↳ System}}\footnote{\url{https://loopspace.
    ↳ mathforge.org/HowDidIDoThat/TeX/VCS/}}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper.tex

```

603 %U0000
604 \begin{mindflow}
605 This is a small note.
606 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```

611 %U0000
612 \textmarker{Marked text.}

```

With \textmarker, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```

617 %U0000
618 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper.tex

```

621 %U0000
622 \modified{Manual marking for text that has been changed
    ↳ since the last version.}

```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper.tex

```

625 %U0000
626 This is some text.
627 \change{FL1: text adjusted}{Changed text}.

```

Here is a comment.

Corresponding L^AT_EX code of ./paper.tex

```

630 %U0000
631 Here is a comment\sidecomment{Comment}.

```

TODO!

Corresponding L^AT_EX code of ./paper.tex

```

634 %U0000
635 \todo{A lot of text still needs to be produced here}

```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also insert \allowbreak{} into the word, as in application-specific, but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For that, write “= instead of -”, as in application=specific. This is enabled by an additional configuration of the babel package.

⁴<https://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/>

Corresponding $\LaTeX$ code of ./paper.tex

```
645 %\U{00000000}
646 In case you write \enquote{application-specific}, then
647   ↳ the word will only be hyphenated at the dash.
648 You can also insert \verb1\allowbreak{}1 into the word,
649   ↳ as in applica\allowbreak{}tion-specific, but
650   ↳ this is much more effort.
651
652 You can now write words containing hyphens which are
653   ↳ hyphenated at other places in the word.
654 For that, write \verb1"=1 instead of \verb1-1, as in
655   ↳ application"=specific.
656 This is enabled by an additional configuration of the
657   ↳ babel package.
```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: 100 $\frac{\text{km}}{\text{h}}$, or by using plain $\LaTeX$ (and math mode): 100 $\frac{\text{km}}{\text{h}}$.

Corresponding $\LaTeX$ code of ./paper.tex

```
656 %\U{00000000}
657 Numbers can be written plain text (such as 100), by
658   ↳ using the \href{https://ctan.org/pkg/siunitx}{
659   ↳ siunitx} package as follows:
660 \SI{100}{\km\per\hour},
661 or by using plain \LaTeX{} (and math mode):
662 $100 \frac{\mathit{km}}{h}$.
```

5 % of 10 kg

Corresponding $\LaTeX$ code of ./paper.tex

```
663 %\U{00000000}
664 \SI{5}{\percent} of \SI{10}{kg}
```

Numbers are automatically grouped: 123 456.

Corresponding $\LaTeX$ code of ./paper.tex

```
667 %\U{00000000}
668 Numbers are automatically grouped: \num{123456}.
```

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding $\LaTeX$ code of ./paper.tex

```
673 %\U{00000000}
674 Please use the \enquote{enquote command} to quote
675   ↳ something.
676 Quoting with “quote” or “quote” also works.
```

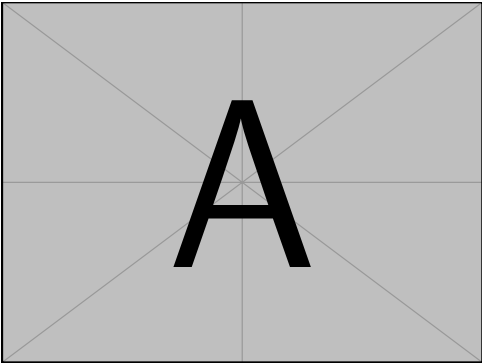


Figure 1: Example figure for zceref demo

Heading1	Heading2
One	Two
Three	Four

Table 1: Example table for zceref demo

3.7 Zref-clever examples

zref-clever demonstration: Zceref (short for zceref[S]) at beginning of sentence, zceref in all other cases.

Figure 1 shows a simple fact, although Figure 1 could also show something else.

Table 1 shows a simple fact, although Table 1 could also show something else.

Section 3.7 shows a simple fact, although Section 3.7 could also show something else.

Corresponding $\LaTeX$ code of ./paper.tex

```
705 %\U{00000000}
706 \Zceref{fig:ex:cref} shows a simple fact, although \zceref
707   ↳ {fig:ex:cref} could also show something else.
708
709 \Zceref{tab:ex:cref} shows a simple fact, although \zceref
710   ↳ {tab:ex:cref} could also show something else.
711
712 \Zceref{sec:ex:cref} shows a simple fact, although \zceref
713   ↳ {sec:ex:cref} could also show something else.
```

3.8 Figures

Figure 2 shows something interesting.

Corresponding $\LaTeX$ code of ./paper.tex

```
715 %\U{00000000}
716 \Zceref{fig:label} shows something interesting.
717
718 \begin{figure}
719   \centering
720   \includegraphics[width=.8\linewidth]{example-image-
721     ↳ golden}
```



Figure 2: Simple Figure. Based on Scharrer [3].



Figure 3: Ulm Minster. Photo: wkrauth, CC0, via Wikimedia Commons.

```

721 \caption[Simple Figure]{
722   Simple Figure.
723   Based on \citet{mwe}.
724 }
725 \label{fig:label}
726 \end{figure}

```

Photos in JPEG or PNG format are included the same way, as shown in Figure 3.

Corresponding $\LaTeX$ code of ./paper.tex

```

731 \begin{figure}
732 \centering
733 \includegraphics[width=.5\linewidth]{figures/ulm-
734   ↳ minster.jpg}
735 \caption{Ulm Minster. Photo: wkrauth, CC0, via
736   ↳ Wikimedia Commons.}
737 \label{fig:jpg}
738 \end{figure}

```

3.9 Sub Figures

An example of two sub figures is shown in Figure 4.

Corresponding $\LaTeX$ code of ./paper.tex

```

744 \begin{figure}[!b]
745 \centering
746 \subfloat[Case I]{\includegraphics[width=.4\linewidth
747   ↳ ]{example-image-a}%
748   \label{fig:first_case}}
749 \hfil
750 \subfloat[Case II]{\includegraphics[width=.4\linewidth
751   ↳ ]{example-image-b}%
752   \label{fig:second_case}}
753 \caption{Example figure with two sub figures.}
754 \label{fig:two_sub_figures}
755 \end{figure}

```

3.10 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.

Corresponding $\LaTeX$ code of ./paper.tex

```

762 \begin{figure}[ht]
763 \centering
764 \begin{tikzpicture}
765 \draw(0,0) rectangle (4,4);
766 \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
767 \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
768 \draw(\x,\y) circle (1pt);
769 \end{tikzpicture}
770 \caption{A regular grid generated easily with two for
771   ↳ loops.}\label{fig:tikz_example}
772 \end{figure}

```

3.11 Plots with pgfplots

The pgfplots package plots functions directly in $\LaTeX$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation⁵.

Corresponding $\LaTeX$ code of ./paper.tex

```

780 \begin{figure}[ht]
781 \centering
782 \begin{tikzpicture}
783

```

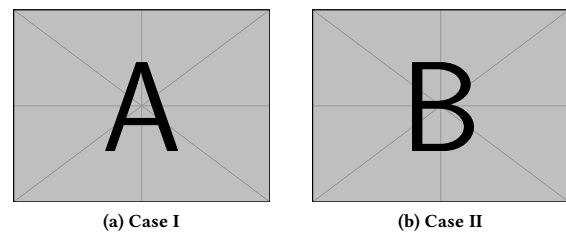


Figure 4: Example figure with two sub figures.

⁵<http://texdoc.net/pkg/pgfplots>




Figure 5: A regular grid generated easily with two for loops.

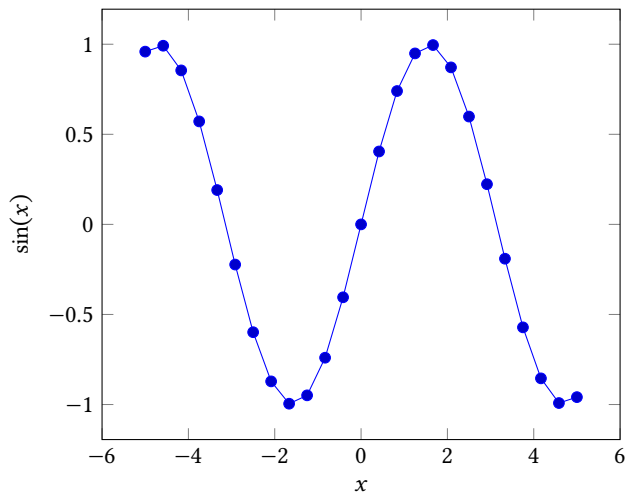


Figure 6: Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

```

784 \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
785 \addplot {sin(deg(x))}; % Plot the sine function
786 \end{axis}
787 \end{tikzpicture}
788 \caption{Plot of  $\sin(x)$  directly inside the figure
    ↪ environment with pgfplots.}
789 \label{fig:pgfplots_example}
790 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

Corresponding $\LaTeX$ code of ./paper.tex

```

794 %\documentclass{article}
795 \begin{figure}[ht]
796 \centering
797 \begin{tikzpicture}
798 \begin{axis}[xlabel=$x$, ylabel=$y$]
799 \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; %
    ↪ Plot explicit coordinates
800 \end{axis}
801 \end{tikzpicture}
802 \caption{Explicit coordinates plotted with pgfplots.}

```

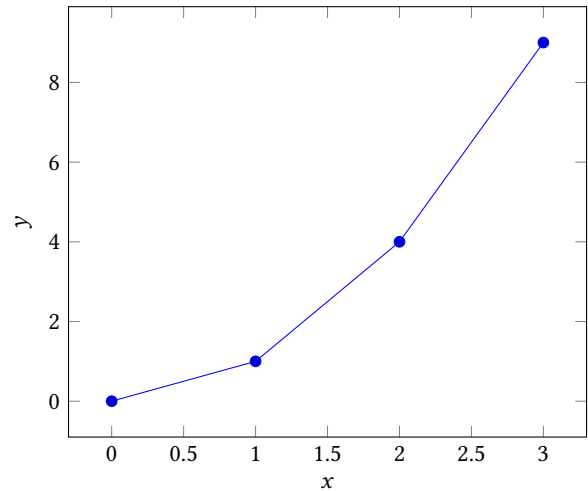


Figure 7: Explicit coordinates plotted with pgfplots.

Table 2: Simple Table

Heading1	Heading2
One	Two
Three	Four

Table 3: Table with diagonal line

	Column	A	B
Row			
1		x	y

3.12 Tables

Corresponding $\LaTeX$ code of ./paper.tex

```

809 %\documentclass{article}
810 \begin{table}
811 \caption{Simple Table}
812 \label{tab:simple}
813 \centering
814 \begin{tabular}{ll}
815 \toprule
816 Heading1 & Heading2 \\
817 \midrule
818 One & Two \\
819 Three & Four \\
820 \bottomrule
821 \end{tabular}
822 \end{table}

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 2: Example XML listing – placed as floating figure**Corresponding L^AT_EX code of ./paper.tex**

```

825 % Adapted from https://tex.stackexchange.com/a
826 % ↪ /468994/9075
827 \begin{table}
828 \caption{Table with diagonal line}
829 \label{tab:diag}
830 \begin{center}
831 \begin{tabular}{|l|c|c|}
832 \hline
833 \diagbox{Row}{Column} & A & B \\
834 \hline
835 & x & y \\
836 \hline
837 \end{tabular}
838 \end{center}
839 \end{table}

```

3.13 Source Code

Listing 1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

Listing 1: Example XML Listing**Corresponding L^AT_EX code of ./paper.tex**

```

845 \Zcref{lst:XML} shows source code written in XML.
846 \Zcref{line:comment} contains a comment.
847
848 \begin{lstlisting}[
849   language=XML,
850   caption={Example XML Listing},
851   label={lst:XML}]
852 <listing name="example">
853   <!-- comment --> (* \label{line:comment} *)
854   <content>not interesting</content>
855 </listing>
856 \end{lstlisting}

```

One can also add float as parameter to have the listing floating. Listing 2 shows the floating listing.

Corresponding L^AT_EX code of ./paper.tex

```

863 \begin{lstlisting}[
864   % one can adjust spacing here if required
865   % aboveskip=2.5\baselineskip,
866   % belowskip=-.8\baselineskip,

```

```

1 {
2   key: "value"
3 }

```

Listing 3: Example JSON listing – placed as floating figure

```

1 public class Hello {
2   public static void main (String[] args) {
3     System.out.println("Hello World!");
4   }
5 }

```

Listing 4: Example Java listing

```

868 float,
869 language=XML,
870 caption={Example XML listing -- placed as floating
871         ↪ figure},
872 label={lst:fXML}]
873 <listing name="example">
874   Floating
875 </listing>
876 \end{lstlisting}

```

One can also typeset JSON as shown in Listing 3.

Corresponding L^AT_EX code of ./paper.tex

```

880 \begin{lstlisting}[
881   float,
882   language=json,
883   caption={Example JSON listing -- placed as floating
884           ↪ figure},
885   label={lst:jjson}]
886 {
887   key: "value"
888 }
889 \end{lstlisting}

```

Java is also possible as shown in Listing 4.

Corresponding L^AT_EX code of ./paper.tex

```

894 \begin{lstlisting}[
895   caption={Example Java listing},
896   label=lst:java,
897   language=Java,
898   float]
899 public class Hello {
900   public static void main (String[] args) {
901     System.out.println("Hello World!");
902   }
903 }
904 \end{lstlisting}

```

3.14 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

912 %\begin{itemize}
913 \begin{itemize}
914 \item Item One
915 \item Item Two
916 \end{itemize}

```

With the package paralist, one can create itemizations with lesser spacing:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

921 %\begin{compactitem}
922 \begin{compactitem}
923 \item Item One
924 \item Item Two
925 \end{compactitem}

```

One can enumerate items as follows:

- (1) Item One
- (2) Item Two

Corresponding L^AT_EX code of ./paper.tex

```

930 %\begin{enumerate}
931 \begin{enumerate}
932 \item Item One
933 \item Item Two
934 \end{enumerate}

```

With the package paralist, one can create enumerations with lesser spacing:

- (1) Item One
- (2) Item Two

Corresponding L^AT_EX code of ./paper.tex

```

939 %\begin{compactenum}
940 \begin{compactenum}
941 \item Item One
942 \item Item Two
943 \end{compactenum}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

- (1) All these items... (2) ...appear in one line (3) This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper.tex

```

948 %\begin{inparaenum}
949 \begin{inparaenum}
950 \item All these items...
951 \item ...appear in one line
952 \item This is enabled by the paralist package.
953 \end{inparaenum}

```

3.15 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper.tex

```

958 %\enquote{workflow} and \enquote{dwarflike} can
959 \enquote{workflow} and \enquote{dwarflike} can
    ↳ be copied from the PDF and pasted to a text
    ↳ file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper.tex

```

962 %\powerset is now correct: $\powerset$ and
963 \powerset is now correct: $\powerset$ and
    ↳ not a Weierstrass p ($\wp$).
964
965 $\powerset(\{1, 2, 3\})$

```

Brackets work as designed: <test> One can also input backticks in verbatim text: `test`.

Corresponding L^AT_EX code of ./paper.tex

```

968 %\brackets work as designed:
969 \brackets work as designed:
970 <test>
971 One can also input backticks in verbatim text: \verb|`
    ↳ test`|.

```

Acronyms can be typeset in running text with \initialism, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (\gls, with an automatic list of abbreviations) provided by the thesis variants: \initialism only typesets the acronym and does not add it to any list. The macro and the ready-made acronyms (\OMG, \BPEL, \BPMN, \UML) are defined in commands.tex, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L^AT_EX code of ./paper.tex

```

976 %\UML is maintained by the \OMG; related standards
977 \UML is maintained by the \OMG; related standards
    ↳ include \BPEL and \BPMN.
978 Any acronym can be set inline with \initialism{REST} or
    ↳ \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur

id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments

Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which comes right before the reference section in your document [4].

For more $\LaTeX$ hints for ACM read on at <https://www.acm.org/publications/taps/latex-best-practices>.

References

- [1] Tobias Binz, Gerd Breiter, Frank Leymann, and Thomas Spatzier. 2012. Portable Cloud Services Using TOSCA. *IEEE Internet Computing* 16, 03 (May 2012), 80–85. doi:10.1109/mic.2012.43
- [2] Oliver Kopp et al. 2013. Winery – A Modeling Tool for TOSCA-based Cloud Applications. In *Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13) (LNCS, Vol. 8274)*. Springer Berlin Heidelberg, 700–704. doi:10.1007/978-3-642-45005-1_64
- [3] Martin Scharrer. 2017. *The mwe Package*. <http://texdoc.net/mwe>
- [4] Boris Veytsman. 2021. LaTeX Class for the Association for Computing Machinery – Acknowledgement Information. Retrieved September 17, 2021 from <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.