

# Paper Title

First Author

Department

Institution

City, Country

first.last@example.com

## Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### ACM Reference Format:

First Author. 2026. Paper Title. In *Proceedings of full-conference-name (short-conference-name)*. ACM, New York, NY, USA, 7 pages. <https://doi.org/10.1145/9999997.9999999>

## 1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultrices et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

*short-conference-name, City, Country*

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YYYY/MM

<https://doi.org/10.1145/9999997.9999999>

parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa. TODO!

The remainder of the paper starts with a presentation of related work (Section 2). It is followed by a presentation of hints on  $\text{\LaTeX}$  (Section 3). Finally, a conclusion is drawn and outlook on future work is made (Section 4).

## 2 Related Work

Winery [2] is a graphical **modeling** tool. The whole idea of TOSCA is explained by Binz et al. [1].

To search for related work, ScienceOS<sup>1</sup> can be used; it stores data in the EU and backs its answers with citations, which you still have to read and check yourself. Writing hints for student theses are given in the open-access book *Student Thesis Projects*<sup>2</sup>. More hints are given in *Writing for Computer Science*<sup>3</sup>.

## 3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

### 3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\\`).

This is rarely used.

<sup>1</sup><https://www.scienceos.ai/>

<sup>2</sup><https://vdf.ch/product/student-thesis-projects-en.html>

<sup>3</sup><https://doi.org/10.1007/978-1-4471-6639-9>

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

499 One sentence per line.
500 This rule is important for the usage of version
    ↳ control systems.
501 A new line is generated with a blank line.
502 As you would do in Word:
503 New paragraphs are generated by pressing enter.
504 In LaTeX, this does not lead to a new paragraph as
    ↳ LaTeX joins subsequent lines.
505 To start a new paragraph, press enter twice.
506 This leads to an empty line.
507 In word, there is the functionality to press shift
    ↳ and enter.
508 This leads to a hard line break.
509 The text starts at the beginning of a new line.
510 In LaTeX, you can do that by using two backslashes
    ↳ (\textbackslash\textbackslash).
511 \\
512 This is rarely used.
513
514 Please do \textit{not} use two backslashes for new
    ↳ paragraphs.
515 For instance, this sentence belongs to the same
    ↳ paragraph, whereas the last one started a new
    ↳ one.
516 A long motivation for that is provided at
    ↳ \url{http://loopspace.mathforge.org/}
    ↳ HowDidIDoThat/TeX/VCS/#section.3}.

```

### 3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

---

This is a small note.

---

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

524 \begin{mindflow}
525 This is a small note.
526 \end{mindflow}

```

### 3.3 Handling TODOs

Marked text.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

532 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

538 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

542 \modified{Manual marking for text that has been
    ↳ changed since the last version.}

```

This is some text. Changed text.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

546 This is some text.
547 \change{FL1: text adjusted}{Changed text}.

```

Here is a comment.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

551 Here is a comment\sidecomment{Comment}.

```

TODO!

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

555 \todo{A lot of text still needs to be produced here}

```

### 3.4 Hyphenation

$\LaTeX$  automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{}tion-specific` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application"=specific` gets `application"=specific`. This is enabled by an additional configuration of the babel package.

#### Corresponding $\LaTeX$ code of ./paper-minted.tex

```

566 In case you write \enquote{application-specific},
    ↳ then the word will only be hyphenated at the
    ↳ dash.
567 You can also write
    ↳ \verb!applica\allowbreak{}tion-specific! (result:
    ↳ applica\allowbreak{}tion-specific), but this is
    ↳ much more effort.
568
569 You can now write words containing hyphens which are
    ↳ hyphenated at other places in the word.
570 For instance, \verb!application"=specific! gets
    ↳ application"=specific.
571 This is enabled by an additional configuration of the
    ↳ babel package.

```

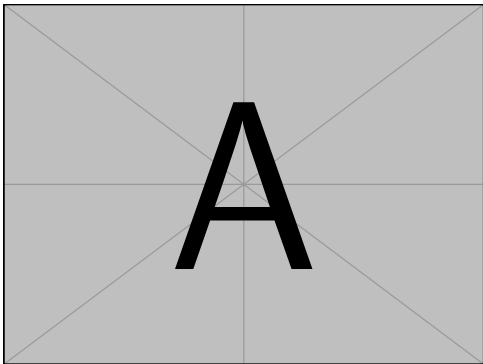


Figure 1: Example figure for zceref demo

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows:  $100 \frac{\text{km}}{\text{h}}$ , or by using plain  $\LaTeX$  (and math mode):  $100 \frac{\text{km}}{\text{h}}$ .

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
577 Numbers can be written plain text (such as 100), by
    ↳ using the
    ↳ \href{https://ctan.org/pkg/siunitx}{siunitx}
    ↳ package as follows:
578 \SI{100}{\km\per\hour},
579 or by using plain \LaTeX{} (and math mode):
580 $100 \frac{\mathit{km}}{h}$.
```

5 % of 10 kg

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
584 \SI{5}{\percent} of \SI{10}{kg}
```

Numbers are automatically grouped: 123 456.

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
588 Numbers are automatically grouped: \num{123456}.
```

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
594 Please use the \enquote{enquote command} to quote
    ↳ something.
595 Quoting with “quote” or “quote” also works.
596
```

3.7 Zref-clever examples

zref-clever demonstration: Zcref (short for zceref[S]) at beginning of sentence, zceref in all other cases.

| Heading1 | Heading2 |
|----------|----------|
| One      | Two      |
| Three    | Four     |

Table 1: Example table for zceref demo



Figure 2: Simple Figure. Based on Scharrer [3].

Figure 1 shows a simple fact, although Figure 1 could also show something else.

Table 1 shows a simple fact, although Table 1 could also show something else.

Section 3.7 shows a simple fact, although Section 3.7 could also show something else.

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
626 \Zceref{fig:ex:cref} shows a simple fact, although
    ↳ \zceref{fig:ex:cref} could also show something
    ↳ else.
627
628 \Zceref{tab:ex:cref} shows a simple fact, although
    ↳ \zceref{tab:ex:cref} could also show something
    ↳ else.
629
630 \Zceref{sec:ex:cref} shows a simple fact, although
    ↳ \zceref{sec:ex:cref} could also show something
    ↳ else.
```

3.8 Figures

Figure 2 shows something interesting.

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
636 \Zceref{fig:label} shows something interesting.
637
638 \begin{figure}
639   \centering
640   \includegraphics[width=.8\linewidth]{example-
    ↳ image-golden}
641   \caption[Simple Figure]{
642     Simple Figure.
643     Based on \citet{mwe}.
644   }
645   \label{fig:label}
646 \end{figure}
```

Photos in JPEG or PNG format are included the same way, as shown in Figure 3.



**Figure 3: Ulm Minster. Photo: wkrauth, CC0, via Wikimedia Commons.**

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

652 \begin{figure}
653 \centering
654 \includegraphics[width=.5\linewidth]{figures/ulm-}
655 \caption{Ulm Minster. Photo: wkrauth, CC0, via
656 \label{fig:jpg}
657 \end{figure}

```

### 3.9 Sub Figures


An example of two sub figures is shown in Figure 4.

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex


```

665 \begin{figure}[!b]
666 \centering
667 \subfloat[Case I]{\includegraphics[width=.4]
    ↪ \linewidth]{example-image-a}%
668 \label{fig:first_case}}
669 \hfil
670 \subfloat[Case II]{\includegraphics[width=.4]
    ↪ \linewidth]{example-image-b}%
671 \label{fig:second_case}}
672 \caption{Example figure with two sub figures.}
673 \label{fig:two_sub_figures}
674 \end{figure}

```



(a) Case I




**(b) Case II**

**Figure 4: Example figure with two sub figures.**

### 3.10 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.



**Figure 5: A regular grid generated easily with two for loops.**

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex


```

683 \begin{figure}[ht]
684 \centering
685 \begin{tikzpicture}
686 \draw(0,0) rectangle (4,4);
687 \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
688 \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
689 \draw(\x,\y) circle (1pt);
690 \end{tikzpicture}
691 \caption{A regular grid generated easily with two
692 ↪ for loops.}\label{fig:tikz_example}
693 \end{figure}

```

### 3.11 Plots with pgfplots

The `pgfplots` package plots functions directly in  $\text{\LaTeX}$ , similar to `MATLAB` or `gnuplot`. Some visual examples are available in the package documentation<sup>4</sup>.

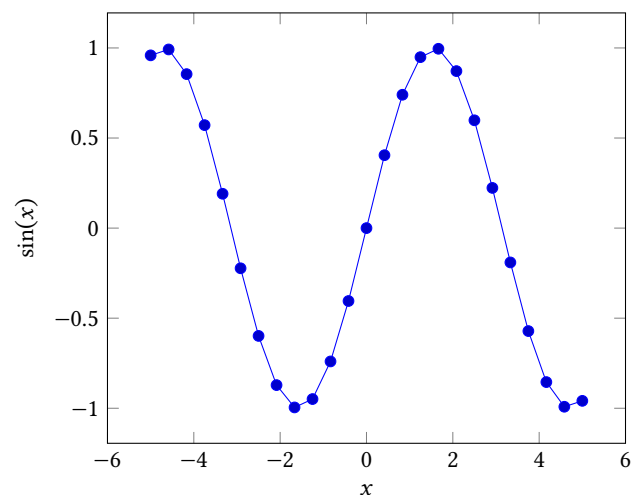

**Figure 6: Plot of  $\sin(x)$  directly inside the figure environment with pgfplots.**

<sup>4</sup><http://texdoc.net/pkg/pgfplots>

Table 2: Simple Table

| Heading1 | Heading2 |
|----------|----------|
| One      | Two      |
| Three    | Four     |

Table 3: Table with diagonal line

| Diag<br>Column Head I | Diag Column<br>Head II | Second | Third |
|-----------------------|------------------------|--------|-------|
|                       |                        | foo    | bar   |

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
701 \begin{figure}[ht]
702 \centering
703 \begin{tikzpicture}
704 \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
705 \addplot {sin(deg(x))}; % Plot the sine
706 \end{axis}
707 \end{tikzpicture}
708 \caption{Plot of  $\sin(x)$  directly inside the
709 \quad \hookrightarrow figure environment with pgfplots.}
710 \label{fig:pgfplots_example}
711 \end{figure}
```

Coordinates can also be given explicitly instead of as a function:

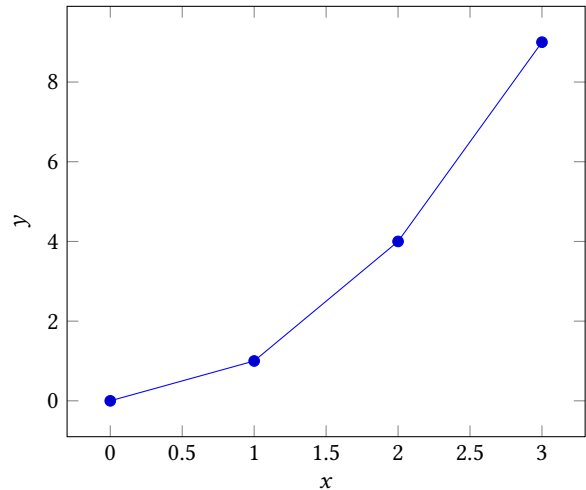


Figure 7: Explicit coordinates plotted with pgfplots.

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
715 \begin{figure}[ht]
716 \centering
717 \begin{tikzpicture}
718 \begin{axis}[xlabel=$x$, ylabel=$y$]
719 \addplot coordinates {(0,0) (1,1) (2,4) (3,9)};
720 \end{axis}
721 \end{tikzpicture}
722 \caption{Explicit coordinates plotted with
723 \quad \hookrightarrow pgfplots.}
724 \label{fig:pgfplots_coords}
725 \end{figure}
```

3.12 Tables

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
730 \begin{table}
731 \caption{Simple Table}
732 \label{tab:simple}
733 \centering
734 \begin{tabular}{ll}
735 \toprule
736 Heading1 & Heading2 \\
737 \midrule
738 One & Two \\
739 Three & Four \\
740 \bottomrule
741 \end{tabular}
742 \end{table}
```

Corresponding  $\LaTeX$  code of ./paper-minted.tex

```
746 % Source: https://tex.stackexchange.com/a/468994/9075
747 \begin{table}
748 \caption{Table with diagonal line}
749 \label{tab:diag}
750 \begin{center}
751 \begin{tabular}{|l|c|c|}
752 \hline
753 \diagbox[width=10em]{Diag \Column Head I}{Diag
754 \quad \hookrightarrow Column\Head II} & Second & Third \\
755 \hline
756 \\
757 \end{tabular}
758 \end{center}
759 \end{table}
```

3.13 Source Code

minted is a sophisticated package to enable properly highlighted listings. It uses the pygments library, which in turn requires Python. Listing 1 shows source code written in XML. line 2 contains a comment.

```
1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>
```

List. 1: Example XML listing using minted

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

769 \Zcref{lst:XML} shows source code written in XML.
770 \refline{line:comment} contains a comment.
771
772 \begin{listing}[htbp]
773   \begin{minted}[linenos=true,escapeinside=||]{xml}
774   <listing name="example">
775     <!-- comment --> |\label{line:comment}|
776     <content>not interesting</content>
777   </listing>
778   \end{minted}
779   \caption{Example XML listing using minted}
780   \label{lst:XML}
781 \end{listing}

```

One can also typeset JSON as shown in Listing 2.

```

1 {
2   key: "value"
3 }

```

**List. 2: Example JSON listing using minted**

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

787 \begin{listing}[htbp]
788   \begin{minted}[linenos=true,escapeinside=||]{json}
789   {
790     key: "value"
791   }
792   \end{minted}
793   \caption{Example JSON listing using minted}
794   \label{lst:f1JSON}
795 \end{listing}

```

Java is also possible as shown in Listing 3.

```

1 public class Hello {
2   public static void main (String[] args) {
3     System.out.println("Hello World!");
4   }
5 }

```

**List. 3: Java code rendered using minted**

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

801 \begin{listing}[htbp]
802   \begin{minted}[linenos=true,escapeinside=||]{java}
803   public class Hello {
804     public static void main (String[] args) {
805       System.out.println("Hello World!");
806     }
807   }
808   \end{minted}
809   \caption{Java code rendered using minted}
810   \label{lst:f1Java}
811 \end{listing}

```

### 3.14 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

819 \begin{itemize}
820   \item Item One
821   \item Item Two
822 \end{itemize}

```

With the package paralist, one can create itemizations with lesser spacing:

- Item One
- Item Two

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

828 \begin{compactitem}
829   \item Item One
830   \item Item Two
831 \end{compactitem}

```

One can enumerate items as follows:

- (1) Item One
- (2) Item Two

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

837 \begin{enumerate}
838   \item Item One
839   \item Item Two
840 \end{enumerate}

```

With the package paralist, one can create enumerations with lesser spacing:

- (1) Item One
- (2) Item Two

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

846 \begin{compactenum}
847   \item Item One
848   \item Item Two
849 \end{compactenum}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

(1) All these items... (2) ...appear in one line (3) This is enabled by the paralist package.

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```

855 \begin{inparaenum}
856   \item All these items...
857   \item ...appear in one line
858   \item This is enabled by the paralist package.
859 \end{inparaenum}

```

### 3.15 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```
865 The words \enquote{workflow} and \enquote{dwarflike}
    ↪ can be copied from the PDF and pasted to a text
    ↪ file.
```

The symbol for powerset is now correct:  $\wp$  and not a Weierstrass p ( $\wp$ ).

$\wp(1, 2, 3)$

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```
869 The symbol for powerset is now correct:  $\wpowerset$ 
    ↪ and not a Weierstrass p ( $\wp$ ).
870
871  $\wpowerset(\{1, 2, 3\})$ 
```

Brackets work as designed: `<test>` One can also input backticks in verbatim text: ``test``.

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```
875 Brackets work as designed:
876 <test>
877 One can also input backticks in verbatim text:
    ↪ \verb|`test`|.
```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in commands.tex, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L<sup>A</sup>T<sub>E</sub>X code of ./paper-minted.tex

```
883 The \UML is maintained by the \OMG; related standards
    ↪ include \BPEL and \BPMN.
884 Any acronym can be set inline with \initialism{REST}
    ↪ or \initialism{HTTP}.
```

## 4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## Acknowledgments

Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

For more L<sup>A</sup>T<sub>E</sub>X hints for ACM read on at <https://www.acm.org/publications/taps/latex-best-practices>.

## References

- [1] Tobias Binz, Gerd Breiter, Frank Leymann, and Thomas Spatzier. 2012. Portable Cloud Services Using TOSCA. *IEEE Internet Computing* 16, 03 (May 2012), 80–85. doi:10.1109/mic.2012.43
- [2] Oliver Kopp et al. 2013. Winery – A Modeling Tool for TOSCA-based Cloud Applications. In *Proceedings of 11<sup>th</sup> International Conference on Service-Oriented Computing (ICSOC'13) (LNCS, Vol. 8274)*. Springer Berlin Heidelberg, 700–704. doi:10.1007/978-3-642-45005-1\_64
- [3] Martin Scharrer. 2017. *The mwe Package*. <http://texdoc.net/mwe>
- [4] Boris Veytsman. 2021. LaTeX Class for the Association for Computing Machinery – Acknowledgement Information. Retrieved September 17, 2021 from <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.