

Paper Title

First Author

Department

Institution

City, Country

first.last@example.com

Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

ACM Reference Format:

First Author. 2026. Paper Title. In *Proceedings of full-conference-name (short-conference-name)*. ACM, New York, NY, USA, 9 pages. <https://doi.org/10.1145/9999997.9999999>

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultrices et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

short-conference-name, City, Country

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YYYY/MM

<https://doi.org/10.1145/9999997.9999999>

parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa. **TODO!**

The remainder of the paper starts with a presentation of related work (Section 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Section 3). Finally, a conclusion is drawn and outlook on future work is made (Section 4).

2 Related Work

Winery [2] is a graphical **modeling** tool. The whole idea of TOSCA is explained by Binz et al. [1].

To search for related work, ScienceOS¹ can be used; it stores data in the EU and backs its answers with citations, which you still have to read and check yourself. Writing hints for student theses are given in the open-access book *Student Thesis Projects*². More hints are given in *Writing for Computer Science*³.

3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\`).

This is rarely used.

¹<https://www.scienceos.ai/>

²<https://vdf.ch/product/student-thesis-projects-en.html>

³<https://doi.org/10.1007/978-1-4471-6639-9>

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding $\LaTeX$ code of ./paper.tex

```

576 %U0000
577 One sentence per line.
578 This rule is important for the usage of version control
    ↳ systems.
579 A new line is generated with a blank line.
580 As you would do in Word:
581 New paragraphs are generated by pressing enter.
582 In LaTeX, this does not lead to a new paragraph as LaTeX
    ↳ joins subsequent lines.
583 To start a new paragraph, press enter twice.
584 This leads to an empty line.
585 In word, there is the functionality to press shift and
    ↳ enter.
586 This leads to a hard line break.
587 The text starts at the beginning of a new line.
588 In LaTeX, you can do that by using two backslashes (\
    ↳ \textbackslash\textbackslash).
589 \\
590 This is rarely used.
591
592 Please do \textit{not} use two backslashes for new
    ↳ paragraphs.
593 For instance, this sentence belongs to the same
    ↳ paragraph, whereas the last one started a new
    ↳ one.
594 A long motivation for that is provided at \url{http://
    ↳ loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#
    ↳ section.3}.
```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding $\LaTeX$ code of ./paper.tex

```

601 %U0000
602 \begin{mindflow}
603 This is a small note.
604 \end{mindflow}
```

3.3 Handling TODOs

Marked text.

Corresponding $\LaTeX$ code of ./paper.tex

```

609 %U0000
610 \textmarker{Marked text.}
```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding $\LaTeX$ code of ./paper.tex

```

615 %U0000
616 \textcomment{Marked text.}{A comment on it.}
```

Manual marking for text that has been changed since the last version.

Corresponding $\LaTeX$ code of ./paper.tex

```

619 %U0000
620 \modified{Manual marking for text that has been changed
    ↳ since the last version.}
```

This is some text. Changed text.

Corresponding $\LaTeX$ code of ./paper.tex

```

623 %U0000
624 This is some text.
625 \change{FL1: text adjusted}{Changed text}.
```

Here is a comment.

Corresponding $\LaTeX$ code of ./paper.tex

```

628 %U0000
629 Here is a comment\sidecomment{Comment}.
```

TODO!

Corresponding $\LaTeX$ code of ./paper.tex

```

632 %U0000
633 \todo{A lot of text still needs to be produced here}
```

3.4 Hyphenation

$\LaTeX$ automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `aplica\allowbreak{}tion-specific` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application="specific` gets `application="specific`. This is enabled by an additional configuration of the babel package.

Corresponding $\LaTeX$ code of ./paper.tex

```
643 %\documentclass{article}
644 In case you write \enquote{application-specific}, then
645   ↳ the word will only be hyphenated at the dash.
646 You can also write \verb!applica\allowbreak!tion-
647   ↳ specific1 (result: applica\allowbreak!tion-
648   ↳ specific), but this is much more effort.
649 You can now write words containing hyphens which are
650   ↳ hyphenated at other places in the word.
651 For instance, \verb!application"=specific1 gets
652   ↳ application"=specific.
653 This is enabled by an additional configuration of the
654   ↳ babel package.
```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: 100 $\frac{\text{km}}{\text{h}}$, or by using plain $\LaTeX$ (and math mode): 100 $\frac{\text{km}}{\text{h}}$.

Corresponding $\LaTeX$ code of ./paper.tex

```
654 %\documentclass{article}
655 Numbers can be written plain text (such as 100), by
656   ↳ using the \href{https://ctan.org/pkg/siunitx}{
657   ↳ siunitx} package as follows:
658 \SI{100}{\km\per\hour},
659 or by using plain \LaTeX{} (and math mode):
660 $100 \frac{\mathit{km}}{h}$.
```

5 % of 10 kg

Corresponding $\LaTeX$ code of ./paper.tex

```
661 %\documentclass{article}
662 \SI{5}{\percent} of \SI{10}{kg}
```

Numbers are automatically grouped: 123 456.

Corresponding $\LaTeX$ code of ./paper.tex

```
665 %\documentclass{article}
666 Numbers are automatically grouped: \num{123456}.
```

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding $\LaTeX$ code of ./paper.tex

```
671 %\documentclass{article}
672 Please use the \enquote{enquote command} to quote
673   ↳ something.
674 Quoting with “quote” or “quote” also works.
```

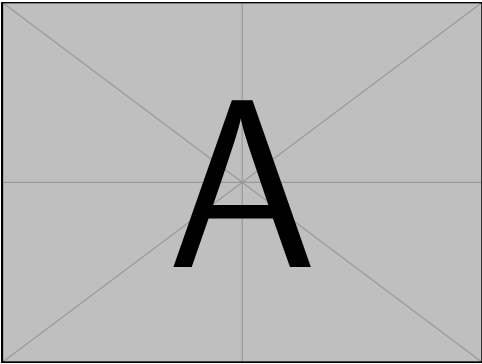


Figure 1: Example figure for zcref demo

Heading1	Heading2
One	Two
Three	Four

Table 1: Example table for zcref demo

3.7 Zref-clever examples

zref-clever demonstration: Zcref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

Figure 1 shows a simple fact, although Figure 1 could also show something else.

Table 1 shows a simple fact, although Table 1 could also show something else.

Section 3.7 shows a simple fact, although Section 3.7 could also show something else.

Corresponding $\LaTeX$ code of ./paper.tex

```
703 %\documentclass{article}
704 \Zcref{fig:ex:cref} shows a simple fact, although \zcref
705   ↳ {fig:ex:cref} could also show something else.
706 \Zcref{tab:ex:cref} shows a simple fact, although \zcref
707   ↳ {tab:ex:cref} could also show something else.
708 \Zcref{sec:ex:cref} shows a simple fact, although \zcref
709   ↳ {sec:ex:cref} could also show something else.
```

3.8 Figures

Figure 2 shows something interesting.

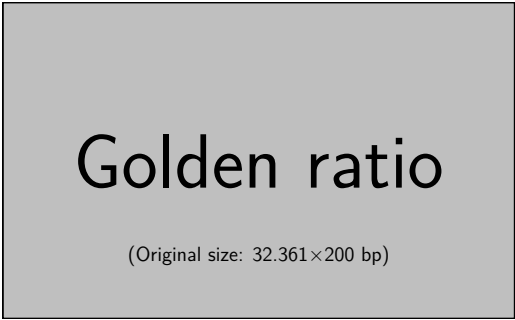


Figure 2: Simple Figure. Based on Scharrer [3].



Figure 3: Ulm Minster. Photo: wkrauth, CC0, via Wikimedia Commons.

Corresponding $\text{\LaTeX}$ code of ./paper.tex

```
729 %\begin{figure}
730 \begin{figure}
731 \centering
732 \includegraphics[width=.5\linewidth]{figures/ulm-
    ↳ minster.jpg}
733 \caption{Ulm Minster. Photo: wkrauth, CC0, via
    ↳ Wikimedia Commons.}
734 \label{fig:jpg}
735 \end{figure}
```

3.9 Sub Figures

An example of two sub figures is shown in Figure 4.

Corresponding $\text{\LaTeX}$ code of ./paper.tex

```
742 %\begin{figure}
743 \begin{figure}[!b]
744 \centering
745 \subfloat[Case I]{\includegraphics[width=.4\linewidth
    ↳ ]{example-image-a}%
746 \label{fig:first_case}}
747 \hfil
748 \subfloat[Case II]{\includegraphics[width=.4\linewidth
    ↳ ]{example-image-b}%
749 \label{fig:second_case}}
750 \caption{Example figure with two sub figures.}
751 \label{fig:two_sub_figures}
752 \end{figure}
```

3.10 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.

Corresponding $\text{\LaTeX}$ code of ./paper.tex

```
713 %\begin{figure}
714 \Zceref{fig:label} shows something interesting.
715
716 \begin{figure}
717 \centering
718 \includegraphics[width=.8\linewidth]{example-image-
    ↳ golden}
719 \caption[Simple Figure]{
720 Simple Figure.
721 Based on \cit{mwe}.
722 }
723 \label{fig:label}
724 \end{figure}
```

Photos in JPEG or PNG format are included the same way, as shown in Figure 3.

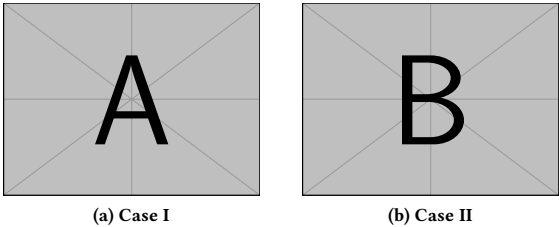


Figure 4: Example figure with two sub figures.




Figure 5: A regular grid generated easily with two for loops.

Corresponding $\LaTeX$ code of ./paper.tex

```

760 \begin{figure}[ht]
761   \centering
762   \begin{tikzpicture}
763     \draw(0,0) rectangle (4,4);
764     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
765       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
766         \draw(\x,\y) circle (1pt);
767   \end{tikzpicture}
768   \caption{A regular grid generated easily with two for
769     \loop loops.} \label{fig:tikz_example}
770 \end{figure}

```

3.11 Plots with pgfplots

The pgfplots package plots functions directly in $\LaTeX$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation⁴.

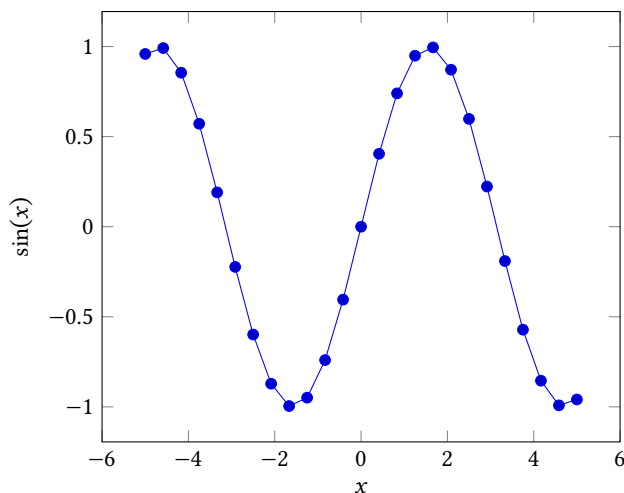


Figure 6: Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

⁴<http://texdoc.net/pkg/pgfplots>

Corresponding $\LaTeX$ code of ./paper.tex

```

778 \begin{figure}[ht]
779   \centering
780   \begin{tikzpicture}
781     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
782       \addplot {\sin(deg(x))}; % Plot the sine function
783     \end{axis}
784   \end{tikzpicture}
785   \caption{Plot of $\sin(x)$ directly inside the figure
786     \loop environment with pgfplots.}
787   \label{fig:pgfplots_example}
788 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

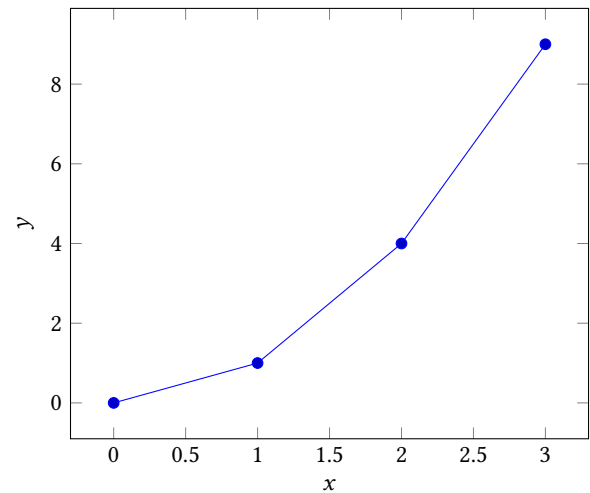


Figure 7: Explicit coordinates plotted with pgfplots.

Corresponding $\LaTeX$ code of ./paper.tex

```

792 \begin{figure}[ht]
793   \centering
794   \begin{tikzpicture}
795     \begin{axis}[xlabel=$x$, ylabel=$y$]
796       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; %
797       \loop Plot explicit coordinates
798     \end{axis}
799   \end{tikzpicture}
800   \caption{Explicit coordinates plotted with pgfplots.}
801   \label{fig:pgfplots_coors}
802 \end{figure}

```

Table 2: Simple Table

Heading1	Heading2
One	Two
Three	Four

Table 3: Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper.tex

```

823 % Source: https://tex.stackexchange.com/a/468994/9075
824 \begin{table}
825   \caption{Table with diagonal line}
826   \label{tab:diag}
827   \begin{center}
828     \begin{tabular}{|l|c|c|}
829       \hline
830       \diagbox[width=10em]{Diag \Column Head I}{Diag
831         \hookrightarrow Column\Head II} & Second & Third \\
832       \hline
833
834       \hline
835     \end{tabular}
836   \end{center}
837 \end{table}

```

&

3.13 Source Code

Listing 1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

Listing 1: Example XML Listing

3.12 Tables

Corresponding L^AT_EX code of ./paper.tex

```

807 % Source: https://tex.stackexchange.com/a/468994/9075
808 \begin{table}
809   \caption{Simple Table}
810   \label{tab:simple}
811   \centering
812   \begin{tabular}{|l|}
813     \toprule
814     Heading1 & Heading2 \\
815     \midrule
816     One      & Two      \\
817     Three   & Four     \\
818     \bottomrule
819   \end{tabular}
820 \end{table}

```

Corresponding L^AT_EX code of ./paper.tex

```

843 % Source: https://tex.stackexchange.com/a/468994/9075
844 \Zcref{lst:XML} shows source code written in XML.
845 \Zcref{line:comment} contains a comment.
846
847 \begin{lstlisting}[
848   language=XML,
849   caption={Example XML Listing},
850   label={lst:XML}]
851 <listing name="example">
852   <!-- comment --> (* \label{line:comment} *)
853   <content>not interesting</content>
854 </listing>
855 \end{lstlisting}

```

One can also add `float` as parameter to have the listing floating. Listing 2 shows the floating listing.

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 2: Example XML listing – placed as floating figure

```

1 {
2   key: "value"
3 }

```

Listing 3: Example JSON listing – placed as floating figure

```

1 public class Hello {
2   public static void main (String[] args) {
3     System.out.println("Hello World!");
4   }
5 }

```

Listing 4: Example Java listing**Corresponding L^AT_EX code of ./paper.tex**

```

861 %\begin{figure}
862 \begin{lstlisting}[
863   % one can adjust spacing here if required
864   % aboveskip=2.5\baselineskip,
865   % belowskip=-.8\baselineskip,
866   float,
867   language=XML,
868   caption={Example XML listing -- placed as floating
869     ↳ figure},
869   label={lst:fXML}]
870 <listing name="example">
871   Floating
872 </listing>
873 \end{lstlisting}

```

One can also typeset JSON as shown in Listing 3.

Corresponding L^AT_EX code of ./paper.tex

```

878 %\begin{figure}
879 \begin{lstlisting}[
880   float,
881   language=json,
882   caption={Example JSON listing -- placed as floating
883     ↳ figure},
883   label={lst:json}]
884 {
885   key: "value"
886 }
887 \end{lstlisting}

```

Java is also possible as shown in Listing 4.

Corresponding L^AT_EX code of ./paper.tex

```

892 %\begin{figure}
893 \begin{lstlisting}[
894   caption={Example Java listing},
895   label=lst:java,
896   language=Java,
897   float]
898 public class Hello {
899   public static void main (String[] args) {
900     System.out.println("Hello World!");
901   }
902 }
903 \end{lstlisting}

```

3.14 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

910 %\begin{figure}
911 \begin{itemize}
912   \item Item One
913   \item Item Two
914 \end{itemize}

```

With the package paralist, one can create itemizations with lesser spacing:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

919 %\begin{figure}
920 \begin{compactitem}
921   \item Item One
922   \item Item Two
923 \end{compactitem}

```

One can enumerate items as follows:

- (1) Item One
- (2) Item Two

Corresponding L^AT_EX code of ./paper.tex

```

928 %\begin{figure}
929 \begin{enumerate}
930   \item Item One
931   \item Item Two
932 \end{enumerate}

```

With the package paralist, one can create enumerations with lesser spacing:

- (1) Item One
- (2) Item Two

Corresponding L^AT_EX code of ./paper.tex

```

937 \begin{compactenum}
938 \item Item One
939 \item Item Two
940 \end{compactenum}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

(1) All these items... (2) ...appear in one line (3) This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper.tex

```

946 \begin{inparaenum}
947 \item All these items...
948 \item ...appear in one line
949 \item This is enabled by the paralist package.
950 \end{inparaenum}

```

3.15 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper.tex

```

956 The words \enquote{workflow} and \enquote{dwarflike} can
957 be copied from the PDF and pasted to a text
958 file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper.tex

```

960 The symbol for powerset is now correct:  $\wp$  and
961 not a Weierstrass p ( $\wp$ ).
962  $\wp(1, 2, 3)$ 

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper.tex

```

966 Brackets work as designed:
967 <test>
968 One can also input backticks in verbatim text: \verb|`
969 test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and

glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in commands.tex, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L^AT_EX code of ./paper.tex

```

974 The \UML is maintained by the \OMG; related standards
975 include \BPEL and \BPMN.
976 Any acronym can be set inline with \initialism{REST} or
977 \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments

Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

For more L^AT_EX hints for ACM read on at <https://www.acm.org/publications/taps/latex-best-practices>.

References

- [1] Tobias Binz, Gerd Breiter, Frank Leymann, and Thomas Spatzier. 2012. Portable Cloud Services Using TOSCA. *IEEE Internet Computing* 16, 03 (May 2012), 80–85. doi:10.1109/mic.2012.43
- [2] Oliver Kopp et al. 2013. Winery – A Modeling Tool for TOSCA-based Cloud Applications. In *Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13) (LNCS, Vol. 8274)*. Springer Berlin Heidelberg, 700–704. doi:10.1007/978-3-642-45005-1_64
- [3] Martin Scharrer. 2017. *The mwe Package*. <http://texdoc.net/mwe>

- [4] Boris Veytsman. 2021. LaTeX Class for the Association for Computing Machinery – Acknowledgement Information. Retrieved September 17, 2021 from <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.