

Quick start for LaTeXing with IEEEtran.cls for IEEE Computer Society Conferences

First Author, Second Author
University of Examples, Germany
{lastname}@example.org

Third Author
School of Electrical and
Computer Examples
Georgia Institute of Examples
Atlanta, Georgia 30332-0250
<http://www.example.org>

Abstract—Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

I. INTRODUCTION

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus enim. Vestibulum pellentesque felis eu massa. TODO!

The remainder of the paper starts with a presentation of related work (Section II). It is followed by a presentation of hints on LaTeX (Section III). Finally, a conclusion is drawn and outlook on future work is made (Section IV).

II. RELATED WORK

Winery [1] is a graphical modeling tool. The whole idea of TOSCA is explained by Binz et al. [2].

III. LATEX HINTS

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

A. Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\\`). This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper.tex

```
634 %EÜÜÖ
635 One sentence per line.
636 This rule is important for the usage of version
    ↳ control systems.
637 A new line is generated with a blank line.
638 As you would do in Word:
639 New paragraphs are generated by pressing enter.
640 In LaTeX, this does not lead to a new paragraph
    ↳ as LaTeX joins subsequent lines.
641 To start a new paragraph, press enter twice.
642 This leads to an empty line.
643 In word, there is the functionality to press
    ↳ shift and enter.
644 This leads to a hard line break.
645 The text starts at the beginning of a new line.
646 In LaTeX, you can do that by using two
    ↳ backslashes
    ↳ (\textbackslash\textbackslash).
647 \\
648 This is rarely used.
649
650 Please do \textit{not} use two backslashes for
    ↳ new paragraphs.
651 For instance, this sentence belongs to the same
    ↳ paragraph, whereas the last one started
    ↳ a new one.
652 A long motivation for that is provided at
    ↳ \url{http://loopspace.mathforge.org/HowDidIDoThat/}
```

B. Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper.tex

```
659 %EÜÜÖ
660 \begin{mindflow}
661 This is a small note.
662 \end{mindflow}
```

C. Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```
667 %EÜÜÖ
668 \textmarker{Marked text.}
```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```
673 %EÜÜÖ
674 \textcomment{Marked text.}{A comment on it.}
```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper.tex

```
677 %EÜÜÖ
678 \modified{Manual marking for text that has been
    ↳ changed since the last version.}
```

This is some text. **Changed text.**

Corresponding L^AT_EX code of ./paper.tex

```
681 %EÜÜÖ
682 This is some text.
683 \change{FL1: text adjusted}{Changed text}.
```

Here is a comment.

Corresponding L^AT_EX code of ./paper.tex

```
686 %EÜÜÖ
687 Here is a comment\sidecomment{Comment}.
```

TODO!

Corresponding L^AT_EX code of ./paper.tex

```
690 %EÜÜÖ
691 \todo{A lot of text still needs to be produced
    ↳ here}
```

D. Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{tion-specific}` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application=specific` gets application=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper.tex

```

701 æÉüŦóŦ
702 In case you write
      ↳ \enquote{application-specific}, then the
      ↳ word will only be hyphenated at the dash.
703 You can also write
      ↳ \verb!applica\allowbreak{tion-specific!
      ↳ (result:
      ↳ applica\allowbreak{tion-specific), but
      ↳ this is much more effort.
704
705 You can now write words containing hyphens which
      ↳ are hyphenated at other places in the
      ↳ word.
706 For instance, \verb!application"=specific! gets
      ↳ application"=specific.
707 This is enabled by an additional configuration
      ↳ of the babel package.

```

E. Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{\text{km}}{\text{h}}$.

Corresponding L^AT_EX code of ./paper.tex

```

712 æÉüŦóŦ
713 Numbers can be written plain text (such as 100),
      ↳ by using the
      ↳ \href{https://ctan.org/pkg/siunitx}{siunitx}
      ↳ package as follows:
714 \SI{100}{\km\per\hour},
715 or by using plain \LaTeX{} (and math mode):
716 $100 \frac{\mathit{km}}{h}$ .

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper.tex

```

719 æÉüŦóŦ
720 \SI{5}{\percent} of \SI{10}{kg}

```

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper.tex

```

723 æÉüŦóŦ
724 Numbers are automatically grouped: \num{123456}.

```

F. Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper.tex

```

729 æÉüŦóŦ
730 Please use the \enquote{enquote command} to
      ↳ quote something.
731 Quoting with ``quote'' or ``quote'' also works.

```

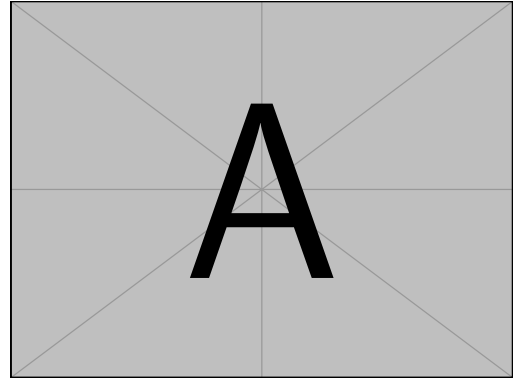


Figure 1. Example figure for zceref demo

Heading1	Heading2
One	Two
Thee	Four

Figure 2. Example table for zceref demo

G. Zref-clever examples

zref-clever demonstration: Zceref (short for zceref[S]) at beginning of sentence, zceref in all other cases.

Figure 1 shows a simple fact, although Figure 1 could also show something else.

Figure 2 shows a simple fact, although Figure 2 could also show something else.

Section III-G shows a simple fact, although Section III-G could also show something else.

Corresponding L^AT_EX code of ./paper.tex

```

761 æÉüŦóŦ
762 \Zceref{fig:ex:cref} shows a simple fact,
      ↳ although \zceref{fig:ex:cref} could also
      ↳ show something else.
763
764 \Zceref{tab:ex:cref} shows a simple fact,
      ↳ although \zceref{tab:ex:cref} could also
      ↳ show something else.
765
766 \Zceref{sec:ex:cref} shows a simple fact,
      ↳ although \zceref{sec:ex:cref} could also
      ↳ show something else.

```

H. Figures

Figure 3 shows something interesting.

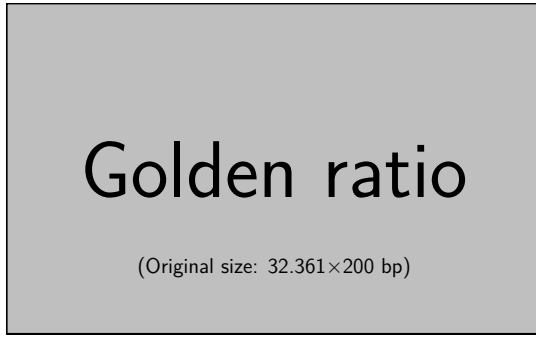


Figure 3. Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of ./paper.tex

```

771 %\documentclass{article}
772 \Zcref{fig:label} shows something interesting.
773
774 \begin{figure}
775   \centering
776   \includegraphics[width=.8\linewidth]{example-image-golden}
777   \caption[Simple Figure]{
778     Simple Figure.
779     Based on \citet{mwe}.
780   }
781   \label{fig:label}
782 \end{figure}

```

One can span a figure across multiple columns by using `\begin{figure*}`. See Figure 4 as an example.

Corresponding L^AT_EX code of ./paper.tex

```

788 %\documentclass{article}
789 \begin{figure*}
790   \centering
791   % note that \textwidth is used instead of
792   % This ensures that the graphics width is 60%
793   % See
794   % of the "page" (text block), and not
795   % just 60% of the current text column
796   % https://tex.stackexchange.com/a/17085/9075
797   % for details
798   \includegraphics[width=.6\textwidth]{example-image-16x9}
799   \caption[16x9 Figure]{
800     16x9 Figure.
801     Based on \citet{mwe}.
802   }
803   \label{fig:16x9}
804 \end{figure*}

```

I. Sub Figures

An example of two sub figures is shown in Figure 5.

Corresponding L^AT_EX code of ./paper.tex

```

805 %\documentclass{article}
806 \begin{figure*}[!b]
807   \centering
808   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{example-image-a}}
809   \label{fig:first_case}}
810   \hfil
811   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{example-image-b}}
812   \label{fig:second_case}}
813   \caption[Example figure with two sub figures.]
814   \label{fig:two_sub_figures}
815 \end{figure*}

```

Note that often IEEE papers with subfigures do not employ subfigure captions (using the optional argument to `\subfloat[]`), but instead will reference/describe all of them (a), (b), etc., within the main caption. Be aware that for `subfig.sty` to generate the (a), (b), etc., subfigure labels, the optional argument to `\subfloat` must be present. If a subcaption is not desired, leave its contents blank, e.g., `\subfloat[]`. An example is shown in Figure 6.

Corresponding L^AT_EX code of ./paper.tex

```

827 %\documentclass{article}
828 \begin{figure*}[!b]
829   \centering
830   \subfloat[]{\includegraphics[width=.4\linewidth]{example-image-a}}
831   \label{fig:first_case_ieee}}
832   \hfil
833   \subfloat[]{\includegraphics[width=.4\linewidth]{example-image-b}}
834   \label{fig:second_case_ieee}}
835   \caption[Example figure with two sub figures.]
836   % IEEE style. (a) The first case. (b)
837   % The second case.
838   \label{fig:two_sub_figures_ieee}
839 \end{figure*}

```

J. Figures with tikz

The `tikz` package creates graphics programmatically. This package generates grids and other regular structures.

Corresponding L^AT_EX code of ./paper.tex

```

845 %\documentclass{article}
846 \begin{figure}[ht]
847   \centering
848   \begin{tikzpicture}
849     \draw(0,0) rectangle (4,4);
850     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
851       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
852         \draw(\x,\y) circle (1pt);
853   \end{tikzpicture}
854   \caption[A regular grid generated easily with
855     two for loops.]{\label{fig:tikz_example}}
856 \end{figure}

```


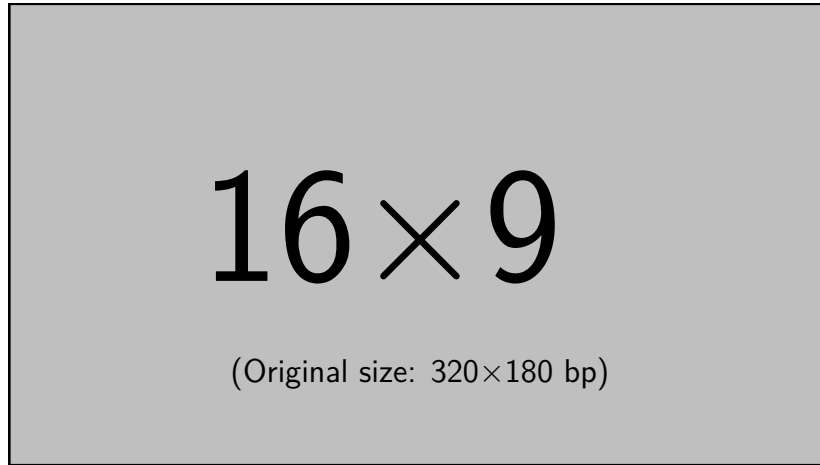


Figure 4. 16x9 Figure


K. Plots with pgfplots

The pgfplots package plots functions directly in $\text{\LaTeX}$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

¹<http://texdoc.net/pkg/pgfplots>

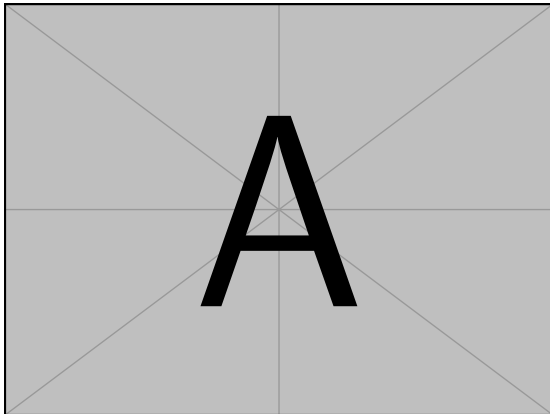


(a) Case I

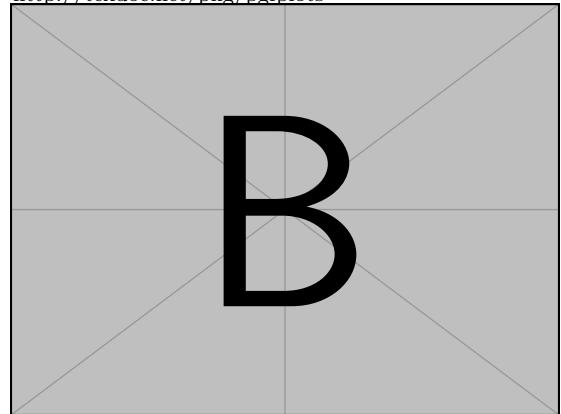


(b) Case II

Figure 5. Example figure with two sub figures.

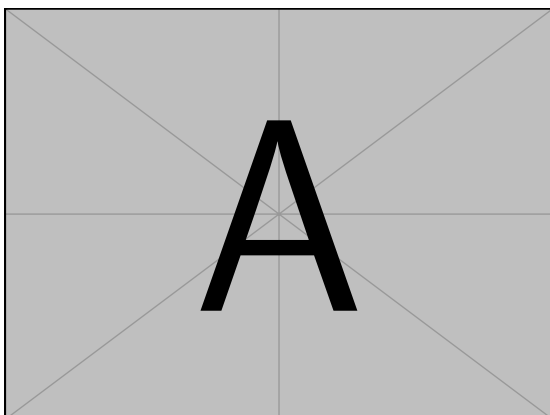

(a)

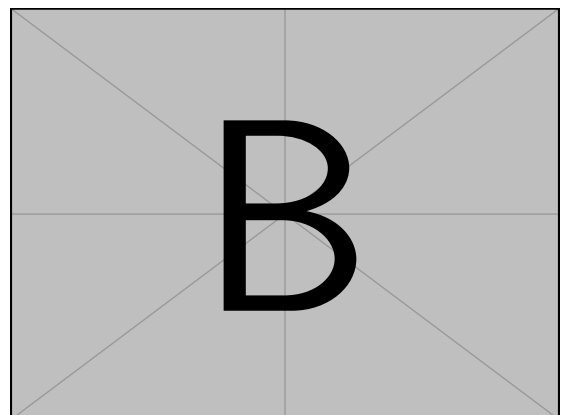

(b)

Figure 6. Example figure with two sub figures. IEEE style. (a) The first case. (b) The second case.




Figure 7. A regular grid generated easily with two for loops.

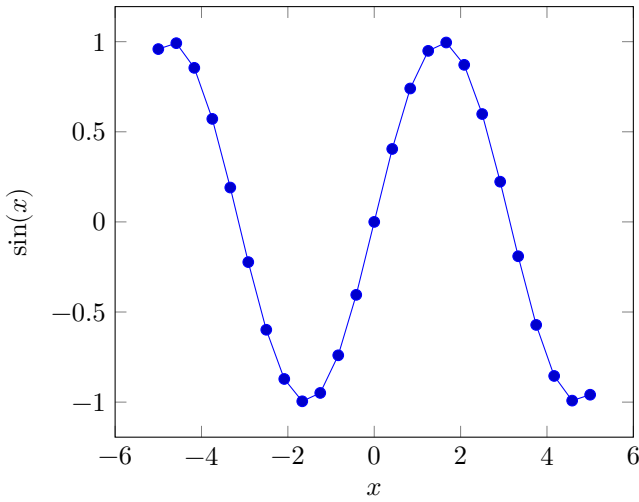


Figure 8. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

Corresponding L^AT_EX code of ./paper.tex

```

863 %\begin{figure}
864 \begin{figure}[ht]
865   \centering
866   \begin{tikzpicture}
867     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
868       \addplot {sin(deg(x))}; % Plot the sine
869       \end{axis}
870     \end{tikzpicture}
871     \caption{Plot of $\sin(x)$ directly inside the
872             \hookrightarrow figure environment with pgfplots.}
873   \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

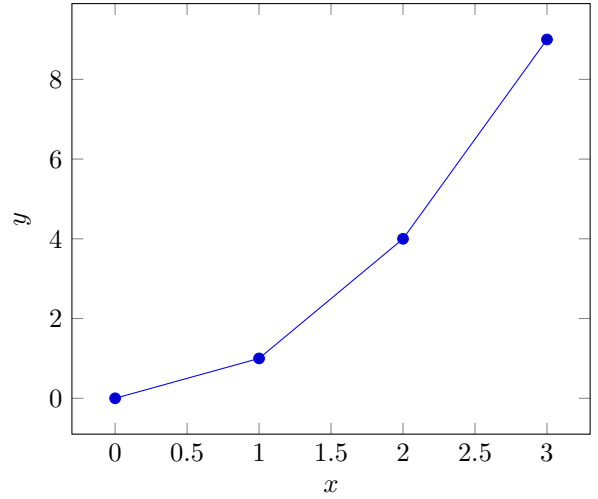


Figure 9. Explicit coordinates plotted with pgfplots.

Figure 10. Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper.tex

```

877 %\begin{figure}
878 \begin{figure}[ht]
879   \centering
880   \begin{tikzpicture}
881     \begin{axis}[xlabel=$x$, ylabel=$y$]
882       \addplot coordinates {(0,0) (1,1) (2,4)
883                           \hookrightarrow (3,9)}; % Plot explicit coordinates
884     \end{axis}
885   \end{tikzpicture}
886   \caption{Explicit coordinates plotted with
887           \hookrightarrow pgfplots.}
888   \label{fig:pgfplots_coords}
889 \end{figure}

```

L. Tables

Note that IEEE does not support `\begin{table}`, one has to use `\begin{figure}`.

Corresponding L^AT_EX code of ./paper.tex

```

894 %\begin{figure}
895 \begin{figure}
896   \caption{Simple Table}
897   \label{tab:simple}
898   \centering
899   \begin{tabular}{ll}
900     \toprule
901     Heading1 & Heading2 \\
902     \midrule
903     One      & Two      \\
904     Thee     & Four     \\
905     \bottomrule
906   \end{tabular}
907 \end{figure}

```

Figure 11. Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper.tex

```

910 % Source:
911 % Source:
912 % Source:
913 % Source:
914 % Source:
915 % Source:
916 % Source:
917 % Source:
918 % Source:
919 % Source:
920 % Source:
921 % Source:
922 % Source:
923 % Source:
924 % Source:

```

M. Source Code

Listing 1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2 <!-- comment -->
3 <content>not interesting</content>
4 </listing>

```

Listing 1. Example XML Listing

Corresponding L^AT_EX code of ./paper.tex

```

930 % Source:
931 % Source:
932 % Source:
933 % Source:
934 % Source:
935 % Source:
936 % Source:
937 % Source:
938 % Source:
939 % Source:
940 % Source:
941 % Source:
942 % Source:

```

One can also add `float` as parameter to have the listing floating. Listing 2 shows the floating listing.

```

1 <listing name="example">
2 Floating
3 </listing>

```

Listing 2. Example XML listing – placed as floating figure

```

1 {
2 key: "value"
3 }

```

Listing 3. Example JSON listing – placed as floating figure

Corresponding L^AT_EX code of ./paper.tex

```

948 % Source:
949 % Source:
950 % Source:
951 % Source:
952 % Source:
953 % Source:
954 % Source:
955 % Source:
956 % Source:
957 % Source:
958 % Source:
959 % Source:
960 % Source:

```

One can also typeset JSON as shown in Listing 3.

Corresponding L^AT_EX code of ./paper.tex

```

965 % Source:
966 % Source:
967 % Source:
968 % Source:
969 % Source:
970 % Source:
971 % Source:
972 % Source:
973 % Source:
974 % Source:

```

Java is also possible as shown in Listing 4.

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

Listing 4. Example Java listing

Corresponding L^AT_EX code of ./paper.tex

```

979 %EÜÜöŦ
980 \begin{lstlisting}[
981   caption={Example Java listing},
982   label=lst:java,
983   language=Java,
984   float]
985 public class Hello {
986     public static void main (String[] args) {
987         System.out.println("Hello World!");
988     }
989 }
990 \end{lstlisting}

```

N. Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

997 %EÜÜöŦ
998 \begin{itemize}
999   \item Item One
1000   \item Item Two
1001 \end{itemize}

```

With the package paralist, one can create itemizations with lesser spacing:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

1006 %EÜÜöŦ
1007 \begin{compactitem}
1008   \item Item One
1009   \item Item Two
1010 \end{compactitem}

```

One can enumerate items as follows:

- 1) Item One
- 2) Item Two

Corresponding L^AT_EX code of ./paper.tex

```

1015 %EÜÜöŦ
1016 \begin{enumerate}
1017   \item Item One
1018   \item Item Two
1019 \end{enumerate}

```

With the package paralist, one can create enumerations with lesser spacing:

- 1) Item One
- 2) Item Two

Corresponding L^AT_EX code of ./paper.tex

```

1024 %EÜÜöŦ
1025 \begin{compactenum}
1026   \item Item One
1027   \item Item Two
1028 \end{compactenum}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1) All these items... 2) ...appear in one line 3) This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper.tex

```

1033 %EÜÜöŦ
1034 \begin{inparaenum}
1035   \item All these items...
1036   \item ...appear in one line
1037   \item This is enabled by the paralist package.
1038 \end{inparaenum}

```

O. Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper.tex

```

1043 %EÜÜöŦ
1044 The words \enquote{workflow} and
      ↳ \enquote{dwarflike} can be copied from
      ↳ the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1,2,3)$

Corresponding L^AT_EX code of ./paper.tex

```

1047 %EÜÜöŦ
1048 The symbol for powerset is now correct:
      ↳ $\powerset$ and not a Weierstrass p
      ↳ ($\wp$).
1049
1050 $\powerset(\{1,2,3\})$

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper.tex

```

1053 %EÜÜöŦ
1054 Brackets work as designed:
1055 <test>
1056 One can also input backticks in verbatim text:
      ↳ \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management

(\gls, with an automatic list of abbreviations) provided by the thesis variants: \initialism only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (\OMG, \BPEL, \BPMN, \UML) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L^AT_EX code of ./paper.tex

```

1061 æŒüŦöŦ
1062 The \UML is maintained by the \OMG; related
      ↪ standards include \BPEL and \BPMN.
1063 Any acronym can be set inline with
      ↪ \initialism{REST} or \initialism{HTTP}.
```

IV. CONCLUSION AND OUTLOOK

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

ACKNOWLEDGMENT

Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

REFERENCES

- [1] O. Kopp *et al.*, “Winery – A Modeling Tool for TOSCA-based Cloud Applications,” in *Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13)*, ser. LNCS, vol. 8274. Springer Berlin Heidelberg, 2013, pp. 700–704.
- [2] T. Binz, G. Breiter, F. Leymann, and T. Spatzier, “Portable Cloud Services Using TOSCA,” *IEEE Internet Computing*, vol. 16, no. 03, pp. 80–85, May 2012.

- [3] M. Scharrer, *The mwe Package*, 2017. [Online]. Available: <http://texdoc.net/mwe>
- [4] B. Veytsman, “Latex class for the association for computing machinery – acknowledgement information,” Aug. 2021. [Online]. Available: <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.