

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend

consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec  mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Sect. 3). Finally, a conclusion is drawn and outlook on future work is made (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

3 $\text{\LaTeX}$ Hints

This section contains hints on writing $\text{\LaTeX}$. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In $\text{\LaTeX}$, this does not lead to a new paragraph as $\text{\LaTeX}$ joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In $\text{\LaTeX}$, you can do that by using two backslashes (`\`).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

609 One sentence per line.
610 This rule is important for the usage of version control
    ↪ systems.
611 A new line is generated with a blank line.
612 As you would do in Word:
613 New paragraphs are generated by pressing enter.
614 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
615 To start a new paragraph, press enter twice.
616 This leads to an empty line.
617 In word, there is the functionality to press shift and enter.
618 This leads to a hard line break.
619 The text starts at the beginning of a new line.
620 In LaTeX, you can do that by using two backslashes
    ↪ (\textbackslash\textbackslash).
621 \\
622 This is rarely used.
623
624 Please do \textit{not} use two backslashes for new paragraphs.
625 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
626 A long motivation for that is provided at \url{http://
    ↪ loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

634 \begin{mindflow}
635 This is a small note.
636 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

642 \textmarker{Marked text.}

```

With `\textcolor`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```
648 \textcolor{blue}{Marked text.}{A comment on it.}
```

Manual marking for text that has been changed since the last version.

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```
652 \modified{Manual marking for text that has been changed since
    ↪ the last version.}
```

This is some text. Changed text.

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```
656 This is some text.
657 \change{FL1: text adjusted}{Changed text}.
```

Here is a comment.

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```
661 Here is a comment\sidecomment{Comment}.
```

TODO!

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```
665 \todo{A lot of text still needs to be produced here}
```

3.4 Hyphenation

$\text{\LaTeX}$ automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{ }tion-specific` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application"=specific` gets application"=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

676 In case you write \enquote{application-specific}, then the
    ↪ word will only be hyphenated at the dash.
677 You can also write \verb!applica\allowbreak{}tion-specific!
    ↪ (result: applica\allowbreak{}tion-specific), but this is
    ↪ much more effort.
678
679 You can now write words containing hyphens which are
    ↪ hyphenated at other places in the word.
680 For instance, \verb!application"=specific! gets
    ↪ application"=specific.
681 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{\text{km}}{\text{h}}$.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

687 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
688 \SI{100}{\km\per\hour},
689 or by using plain \LaTeX{} (and math mode):
690 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

694 \SI{5}{\percent} of \SI{10}{kg}

```

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

698 Numbers are automatically grouped: \num{123456}.

```

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

704

Please use the `\enquote`{enquote command} to quote something.

705

Quoting with "``quote'`" or "``quote'`" also works.

706

3.7 Zref-clever examples

zref-clever demonstration: Zref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

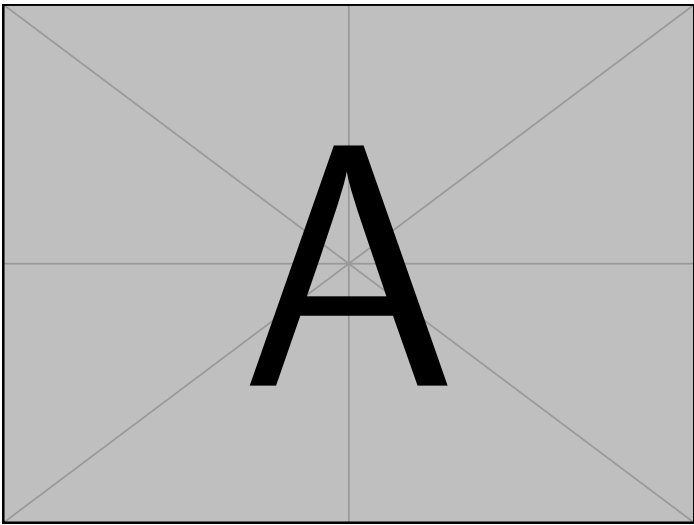


Fig. 1: Example figure for zcref demo

Heading1 Heading2	
One	Two
Thee	Four

Table 1: Example table for zcref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

736 \Zcref{fig:ex:cref} shows a simple fact, although
    ↪ \zcref{fig:ex:cref} could also show something else.
737
738 \Zcref{tab:ex:cref} shows a simple fact, although
    ↪ \zcref{tab:ex:cref} could also show something else.
739
740 \Zcref{sec:ex:cref} shows a simple fact, although
    ↪ \zcref{sec:ex:cref} could also show something else.

```

3.8 Theorem-like Environments and Mathematics

The `llncs` class already provides the theorem-like environments `theorem`, `proposition`, `lemma`, `corollary`, `definition`, `example`, `exercise`, `note`, `problem`, `question`, `remark`, and `solution` as well as the unnumbered proof environment – no additional package is required.

Definition 1 (Idempotence). *An operation f is idempotent if $f(f(x)) = f(x)$ holds for all inputs x .*

Proposition 1. *The identity operation is idempotent.*

Lemma 1. *An idempotent operation fixes every element of its image.*

Theorem 1. *If two idempotent operations f and g commute, their composition $f \circ g$ is idempotent.*

Proof. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Corollary 1. *Applying $f \circ g$ a second time yields no further change, as Eq. (1) shows.*

Example 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

748 \begin{definition}[Idempotence]
749   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
750    $\Leftrightarrow$  holds for all inputs  $x$ .
751 \end{definition}
752 \begin{proposition}
753   The identity operation is idempotent.
754 \end{proposition}
755 \begin{lemma}\label{lem:fixed}
756   An idempotent operation fixes every element of its image.
757 \end{lemma}
758 \begin{theorem}\label{thm:idempotent-composition}
759   If two idempotent operations  $f$  and  $g$  commute, their
760    $\Leftrightarrow$  composition  $f \circ g$  is idempotent.
761 \end{theorem}
762 \begin{proof}
763 \begin{equation}
764   \text{Since } f \text{ and } g \text{ commute and are idempotent,}
765   (f \circ g)(f \circ g)(x) =
766   \Leftrightarrow f(g(g(x))) = f(g(x)) = (f \circ g)(x).
767   \label{eq:idempotent-composition}
768 \end{equation}
769 \qed
770 \end{proof}
771 \begin{corollary}
772   Applying  $f \circ g$  a second time yields no further change,
773    $\Leftrightarrow$  as \zcref{eq:idempotent-composition} shows.
774 \end{corollary}
775 \begin{example}
776   Trimming spaces in a string is idempotent: \zcref{lem:fixed}
777    $\Leftrightarrow$  applies to every already-trimmed string.
778 \end{example}

```

3.9 Figures

Figure 2 shows something interesting.



Fig. 2: Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
785 \Zcref{fig:label} shows something interesting.  
786  
787 \begin{figure}  
788   \centering  
789   \includegraphics[width=.8\linewidth]{example-image-golden}  
790   \caption[Simple Figure]{  
791     Simple Figure.  
792     Based on \citet{mwe}.  
793   }  
794   \label{fig:label}  
795 \end{figure}
```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 3: A floating figure

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
802 \begin{floatingfigure}{.33\linewidth}
803   \includegraphics[width=.29\linewidth]{example-image-a}
804   \caption{A floating figure}
805 \end{floatingfigure}
806 \lipsum[2]
```

3.10 Sub Figures

An example of two sub figures is shown in Fig. 4.

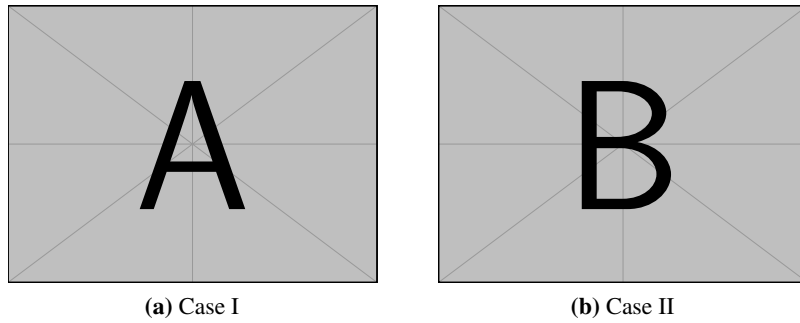


Fig. 4: Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

814 \begin{figure}[!b]
815   \centering
816   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{
      ↪ example-image-a}%
817     \label{fig:first_case}}
818   \hfil
819   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{
      ↪ example-image-b}%
820     \label{fig:second_case}}
821   \caption{Example figure with two sub figures.}
822   \label{fig:two_sub_figures}
823 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.




Fig. 5: A regular grid generated easily with two for loops.

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```

832 \begin{figure}[ht]
833   \centering
834   \begin{tikzpicture}
835     \draw(0,0) rectangle (4,4);
836     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
837       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
838         \draw(\x,\y) circle (1pt);
839   \end{tikzpicture}
840   \caption{A regular grid generated easily with two for
841     ↪ loops.}\label{fig:tikz_example}
842 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in $\text{\LaTeX}$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

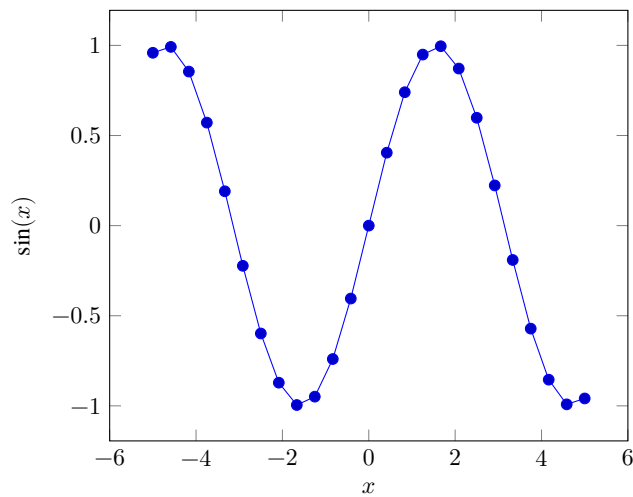


Fig. 6: Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

¹ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

850 \begin{figure}[ht]
851   \centering
852   \begin{tikzpicture}
853     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
854       \addplot {sin(deg(x))}; % Plot the sine function
855     \end{axis}
856   \end{tikzpicture}
857   \caption{Plot of  $\sin(x)$  directly inside the figure
858     ↪ environment with pgfplots.}
859   \label{fig:pgfplots_example}
860 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

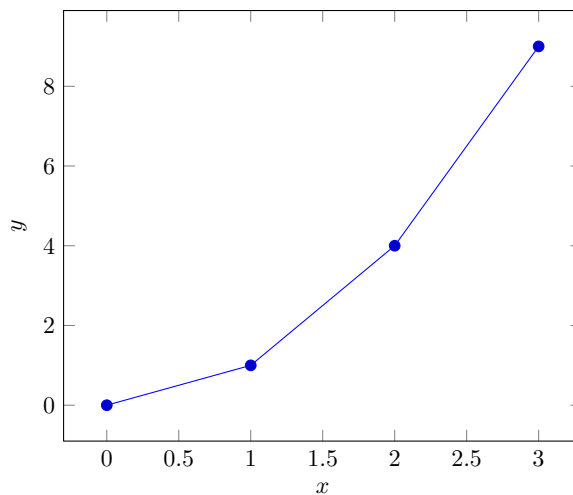


Fig. 7: Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

864 \begin{figure}[ht]
865   \centering
866   \begin{tikzpicture}
867     \begin{axis}[xlabel=$x$, ylabel=$y$]
868       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
869       ↪ explicit coordinates
870     \end{axis}
871   \end{tikzpicture}
872   \caption{Explicit coordinates plotted with pgfplots.}
873   \label{fig:pgfplots_coords}
874 \end{figure}

```

3.13 Tables

Table 2: Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

879 \begin{table}
880   \caption{Simple Table}
881   \label{tab:simple}
882   \centering
883   \begin{tabular}{ll}
884     \toprule
885     Heading1 & Heading2 \\
886     \midrule
887     One      & Two      \\
888     Thee     & Four     \\
889     \bottomrule
890   \end{tabular}
891 \end{table}

```

Table 3: Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
895 % Source: https://tex.stackexchange.com/a/468994/9075
896 \begin{table}
897   \caption{Table with diagonal line}
898   \label{tab:diag}
899   \begin{center}
900     \begin{tabular}{|l|c|c|}
901       \hline
902       \diagbox[width=10em]{Diag \Column Head I}{Diag
903       ↪ Column\Head II} & Second & Third \\\hline
904
905       \hline
906     \end{tabular}
907   \end{center}
908 \end{table}
```

↪ &
↪ foo
↪ &
↪ bar
↪ |
↪ \\\

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (\endhead) and footer (\endfoot) rows are repeated on every page; once enough rows are added, the table spans several pages on its own.

Table 4: A sample long table.

First column	Second column	Third column
A	BC	D
A	BC	D
Continued on next page		

Table 4 – continued from previous page

[illegible]

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

918 \begin{longtable}{|l|l|l|}
919   \caption{A sample long table.}\label{tab:long} \\
920   \hline
921   \multicolumn{1}{|c|}{\textbf{First column}} &
    ⇨ \multicolumn{1}{c|}{\textbf{Second column}} &
    ⇨ \multicolumn{1}{c|}{\textbf{Third column}} \\ \hline
922 \endfirsthead
923
924 \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
    ⇨ continued from previous page}} \\
925 \hline
926 \multicolumn{1}{|c|}{\textbf{First column}} &
    ⇨ \multicolumn{1}{c|}{\textbf{Second column}} &
    ⇨ \multicolumn{1}{c|}{\textbf{Third column}} \\ \hline
927 \endhead
928
929 \hline \multicolumn{3}{|r|}{Continued on next page}} \\
930 ⇨ \hline
931 \endfoot
932
933 \hline\hline
934 \endlastfoot
935
936 A & BC & D \\
937 A & BC & D \\
938 A & BC & D \\
939 A & BC & D \\
940 A & BC & D \\
941 A & BC & D \\
942 A & BC & D \\
943 A & BC & D \\
944 A & BC & D \\
945 A & BC & D \\
946 A & BC & D \\
947 \end{longtable}

```

3.15 Source Code

minted is a sophisticated package to enable properly highlighted listings. It uses the pygments library, which in turn requires Python.

Listing 1 shows source code written in XML. line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

List. 1: Example XML listing using minted

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

956 \Zcref{lst:XML} shows source code written in XML.
957 \refline{line:comment} contains a comment.
958
959 \begin{listing}[htbp]
960   \begin{minted}[linenos=true,escapeinside=||]{xml}
961   <listing name="example">
962     <!-- comment --> |\labelline{line:comment}|
963     <content>not interesting</content>
964   </listing>
965   \end{minted}
966   \caption{Example XML listing using minted}
967   \label{lst:XML}
968 \end{listing}

```

One can also typeset JSON as shown in List. 2.

```

1 {
2   key: "value"
3 }

```

List. 2: Example JSON listing using minted

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

974 \begin{listing}[htbp]
975   \begin{minted}[linenos=true,escapeinside=||]{json}
976   {
977     key: "value"
978   }
979   \end{minted}
980   \caption{Example JSON listing using minted}
981   \label{lst:f1JSON}
982 \end{listing}

```

Java is also possible as shown in List. 3.

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

List. 3: Java code rendered using minted

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

988 \begin{listing}[htbp]
989     \begin{minted}[linenos=true,escapeinside=||]{java}
990     public class Hello {
991         public static void main (String[] args) {
992             System.out.println("Hello World!");
993         }
994     }
995 \end{minted}
996 \caption{Java code rendered using minted}
997 \label{lst:flJava}
998 \end{listing}

```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

1006 \begin{itemize}
1007     \item Item One
1008     \item Item Two
1009 \end{itemize}

```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

1016 \begin{enumerate}
1017     \item Item One
1018     \item Item Two
1019 \end{enumerate}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1026 \begin{inparaenum}
1027   \item All these items...
1028   \item ...appear in one line
1029   \item This is enabled by the paralist package.
1030 \end{inparaenum}
```

3.17 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1036 The words \enquote{workflow} and \enquote{dwarflike} can be
      ↪ copied from the PDF and pasted to a text file.
```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1040 The symbol for powerset is now correct: $\powerset$ and not a
      ↪ Weierstrass p ($\wp$).
1041
1042 $\powerset(\{1,2,3\})$
```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1046 Brackets work as designed:
1047 <test>
1048 One can also input backticks in verbatim text: \verb|`test`|.
```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

1054 The \UML is maintained by the \OMG; related standards include
      ↳ \BPEL and \BPMN.
1055 Any acronym can be set inline with \initialism{REST} or
      ↳ \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The mwe Package (2017), URL <http://texdoc.net/mwe>

4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgement information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.