

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend

consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec  mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Sect. 3). Finally, a conclusion is drawn and outlook on future work is made (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

3 $\text{\LaTeX}$ Hints

This section contains hints on writing $\text{\LaTeX}$. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In $\text{\LaTeX}$, this does not lead to a new paragraph as $\text{\LaTeX}$ joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In $\text{\LaTeX}$, you can do that by using two backslashes (`\`).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

684 æŒúŮŰŰ
685 One sentence per line.
686 This rule is important for the usage of version control systems.
687 A new line is generated with a blank line.
688 As you would do in Word:
689 New paragraphs are generated by pressing enter.
690 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
691 To start a new paragraph, press enter twice.
692 This leads to an empty line.
693 In word, there is the functionality to press shift and enter.
694 This leads to a hard line break.
695 The text starts at the beginning of a new line.
696 In LaTeX, you can do that by using two backslashes
    ↪ (\textbackslash\textbackslash).
697 \\
698 This is rarely used.
699
700 Please do \textit{not} use two backslashes for new paragraphs.
701 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
702 A long motivation for that is provided at
    ↪ \url{http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

709 æŒúŮŰŰ
710 \begin{mindflow}
711 This is a small note.
712 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

717 æẼüŰőŰ
718 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

723 æẼüŰőŰ
724 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

727 æẼüŰőŰ
728 \modified{Manual marking for text that has been changed since
    ↪ the last version.}

```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

731 æẼüŰőŰ
732 This is some text.
733 \change{FL1: text adjusted}{Changed text}.

```

Here is a comment.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

736 æẼüŰőŰ
737 Here is a comment\sidecomment{Comment}.

```

TODO!

Corresponding L^AT_EX code of ./paper-newtx.tex

```

740 æẼüŰőŰ
741 \todo{A lot of text still needs to be produced here}

```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{}tion-specific` (result: applica tion-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application"=specific` gets `application"=specific`. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of `./paper-newtx.tex`

```

751 æÉúŮöŮ
752 In case you write \enquote{application-specific}, then the word
    ↪ will only be hyphenated at the dash.
753 You can also write \verb1applica\allowbreak{}tion-specific1
    ↪ (result: applica\allowbreak{}tion-specific), but this is
    ↪ much more effort.
754
755 You can now write words containing hyphens which are hyphenated
    ↪ at other places in the word.
756 For instance, \verb1application"=specific1 gets
    ↪ application"=specific.
757 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{km}{h}$.

Corresponding L^AT_EX code of `./paper-newtx.tex`

```

762 æÉúŮöŮ
763 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
764 \SI{100}{\km\per\hour},
765 or by using plain \LaTeX{} (and math mode):
766 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper-newtx.tex

769

œƐüŦõŦ

770

\SI{5}{\percent} of \SI{10}{kg}

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper-newtx.tex

773

œƐüŦõŦ

774

Numbers are automatically grouped: \num{123456}.

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper-newtx.tex

779

œƐüŦõŦ

780

Please use the \enquote{enquote command} to quote something.

781

Quoting with “`quote” or “`quote” also works.

3.7 Zref-clever examples

zref-clever demonstration: Zcref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

Heading1 Heading2	
One	Two
Thee	Four

Table 1. Example table for zcref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

Proof. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Corollary 1. Applying $f \circ g$ a second time yields no further change, as Eq. (1) shows.

Example 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

823 %\begin{document}
824 \begin{definition}[Idempotence]
825   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
826    $\hookrightarrow$  holds for all inputs  $x$ .
827 \end{definition}
828 \begin{proposition}
829   The identity operation is idempotent.
830 \end{proposition}
831 \begin{lemma}\label{lem:fixed}
832   An idempotent operation fixes every element of its image.
833 \end{lemma}
834 \begin{theorem}\label{thm:idempotent-composition}
835   If two idempotent operations  $f$  and  $g$  commute, their
836    $\hookrightarrow$  composition  $f \circ g$  is idempotent.
837 \end{theorem}
838 \begin{proof}
839   Since  $f$  and  $g$  commute and are idempotent,
840   \begin{equation}
841     (f \circ g)(f \circ g)(x) =
842     \hookrightarrow f(g(f(g(x)))) = f(g(x)) = (f \circ g)(x).
843   \end{equation}
844   \label{eq:idempotent-composition}
845   \end{equation}
846   \qed
847 \end{proof}
848 \begin{corollary}
849   Applying  $f \circ g$  a second time yields no further change,
850    $\hookrightarrow$  as \zcref{eq:idempotent-composition} shows.
851 \end{corollary}
852 \begin{example}
853   Trimming spaces in a string is idempotent: \zcref{lem:fixed}
854    $\hookrightarrow$  applies to every already-trimmed string.
855 \end{example}

```

3.9 Figures

Figure 2 shows something interesting.



Fig. 2. Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of ./paper-newtx.tex

```
860 æÉúŰõŰ
861 \Zcref{fig:label} shows something interesting.
862
863 \begin{figure}
864   \centering
865   \includegraphics[width=.8\linewidth]{example-image-golden}
866   \caption[Simple Figure]{
867     Simple Figure.
868     Based on \citet{mwe}.
869   }
870   \label{fig:label}
871 \end{figure}
```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 3. A floating figure

Corresponding L^AT_EX code of ./paper-newtx.tex

```

877 æÉúŰöŰ
878 \begin{floatingfigure}{.33\linewidth}
879   \includegraphics[width=.29\linewidth]{example-image-a}
880   \caption{A floating figure}
881 \end{floatingfigure}
882 \lipsum[2]

```

3.10 Sub Figures

An example of two sub figures is shown in Fig. 4.

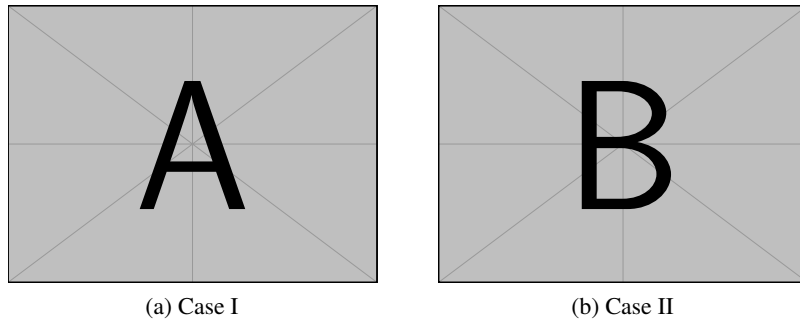


Fig. 4. Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

889 \begin{figure}
890 \begin{center}
891 \subfloat[Case
      ↪ I]{\includegraphics[width=.4\linewidth]{example-image-a}}%
892 \label{fig:first_case}}
893 \hfil
894 \subfloat[Case
      ↪ II]{\includegraphics[width=.4\linewidth]{example-image-b}}%
895 \label{fig:second_case}}
896 \caption{Example figure with two sub figures.}
897 \label{fig:two_sub_figures}
898 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.




Fig. 5. A regular grid generated easily with two for loops.

Corresponding $\LaTeX$ code of ./paper-newtx.tex

```

907 \begin{figure}[ht]
908   \centering
909   \begin{tikzpicture}
910     \draw(0,0) rectangle (4,4);
911     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
912       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
913         \draw(\x,\y) circle (1pt);
914   \end{tikzpicture}
915   \caption{A regular grid generated easily with two for
916     ↪ loops.}\label{fig:tikz_example}
917 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in $\LaTeX$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

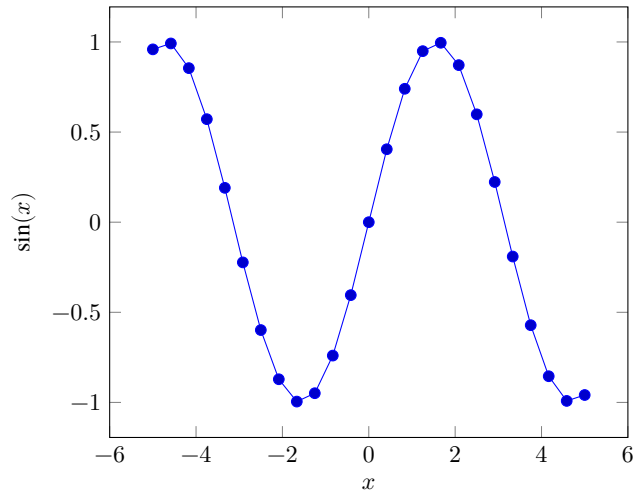


Fig. 6. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

¹ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper-newtx.tex

```

925 %\begin{figure}
926 \begin{figure}[ht]
927   \centering
928   \begin{tikzpicture}
929     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
930       \addplot {sin(deg(x))}; % Plot the sine function
931     \end{axis}
932   \end{tikzpicture}
933   \caption{Plot of $\sin(x)$ directly inside the figure
934     ↪ environment with pgfplots.}
935   \label{fig:pgfplots_example}
936 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

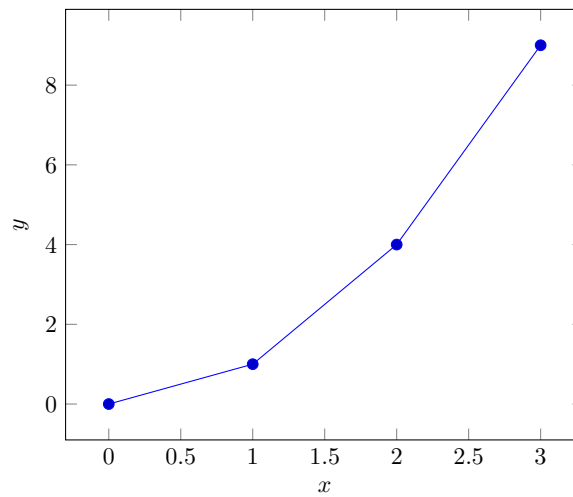


Fig. 7. Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

939 %\begin{figure}
940 \begin{figure}[ht]
941   \centering
942   \begin{tikzpicture}
943     \begin{axis}[xlabel=$x$, ylabel=$y$]
944       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
945       \end{axis}
946     \end{tikzpicture}
947     \caption{Explicit coordinates plotted with pgfplots.}
948     \label{fig:pgfplots_coords}
949 \end{figure}

```

3.13 Tables

Table 2. Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper-newtx.tex

```

954 %\begin{table}
955 \begin{table}
956   \caption{Simple Table}
957   \label{tab:simple}
958   \centering
959   \begin{tabular}{ll}
960     \toprule
961     Heading1 & Heading2 \\
962     \midrule
963     One      & Two      \\
964     Thee     & Four     \\
965     \bottomrule
966   \end{tabular}
967 \end{table}

```

Table 3. Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper-newtx.tex

```
970 % Source: https://tex.stackexchange.com/a/468994/9075
971 \begin{table}
972   \caption{Table with diagonal line}
973   \label{tab:diag}
974   \begin{center}
975     \begin{tabular}{|l|c|c|}
976       \hline
977       \diagbox[width=10em]{Diag \Column Head I}{Diag
978         \hookrightarrow Column\Head II} & Second & Third \\\
979       \hline
980       & foo & bar \\
981       \hline
982     \end{tabular}
983   \end{center}
984 \end{table}
```

&
↪ foo
↪
↪ &
↪ bar
↪
↪ \\\

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (\endhead) and footer (\endfoot) rows are repeated on every page; once enough rows are added, the table spans several pages on its own.

Table 4: A sample long table.

[illegible]

Corresponding L^AT_EX code of ./paper-newtx.tex

```

993 %\begin{table}
994 \begin{longtable}{|l|l|l|}
995   \caption{A sample long table.}\label{tab:long} \\
996   \hline
997   \multicolumn{1}{|c|}{\textbf{First column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Second column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
998   \endfirsthead
999
1000   \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
      ↪ continued from previous page} \\
1001   \hline
1002   \multicolumn{1}{|c|}{\textbf{First column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Second column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
1003   \endhead
1004
1005   \hline \multicolumn{3}{|r|}{Continued on next page} \\
      ↪ \hline
1006   \endfoot
1007
1008   \hline\hline
1009   \endlastfoot
1010
1011   A & BC & D \\
1012   A & BC & D \\
1013   A & BC & D \\
1014   A & BC & D \\
1015   A & BC & D \\
1016   A & BC & D \\
1017   A & BC & D \\
1018   A & BC & D \\
1019   A & BC & D \\
1020   A & BC & D \\
1021   A & BC & D \\
1022   A & BC & D \\
1023 \end{longtable}

```

3.15 Source Code

Listing 1.1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 1.2. Example XML listing – placed as floating figure**Listing 1.1.** Example XML ListingCorresponding L^AT_EX code of ./paper-newtx.tex

```

1028 æŒúŮŮŮ
1029 \Zcref{lst:XML} shows source code written in XML.
1030 \Zcref{line:comment} contains a comment.
1031
1032 \begin{lstlisting}[
1033   language=XML,
1034   caption={Example XML Listing},
1035   label={lst:XML}]
1036 <listing name="example">
1037   <!-- comment --> (* \label{line:comment} *)
1038   <content>not interesting</content>
1039 </listing>
1040 \end{lstlisting}

```

One can also add float as parameter to have the listing floating. Listing 1.2 shows the floating listing.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1046 æŒúŮŮŮ
1047 \begin{lstlisting}[
1048   % one can adjust spacing here if required
1049   % aboveskip=2.5\baselineskip,
1050   % belowskip=-.8\baselineskip,
1051   float,
1052   language=XML,
1053   caption={Example XML listing -- placed as floating figure},
1054   label={lst:flXML}]
1055 <listing name="example">
1056   Floating
1057 </listing>
1058 \end{lstlisting}

```

One can also typeset JSON as shown in List. 1.3.

```

1 {
2   key: "value"
3 }

```

Listing 1.3. Example JSON listing – placed as floating figure

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

Listing 1.4. Example Java listing

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1063 %\begin{lstlisting}
1064 \begin{lstlisting}[
1065     float,
1066     language=json,
1067     caption={Example JSON listing -- placed as floating figure},
1068     label={lst:json}]
1069 {
1070     key: "value"
1071 }
1072 \end{lstlisting}

```

Java is also possible as shown in List. 1.4.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1077 %\begin{lstlisting}
1078 \begin{lstlisting}[
1079     caption={Example Java listing},
1080     label=lst:java,
1081     language=Java,
1082     float]
1083 public class Hello {
1084     public static void main (String[] args) {
1085         System.out.println("Hello World!");
1086     }
1087 }
1088 \end{lstlisting}

```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper-newtx.tex

```
1095 %\documentclass{newtx}
1096 \begin{itemize}
1097   \item Item One
1098   \item Item Two
1099 \end{itemize}
```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper-newtx.tex

```
1105 %\documentclass{newtx}
1106 \begin{enumerate}
1107   \item Item One
1108   \item Item Two
1109 \end{enumerate}
```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper-newtx.tex

```
1115 %\documentclass{newtx}
1116 \begin{inparaenum}
1117   \item All these items...
1118   \item ...appear in one line
1119   \item This is enabled by the paralist package.
1120 \end{inparaenum}
```

3.17 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1125 æŒüŮŮŮ
1126 The words \enquote{workflow} and \enquote{dwarflike} can be
      ↪ copied from the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1129 æŒüŮŮŮ
1130 The symbol for powerset is now correct:  $\wpowerset$  and not a
      ↪ Weierstrass  $p$  ( $\wp$ ).
1131
1132  $\wpowerset(\{1,2,3\})$ 

```

Brackets work as designed: `<test>` One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1135 æŒüŮŮŮ
1136 Brackets work as designed:
1137 <test>
1138 One can also input backticks in verbatim text: \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with `REST` or `HTTP`.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1143 æŒüŮŮŮ
1144 The \UML is maintained by the \OMG; related standards include
      ↪ \BPEL and \BPMN.
1145 Any acronym can be set inline with \initialism{REST} or
      ↪ \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The mwe Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgement information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.