

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac

quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et  am vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on L^AT_EX (Sect. 3). Finally, a conclusion is drawn and outlook on future work is made (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. In case you want a new paragraph, just press enter twice! This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\\`).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper-minted.tex

```

591 One sentence per line.
592 This rule is important for the usage of version control
    ↪ systems.
593 A new line is generated with a blank line.
594 As you would do in Word:
595 New paragraphs are generated by pressing enter.
596 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
597 In case you want a new paragraph, just press enter twice!
598 This leads to an empty line.
599 In word, there is the functionality to press shift and enter.
600 This leads to a hard line break.
601 The text starts at the beginning of a new line.
602 In LaTeX, you can do that by using two backslashes
    ↪ (\textbackslash\textbackslash).
603 \\
604 This is rarely used.
605
606 Please do \textit{not} use two backslashes for new paragraphs.
607 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
608 A long motivation for that is provided at \url{http://}
    ↪ loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper-minted.tex

```

616 \begin{mindflow}
617 This is a small note.
618 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper-minted.tex

```

624 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of `./paper-minted.tex`

```
630 \textcomment{Marked text.}{A comment on it.}
```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of `./paper-minted.tex`

```
634 \modified{Manual marking for text that has been changed since
    ↪ the last version.}
```

This is some text. Changed text.

Corresponding L^AT_EX code of `./paper-minted.tex`

```
638 This is some text.
639 \change{FL1: text adjusted}{Changed text}.
```

Here just a comment.

Corresponding L^AT_EX code of `./paper-minted.tex`

```
643 Here just a comment\sidecomment{Comment}.
```

TODO!

Corresponding L^AT_EX code of `./paper-minted.tex`

```
647 \todo{A lot of text still needs to be produced here}
```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. It might be necessary to tweak the hyphenations nevertheless. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{}tion-specific` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application=specific` gets application=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper-minted.tex

```

658 In case you write \enquote{application-specific}, then the
    ↪ word will only be hyphenated at the dash.
659 You can also write \verb!applica\allowbreak{}tion-specific!
    ↪ (result: applica\allowbreak{}tion-specific), but this is
    ↪ much more effort.
660
661 You can now write words containing hyphens which are
    ↪ hyphenated at other places in the word.
662 For instance, \verb!application"=specific! gets
    ↪ application"=specific.
663 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: 100 $\frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{\text{km}}{\text{h}}$.

Corresponding L^AT_EX code of ./paper-minted.tex

```

669 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
670 \SI{100}{\km\per\hour},
671 or by using plain \LaTeX{} (and math mode):
672 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper-minted.tex

```

676 \SI{5}{\percent} of \SI{10}{kg}

```

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper-minted.tex

```

680 Numbers are automatically grouped: \num{123456}.

```

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper-minted.tex

686 Please use the \enquote{enquote command} to quote something.
687 Quoting with "`quote'" or ``quote'" also works.
688

3.7 Cleveref examples

Cleveref demonstration: Cref at beginning of sentence, cref in all other cases.

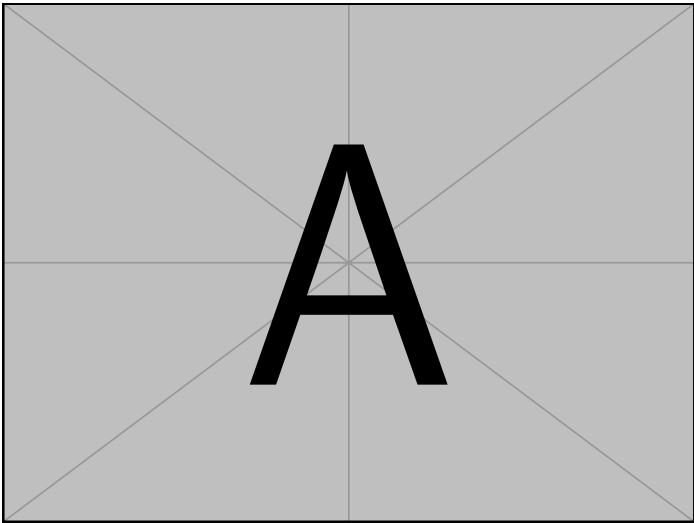


Fig. 1: Example figure for cref demo

Heading1 Heading2	
One	Two
Thee	Four

Table 1: Example table for cref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

Corresponding L^AT_EX code of ./paper-minted.tex

```
718 \Cref{fig:ex:cref} shows a simple fact, although
    ⇨ \cref{fig:ex:cref} could also show something else.
719
720 \Cref{tab:ex:cref} shows a simple fact, although
    ⇨ \cref{tab:ex:cref} could also show something else.
721
722 \Cref{sec:ex:cref} shows a simple fact, although
    ⇨ \cref{sec:ex:cref} could also show something else.
```

3.8 Figures

Figure 2 shows something interesting.

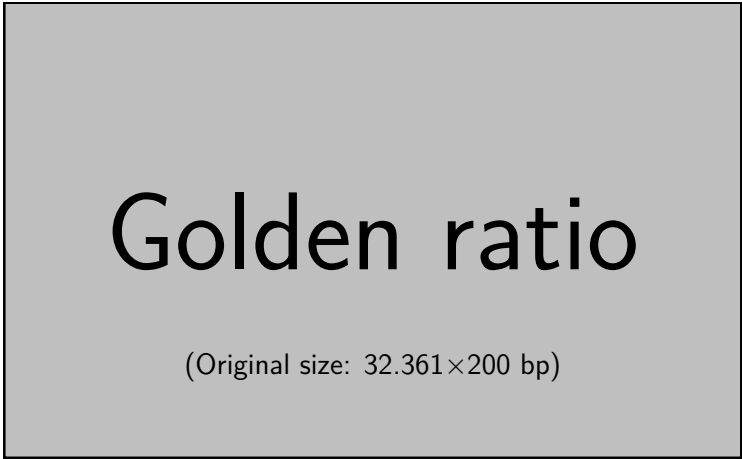


Fig. 2: Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of ./paper-minted.tex

```
728 \Cref{fig:label} shows something interesting.  
729  
730 \begin{figure}  
731   \centering  
732   \includegraphics[width=.8\linewidth]{example-image-golden}  
733   \caption[Simple Figure]{  
734     Simple Figure.  
735     Based on \citet{mwe}.  
736   }  
737   \label{fig:label}  
738 \end{figure}
```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 3: A floating figure

Corresponding L^AT_EX code of ./paper-minted.tex

```

745 \begin{floatingfigure}{.33\linewidth}
746   \includegraphics[width=.29\linewidth]{example-image-a}
747   \caption{A floating figure}
748 \end{floatingfigure}
749 \lipsum[2]

```

3.9 Sub Figures

An example of two sub figures is shown in Fig. 4.

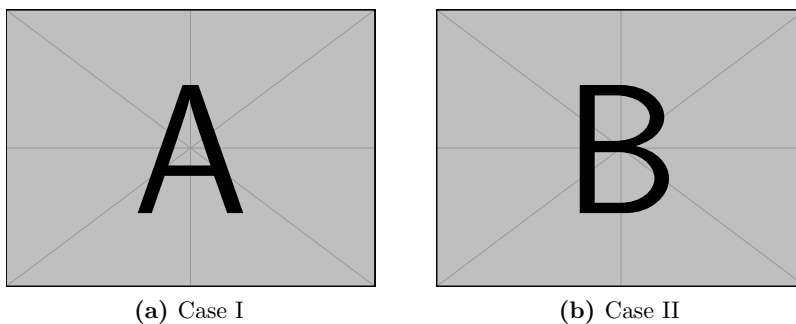


Fig. 4: Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper-minted.tex

```

757 \begin{figure}[!b]
758   \centering
759   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{
    ↪ example-image-a}%
760     \label{fig:first_case}}
761   \hfil
762   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{
    ↪ example-image-b}%
763     \label{fig:second_case}}
764   \caption{Example figure with two sub figures.}
765   \label{fig:two_sub_figures}
766 \end{figure}

```

3.10 Figures with tikz

The tikz package creates graphics programmatically. With this package, grids or other regular structures can be generated easily.




Fig. 5: A regular grid generated easily with two for loops.

Corresponding L^AT_EX code of ./paper-minted.tex

```

775 \begin{figure}[ht]
776   \centering
777   \begin{tikzpicture}
778     \draw(0,0) rectangle (4,4);
779     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
780       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
781         \draw(\x,\y) circle (1pt);
782   \end{tikzpicture}
783   \caption{A regular grid generated easily with two for
784     ↵ loops.}\label{fig:tikz_example}
785 \end{figure}

```

3.11 Plots with pgfplots

The pgfplots package plots functions directly in L^AT_EX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

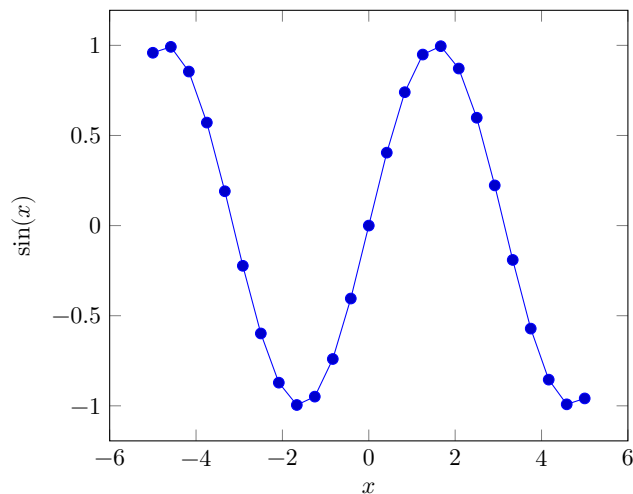


Fig. 6: Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

¹ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper-minted.tex

```

793 \begin{figure}[ht]
794   \centering
795   \begin{tikzpicture}
796     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
797       \addplot {sin(deg(x))}; % Plot the sine function
798     \end{axis}
799   \end{tikzpicture}
800   \caption{Plot of  $\sin(x)$  directly inside the figure
801     ↪ environment with pgfplots.}
801   \label{fig:pgfplots_example}
802 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

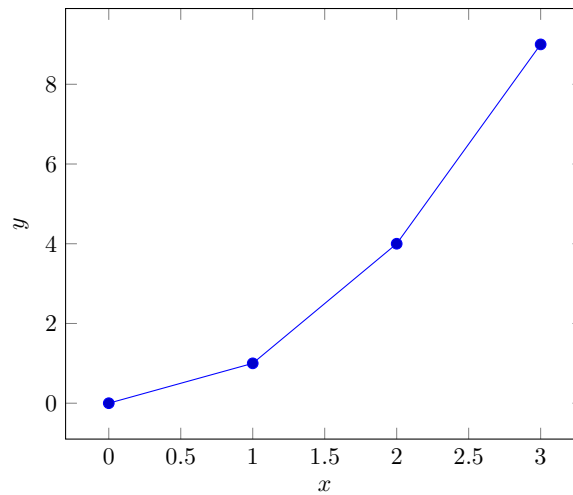


Fig. 7: Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper-minted.tex

```
807 \begin{figure}[ht]
808   \centering
809   \begin{tikzpicture}
810     \begin{axis}[xlabel=$x$, ylabel=$y$]
811       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
812       ↪ explicit coordinates
813     \end{axis}
814   \end{tikzpicture}
815   \caption{Explicit coordinates plotted with pgfplots.}
816   \label{fig:pgfplots_coords}
817 \end{figure}
```

3.12 Tables

Table 2: Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper-minted.tex

```
822 \begin{table}
823   \caption{Simple Table}
824   \label{tab:simple}
825   \centering
826   \begin{tabular}{ll}
827     \toprule
828     Heading1 & Heading2 \\
829     \midrule
830     One      & Two      \\
831     Thee     & Four     \\
832     \bottomrule
833   \end{tabular}
834 \end{table}
```

Table 3: Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper-minted.tex

```
838 % Source: https://tex.stackexchange.com/a/468994/9075
839 \begin{table}
840   \caption{Table with diagonal line}
841   \label{tab:diag}
842   \begin{center}
843     \begin{tabular}{|l|c|c|}
844       \hline
845       \diagbox[width=10em]{Diag \Column Head I}{Diag
      ↪ Column\Head II} & Second & Third \\\
846       \hline
847
848       \hline
849     \end{tabular}
850   \end{center}
851 \end{table}
```

↪ &
↪ foo
↪ &
↪ bar
↪ |
↪ \\\

3.13 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (`\endhead`) and footer (`\endfoot`) rows are repeated on every page; once enough rows are added, the table spans several pages on its own.

Table 4: A sample long table.

First column	Second column	Third column
A	BC	D
Continued on next page		

Table 4 – continued from previous page

[illegible]

Corresponding L^AT_EX code of ./paper-minted.tex

```

861 \begin{longtable}{|l|l|l|}
862   \caption{A sample long table.}\label{tab:long} \\
863   \hline
864   \multicolumn{1}{|c|}{\textbf{First column}} &
      \multicolumn{1}{c|}{\textbf{Second column}} &
      \multicolumn{1}{c|}{\textbf{Third column}} \\ \hline
865   \endfirsthead
866
867   \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
      \multicolumn{3}{c}{continued from previous page}} \\
868   \hline
869   \multicolumn{1}{|c|}{\textbf{First column}} &
      \multicolumn{1}{c|}{\textbf{Second column}} &
      \multicolumn{1}{c|}{\textbf{Third column}} \\ \hline
870   \endhead
871
872   \hline \multicolumn{3}{|r|}{Continued on next page} \\
873   \hline
874   \endfoot
875
876   \hline\hline
877   \endlastfoot
878   A & BC & D \\
879   A & BC & D \\
880   A & BC & D \\
881   A & BC & D \\
882   A & BC & D \\
883   A & BC & D \\
884   A & BC & D \\
885   A & BC & D \\
886   A & BC & D \\
887   A & BC & D \\
888   A & BC & D \\
889   A & BC & D \\
890 \end{longtable}

```

3.14 Source Code

minted is a sophisticated package to enable properly highlighted listings. It uses the pygments library, which in turn requires Python.

Listing 1 shows source code written in XML. line 2 contains a comment.


```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

List. 1: Example XML listing using minted

Corresponding L^AT_EX code of ./paper-minted.tex

```

899 \Cref{lst:XML} shows source code written in XML.
900 \refline{line:comment} contains a comment.
901
902 \begin{listing}[htbp]
903   \begin{minted}[linenos=true,escapeinside=||]{xml}
904   <listing name="example">
905     <!-- comment --> |\labelline{line:comment}|
906     <content>not interesting</content>
907   </listing>
908   \end{minted}
909   \caption{Example XML listing using minted}
910   \label{lst:XML}
911 \end{listing}

```

One can also typeset JSON as shown in Listing 2.

```

1 {
2   key: "value"
3 }

```

List. 2: Example JSON listing using minted

Corresponding L^AT_EX code of ./paper-minted.tex

```

917 \begin{listing}[htbp]
918   \begin{minted}[linenos=true,escapeinside=||]{json}
919   {
920     key: "value"
921   }
922   \end{minted}
923   \caption{Example JSON listing using minted}
924   \label{lst:f1JSON}
925 \end{listing}

```

Java is also possible as shown in Listing 3.

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

List. 3: Java code rendered using mintedCorresponding L^AT_EX code of ./paper-minted.tex

```

931 \begin{listing}[htbp]
932     \begin{minted}[linenos=true,escapeinside=||]{java}
933     public class Hello {
934         public static void main (String[] args) {
935             System.out.println("Hello World!");
936         }
937     }
938 \end{minted}
939 \caption{Java code rendered using minted}
940 \label{lst:flJava}
941 \end{listing}

```

3.15 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper-minted.tex

```

949 \begin{itemize}
950     \item Item One
951     \item Item Two
952 \end{itemize}

```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper-minted.tex

```

959 \begin{enumerate}
960     \item Item One
961     \item Item Two
962 \end{enumerate}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper-minted.tex

```
969 \begin{inparaenum}
970   \item All these items...
971   \item ...appear in one line
972   \item This is enabled by the paralist package.
973 \end{inparaenum}
```

3.16 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper-minted.tex

```
979 The words \enquote{workflow} and \enquote{dwarflike} can be
    ↪ copied from the PDF and pasted to a text file.
```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).
 $\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper-minted.tex

```
983 The symbol for powerset is now correct:  $\wp$  and not a
    ↪ Weierstrass  $p$ .
984
985  $\wp(\{1, 2, 3\})$ 
```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper-minted.tex

```
989 Brackets work as designed:
990 <test>
991 One can also input backticks in verbatim text: \verb|`test`|.
```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism`

only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L^AT_EX code of `./paper-minted.tex`

```

997 The \UML is maintained by the \OMG; related standards include
    ↪ \BPEL and \BPMN.
998 Any acronym can be set inline with \initialism{REST} or
    ↪ \initialism{HTTP}.
```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. *IEEE Internet Computing* **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>

2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC'13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharer, M.: The `mwe` Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgment information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.