

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend

consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec  mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on $\LaTeX$ (Sect. 3). Finally, a conclusion is drawn and outlook on future work is made (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

3 $\LaTeX$ Hints

This section contains hints on writing $\LaTeX$. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In $\LaTeX$, this does not lead to a new paragraph as $\LaTeX$ joins subsequent lines. In case you want a new paragraph, just press enter twice! This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In $\LaTeX$, you can do that by using two backslashes (`\`).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

645 æŒúŮŮŮ
646 One sentence per line.
647 This rule is important for the usage of version control systems.
648 A new line is generated with a blank line.
649 As you would do in Word:
650 New paragraphs are generated by pressing enter.
651 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    subsequent lines.
652 In case you want a new paragraph, just press enter twice!
653 This leads to an empty line.
654 In word, there is the functionality to press shift and enter.
655 This leads to a hard line break.
656 The text starts at the beginning of a new line.
657 In LaTeX, you can do that by using two backslashes
    (\textbackslash\textbackslash).
658 \\
659 This is rarely used.
660
661 Please do \textit{not} use two backslashes for new paragraphs.
662 For instance, this sentence belongs to the same paragraph,
    whereas the last one started a new one.
663 A long motivation for that is provided at
    \url{http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

670 æŒúŮŮŮ
671 \begin{mindflow}
672 This is a small note.
673 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

678 %\u{0000}
679 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

684 %\u{0000}
685 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

688 %\u{0000}
689 \modified{Manual marking for text that has been changed since
        the last version.}

```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

692 %\u{0000}
693 This is some text.
694 \change{FL1: text adjusted}{Changed text}.

```

Here just a comment.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

697 %\u{0000}
698 Here just a comment\sidecomment{Comment}.

```

TODO!

Corresponding L^AT_EX code of ./paper-newtx.tex

```

701 %\u{0000}
702 \todo{A lot of text still needs to be produced here}

```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. It might be necessary to tweak the hyphenations nevertheless. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{}tion-specific` (result: `applica tion-specific`), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application"=specific` gets `application"=specific`. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of `./paper-newtx.tex`

```

712 æÉúŮöŮ
713 In case you write \enquote{application-specific}, then the word
      will only be hyphenated at the dash.
714 You can also write \verb!applica\allowbreak{}tion-specific!
      (result: applica\allowbreak{}tion-specific), but this is
      much more effort.
715
716 You can now write words containing hyphens which are hyphenated
      at other places in the word.
717 For instance, \verb!application"=specific! gets
      application"=specific.
718 This is enabled by an additional configuration of the babel
      package.
```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{km}{h}$.

Corresponding L^AT_EX code of `./paper-newtx.tex`

```

723 æÉúŮöŮ
724 Numbers can be written plain text (such as 100), by using the
      \href{https://ctan.org/pkg/siunitx}{siunitx} package as
      follows:
725 \SI{100}{\km\per\hour},
726 or by using plain \LaTeX{} (and math mode):
727 $100 \frac{\mathit{km}}{h}$.
```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper-newtx.tex

730

æŒúŮőŰ

731

\SI{5}{\percent} of \SI{10}{kg}

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper-newtx.tex

734

æŒúŮőŰ

735

Numbers are automatically grouped: \num{123456}.

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper-newtx.tex

740

æŒúŮőŰ

741

Please use the \enquote{enquote command} to quote something.

742

Quoting with "`quote'" or ``quote'" also works.

3.7 Cleveref examples

Cleveref demonstration: Cref at beginning of sentence, cref in all other cases.

Heading1 Heading2	
One	Two
Thee	Four

Table 1. Example table for cref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

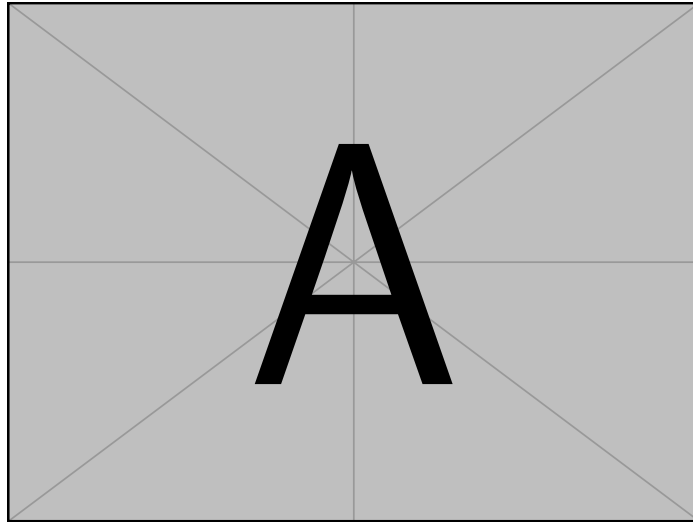


Fig. 1. Example figure for cref demo

Corresponding L^AT_EX code of ./paper-newtx.tex

```

772 æŒúŮŮŮ
773 \Cref{fig:ex:cref} shows a simple fact, although
       \cref{fig:ex:cref} could also show something else.
774
775 \Cref{tab:ex:cref} shows a simple fact, although
       \cref{tab:ex:cref} could also show something else.
776
777 \Cref{sec:ex:cref} shows a simple fact, although
       \cref{sec:ex:cref} could also show something else.

```

3.8 Figures

Figure 2 shows something interesting.



Fig. 2. Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of ./paper-newtx.tex

```

782 æŒŮŮŮŮ
783 \Cref{fig:label} shows something interesting.
784
785 \begin{figure}
786   \centering
787   \includegraphics[width=.8\linewidth]{example-image-golden}
788   \caption[Simple Figure]{
789     Simple Figure.
790     Based on \citet{mwe}.
791   }
792   \label{fig:label}
793 \end{figure}

```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 3. A floating figure

Corresponding L^AT_EX code of ./paper-newtx.tex

```

799 æÉúŰõŰ
800 \begin{floatingfigure}{.33\linewidth}
801   \includegraphics[width=.29\linewidth]{example-image-a}
802   \caption{A floating figure}
803 \end{floatingfigure}
804 \lipsum[2]

```

3.9 Sub Figures

An example of two sub figures is shown in Fig. 4.

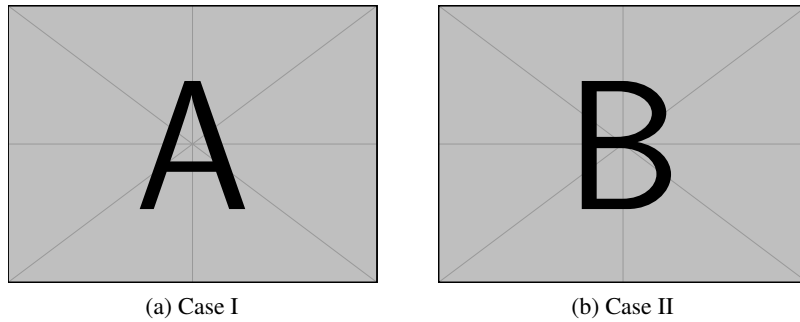


Fig. 4. Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

811 œŒŮŮŮŮ
812 \begin{figure}[!b]
813   \centering
814   \subfloat[Case
      I]{\includegraphics[width=.4\linewidth]{example-image-a}%
815     \label{fig:first_case}}
816   \hfil
817   \subfloat[Case
      II]{\includegraphics[width=.4\linewidth]{example-image-b}%
818     \label{fig:second_case}}
819   \caption{Example figure with two sub figures.}
820   \label{fig:two_sub_figures}
821 \end{figure}

```

3.10 Figures with tikz

The tikz package creates graphics programmatically. With this package, grids or other regular structures can be generated easily.




Fig. 5. A regular grid generated easily with two for loops.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

829 %\begin{figure}
830 \begin{figure}[ht]
831   \centering
832   \begin{tikzpicture}
833     \draw(0,0) rectangle (4,4);
834     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
835       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
836         \draw(\x,\y) circle (1pt);
837   \end{tikzpicture}
838   \caption{A regular grid generated easily with two for
839     loops.}\label{fig:tikz_example}
\end{figure}

```

3.11 Plots with pgfplots

The pgfplots package plots functions directly in L^AT_EX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

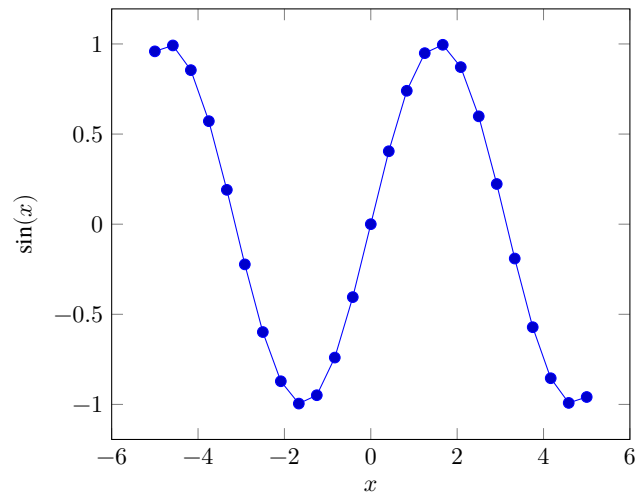


Fig. 6. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

¹ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper-newtx.tex

```

847 %\begin{figure}
848 \begin{figure}[ht]
849   \centering
850   \begin{tikzpicture}
851     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
852       \addplot {sin(deg(x))}; % Plot the sine function
853     \end{axis}
854   \end{tikzpicture}
855   \caption{Plot of $\sin(x)$ directly inside the figure
856     environment with pgfplots.}
857 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

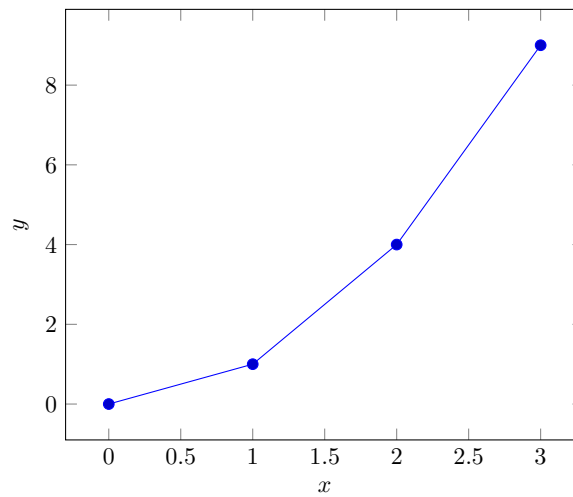


Fig. 7. Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper-newtx.tex

```
861 %\begin{figure}[ht]
862 \begin{figure}[ht]
863   \centering
864   \begin{tikzpicture}
865     \begin{axis}[xlabel=$x$, ylabel=$y$]
866       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
867       \end{axis}
868     \end{tikzpicture}
869     \caption{Explicit coordinates plotted with pgfplots.}
870     \label{fig:pgfplots_coords}
871 \end{figure}
```

3.12 Tables

Table 2. Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper-newtx.tex

```
876 %\begin{table}
877 \begin{table}
878   \caption{Simple Table}
879   \label{tab:simple}
880   \centering
881   \begin{tabular}{ll}
882     \toprule
883     Heading1 & Heading2 \\
884     \midrule
885     One      & Two      \\
886     Thee     & Four     \\
887     \bottomrule
888   \end{tabular}
889 \end{table}
```

Table 3. Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper-newtx.tex

```

892 % Source: https://tex.stackexchange.com/a/468994/9075
893 \begin{table}
894   \caption{Table with diagonal line}
895   \label{tab:diag}
896   \begin{center}
897     \begin{tabular}{|l|c|c|}
898       \hline
899       \diagbox[width=10em]{Diag \Column Head I}{Diag
900         Column\Head II} & Second & Third \\
901       \hline
902
903       \hline
904     \end{tabular}
905   \end{center}
906 \end{table}

```

```

&
foo
&
bar
\\

```

3.13 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (\endhead) and footer (\endfoot) rows are repeated on every page; once enough rows are added, the table spans several pages on its own.

Table 4: A sample long table.

[illegible]

Corresponding L^AT_EX code of ./paper-newtx.tex

```

915 %EüÜöŮ
916 \begin{longtable}{|l|l|l|}
917   \caption{A sample long table.}\label{tab:long} \\
918   \hline
919   \multicolumn{1}{|c|}{\textbf{First column}} &
     \multicolumn{1}{|c|}{\textbf{Second column}} &
     \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
920 \endfirsthead
921
922 \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
     continued from previous page}} \\
923 \hline
924 \multicolumn{1}{|c|}{\textbf{First column}} &
     \multicolumn{1}{|c|}{\textbf{Second column}} &
     \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
925 \endhead
926
927 \hline \multicolumn{3}{|r|}{Continued on next page} \\
928 \hline
929 \endfoot
930
931 \hline\hline
932 \endlastfoot
933 A & BC & D \\
934 A & BC & D \\
935 A & BC & D \\
936 A & BC & D \\
937 A & BC & D \\
938 A & BC & D \\
939 A & BC & D \\
940 A & BC & D \\
941 A & BC & D \\
942 A & BC & D \\
943 A & BC & D \\
944 A & BC & D \\
945 \end{longtable}

```

3.14 Source Code

Listing 1.1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 1.2. Example XML listing – placed as floating figure

Listing 1.1. Example XML Listing

Corresponding L^AT_EX code of ./paper-newtx.tex

```

950 æÉúÛöŦ
951 \Cref{lst:XML} shows source code written in XML.
952 \Cref{line:comment} contains a comment.
953
954 \begin{lstlisting}[
955   language=XML,
956   caption={Example XML Listing},
957   label={lst:XML}]
958 <listing name="example">
959   <!-- comment --> (* \label{line:comment} *)
960   <content>not interesting</content>
961 </listing>
962 \end{lstlisting}

```

One can also add float as parameter to have the listing floating. Listing 1.2 shows the floating listing.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

968 æÉúÛöŦ
969 \begin{lstlisting}[
970   % one can adjust spacing here if required
971   % aboveskip=2.5\baselineskip,
972   % belowskip=-.8\baselineskip,
973   float,
974   language=XML,
975   caption={Example XML listing -- placed as floating figure},
976   label={lst:flXML}]
977 <listing name="example">
978   Floating
979 </listing>
980 \end{lstlisting}

```

One can also typeset JSON as shown in Listing 1.3.

```

1 {
2   key: "value"
3 }

```

Listing 1.3. Example JSON listing – placed as floating figure

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

Listing 1.4. Example Java listingCorresponding L^AT_EX code of ./paper-newtx.tex

```

985 %\begin{lstlisting}
986 \begin{lstlisting}[
987     float,
988     language=json,
989     caption={Example JSON listing -- placed as floating figure},
990     label={lst:json}]
991 {
992     key: "value"
993 }
994 \end{lstlisting}

```

Java is also possible as shown in Listing 1.4.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

999 %\begin{lstlisting}
1000 \begin{lstlisting}[
1001     caption={Example Java listing},
1002     label=lst:java,
1003     language=Java,
1004     float]
1005 public class Hello {
1006     public static void main (String[] args) {
1007         System.out.println("Hello World!");
1008     }
1009 }
1010 \end{lstlisting}

```

3.15 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper-newtx.tex

```
1017 %\documentclass{newtx}
1018 \begin{itemize}
1019   \item Item One
1020   \item Item Two
1021 \end{itemize}
```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper-newtx.tex

```
1027 %\documentclass{newtx}
1028 \begin{enumerate}
1029   \item Item One
1030   \item Item Two
1031 \end{enumerate}
```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper-newtx.tex

```
1037 %\documentclass{newtx}
1038 \begin{inparaenum}
1039   \item All these items...
1040   \item ...appear in one line
1041   \item This is enabled by the paralist package.
1042 \end{inparaenum}
```

3.16 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1047 æŒúŮŮŮ
1048 The words \enquote{workflow} and \enquote{dwarflike} can be
      copied from the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1051 æŒúŮŮŮ
1052 The symbol for powerset is now correct:  $\wpowerset$  and not a
      Weierstrass  $p$  ( $\wp$ ).
1053
1054  $\wpowerset(\{1,2,3\})$ 

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1057 æŒúŮŮŮ
1058 Brackets work as designed:
1059 <test>
1060 One can also input backticks in verbatim text: \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with `REST` or `HTTP`.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1065 æŒúŮŮŮ
1066 The \UML is maintained by the \OMG; related standards include
      \BPEL and \BPMN.
1067 Any acronym can be set inline with \initialism{REST} or
      \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The mwe Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgement information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.