

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac

quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et  am vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on L^AT_EX (Sect. 3). Finally, a conclusion is drawn and outlook on future work is made (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. In case you want a new paragraph, just press enter twice! This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\\`).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper.tex

```

657 œŒŮŮŮŮ
658 One sentence per line.
659 This rule is important for the usage of version control systems.
660 A new line is generated with a blank line.
661 As you would do in Word:
662 New paragraphs are generated by pressing enter.
663 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    subsequent lines.
664 In case you want a new paragraph, just press enter twice!
665 This leads to an empty line.
666 In word, there is the functionality to press shift and enter.
667 This leads to a hard line break.
668 The text starts at the beginning of a new line.
669 In LaTeX, you can do that by using two backslashes
    (\textbackslash\textbackslash).
670 \\\
671 This is rarely used.
672
673 Please do \textit{not} use two backslashes for new paragraphs.
674 For instance, this sentence belongs to the same paragraph,
    whereas the last one started a new one.
675 A long motivation for that is provided at
    \url{http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper.tex

```

682 œŒŮŮŮŮ
683 \begin{mindflow}
684 This is a small note.
685 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```
690 æẼüŦőŦ
691 \textmarker{Marked text.}
```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```
696 æẼüŦőŦ
697 \textcomment{Marked text.}{A comment on it.}
```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper.tex

```
700 æẼüŦőŦ
701 \modified{Manual marking for text that has been changed since
        the last version.}
```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper.tex

```
704 æẼüŦőŦ
705 This is some text.
706 \change{FL1: text adjusted}{Changed text}.
```

Here just a comment.

Corresponding L^AT_EX code of ./paper.tex

```
709 æẼüŦőŦ
710 Here just a comment\sidecomment{Comment}.
```

TODO!

Corresponding L^AT_EX code of ./paper.tex

```
713 æẼüŦőŦ
714 \todo{A lot of text still needs to be produced here}
```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. It might be necessary to tweak the hyphenations nevertheless. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak\}tion-specific` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application"=specific` gets application"=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper.tex

```

724  æÉúŮõŮ
725  In case you write \enquote{application-specific}, then the word
      will only be hyphenated at the dash.
726  You can also write \verb1applica\allowbreak\}tion-specific1
      (result: applica\allowbreak\}tion-specific), but this is
      much more effort.
727
728  You can now write words containing hyphens which are hyphenated
      at other places in the word.
729  For instance, \verb1application"=specific1 gets
      application"=specific.
730  This is enabled by an additional configuration of the babel
      package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{km}{h}$.

Corresponding L^AT_EX code of ./paper.tex

```

735  æÉúŮõŮ
736  Numbers can be written plain text (such as 100), by using the
      \href{https://ctan.org/pkg/siunitx}{siunitx} package as
      follows:
737  \SI{100}{\km\per\hour},
738  or by using plain \LaTeX{} (and math mode):
739  $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper.tex

742 æƒüŦŦŦ
743 \SI{5}{\percent} of \SI{10}{kg}

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper.tex

746 æƒüŦŦŦ
747 Numbers are automatically grouped: \num{123456}.

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper.tex

752 æƒüŦŦŦ
753 Please use the \enquote{enquote command} to quote something.
754 Quoting with "`quote'" or ``quote'" also works.

3.7 Cleveref examples

Cleveref demonstration: Cref at beginning of sentence, cref in all other cases.

Heading1 Heading2	
One	Two
Thee	Four

Table 1. Example table for cref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

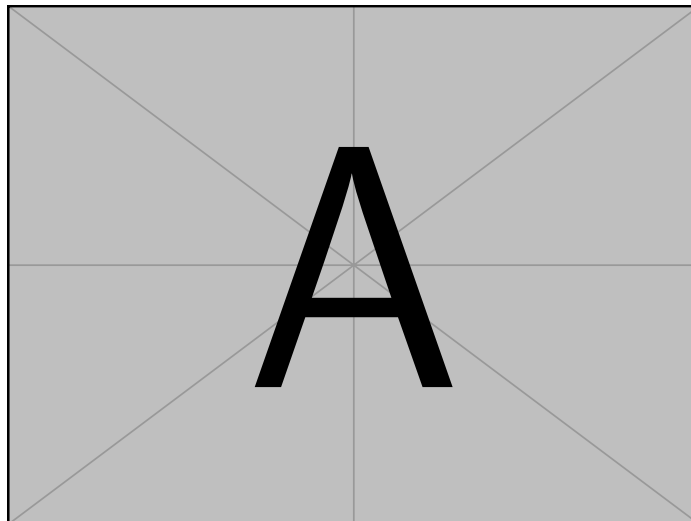


Fig. 1. Example figure for cref demo

Corresponding L^AT_EX code of ./paper.tex

```

784 æEúŰöŰ
785 \Cref{fig:ex:cref} shows a simple fact, although
       \cref{fig:ex:cref} could also show something else.
786
787 \Cref{tab:ex:cref} shows a simple fact, although
       \cref{tab:ex:cref} could also show something else.
788
789 \Cref{sec:ex:cref} shows a simple fact, although
       \cref{sec:ex:cref} could also show something else.

```

3.8 Figures

Figure 2 shows something interesting.



Fig. 2. Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of `./paper.tex`

```
794 æŒúŮŮŮ
795 \Cref{fig:label} shows something interesting.
796
797 \begin{figure}
798   \centering
799   \includegraphics[width=.8\linewidth]{example-image-golden}
800   \caption[Simple Figure]{
801     Simple Figure.
802     Based on \citet{mwe}.
803   }
804   \label{fig:label}
805 \end{figure}
```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 3. A floating figure

Corresponding L^AT_EX code of `./paper.tex`

```

811 æÉúŮóŮ
812 \begin{floatingfigure}{.33\linewidth}
813   \includegraphics[width=.29\linewidth]{example-image-a}
814   \caption{A floating figure}
815 \end{floatingfigure}
816 \lipsum[2]

```

3.9 Sub Figures

An example of two sub figures is shown in Fig. 4.

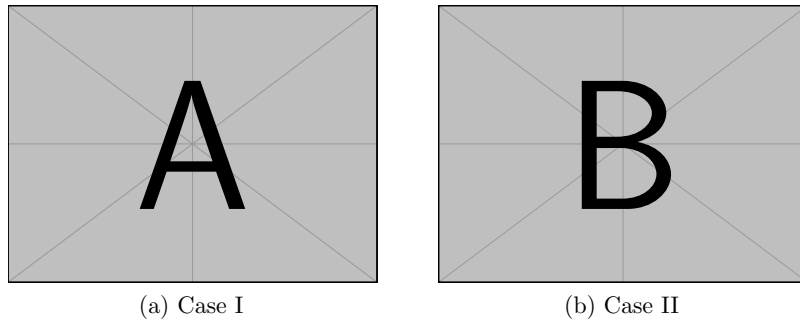


Fig. 4. Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper.tex

```

823 %\begin{figure}
824 \begin{figure}[!b]
825   \centering
826   \subfloat[Case
      I]{\includegraphics[width=.4\linewidth]{example-image-a}}%
827   \label{fig:first_case}}
828   \hfil
829   \subfloat[Case
      II]{\includegraphics[width=.4\linewidth]{example-image-b}}%
830   \label{fig:second_case}}
831   \caption{Example figure with two sub figures.}
832   \label{fig:two_sub_figures}
833 \end{figure}

```

3.10 Figures with tikz

The tikz package creates graphics programmatically. With this package, grids or other regular structures can be generated easily.




Fig. 5. A regular grid generated easily with two for loops.

Corresponding L^AT_EX code of ./paper.tex

```

841 \begin{figure}[ht]
842   \centering
843   \begin{tikzpicture}
844     \draw(0,0) rectangle (4,4);
845     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
846       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
847         \draw(\x,\y) circle (1pt);
848   \end{tikzpicture}
849   \caption{A regular grid generated easily with two for
850     loops.}\label{fig:tikz_example}
851 \end{figure}

```

3.11 Plots with pgfplots

The pgfplots package plots functions directly in L^AT_EX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

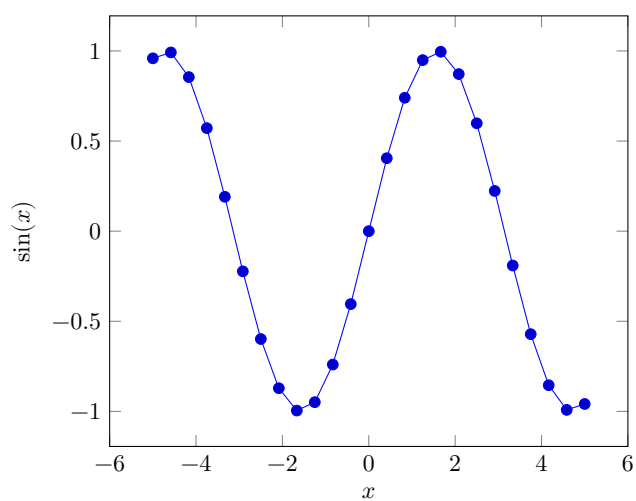


Fig. 6. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

¹ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper.tex

```

859 %\begin{figure}
860 \begin{figure}[ht]
861   \centering
862   \begin{tikzpicture}
863     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
864       \addplot {sin(deg(x))}; % Plot the sine function
865     \end{axis}
866   \end{tikzpicture}
867   \caption{Plot of $\sin(x)$ directly inside the figure
868     environment with pgfplots.}
869   \label{fig:pgfplots_example}
\end{figure}

```

Coordinates can also be given explicitly instead of as a function:

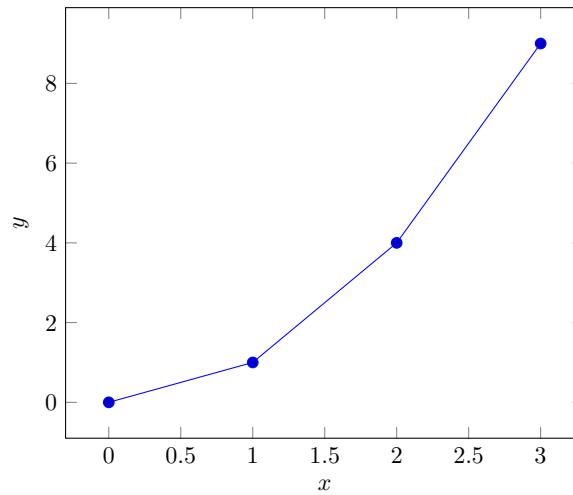


Fig. 7. Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper.tex

```
873 %EüÜöŮ
874 \begin{figure}[ht]
875   \centering
876   \begin{tikzpicture}
877     \begin{axis}[xlabel=$x$, ylabel=$y$]
878       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
879       \end{axis}
880     \end{tikzpicture}
881     \caption{Explicit coordinates plotted with pgfplots.}
882     \label{fig:pgfplots_coords}
883 \end{figure}
```

3.12 Tables

Table 2. Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper.tex

```
888 %EüÜöŮ
889 \begin{table}
890   \caption{Simple Table}
891   \label{tab:simple}
892   \centering
893   \begin{tabular}{ll}
894     \toprule
895     Heading1 & Heading2 \\
896     \midrule
897     One      & Two      \\
898     Thee     & Four     \\
899     \bottomrule
900   \end{tabular}
901 \end{table}
```

Table 3. Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper.tex

```

904 % Source: https://tex.stackexchange.com/a/468994/9075
905 \begin{table}
906   \caption{Table with diagonal line}
907   \label{tab:diag}
908   \begin{center}
909     \begin{tabular}{|l|c|c|}
910       \hline
911       \diagbox[width=10em]{Diag \Column Head I}{Diag
912         Column\Head II} & Second & Third \\
913       \hline
914
915       \hline
916     \end{tabular}
917   \end{center}
918 \end{table}

```

&

foo

&

bar

\\

3.13 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (`\endhead`) and footer (`\endfoot`) rows are repeated on every page; once enough rows are added, the table spans several pages on its own.

Table 4: A sample long table.

[illegible]

Corresponding L^AT_EX code of ./paper.tex

```

927 %EüÜöÜ
928 \begin{longtable}{|l|l|l|}
929   \caption{A sample long table.}\label{tab:long} \\
930   \hline
931   \multicolumn{1}{|c|}{\textbf{First column}} &
     \multicolumn{1}{|c|}{\textbf{Second column}} &
     \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
932 \endfirsthead
933
934 \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
     continued from previous page}} \\
935 \hline
936 \multicolumn{1}{|c|}{\textbf{First column}} &
     \multicolumn{1}{|c|}{\textbf{Second column}} &
     \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
937 \endhead
938
939 \hline \multicolumn{3}{|r|}{Continued on next page} \\
940 \hline
941 \endfoot
942
943 \hline\hline
944 \endlastfoot
945 A & BC & D \\
946 A & BC & D \\
947 A & BC & D \\
948 A & BC & D \\
949 A & BC & D \\
950 A & BC & D \\
951 A & BC & D \\
952 A & BC & D \\
953 A & BC & D \\
954 A & BC & D \\
955 A & BC & D \\
956 A & BC & D \\
957 \end{longtable}

```

3.14 Source Code

Listing 1.1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 1.2. Example XML listing – placed as floating figure

Listing 1.1. Example XML Listing

Corresponding L^AT_EX code of ./paper.tex

```

962 æÉúŮõŮ
963 \Cref{lst:XML} shows source code written in XML.
964 \Cref{line:comment} contains a comment.
965
966 \begin{lstlisting}[
967   language=XML,
968   caption={Example XML Listing},
969   label={lst:XML}]
970 <listing name="example">
971   <!-- comment --> (* \label{line:comment} *)
972   <content>not interesting</content>
973 </listing>
974 \end{lstlisting}

```

One can also add `float` as parameter to have the listing floating. Listing 1.2 shows the floating listing.

Corresponding L^AT_EX code of ./paper.tex

```

980 æÉúŮõŮ
981 \begin{lstlisting}[
982   % one can adjust spacing here if required
983   % aboveskip=2.5\baselineskip,
984   % belowskip=-.8\baselineskip,
985   float,
986   language=XML,
987   caption={Example XML listing -- placed as floating figure},
988   label={lst:flXML}]
989 <listing name="example">
990   Floating
991 </listing>
992 \end{lstlisting}

```

One can also typeset JSON as shown in Listing 1.3.

```
1 {
2   key: "value"
3 }
```

Listing 1.3. Example JSON listing – placed as floating figure

```
1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }
```

Listing 1.4. Example Java listing

Corresponding L^AT_EX code of ./paper.tex

```
997 %\begin{figure}
998 \begin{lstlisting}[
999     float,
1000     language=json,
1001     caption={Example JSON listing -- placed as floating figure},
1002     label={lst:json}]
1003 {
1004     key: "value"
1005 }
1006 \end{lstlisting}
```

Java is also possible as shown in Listing 1.4.

Corresponding L^AT_EX code of ./paper.tex

```
1011 %\begin{figure}
1012 \begin{lstlisting}[
1013     caption={Example Java listing},
1014     label=lst:java,
1015     language=Java,
1016     float]
1017 public class Hello {
1018     public static void main (String[] args) {
1019         System.out.println("Hello World!");
1020     }
1021 }
1022 \end{lstlisting}
```

3.15 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```
1029 %\documentclass{article}
1030 \begin{itemize}
1031   \item Item One
1032   \item Item Two
1033 \end{itemize}
```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper.tex

```
1039 %\documentclass{article}
1040 \begin{enumerate}
1041   \item Item One
1042   \item Item Two
1043 \end{enumerate}
```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper.tex

```
1049 %\documentclass{article}
1050 \begin{inparaenum}
1051   \item All these items...
1052   \item ...appear in one line
1053   \item This is enabled by the paralist package.
1054 \end{inparaenum}
```

3.16 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper.tex

```

1059 æŒúŮŮŮ
1060 The words \enquote{workflow} and \enquote{dwarflike} can be
      copied from the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper.tex

```

1063 æŒúŮŮŮ
1064 The symbol for powerset is now correct:  $\wp$  and not a
      Weierstrass p ( $\wp$ ).
1065
1066  $\wp(\{1, 2, 3\})$ 

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper.tex

```

1069 æŒúŮŮŮ
1070 Brackets work as designed:
1071 <test>
1072 One can also input backticks in verbatim text: \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with `REST` or `HTTP`.

Corresponding L^AT_EX code of ./paper.tex

```

1077 æŒúŮŮŮ
1078 The \UML is maintained by the \OMG; related standards include
      \BPEL and \BPMN.
1079 Any acronym can be set inline with \initialism{REST} or
      \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. *IEEE Internet Computing* **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: *Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13)*, LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The `mwe` Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgment information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.