

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac

quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et  am vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on L^AT_EX (Sect. 3). Finally, a conclusion is drawn and outlook on future work is made (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. In case you want a new paragraph, just press enter twice! This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\\`).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopSPACE.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

Corresponding L^AT_EX code of ./paper.tex

```

695 æŒúŮŮ
696 One sentence per line.
697 This rule is important for the usage of version control systems.
698 A new line is generated with a blank line.
699 As you would do in Word:
700 New paragraphs are generated by pressing enter.
701 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
702 In case you want a new paragraph, just press enter twice!
703 This leads to an empty line.
704 In word, there is the functionality to press shift and enter.
705 This leads to a hard line break.
706 The text starts at the beginning of a new line.
707 In LaTeX, you can do that by using two backslashes
    ↪ (\textbackslash\textbackslash).
708 \\
709 This is rarely used.
710
711 Please do \textit{not} use two backslashes for new paragraphs.
712 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
713 A long motivation for that is provided at
    ↪ \url{http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper.tex

```

720 æŒúŮŮ
721 \begin{mindflow}
722 This is a small note.
723 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```

728 æĖũŮŮŮ
729 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```

734 æĖũŮŮŮ
735 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper.tex

```

738 æĖũŮŮŮ
739 \modified{Manual marking for text that has been changed since
    ↪ the last version.}

```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper.tex

```

742 æĖũŮŮŮ
743 This is some text.
744 \change{FL1: text adjusted}{Changed text}.

```

Here just a comment.

Corresponding L^AT_EX code of ./paper.tex

```

747 æĖũŮŮŮ
748 Here just a comment\sidecomment{Comment}.

```

TODO!

Corresponding L^AT_EX code of ./paper.tex

```

751 æĖũŮŮŮ
752 \todo{A lot of text still needs to be produced here}

```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. It might be necessary to tweak the hyphenations nevertheless. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also write `applica\allowbreak{}tion-specific` (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, `application"=specific` gets application”=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper.tex

```

762 æŒúŮőŰ
763 In case you write \enquote{application-specific}, then the word
    ↪ will only be hyphenated at the dash.
764 You can also write \verb1applica\allowbreak{}tion-specific1
    ↪ (result: applica\allowbreak{}tion-specific), but this is
    ↪ much more effort.
765
766 You can now write words containing hyphens which are hyphenated
    ↪ at other places in the word.
767 For instance, \verb1application"=specific1 gets
    ↪ application"=specific.
768 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{km}{h}$.

Corresponding L^AT_EX code of ./paper.tex

```

773 æŒúŮőŰ
774 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
775 \SI{100}{\km\per\hour},
776 or by using plain \LaTeX{} (and math mode):
777 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper.tex

780 æƒüŦŦŦ
781 \SI{5}{\percent} of \SI{10}{kg}

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper.tex

784 æƒüŦŦŦ
785 Numbers are automatically grouped: \num{123456}.

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper.tex

790 æƒüŦŦŦ
791 Please use the \enquote{enquote command} to quote something.
792 Quoting with "`quote'" or ``quote'" also works.

3.7 Cleveref examples

Cleveref demonstration: Cref at beginning of sentence, cref in all other cases.

Heading1 Heading2	
One	Two
Thee	Four

Table 1. Example table for cref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

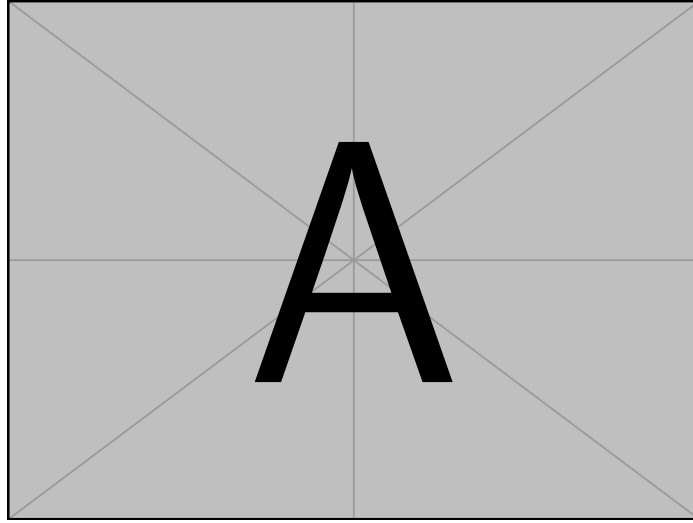


Fig. 1. Example figure for cref demo

Corresponding L^AT_EX code of ./paper.tex

```

822 œÊüŮŮŮ
823 \Cref{fig:ex:cref} shows a simple fact, although
      ↳ \cref{fig:ex:cref} could also show something else.
824
825 \Cref{tab:ex:cref} shows a simple fact, although
      ↳ \cref{tab:ex:cref} could also show something else.
826
827 \Cref{sec:ex:cref} shows a simple fact, although
      ↳ \cref{sec:ex:cref} could also show something else.

```

3.8 Theorem-like Environments and Mathematics

The `llncs` class already provides the theorem-like environments `theorem`, `proposition`, `lemma`, `corollary`, `definition`, `example`, `exercise`, `note`, `problem`, `question`, `remark`, and `solution` as well as the unnumbered `proof` environment – no additional package is required.

Definition 1 (Idempotence). *An operation f is idempotent if $f(f(x)) = f(x)$ holds for all inputs x .*

Proposition 1. *The identity operation is idempotent.*

Lemma 1. *An idempotent operation fixes every element of its image.*

Theorem 1. *If two idempotent operations f and g commute, their composition $f \circ g$ is idempotent.*

Proof. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Corollary 1. *Applying $f \circ g$ a second time yields no further change, as Eq. (1) shows.*

Example 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Corresponding L^AT_EX code of ./paper.tex

```

834 %\begin{document}
835 \begin{definition}[Idempotence]
836   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
837    $\hookrightarrow$  holds for all inputs  $x$ .
838 \end{definition}
839 \begin{proposition}
840   The identity operation is idempotent.
841 \end{proposition}
842 \begin{lemma}\label{lem:fixed}
843   An idempotent operation fixes every element of its image.
844 \end{lemma}
845 \begin{theorem}\label{thm:idempotent-composition}
846   If two idempotent operations  $f$  and  $g$  commute, their
847    $\hookrightarrow$  composition  $f \circ g$  is idempotent.
848 \end{theorem}
849 \begin{proof}
850   Since  $f$  and  $g$  commute and are idempotent,
851   \begin{equation}
852     (f \circ g) \bigl( (f \circ g)(x) \bigr) =
853     \hookrightarrow f \bigl( f(g(g(x))) \bigr) = f(g(x)) = (f \circ g)(x).
854   \end{equation}
855   \label{eq:idempotent-composition}
856   \end{equation}
857   \qed
858 \end{proof}
859 \begin{corollary}
860   Applying  $f \circ g$  a second time yields no further change,
861    $\hookrightarrow$  as \cref{eq:idempotent-composition} shows.
862 \end{corollary}
863 \begin{example}
864   Trimming spaces in a string is idempotent: \cref{lem:fixed}
865    $\hookrightarrow$  applies to every already-trimmed string.
866 \end{example}

```

3.9 Figures

Figure 2 shows something interesting.



Fig. 2. Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of `./paper.tex`

```

871 æEuÛöŦ
872 \Cref{fig:label} shows something interesting.
873
874 \begin{figure}
875   \centering
876   \includegraphics[width=.8\linewidth]{example-image-golden}
877   \caption[Simple Figure]{
878     Simple Figure.
879     Based on \citet{mwe}.
880   }
881   \label{fig:label}
882 \end{figure}

```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 3. A floating figure

Corresponding L^AT_EX code of `./paper.tex`

```

888 æÉúŮóŮ
889 \begin{floatingfigure}{.33\linewidth}
890   \includegraphics[width=.29\linewidth]{example-image-a}
891   \caption{A floating figure}
892 \end{floatingfigure}
893 \lipsum[2]

```

3.10 Sub Figures

An example of two sub figures is shown in Fig. 4.

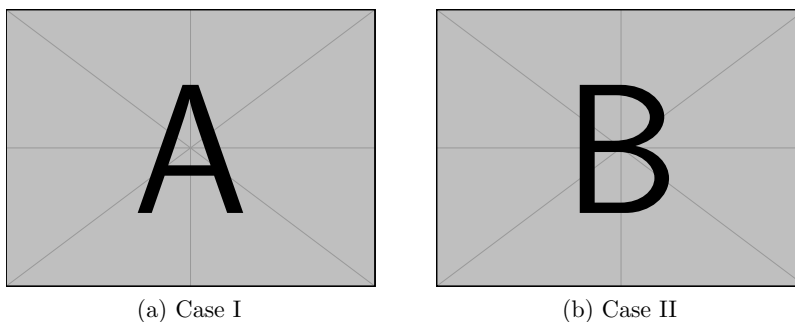


Fig. 4. Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper.tex

```

900 %\begin{figure}
901 \begin{figure}[!b]
902   \centering
903   \subfloat[Case
     ↪ I]{\includegraphics[width=.4\linewidth]{example-image-a}%
904     \label{fig:first_case}}
905   \hfil
906   \subfloat[Case
     ↪ II]{\includegraphics[width=.4\linewidth]{example-image-b}%
907     \label{fig:second_case}}
908   \caption{Example figure with two sub figures.}
909   \label{fig:two_sub_figures}
910 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. With this package, grids or other regular structures can be generated easily.




Fig. 5. A regular grid generated easily with two for loops.

Corresponding L^AT_EX code of ./paper.tex

```

918 æ£üŰŰŰ
919 \begin{figure}[ht]
920   \centering
921   \begin{tikzpicture}
922     \draw(0,0) rectangle (4,4);
923     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
924       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
925         \draw(\x,\y) circle (1pt);
926   \end{tikzpicture}
927   \caption{A regular grid generated easily with two for
928     ↪ loops.}\label{fig:tikz_example}
929 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in L^AT_EX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation¹.

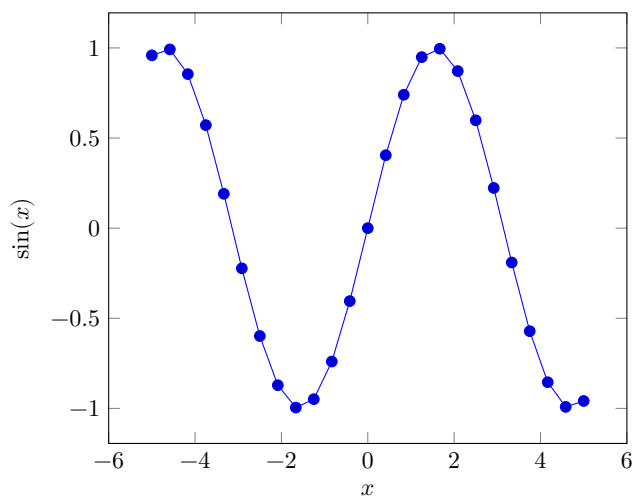


Fig. 6. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

¹ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper.tex

```

936 %EüÜö
937 \begin{figure}[ht]
938   \centering
939   \begin{tikzpicture}
940     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
941       \addplot {sin(deg(x))}; % Plot the sine function
942     \end{axis}
943   \end{tikzpicture}
944   \caption{Plot of $\sin(x)$ directly inside the figure
945     ↪ environment with pgfplots.}
946   \label{fig:pgfplots_example}
947 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

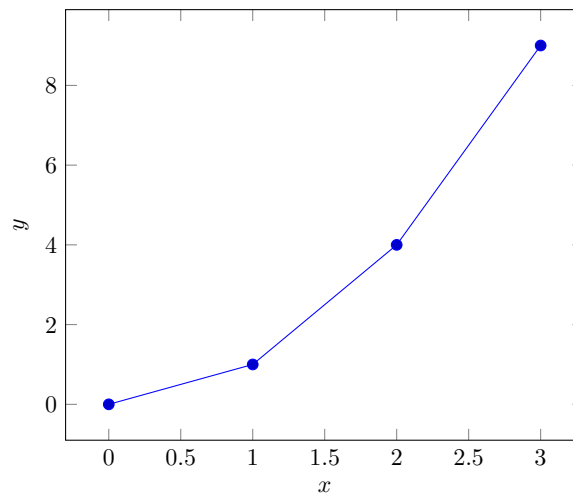


Fig. 7. Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper.tex

```
950 %EüÜöŦ
951 \begin{figure}[ht]
952   \centering
953   \begin{tikzpicture}
954     \begin{axis}[xlabel=$x$, ylabel=$y$]
955       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
956       \end{axis}
957     \end{tikzpicture}
958     \caption{Explicit coordinates plotted with pgfplots.}
959     \label{fig:pgfplots_coords}
960 \end{figure}
```

3.13 Tables

Table 2. Simple Table

Heading1	Heading2
One	Two
Thee	Four

Corresponding L^AT_EX code of ./paper.tex

```
965 %EüÜöŦ
966 \begin{table}
967   \caption{Simple Table}
968   \label{tab:simple}
969   \centering
970   \begin{tabular}{ll}
971     \toprule
972     Heading1 & Heading2 \\
973     \midrule
974     One      & Two      \\
975     Thee     & Four     \\
976     \bottomrule
977   \end{tabular}
978 \end{table}
```

Table 3. Table with diagonal line

Diag Column Head I	Diag Column Head II	Second	Third
		foo	bar

Corresponding L^AT_EX code of ./paper.tex

```

981 % Source: https://tex.stackexchange.com/a/468994/9075
982 \begin{table}
983   \caption{Table with diagonal line}
984   \label{tab:diag}
985   \begin{center}
986     \begin{tabular}{|l|c|c|}
987       \hline
988       \diagbox[width=10em]{Diag \Column Head I}{Diag
989         ↪ Column\Head II} & Second & Third \\
990       \hline
991
992       \hline
993     \end{tabular}
994   \end{center}
995 \end{table}

```

&

↪ foo

↪

↪ &

↪ bar

↪

↪ \\\

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (`\endhead`) and footer (`\endfoot`) rows are repeated on every page; once enough rows are added, the table spans several pages on its own.

Table 4: A sample long table.

[illegible]

Corresponding L^AT_EX code of ./paper.tex

```

1004 %EüÜöŦ
1005 \begin{longtable}{|l|l|l|}
1006   \caption{A sample long table.}\label{tab:long} \\
1007   \hline
1008   \multicolumn{1}{|c|}{\textbf{First column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Second column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
1009   \endfirsthead
1010
1011   \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
      ↪ continued from previous page}} \\
1012   \hline
1013   \multicolumn{1}{|c|}{\textbf{First column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Second column}} &
      ↪ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
1014   \endhead
1015
1016   \hline \multicolumn{3}{|r|}{Continued on next page} \\
      ↪ \hline
1017   \endfoot
1018
1019   \hline\hline
1020   \endlastfoot
1021
1022   A & BC & D \\
1023   A & BC & D \\
1024   A & BC & D \\
1025   A & BC & D \\
1026   A & BC & D \\
1027   A & BC & D \\
1028   A & BC & D \\
1029   A & BC & D \\
1030   A & BC & D \\
1031   A & BC & D \\
1032   A & BC & D \\
1033   A & BC & D \\
1034   \end{longtable}

```

3.15 Source Code

Listing 1.1 shows source code written in XML. Line 2 contains a comment.

```

1  <listing name="example">
2    <!-- comment -->
3    <content>not interesting</content>
4  </listing>

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 1.2. Example XML listing – placed as floating figure

Listing 1.1. Example XML Listing

Corresponding L^AT_EX code of ./paper.tex

```

1039 æEúŰõŰ
1040 \Cref{lst:XML} shows source code written in XML.
1041 \Cref{line:comment} contains a comment.
1042
1043 \begin{lstlisting}[
1044   language=XML,
1045   caption={Example XML Listing},
1046   label={lst:XML}]
1047 <listing name="example">
1048   <!-- comment --> (* \label{line:comment} *)
1049   <content>not interesting</content>
1050 </listing>
1051 \end{lstlisting}

```

One can also add `float` as parameter to have the listing floating. Listing 1.2 shows the floating listing.

Corresponding L^AT_EX code of ./paper.tex

```

1057 æEúŰõŰ
1058 \begin{lstlisting}[
1059   % one can adjust spacing here if required
1060   % aboveskip=2.5\baselineskip,
1061   % belowskip=-.8\baselineskip,
1062   float,
1063   language=XML,
1064   caption={Example XML listing -- placed as floating figure},
1065   label={lst:flXML}]
1066 <listing name="example">
1067   Floating
1068 </listing>
1069 \end{lstlisting}

```

One can also typeset JSON as shown in Listing 1.3.

```
1 {
2   key: "value"
3 }
```

Listing 1.3. Example JSON listing – placed as floating figure

```
1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }
```

Listing 1.4. Example Java listing

Corresponding L^AT_EX code of ./paper.tex

```
1074 %\begin{lstlisting}
1075 \begin{lstlisting}[
1076     float,
1077     language=json,
1078     caption={Example JSON listing -- placed as floating figure},
1079     label={lst:json}]
1080 {
1081     key: "value"
1082 }
1083 \end{lstlisting}
```

Java is also possible as shown in Listing 1.4.

Corresponding L^AT_EX code of ./paper.tex

```
1088 %\begin{lstlisting}
1089 \begin{lstlisting}[
1090     caption={Example Java listing},
1091     label=lst:java,
1092     language=Java,
1093     float]
1094 public class Hello {
1095     public static void main (String[] args) {
1096         System.out.println("Hello World!");
1097     }
1098 }
1099 \end{lstlisting}
```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```
1106 %\documentclass{article}
1107 \begin{itemize}
1108   \item Item One
1109   \item Item Two
1110 \end{itemize}
```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper.tex

```
1116 %\documentclass{article}
1117 \begin{enumerate}
1118   \item Item One
1119   \item Item Two
1120 \end{enumerate}
```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper.tex

```
1126 %\documentclass{article}
1127 \begin{inparaenum}
1128   \item All these items...
1129   \item ...appear in one line
1130   \item This is enabled by the paralist package.
1131 \end{inparaenum}
```

3.17 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper.tex

```

1136 æEuÛöŦ
1137 The words \enquote{workflow} and \enquote{dwarflike} can be
      ↪ copied from the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper.tex

```

1140 æEuÛöŦ
1141 The symbol for powerset is now correct:  $\wp$  and not a
      ↪ Weierstrass p ( $\wp$ ).
1142
1143  $\wp(\{1, 2, 3\})$ 

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper.tex

```

1146 æEuÛöŦ
1147 Brackets work as designed:
1148 <test>
1149 One can also input backticks in verbatim text: \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and a few ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with `REST` or `HTTP`.

Corresponding L^AT_EX code of ./paper.tex

```

1154 æEuÛöŦ
1155 The \UML is maintained by the \OMG; related standards include
      ↪ \BPEL and \BPMN.
1156 Any acronym can be set inline with \initialism{REST} or
      ↪ \initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. *IEEE Internet Computing* **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: *Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13)*, LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The `mwe` Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgment information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.