

Paper Title

Firstname Lastname und Firstname Lastname

Institute

Zusammenfassung. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Schlüsselwörter: First keyword · Second keyword · Third keyword

1 Einleitung

Hier steht die Einleitung zu dieser Ausarbeitung. Sie soll nur als Beispiel dienen. Nun viel Erfolg bei der Arbeit!

Die Arbeit ist in folgender Weise gegliedert: Zuerst werden Grundlagen und verwandte Arbeiten vorgestellt (Abschnitt 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Abschnitt 3). Schließlich fasst Abschnitt 4 die Ergebnisse der Arbeit zusammen und stellt Anknüpfungspunkte vor.

2 Verwandte Arbeiten

Eine Beschreibung relevanter wissenschaftlicher Arbeiten mit Bezug zur eigenen Arbeit. Der Abschnitt kann je nach Kontext auch an anderer Stelle stehen.

Winery [2] is a graphical modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

Für die Suche nach verwandten Arbeiten eignet sich ScienceOS¹; es speichert Daten in der EU und belegt seine Antworten mit Quellen, die man trotzdem selbst lesen und prüfen muss. Schreibhinweise für studentische Arbeiten gibt das Open-Access-Buch *Student Thesis Projects*². Weitere Hinweise gibt *Writing for Computer Science*³.

¹ <https://www.scienceos.ai/>

² <https://vdf.ch/product/student-thesis-projects-en.html>

³ <https://doi.org/10.1007/978-1-4471-6639-9>

3 LaTeX Hinweise

Hier sollen allgemeine $\text{\LaTeX}$ -Hinweise gegeben werden, damit man Minimalbeispiele vorliegen hat, um sofort loszulegen.

3.1 Trennung von Absätzen

Pro Satz eine neue Zeile. Das ist wichtig, um sauber versionieren zu können. In LaTeX werden Absätze durch eine Leerzeile getrennt. Analogie zu Word: Bei Word werden neue Absätze durch einmal Eingabetaste herbeigeführt. Dies führt bei LaTeX jedoch nicht zu einem neuen Absatz, da LaTeX direkt aufeinanderfolgende Zeilen zu einer Zeile zusammenfügt. Mächtige man nun einen Absatz haben, muss man zweimal die Eingabetaste drücken. Dies führt zu einer leeren Zeile. In Word gibt es die Funktion Großschreibetaste und Eingabetaste gleichzeitig. Wenn man dies drückt, wird einer harter Umbruch erzwungen. Der Text fängt am Anfang der neuen Zeile an. In LaTeX erreicht man dies durch Doppelbackslashes (`\`) erzeugt.

Dies verwendet man quasi nie.

Folglich werden neue Absätze insbesondere *nicht* durch Doppelbackslashes erzeugt. Beispielsweise begann der letzte Satz in einem neuen Absatz. Andrew Stacey begründet dies ausführlich im Abschnitt „Line Wrapping“ seines *Document Revision System*⁴.

⁴ <https://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/>

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

637 Pro Satz eine neue Zeile.
638 Das ist wichtig, um sauber versionieren zu können.
639 In LaTeX werden Absätze durch eine Leerzeile getrennt.
640 Analogie zu Word: Bei Word werden neue Absätze durch einmal
    ↪ Eingabetaste herbeigeführt.
641 Dies führt bei LaTeX jedoch nicht zu einem neuen Absatz, da
    ↪ LaTeX direkt aufeinanderfolgende Zeilen zu einer Zeile
    ↪ zusammenfügt.
642 Mächte man nun einen Absatz haben, muss man zweimal die
    ↪ Eingabetaste drücken.
643 Dies führt zu einer leeren Zeile.
644 In Word gibt es die Funktion Großschreibetaste und
    ↪ Eingabetaste gleichzeitig.
645 Wenn man dies drückt, wird einer harter Umbruch erzwungen.
646 Der Text fängt am Anfang der neuen Zeile an.
647 In LaTeX erreicht man dies durch Doppelbackslashes
    ↪ (\textbackslash\textbackslash) erzeugt.
648 \\
649 Dies verwendet man quasi nie.
650
651 Folglich werden neue Absätze insbesondere \emph{nicht} durch
    ↪ Doppelbackslashes erzeugt.
652 Beispielsweise begann der letzte Satz in einem neuen Absatz.
653 Andrew Stacey begründet dies ausführlich im Abschnitt
    ↪ \enquote{Line Wrapping} seines
    ↪ \href{https://loopSPACE.mathforge.org/HowDidIDoThat/TeX/}
    ↪ VCS/#section.3}{\emph{Document Revision
    ↪ System}}\footnote{\url{https://loopSPACE.mathforge.org/}
    ↪ HowDidIDoThat/TeX/VCS/}}.

```

3.2 Notes separated from the text

The package `mindflow` enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

662 \begin{mindflow}
663 This is a small note.
664 \end{mindflow}

```

3.3 Umgang mit TODOs

Markierter Text.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
670 \textmarker{Markierter Text.}
```

Bei `\textmarker` wird nur die Textfarbe geändert, da dies auch bei einigen Worten gut funktioniert.

Markierter Text.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
676 \textcomment{Markierter Text.}{Kommentar dazu.}
```

Manuelle Markierung für Text, der seit der letzten Version geändert wurde.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
680 \modified{Manuelle Markierung für Text, der seit der letzten
↪ Version geändert wurde.}
```

Das ist ein Text. Geänderter Text.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
684 Das ist ein Text.
685 \change{FL1: Text angepasst}{Geänderter Text}.
```

Hier nur ein Kommentar.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
689 Hier nur ein Kommentar\sidecomment{Kommentar}.
```

TODO!

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
693 \todo{Hier muss noch kräftig Text produziert werden}
```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write „application-specific“, then the word will only be hyphenated at the dash. You can also insert `\allowbreak{}` into the word, as in application-specific, but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For that, write `"=` instead of `-`, as in application-specific. This is enabled by an additional configuration of the babel package.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

704 In case you write \enquote{application-specific}, then the
    ↪ word will only be hyphenated at the dash.
705 You can also insert \verb1\allowbreak{1 into the word, as in
    ↪ applica\allowbreak{tion-specific, but this is much more
    ↪ effort.
706
707 You can now write words containing hyphens which are
    ↪ hyphenated at other places in the word.
708 For that, write \verb1"=1 instead of \verb1-1, as in
    ↪ application"=specific.
709 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{\text{km}}{\text{h}}$.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

715 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
716 \SI{100}{\km\per\hour},
717 or by using plain \LaTeX{} (and math mode):
718 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

722 \SI{5}{\percent} of \SI{10}{kg}

```

Numbers are automatically grouped: 123 456.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
726 Numbers are automatically grouped: \num{123456}.
```

3.6 Surrounding Text by Quotes

Please use the „enquote command“ to quote something. Quoting with „quote“ or “quote” also works.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
732 Please use the \enquote{enquote command} to quote something.
733 Quoting with "`quote'" or ``quote'" also works.
734
```

3.7 Zref-clever examples

zref-clever demonstration: Zref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

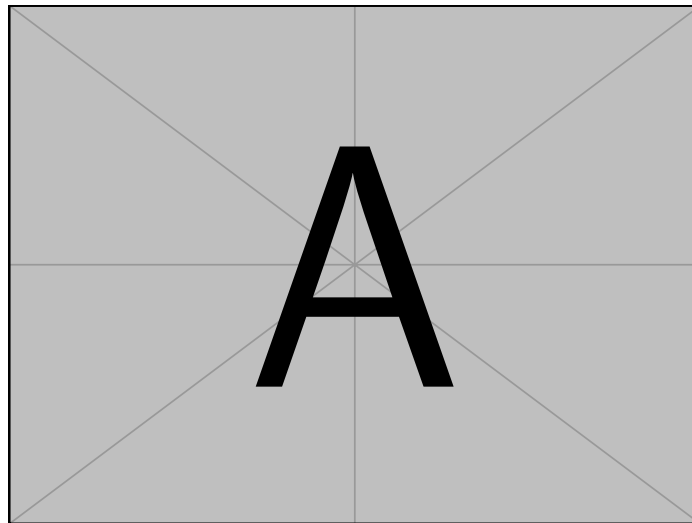


Abb. 1: Example figure for zcref demo

Abbildung 1 shows a simple fact, although Abb. 1 could also show something else.

Tabelle 1 shows a simple fact, although Tabelle 1 could also show something else.

Abschnitt 3.7 shows a simple fact, although Abschnitt 3.7 could also show something else.

Heading1	Heading2
One	Two
Three	Four

Tabelle 1: Example table for zceref demo

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

764 \Zceref{fig:ex:ceref} shows a simple fact, although
      ↳ \zceref{fig:ex:ceref} could also show something else.
765
766 \Zceref{tab:ex:ceref} shows a simple fact, although
      ↳ \zceref{tab:ex:ceref} could also show something else.
767
768 \Zceref{sec:ex:ceref} shows a simple fact, although
      ↳ \zceref{sec:ex:ceref} could also show something else.

```

3.8 Theorem-like Environments and Mathematics

The `llncs` class already provides the theorem-like environments `theorem`, `proposition`, `lemma`, `corollary`, `definition`, `example`, `exercise`, `note`, `problem`, `question`, `remark`, and `solution` as well as the unnumbered proof environment – no additional package is required.

Definition 1 (Idempotence). *An operation f is idempotent if $f(f(x)) = f(x)$ holds for all inputs x .*

Proposition 1. *The identity operation is idempotent.*

Lemma 1. *An idempotent operation fixes every element of its image.*

Theorem 1. *If two idempotent operations f and g commute, their composition $f \circ g$ is idempotent.*

Beweis. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Korollar 1. *Applying $f \circ g$ a second time yields no further change, as Gleichung (1) shows.*

Beispiel 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

776 \begin{definition}[Idempotence]
777   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
778    $\hookrightarrow$  holds for all inputs  $x$ .
779 \end{definition}
780 \begin{proposition}
781   The identity operation is idempotent.
782 \end{proposition}
783 \begin{lemma}\label{lem:fixed}
784   An idempotent operation fixes every element of its image.
785 \end{lemma}
786 \begin{theorem}\label{thm:idempotent-composition}
787   If two idempotent operations  $f$  and  $g$  commute, their
788    $\hookrightarrow$  composition  $f \circ g$  is idempotent.
789 \end{theorem}
790 \begin{proof}
791   Since  $f$  and  $g$  commute and are idempotent,
792   \begin{equation}
793     (f \circ g)(f \circ g)(x) =
794     \hookrightarrow f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x).
795     \label{eq:idempotent-composition}
796   \end{equation}
797   \qed
798 \end{proof}
799 \begin{corollary}
800   Applying  $f \circ g$  a second time yields no further change,
801    $\hookrightarrow$  as \zcref{eq:idempotent-composition} shows.
802 \end{corollary}
803 \begin{example}
804   Trimming spaces in a string is idempotent: \zcref{lem:fixed}
805    $\hookrightarrow$  applies to every already-trimmed string.
806 \end{example}

```

3.9 Abbildungen

Abbildung 2 zeigt etwas Interessantes

Füge deine Abbildung hier ein.

Abb. 2: Bildunterschrift.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

813 \Zcref{fig:label} zeigt etwas Interessantes
814
815 \begin{figure}
816   \centering
817   Füge deine Abbildung hier ein.
818   \caption{Bildunterschrift.}
819   \label{fig:label}
820 \end{figure}

```

Fotos im JPEG- oder PNG-Format werden genauso eingebunden, wie Abb. 3 zeigt.



Abb. 3: Ulmer Münster. Foto: wkrauth, CC0, via Wikimedia Commons.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

826 \begin{figure}
827   \centering
828   \includegraphics[width=.5\linewidth]{figures/ulm-minster.jpg}
829   \caption{Ulmer Münster. Foto: wkrauth, CC0, via Wikimedia
830     ↪ Commons.}
830   \label{fig:jpg}
831 \end{figure}

```

10 Firstname Lastname und Firstname Lastname

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.





Abb. 4: A floating figure

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex


```
838 \begin{floatingfigure}{.33\linewidth}
839   \includegraphics[width=.29\linewidth]{example-image-a}
840   \caption{A floating figure}
841 \end{floatingfigure}
842 \lipsum[2]
```

3.10 Sub Figures

An example of two sub figures is shown in Abb. 5.

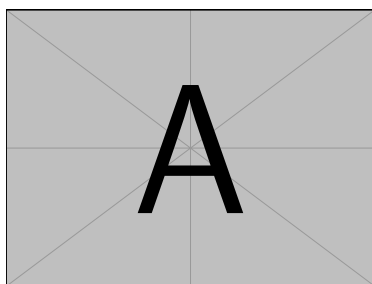

(a) Case I

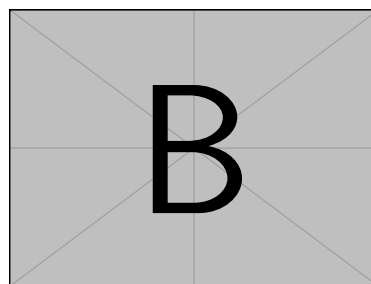

(b) Case II

Abb. 5: Example figure with two sub figures.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

850 \begin{figure}[!b]
851   \centering
852   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{
      ↪ example-image-a}%
853     \label{fig:first_case}}
854   \hfil
855   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{
      ↪ example-image-b}%
856     \label{fig:second_case}}
857   \caption{Example figure with two sub figures.}
858   \label{fig:two_sub_figures}
859 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.




Abb. 6: A regular grid generated easily with two for loops.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

868 \begin{figure}[ht]
869   \centering
870   \begin{tikzpicture}
871     \draw(0,0) rectangle (4,4);
872     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
873       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
874         \draw(\x,\y) circle (1pt);
875   \end{tikzpicture}
876   \caption{A regular grid generated easily with two for
877     ↵ loops.}\label{fig:tikz_example}
877 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in L^AT_EX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation⁵.

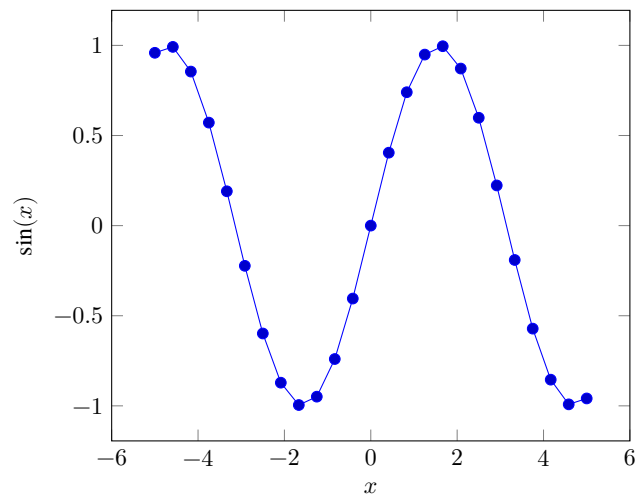


Abb. 7: Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

⁵ <http://texdoc.net/pkg/pgfplots>

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

886 \begin{figure}[ht]
887   \centering
888   \begin{tikzpicture}
889     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
890       \addplot {sin(deg(x))}; % Plot the sine function
891     \end{axis}
892   \end{tikzpicture}
893   \caption{Plot of $\sin(x)$ directly inside the figure
894     ↪ environment with pgfplots.}
895   \label{fig:pgfplots_example}
896 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

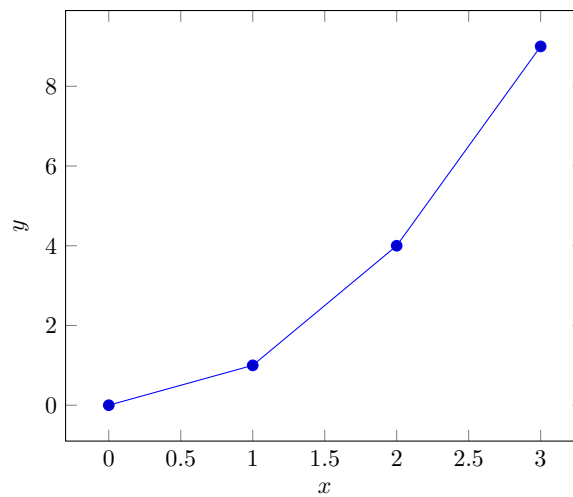


Abb. 8: Explicit coordinates plotted with pgfplots.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

900 \begin{figure}[ht]
901   \centering
902   \begin{tikzpicture}
903     \begin{axis}[xlabel=$x$, ylabel=$y$]
904       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
905       ↪ explicit coordinates
906     \end{axis}
907   \end{tikzpicture}
908   \caption{Explicit coordinates plotted with pgfplots.}
909   \label{fig:pgfplots_coords}
910 \end{figure}

```

3.13 Tables

Tabelle 2: Simple Table

Heading1	Heading2
One	Two
Three	Four

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

915 \begin{table}
916   \caption{Simple Table}
917   \label{tab:simple}
918   \centering
919   \begin{tabular}{ll}
920     \toprule
921     Heading1 & Heading2 \\
922     \midrule
923     One      & Two      \\
924     Three    & Four     \\
925     \bottomrule
926   \end{tabular}
927 \end{table}

```

Tabelle 3: Table with diagonal line

Row	Column	
	A	B
1	x	y

Zugehöriger $\LaTeX$ -Quelltext aus ./paper-de-minted-newtx.tex

```

931 % Adapted from https://tex.stackexchange.com/a/468994/9075
932 \begin{table}
933   \caption{Table with diagonal line}
934   \label{tab:diag}
935   \begin{center}
936     \begin{tabular}{|l|c|c|}
937       \hline
938       \diagbox{Row}{Column} & A & B \\
939       \hline
940       1 & x & y \\
941       \hline
942     \end{tabular}
943   \end{center}
944 \end{table}

```

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (`\endhead`) and footer (`\endfoot`) rows are repeated on every page; once enough rows are added, the table spans more than one page on its own.

Tabelle 4: A sample long table.

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
Continued on next page		

Tabelle 4 – continued from previous page

First column	Second column	Third column
A	BC	D
A	BC	D

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

954 \begin{longtable}{|l|l|l|}
955   \caption{A sample long table.}\label{tab:long} \\
956   \hline
957   \multicolumn{1}{|c|}{\textbf{First column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Second column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
958   \endfirsthead
959
960   \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
    ⇨ continued from previous page}} \\
961   \hline
962   \multicolumn{1}{|c|}{\textbf{First column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Second column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
963   \endhead
964
965   \hline \multicolumn{3}{|r|}{Continued on next page} \\
966   ⇨ \hline
967   \endfoot
968
969   \hline\hline
970   \endlastfoot
971   A & BC & D \\
972   A & BC & D \\
973   A & BC & D \\
974   A & BC & D \\
975   A & BC & D \\
976   A & BC & D \\
977   A & BC & D \\
978   A & BC & D \\
979   A & BC & D \\
980   A & BC & D \\
981   A & BC & D \\
982   A & BC & D \\
983 \end{longtable}

```

3.15 Source Code

minted is a sophisticated package to enable properly highlighted listings. It uses the pygments library, which in turn requires Python.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

List. 1: Example XML listing using minted

Listing 1 shows source code written in XML. Zeile 2 contains a comment.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

992 \Zcref{lst:XML} shows source code written in XML.
993 \refline{line:comment} contains a comment.
994
995 \begin{listing}[htbp]
996   \begin{minted}[linenos=true,escapeinside=||]{xml}
997   <listing name="example">
998     <!-- comment --> |\labelline{line:comment}|
999     <content>not interesting</content>
1000   </listing>
1001   \end{minted}
1002   \caption{Example XML listing using minted}
1003   \label{lst:XML}
1004 \end{listing}

```

One can also typeset JSON as shown in Listing 2.

```

1 {
2   key: "value"
3 }

```

List. 2: Example JSON listing using minted

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

1010 \begin{listing}[htbp]
1011   \begin{minted}[linenos=true,escapeinside=||]{json}
1012   {
1013     key: "value"
1014   }
1015   \end{minted}
1016   \caption{Example JSON listing using minted}
1017   \label{lst:flJSON}
1018 \end{listing}

```

Java is also possible as shown in Listing 3.

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

List. 3: Java code rendered using minted

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

1024 \begin{listing}[htbp]
1025     \begin{minted}[linenos=true,escapeinside=||]{java}
1026     public class Hello {
1027         public static void main (String[] args) {
1028             System.out.println("Hello World!");
1029         }
1030     }
1031 \end{minted}
1032 \caption{Java code rendered using minted}
1033 \label{lst:flJava}
1034 \end{listing}

```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

1042 \begin{itemize}
1043     \item Item One
1044     \item Item Two
1045 \end{itemize}

```

One can enumerate items as follows:

1. Item One
2. Item Two

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

1052 \begin{enumerate}
1053     \item Item One
1054     \item Item Two
1055 \end{enumerate}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
1062 \begin{inparaenum}
1063   \item All these items...
1064   \item ...appear in one line
1065   \item This is enabled by the paralist package.
1066 \end{inparaenum}
```

3.17 Other Features

The words „workflow“ and „dwarflike“ can be copied from the PDF and pasted to a text file.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
1072 The words \enquote{workflow} and \enquote{dwarflike} can be
    ↪ copied from the PDF and pasted to a text file.
```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
1076 The symbol for powerset is now correct: $\powerset$ and not a
    ↪ Weierstrass p ($\wp$).
1077
1078 $\powerset(\{1,2,3\})$
```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```
1082 Brackets work as designed:
1083 <test>
1084 One can also input backticks in verbatim text: \verb|`test`|.
```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and the ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Zugehöriger L^AT_EX-Quelltext aus ./paper-de-minted-newtx.tex

```

1090 The \UML is maintained by the \OMG; related standards include
      ↳ \BPEL and \BPMN.
1091 Any acronym can be set inline with \initialism{REST} or
      ↳ \initialism{HTTP}.

```

4 Zusammenfassung und Ausblick

Hier bitte einen kurzen Durchgang durch die Arbeit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

...und anschließend einen Ausblick.

Danksagungen Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which comes right before the reference section in your document [3].

Literatur

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC'13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64

3. Veytsman, B.: Latex class for the association for computing machinery – acknowledgement information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

Alle Links wurden zuletzt am 29.03.2021 geprüft.