

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend

consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec  mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Sect. 3). The paper closes with a conclusion and an outlook on future work (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

To search for related work, ScienceOS¹ can be used; it stores data in the EU and backs its answers with citations, which you still have to read and check yourself. Writing hints for student theses are given in the open-access book *Student Thesis Projects*². More hints are given in *Writing for Computer Science*³.

3 $\text{\LaTeX}$ Hints

This section contains hints on writing $\text{\LaTeX}$. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In $\text{\LaTeX}$, this does not lead to a new paragraph as $\text{\LaTeX}$ joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In $\text{\LaTeX}$, you can do that by using two backslashes (`\`).

Running text seldom needs a hard line break.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. Andrew Stacey gives a long motivation for that in the section “Line Wrapping” of his *Document Revision System*⁴.

¹ <https://www.scienceos.ai/>

² <https://vdf.ch/product/student-thesis-projects-en.html>

³ <https://doi.org/10.1007/978-1-4471-6639-9>

⁴ <https://loopSPACE.mathforge.org/HowDidIDoThat/TeX/VCS/>

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

613 One sentence per line.
614 This rule is important for the usage of version control
    ↪ systems.
615 A new line is generated with a blank line.
616 As you would do in Word:
617 New paragraphs are generated by pressing enter.
618 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
619 To start a new paragraph, press enter twice.
620 This leads to an empty line.
621 In word, there is the functionality to press shift and enter.
622 This leads to a hard line break.
623 The text starts at the beginning of a new line.
624 In LaTeX, you can do that by using two backslashes
    ↪ (\textbackslash\textbackslash).
625 \\
626 Running text seldom needs a hard line break.
627
628 Please do \textit{not} use two backslashes for new paragraphs.
629 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
630 Andrew Stacey gives a long motivation for that in the section
    ↪ \enquote{Line Wrapping} of his
    ↪ \href{https://loopspace.mathforge.org/HowDidIDoThat/TeX/}
    ↪ VCS/#section.3}{\emph{Document Revision
    ↪ System}}\footnote{\url{https://loopspace.mathforge.org/}
    ↪ HowDidIDoThat/TeX/VCS/}}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

638 \begin{mindflow}
639 This is a small note.
640 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
646 \textmarker{Marked text.}
```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
652 \textcomment{Marked text.}{A comment on it.}
```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
656 \modified{Manual marking for text that has been changed since
↪ the last version.}
```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
660 This is some text.
661 \change{FL1: text adjusted}{Changed text}.
```

Here is a comment.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
665 Here is a comment\sidecomment{Comment}.
```

TODO!

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
669 \todo{A lot of text still needs to be produced here}
```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also insert `\allowbreak{}` into the word, as in application-specific, but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For that, write " = instead of -, as in application"=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

680 In case you write \enquote{application-specific}, then the
    ↪ word will only be hyphenated at the dash.
681 You can also insert \verb1\allowbreak{}1 into the word, as in
    ↪ applica\allowbreak{}tion-specific, but this is much more
    ↪ effort.
682
683 You can now write words containing hyphens which are
    ↪ hyphenated at other places in the word.
684 For that, write \verb1"=1 instead of \verb1-1, as in
    ↪ application"=specific.
685 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{\text{km}}{\text{h}}$.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

691 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
692 \SI{100}{\km\per\hour},
693 or by using plain \LaTeX{} (and math mode):
694 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

698 \SI{5}{\percent} of \SI{10}{kg}

```

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

702 Numbers are automatically grouped: \num{123456}.

```

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

708 Please use the \enquote{enquote command} to quote something.
709 Quoting with "`quote'" or ``quote'" also works.
710

3.7 Zref-clever examples

zref-clever demonstration: Zref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

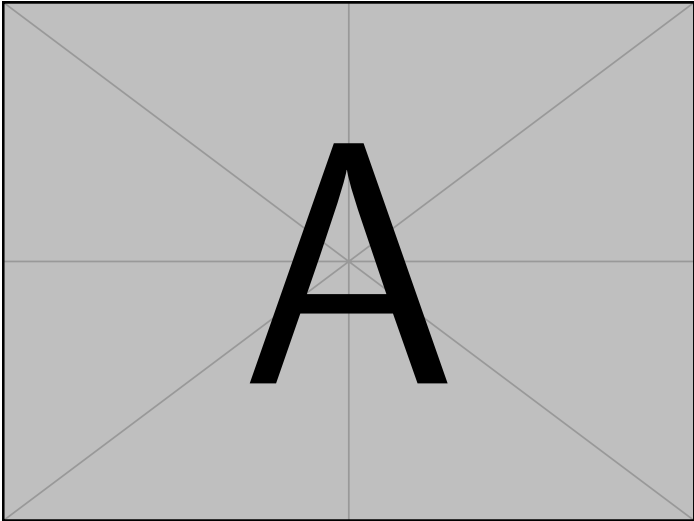


Fig. 1: Example figure for zcref demo

Heading1	Heading2
One	Two
Three	Four

Table 1: Example table for zcref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.

Table 1 shows a simple fact, although Table 1 could also show something else.
 Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

740 \Zcref{fig:ex:cref} shows a simple fact, although
    ⇨ \zcref{fig:ex:cref} could also show something else.
741
742 \Zcref{tab:ex:cref} shows a simple fact, although
    ⇨ \zcref{tab:ex:cref} could also show something else.
743
744 \Zcref{sec:ex:cref} shows a simple fact, although
    ⇨ \zcref{sec:ex:cref} could also show something else.
```

3.8 Theorem-like Environments and Mathematics

The `llncs` class already provides the theorem-like environments `theorem`, `proposition`, `lemma`, `corollary`, `definition`, `example`, `exercise`, `note`, `problem`, `question`, `remark`, and `solution` as well as the unnumbered proof environment – no additional package is required.

Definition 1 (Idempotence). *An operation f is idempotent if $f(f(x)) = f(x)$ holds for all inputs x .*

Proposition 1. *The identity operation is idempotent.*

Lemma 1. *An idempotent operation fixes every element of its image.*

Theorem 1. *If two idempotent operations f and g commute, their composition $f \circ g$ is idempotent.*

Proof. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Corollary 1. *Applying $f \circ g$ a second time yields no further change, as Eq. (1) shows.*

Example 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

752 \begin{definition}[Idempotence]
753   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
754    $\hookrightarrow$  holds for all inputs  $x$ .
755 \end{definition}
756 \begin{proposition}
757   The identity operation is idempotent.
758 \end{proposition}
759 \begin{lemma}\label{lem:fixed}
760   An idempotent operation fixes every element of its image.
761 \end{lemma}
762 \begin{theorem}\label{thm:idempotent-composition}
763   If two idempotent operations  $f$  and  $g$  commute, their
764    $\hookrightarrow$  composition  $f \circ g$  is idempotent.
765 \end{theorem}
766 \begin{proof}
767   Since  $f$  and  $g$  commute and are idempotent,
768   \begin{equation}
769     (f \circ g)(f \circ g)(x) =
770     \hookrightarrow f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x).
771   \end{equation}
772   \label{eq:idempotent-composition}
773   \end{equation}
774   \qed
775 \end{proof}
776 \begin{corollary}
777   Applying  $f \circ g$  a second time yields no further change,
778    $\hookrightarrow$  as \zcref{eq:idempotent-composition} shows.
779 \end{corollary}
780 \begin{example}
781   Trimming spaces in a string is idempotent: \zcref{lem:fixed}
782    $\hookrightarrow$  applies to every already-trimmed string.
783 \end{example}

```

3.9 Figures

Figure 2 shows something interesting.



Fig. 2: Simple Figure. Based on Scharrer [3].

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```

789 \Zcref{fig:label} shows something interesting.
790
791 \begin{figure}
792   \centering
793   \includegraphics[width=.8\linewidth]{example-image-golden}
794   \caption[Simple Figure]{
795     Simple Figure.
796     Based on \citet{mwe}.
797   }
798   \label{fig:label}
799 \end{figure}

```

Photos in JPEG or PNG format are included the same way, as shown in Fig. 3.

Corresponding $\text{\LaTeX}$ code of `./paper-minted-newtx.tex`

```

805 \begin{figure}
806   \centering
807   \includegraphics[width=.5\linewidth]{figures/ulm-minster.jpg}
808   \caption{Ulm Minster. Photo: wkrauth, CC0, via Wikimedia
809     ↪ Commons.}
809   \label{fig:jpg}
810 \end{figure}

```

One can also have pictures floating inside text:



Fig. 3: Ulm Minster. Photo: wkrauth, CC0, via Wikimedia Commons.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.




Fig. 4: A floating figure

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
817 \begin{floatingfigure}{.33\linewidth}
818   \includegraphics[width=.29\linewidth]{example-image-a}
819   \caption{A floating figure}
820 \end{floatingfigure}
821 \lipsum[2]
```

3.10 Sub Figures

An example of two sub figures is shown in Fig. 5.

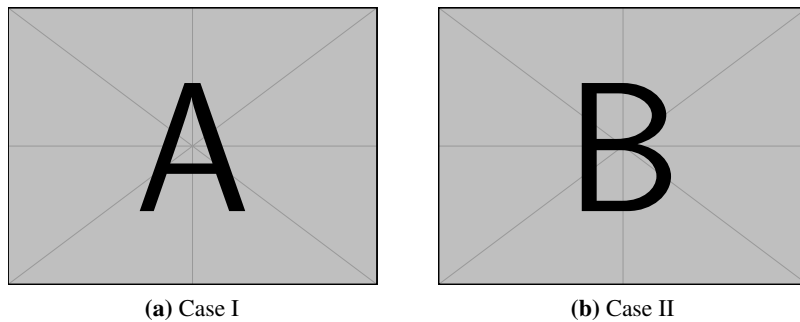


Fig. 5: Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

829 \begin{figure}[!b]
830   \centering
831   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{
      ↪ example-image-a}%
832     \label{fig:first_case}}
833   \hfil
834   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{
      ↪ example-image-b}%
835     \label{fig:second_case}}
836   \caption{Example figure with two sub figures.}
837   \label{fig:two_sub_figures}
838 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.




Fig. 6: A regular grid generated easily with two for loops.

Corresponding $\LaTeX$ code of ./paper-minted-newtx.tex

```

847 \begin{figure}[ht]
848   \centering
849   \begin{tikzpicture}
850     \draw(0,0) rectangle (4,4);
851     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
852       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
853         \draw(\x,\y) circle (1pt);
854   \end{tikzpicture}
855   \caption{A regular grid generated easily with two for
856     ↪ loops.}\label{fig:tikz_example}
857 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in $\LaTeX$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation⁵.

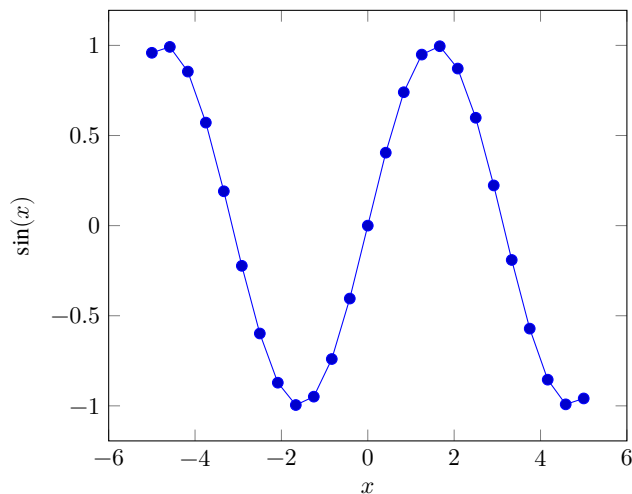


Fig. 7: Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

⁵ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

865 \begin{figure}[ht]
866   \centering
867   \begin{tikzpicture}
868     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
869       \addplot {sin(deg(x))}; % Plot the sine function
870     \end{axis}
871   \end{tikzpicture}
872   \caption{Plot of  $\sin(x)$  directly inside the figure
873     ↪ environment with pgfplots.}
873   \label{fig:pgfplots_example}
874 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

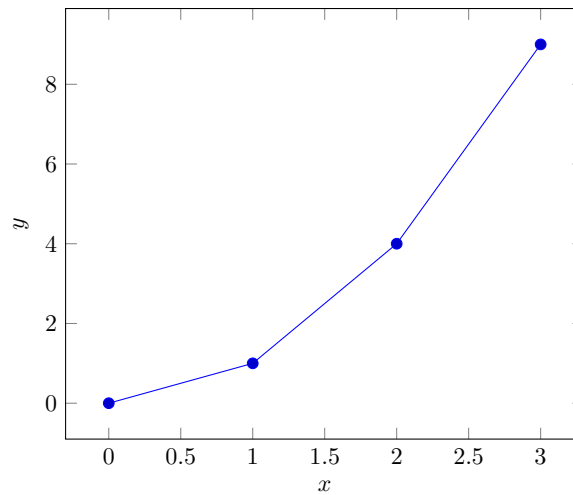


Fig. 8: Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

879 \begin{figure}[ht]
880   \centering
881   \begin{tikzpicture}
882     \begin{axis}[xlabel=$x$, ylabel=$y$]
883       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
884       ↪ explicit coordinates
885     \end{axis}
886   \end{tikzpicture}
887   \caption{Explicit coordinates plotted with pgfplots.}
888   \label{fig:pgfplots_coords}
889 \end{figure}

```

3.13 Tables

Table 2: Simple Table

Heading1	Heading2
One	Two
Three	Four

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

894 \begin{table}
895   \caption{Simple Table}
896   \label{tab:simple}
897   \centering
898   \begin{tabular}{ll}
899     \toprule
900     Heading1 & Heading2 \\
901     \midrule
902     One      & Two      \\
903     Three    & Four     \\
904     \bottomrule
905   \end{tabular}
906 \end{table}

```

Table 3: Table with diagonal line

Row	Column	
	A	B
1	x	y

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

910 % Adapted from https://tex.stackexchange.com/a/468994/9075
911 \begin{table}
912   \caption{Table with diagonal line}
913   \label{tab:diag}
914   \begin{center}
915     \begin{tabular}{|l|c|c|}
916       \hline
917       \diagbox{Row}{Column} & A & B \\
918       \hline
919       1 & x & y \\
920       \hline
921     \end{tabular}
922   \end{center}
923 \end{table}

```

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (\endhead) and footer (\endfoot) rows are repeated on every page; once enough rows are added, the table spans more than one page on its own.

Table 4: A sample long table.

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
Continued on next page		

Table 4 – continued from previous page

First column	Second column	Third column
A	BC	D
A	BC	D

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

933 \begin{longtable}{|l|l|l|}
934   \caption{A sample long table.}\label{tab:long} \\
935   \hline
936   \multicolumn{1}{|c|}{\textbf{First column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Second column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
937   \endfirsthead
938
939   \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --
    ⇨ continued from previous page}} \\
940   \hline
941   \multicolumn{1}{|c|}{\textbf{First column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Second column}} &
    ⇨ \multicolumn{1}{|c|}{\textbf{Third column}} \\ \hline
942   \endhead
943
944   \hline \multicolumn{3}{|r|}{Continued on next page} \\
945   ⇨ \hline
946   \endfoot
947
948   \hline\hline
949   \endlastfoot
950   A & BC & D \\
951   A & BC & D \\
952   A & BC & D \\
953   A & BC & D \\
954   A & BC & D \\
955   A & BC & D \\
956   A & BC & D \\
957   A & BC & D \\
958   A & BC & D \\
959   A & BC & D \\
960   A & BC & D \\
961   A & BC & D \\
962 \end{longtable}

```

3.15 Source Code

minted is a sophisticated package to enable properly highlighted listings. It uses the pygments library, which in turn requires Python.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

List. 1: Example XML listing using minted

Listing 1 shows source code written in XML. line 2 contains a comment.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

971 \Zcref{lst:XML} shows source code written in XML.
972 \refline{line:comment} contains a comment.
973
974 \begin{listing}[htbp]
975   \begin{minted}[linenos=true,escapeinside=||]{xml}
976   <listing name="example">
977     <!-- comment --> |\labelline{line:comment}|
978     <content>not interesting</content>
979   </listing>
980   \end{minted}
981   \caption{Example XML listing using minted}
982   \label{lst:XML}
983 \end{listing}

```

One can also typeset JSON as shown in List. 2.

```

1 {
2   key: "value"
3 }

```

List. 2: Example JSON listing using minted

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```

989 \begin{listing}[htbp]
990   \begin{minted}[linenos=true,escapeinside=||]{json}
991   {
992     key: "value"
993   }
994   \end{minted}
995   \caption{Example JSON listing using minted}
996   \label{lst:flJSON}
997 \end{listing}

```

Java is also possible as shown in List. 3.

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

List. 3: Java code rendered using minted

Corresponding $\text{\LaTeX}$ code of ./paper-minted-newtx.tex

```

1003 \begin{listing}[htbp]
1004     \begin{minted}[linenos=true,escapeinside=||]{java}
1005     public class Hello {
1006         public static void main (String[] args) {
1007             System.out.println("Hello World!");
1008         }
1009     }
1010     \end{minted}
1011     \caption{Java code rendered using minted}
1012     \label{lst:flJava}
1013 \end{listing}

```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding $\text{\LaTeX}$ code of ./paper-minted-newtx.tex

```

1021 \begin{itemize}
1022     \item Item One
1023     \item Item Two
1024 \end{itemize}

```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding $\text{\LaTeX}$ code of ./paper-minted-newtx.tex

```

1031 \begin{enumerate}
1032     \item Item One
1033     \item Item Two
1034 \end{enumerate}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1041 \begin{inparaenum}
1042   \item All these items...
1043   \item ...appear in one line
1044   \item This is enabled by the paralist package.
1045 \end{inparaenum}
```

3.17 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1051 The words \enquote{workflow} and \enquote{dwarflike} can be
      ↪ copied from the PDF and pasted to a text file.
```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1055 The symbol for powerset is now correct:  $\wpowerset$  and not a
      ↪ Weierstrass p ( $\wp$ ).
1056
1057  $\wpowerset(\{1, 2, 3\})$ 
```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1061 Brackets work as designed:
1062 <test>
1063 One can also input backticks in verbatim text: \verb|`test`|.
```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and the ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Corresponding L^AT_EX code of ./paper-minted-newtx.tex

```
1069 The \UML is maintained by the \OMG; related standards include
      ↪ \BPEL and \BPMN.
1070 Any acronym can be set inline with \initialism{REST} or
      ↪ \initialism{HTTP}.
```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which comes right before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>
2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC’13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The mwe Package (2017), URL <http://texdoc.net/mwe>

4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgement information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.