

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend

consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec  mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa. TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on $\text{\LaTeX}$ (Sect. 3). The paper closes with a conclusion and an outlook on future work (Sect. 4).

2 Related Work

Winery [2] is a graphical  modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

To search for related work, ScienceOS¹ can be used; it stores data in the EU and backs its answers with citations, which you still have to read and check yourself. Writing hints for student theses are given in the open-access book *Student Thesis Projects*². More hints are given in *Writing for Computer Science*³.

3 $\text{\LaTeX}$ Hints

This section contains hints on writing $\text{\LaTeX}$. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In $\text{\LaTeX}$, this does not lead to a new paragraph as $\text{\LaTeX}$ joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In $\text{\LaTeX}$, you can do that by using two backslashes (`\`).

Running text seldom needs a hard line break.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. Andrew Stacey gives a long motivation for that in the section “Line Wrapping” of his *Document Revision System*⁴.

¹ <https://www.scienceos.ai/>

² <https://vdf.ch/product/student-thesis-projects-en.html>

³ <https://doi.org/10.1007/978-1-4471-6639-9>

⁴ <https://loopSPACE.mathforge.org/HowDidIDoThat/TeX/VCS/>

Corresponding L^AT_EX code of ./paper-newtx.tex

```

690 æŒúŮŮŮ
691 One sentence per line.
692 This rule is important for the usage of version control systems.
693 A new line is generated with a blank line.
694 As you would do in Word:
695 New paragraphs are generated by pressing enter.
696 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
697 To start a new paragraph, press enter twice.
698 This leads to an empty line.
699 In word, there is the functionality to press shift and enter.
700 This leads to a hard line break.
701 The text starts at the beginning of a new line.
702 In LaTeX, you can do that by using two backslashes (\
    ↪ textbackslash\textbackslash).
703 \\
704 Running text seldom needs a hard line break.
705
706 Please do \textit{not} use two backslashes for new paragraphs.
707 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
708 Andrew Stacey gives a long motivation for that in the section \
    ↪ enquote{Line Wrapping} of his \href{https://loopspace.
    ↪ mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}{\emph{
    ↪ Document Revision System}}\footnote{\url{https://
    ↪ loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/}}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

715 æŒúŮŮŮ
716 \begin{mindflow}
717 This is a small note.
718 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

723 %ÜÜÜÜ
724 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

729 %ÜÜÜÜ
730 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

733 %ÜÜÜÜ
734 \modified{Manual marking for text that has been changed since
    ↪ the last version.}

```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

737 %ÜÜÜÜ
738 This is some text.
739 \change{FL1: text adjusted}{Changed text}.

```

Here is a comment.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

742 %ÜÜÜÜ
743 Here is a comment\sidecomment{Comment}.

```

TODO!

Corresponding L^AT_EX code of ./paper-newtx.tex

```

746 %ÜÜÜÜ
747 \todo{A lot of text still needs to be produced here}

```

3.4 Hyphenation

$\LaTeX$ automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also insert `\allowbreak{}` into the word, as in application-specific, but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For that, write “= instead of -, as in application”=specific. This is enabled by an additional configuration of the babel package.

Corresponding $\LaTeX$ code of ./paper-newtx.tex

```

757 æŒúŮŮŮ
758 In case you write \enquote{application-specific}, then the word
    ↪ will only be hyphenated at the dash.
759 You can also insert \verb1\allowbreak{}1 into the word, as in
    ↪ applica\allowbreak{}tion-specific, but this is much more
    ↪ effort.
760
761 You can now write words containing hyphens which are hyphenated
    ↪ at other places in the word.
762 For that, write \verb1"=1 instead of \verb1-1, as in application
    ↪ "=specific.
763 This is enabled by an additional configuration of the babel
    ↪ package.

```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain $\LaTeX$ (and math mode): $100 \frac{\text{km}}{\text{h}}$.

Corresponding $\LaTeX$ code of ./paper-newtx.tex

```

768 æŒúŮŮŮ
769 Numbers can be written plain text (such as 100), by using the \
    ↪ href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
770 \SI{100}{\km\per\hour},
771 or by using plain \LaTeX{} (and math mode):
772 $100 \frac{\mathit{km}}{h}$.

```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper-newtx.tex

775 æẼũŰõŰ
776 \SI{5}{\percent} of \SI{10}{kg}

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper-newtx.tex

779 æẼũŰõŰ
780 Numbers are automatically grouped: \num{123456}.

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper-newtx.tex

785 æẼũŰõŰ
786 Please use the \enquote{enquote command} to quote something.
787 Quoting with “quote” or “quote” also works.

3.7 Zref-clever examples

zref-clever demonstration: Zcref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

Heading1 Heading2	
One	Two
Three	Four

Table 1. Example table for zcref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

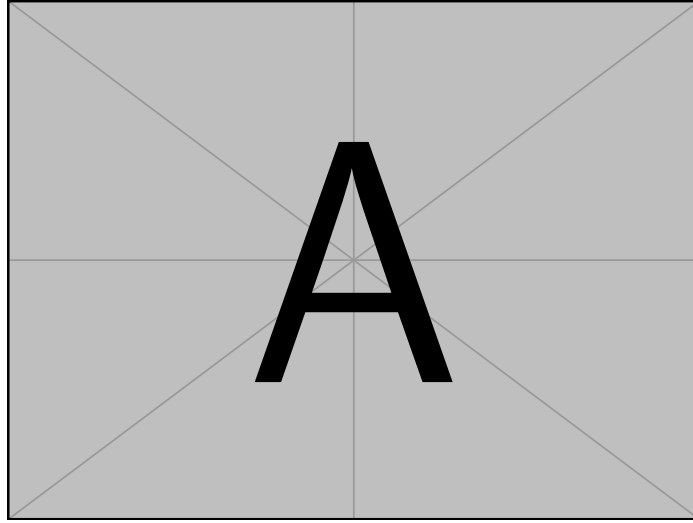


Fig. 1. Example figure for zcref demo

Corresponding L^AT_EX code of ./paper-newtx.tex

```

817 œÊüŮŮŮ
818 \Zcref{fig:ex:cref} shows a simple fact, although \zcref{fig:ex:
      ↪ cref} could also show something else.
819
820 \Zcref{tab:ex:cref} shows a simple fact, although \zcref{tab:ex:
      ↪ cref} could also show something else.
821
822 \Zcref{sec:ex:cref} shows a simple fact, although \zcref{sec:ex:
      ↪ cref} could also show something else.

```

3.8 Theorem-like Environments and Mathematics

The `llncs` class already provides the theorem-like environments `theorem`, `proposition`, `lemma`, `corollary`, `definition`, `example`, `exercise`, `note`, `problem`, `question`, `remark`, and `solution` as well as the unnumbered proof environment – no additional package is required.

Definition 1 (Idempotence). *An operation f is idempotent if $f(f(x)) = f(x)$ holds for all inputs x .*

Proposition 1. *The identity operation is idempotent.*

Lemma 1. *An idempotent operation fixes every element of its image.*

Theorem 1. *If two idempotent operations f and g commute, their composition $f \circ g$ is idempotent.*

Proof. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Corollary 1. Applying $f \circ g$ a second time yields no further change, as Eq. (1) shows.

Example 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

829 %\begin{document}
830 \begin{definition}[Idempotence]
831   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
832    $\hookrightarrow$  holds for all inputs  $x$ .
833 \end{definition}
834 \begin{proposition}
835   The identity operation is idempotent.
836 \end{proposition}
837 \begin{lemma}\label{lem:fixed}
838   An idempotent operation fixes every element of its image.
839 \end{lemma}
840 \begin{theorem}\label{thm:idempotent-composition}
841   If two idempotent operations  $f$  and  $g$  commute, their
842    $\hookrightarrow$  composition  $f \circ g$  is idempotent.
843 \end{theorem}
844 \begin{proof}
845   Since  $f$  and  $g$  commute and are idempotent,
846   \begin{equation}
847     (f \circ g)(f \circ g)(x) = f(g(g(f(x)))) = f(g(f(x))) = f(f(g(x))) = f(g(x)) = (f \circ g)(x).
848   \end{equation}
849   \label{eq:idempotent-composition}
850 \end{equation}
851 \qed
852 \end{proof}
853 \begin{corollary}
854   Applying  $f \circ g$  a second time yields no further change,
855    $\hookrightarrow$  as \zcref{eq:idempotent-composition} shows.
856 \end{corollary}
857 \begin{example}
858   Trimming spaces in a string is idempotent: \zcref{lem:fixed}
859    $\hookrightarrow$  applies to every already-trimmed string.
860 \end{example}

```

3.9 Figures

Figure 2 shows something interesting.



Fig. 2. Simple Figure. Based on Scharer [3].

Corresponding L^AT_EX code of ./paper-newtx.tex

```

866 æŒúŮŮŮ
867 \Zcref{fig:label} shows something interesting.
868
869 \begin{figure}
870   \centering
871   \includegraphics[width=.8\linewidth]{example-image-golden}
872   \caption[Simple Figure]{
873     Simple Figure.
874     Based on \citet{mwe}.
875   }
876   \label{fig:label}
877 \end{figure}

```

Photos in JPEG or PNG format are included the same way, as shown in Fig. 3.



Fig. 3. Ulm Minster. Photo: wkrauth, CC0, via Wikimedia Commons.

Corresponding L^AT_EX code of ./paper-newtx.tex

```
882 æŒúŮŮŮ
883 \begin{figure}
884   \centering
885   \includegraphics[width=.5\linewidth]{figures/ulm-minster.jpg}
886   \caption{Ulm Minster. Photo: wkrauth, CC0, via Wikimedia
887           ↪ Commons.}
887   \label{fig:jpg}
888 \end{figure}
```

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

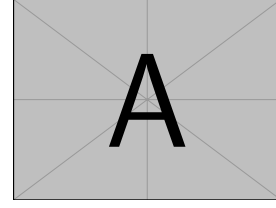


Fig. 4. A floating figure

Corresponding L^AT_EX code of ./paper-newtx.tex

```

894 æÉúŰöŰ
895 \begin{floatingfigure}{.33\linewidth}
896   \includegraphics[width=.29\linewidth]{example-image-a}
897   \caption{A floating figure}
898 \end{floatingfigure}
899 \lipsum[2]

```

3.10 Sub Figures

An example of two sub figures is shown in Fig. 5.

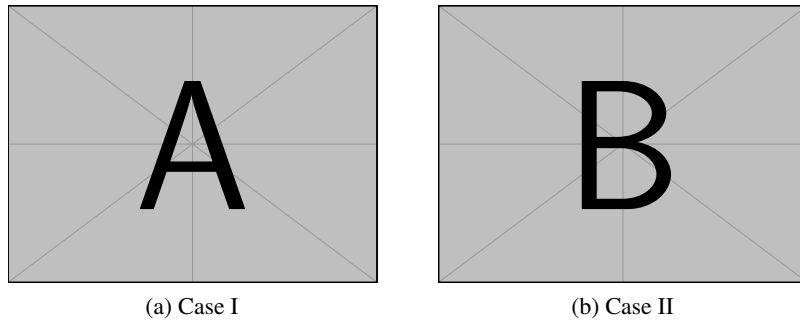


Fig. 5. Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

906 %\begin{figure}
907 \begin{figure}[!b]
908   \centering
909   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{example
    ↪ -image-a}%
910   \label{fig:first_case}}
911   \hfil
912   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{
    ↪ example-image-b}%
913   \label{fig:second_case}}
914   \caption{Example figure with two sub figures.}
915   \label{fig:two_sub_figures}
916 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.

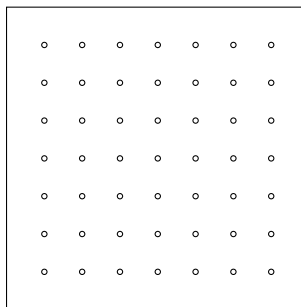


Fig. 6. A regular grid generated easily with two for loops.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

924 \begin{figure}[ht]
925   \centering
926   \begin{tikzpicture}
927     \draw(0,0) rectangle (4,4);
928     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
929       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
930         \draw(\x,\y) circle (1pt);
931   \end{tikzpicture}
932   \caption{A regular grid generated easily with two for loops.}\label{fig:tikz_example}
933 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in L^AT_EX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation⁵.

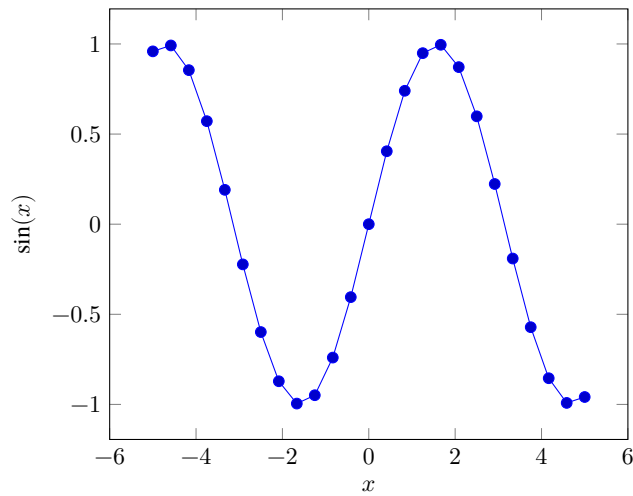


Fig. 7. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

⁵ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper-newtx.tex

```

942 \begin{figure}[ht]
943   \centering
944   \begin{tikzpicture}
945     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
946       \addplot {sin(deg(x))}; % Plot the sine function
947     \end{axis}
948   \end{tikzpicture}
949   \caption{Plot of $\sin(x)$ directly inside the figure
950     ↪ environment with pgfplots.}
951   \label{fig:pgfplots_example}
952 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

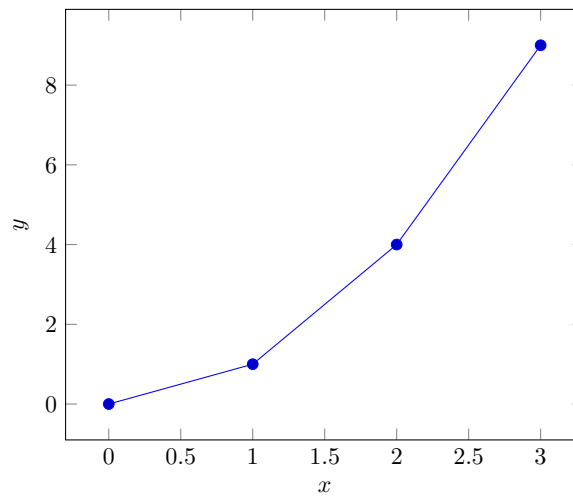


Fig. 8. Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper-newtx.tex

```
956 %\begin{figure}[ht]
957 \begin{figure}[ht]
958 \centering
959 \begin{tikzpicture}
960 \begin{axis}[xlabel=$x$, ylabel=$y$]
961 \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
962 \end{axis}
963 \end{tikzpicture}
964 \caption{Explicit coordinates plotted with pgfplots.}
965 \label{fig:pgfplots_coords}
966 \end{figure}
```

3.13 Tables

Table 2. Simple Table

Heading1	Heading2
One	Two
Three	Four

Corresponding L^AT_EX code of ./paper-newtx.tex

```
971 %\begin{table}
972 \begin{table}
973 \caption{Simple Table}
974 \label{tab:simple}
975 \centering
976 \begin{tabular}{ll}
977 \toprule
978 Heading1 & Heading2 \\
979 \midrule
980 One & Two \\
981 Three & Four \\
982 \bottomrule
983 \end{tabular}
984 \end{table}
```

Table 3. Table with diagonal line

Row	Column	
	A	B
1	x	y

Corresponding L^AT_EX code of ./paper-newtx.tex

```

987 % Adapted from https://tex.stackexchange.com/a/468994/9075
988 \begin{table}
989   \caption{Table with diagonal line}
990   \label{tab:diag}
991   \begin{center}
992     \begin{tabular}{|l|c|c|}
993       \hline
994       \diagbox{Row}{Column} & A & B \\
995       \hline
996       1 & x & y \\
997       \hline
998     \end{tabular}
999   \end{center}
1000 \end{table}

```

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (`\endhead`) and footer (`\endfoot`) rows are repeated on every page; once enough rows are added, the table spans more than one page on its own.

Table 4: A sample long table.

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
Continued on next page		

Table 4 – continued from previous page

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1010 \begin{longtable}{|l|l|l|}
1011 \caption{A sample long table.}\label{tab:long} \\
1012 \hline
1013 \multicolumn{1}{|c|}{\textbf{First column}} & \multicolumn{1}{|c|}{\textbf{Second column}} & \multicolumn{1}{|c|}{\textbf{Third column}} \\
1014 \hline
1015 \endfirsthead
1016
1017 \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --}
1018 \multicolumn{3}{c}{continued from previous page} \\
1019 \hline
1020 \multicolumn{1}{|c|}{\textbf{First column}} & \multicolumn{1}{|c|}{\textbf{Second column}} & \multicolumn{1}{|c|}{\textbf{Third column}} \\
1021 \hline
1022 \endhead
1023
1024 \hline \multicolumn{3}{|r|}{Continued on next page} \\
1025 \hline
1026 \endfoot
1027
1028 \hline\hline
1029 \endlastfoot
1030
1031 A & BC & D \\
1032 A & BC & D \\
1033 A & BC & D \\
1034 A & BC & D \\
1035 A & BC & D \\
1036 A & BC & D \\
1037 A & BC & D \\
1038 A & BC & D \\
1039 A & BC & D \\
1040 \end{longtable}

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 1.2. Example XML listing – placed as floating figure

3.15 Source Code

Listing 1.1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

Listing 1.1. Example XML Listing

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1045 œŒŮŮŮŮ
1046 \Zcref{lst:XML} shows source code written in XML.
1047 \Zcref{line:comment} contains a comment.
1048
1049 \begin{lstlisting}[
1050   language=XML,
1051   caption={Example XML Listing},
1052   label={lst:XML}]
1053 <listing name="example">
1054   <!-- comment --> (* \label{line:comment} *)
1055   <content>not interesting</content>
1056 </listing>
1057 \end{lstlisting}

```

One can also add `float` as parameter to have the listing floating. Listing 1.2 shows the floating listing.

```

1 {
2   key: "value"
3 }

```

Listing 1.3. Example JSON listing – placed as floating figure

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

Listing 1.4. Example Java listing

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1063 %\begin{lstlisting}
1064 \begin{lstlisting}[
1065   % one can adjust spacing here if required
1066   % aboveskip=2.5\baselineskip,
1067   % belowskip=-.8\baselineskip,
1068   float,
1069   language=XML,
1070   caption={Example XML listing -- placed as floating figure},
1071   label={lst:flXML}]
1072 <listing name="example">
1073   Floating
1074 </listing>
1075 \end{lstlisting}

```

One can also typeset JSON as shown in List. 1.3.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1080 %\begin{lstlisting}
1081 \begin{lstlisting}[
1082   float,
1083   language=json,
1084   caption={Example JSON listing -- placed as floating figure},
1085   label={lst:json}]
1086 {
1087   key: "value"
1088 }
1089 \end{lstlisting}

```

Java is also possible as shown in List. 1.4.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1094 %\begin{lstlisting}
1095 \begin{lstlisting}[
1096   caption={Example Java listing},
1097   label=lst:java,
1098   language=Java,
1099   float]
1100 public class Hello {
1101     public static void main (String[] args) {
1102         System.out.println("Hello World!");
1103     }
1104 }
1105 \end{lstlisting}

```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1112 %\begin{itemize}
1113 \begin{itemize}
1114     \item Item One
1115     \item Item Two
1116 \end{itemize}

```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1122 %\begin{enumerate}
1123 \begin{enumerate}
1124     \item Item One
1125     \item Item Two
1126 \end{enumerate}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1132 æŒüŦŦŦ
1133 \begin{inparaenum}
1134   \item All these items...
1135   \item ...appear in one line
1136   \item This is enabled by the paralist package.
1137 \end{inparaenum}

```

3.17 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1142 æŒüŦŦŦ
1143 The words \enquote{workflow} and \enquote{dwarflike} can be
      ↪ copied from the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

$\wp(1, 2, 3)$

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1146 æŒüŦŦŦ
1147 The symbol for powerset is now correct:  $\wpowerset$  and not a
      ↪ Weierstrass p ( $\wp$ ).
1148
1149  $\wpowerset(\{1, 2, 3\})$ 

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper-newtx.tex

```

1152 æŒüŦŦŦ
1153 Brackets work as designed:
1154 <test>
1155 One can also input backticks in verbatim text: \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations)

provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and the ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with `REST` or `HTTP`.

Corresponding L^AT_EX code of `./paper-newtx.tex`

```

1160 æÉúŮóŮ
1161 The \UML is maintained by the \OMG; related standards include \
      ↪ BPEL and \BPMN.
1162 Any acronym can be set inline with \initialism{REST} or \
      ↪ initialism{HTTP}.

```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which comes right before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>

2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC'13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The mwe Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgement information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.