

Paper Title

Firstname Lastname and Firstname Lastname

Institute

Abstract. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Keywords: First keyword · Second keyword · Third keyword

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac

quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et nunciam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.TODO!

The remainder of the paper starts with a presentation of related work (Sect. 2). It is followed by a presentation of hints on L^AT_EX (Sect. 3). The paper closes with a conclusion and an outlook on future work (Sect. 4).

2 Related Work

Winery [2] is a graphical modeling tool. The whole idea of TOSCA is explained by Binz et al. [1].

To search for related work, ScienceOS¹ can be used; it stores data in the EU and backs its answers with citations, which you still have to read and check yourself. Writing hints for student theses are given in the open-access book *Student Thesis Projects*². More hints are given in *Writing for Computer Science*³.

3 LaTeX Hints

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

3.1 Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. To start a new paragraph, press enter twice. This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\\`).

Running text seldom needs a hard line break.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. Andrew Stacey gives a long motivation for that in the section “Line Wrapping” of his *Document Revision System*⁴.

¹ <https://www.scienceos.ai/>

² <https://vdf.ch/product/student-thesis-projects-en.html>

³ <https://doi.org/10.1007/978-1-4471-6639-9>

⁴ <https://loopSPACE.mathforge.org/HowDidIDoThat/TeX/VCS/>

Corresponding L^AT_EX code of ./paper.tex

```

702 æŒŮŮŮŮ
703 One sentence per line.
704 This rule is important for the usage of version control systems.
705 A new line is generated with a blank line.
706 As you would do in Word:
707 New paragraphs are generated by pressing enter.
708 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    ↪ subsequent lines.
709 To start a new paragraph, press enter twice.
710 This leads to an empty line.
711 In word, there is the functionality to press shift and enter.
712 This leads to a hard line break.
713 The text starts at the beginning of a new line.
714 In LaTeX, you can do that by using two backslashes (\
    ↪ \textbackslash\textbackslash).
715 \\
716 Running text seldom needs a hard line break.
717
718 Please do \textit{not} use two backslashes for new paragraphs.
719 For instance, this sentence belongs to the same paragraph,
    ↪ whereas the last one started a new one.
720 Andrew Stacey gives a long motivation for that in the section \
    ↪ enquote{Line Wrapping} of his \href{https://loopspace.
    ↪ mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}{\emph{
    ↪ Document Revision System}}\footnote{\url{https://
    ↪ loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/}}.

```

3.2 Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding L^AT_EX code of ./paper.tex

```

727 æŒŮŮŮŮ
728 \begin{mindflow}
729 This is a small note.
730 \end{mindflow}

```

3.3 Handling TODOs

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```

735 æĖũŰŝŰ
736 \textmarker{Marked text.}

```

With `\textmarker`, only the text color is changed, since this also works well for individual words.

Marked text.

Corresponding L^AT_EX code of ./paper.tex

```

741 æĖũŰŝŰ
742 \textcomment{Marked text.}{A comment on it.}

```

Manual marking for text that has been changed since the last version.

Corresponding L^AT_EX code of ./paper.tex

```

745 æĖũŰŝŰ
746 \modified{Manual marking for text that has been changed since
      ↪ the last version.}

```

This is some text. Changed text.

Corresponding L^AT_EX code of ./paper.tex

```

749 æĖũŰŝŰ
750 This is some text.
751 \change{FL1: text adjusted}{Changed text}.

```

Here is a comment.

Corresponding L^AT_EX code of ./paper.tex

```

754 æĖũŰŝŰ
755 Here is a comment\sidecomment{Comment}.

```

TODO!

Corresponding L^AT_EX code of ./paper.tex

```

758 æĖũŰŝŰ
759 \todo{A lot of text still needs to be produced here}

```

3.4 Hyphenation

L^AT_EX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write “application-specific”, then the word will only be hyphenated at the dash. You can also insert `\allowbreak{}` into the word, as in application-specific, but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For that, write “= instead of -”, as in application=specific. This is enabled by an additional configuration of the babel package.

Corresponding L^AT_EX code of ./paper.tex

```

769 æÉúŮõŮ
770 In case you write \enquote{application-specific}, then the word
    ↪ will only be hyphenated at the dash.
771 You can also insert \verb1\allowbreak{}1 into the word, as in
    ↪ applica\allowbreak{}tion-specific, but this is much more
    ↪ effort.
772
773 You can now write words containing hyphens which are hyphenated
    ↪ at other places in the word.
774 For that, write \verb1"=1 instead of \verb1-1, as in application
    ↪ "=specific.
775 This is enabled by an additional configuration of the babel
    ↪ package.
```

3.5 Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: $100 \frac{\text{km}}{\text{h}}$, or by using plain L^AT_EX (and math mode): $100 \frac{km}{h}$.

Corresponding L^AT_EX code of ./paper.tex

```

780 æÉúŮõŮ
781 Numbers can be written plain text (such as 100), by using the \
    ↪ href{https://ctan.org/pkg/siunitx}{siunitx} package as
    ↪ follows:
782 \SI{100}{\km\per\hour},
783 or by using plain \LaTeX{} (and math mode):
784 $100 \frac{\mathit{km}}{h}$.
```

5 % of 10 kg

Corresponding L^AT_EX code of ./paper.tex

787 æƒüŦŦŦ
788 \SI{5}{\percent} of \SI{10}{kg}

Numbers are automatically grouped: 123 456.

Corresponding L^AT_EX code of ./paper.tex

791 æƒüŦŦŦ
792 Numbers are automatically grouped: \num{123456}.

3.6 Surrounding Text by Quotes

Please use the “enquote command” to quote something. Quoting with “quote” or “quote” also works.

Corresponding L^AT_EX code of ./paper.tex

797 æƒüŦŦŦ
798 Please use the \enquote{enquote command} to quote something.
799 Quoting with "`quote'" or ``quote'' also works.

3.7 Zref-clever examples

zref-clever demonstration: Zcref (short for zcref[S]) at beginning of sentence, zcref in all other cases.

Heading1 Heading2	
One	Two
Three	Four

Table 1. Example table for zcref demo

Figure 1 shows a simple fact, although Fig. 1 could also show something else.
Table 1 shows a simple fact, although Table 1 could also show something else.
Section 3.7 shows a simple fact, although Sect. 3.7 could also show something else.

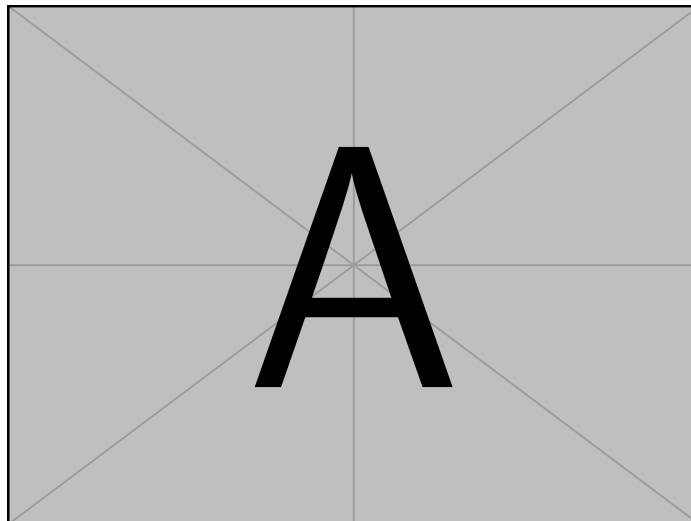


Fig. 1. Example figure for zcref demo

Corresponding L^AT_EX code of ./paper.tex

```

829 œEüŰöŰ
830 \Zcref{fig:ex:cref} shows a simple fact, although \zcref{fig:ex:
      ↪ cref} could also show something else.
831
832 \Zcref{tab:ex:cref} shows a simple fact, although \zcref{tab:ex:
      ↪ cref} could also show something else.
833
834 \Zcref{sec:ex:cref} shows a simple fact, although \zcref{sec:ex:
      ↪ cref} could also show something else.

```

3.8 Theorem-like Environments and Mathematics

The `llncs` class already provides the theorem-like environments `theorem`, `proposition`, `lemma`, `corollary`, `definition`, `example`, `exercise`, `note`, `problem`, `question`, `remark`, and `solution` as well as the unnumbered `proof` environment – no additional package is required.

Definition 1 (Idempotence). *An operation f is idempotent if $f(f(x)) = f(x)$ holds for all inputs x .*

Proposition 1. *The identity operation is idempotent.*

Lemma 1. *An idempotent operation fixes every element of its image.*

Theorem 1. *If two idempotent operations f and g commute, their composition $f \circ g$ is idempotent.*

Proof. Since f and g commute and are idempotent,

$$(f \circ g)((f \circ g)(x)) = f(f(g(g(x)))) = f(g(x)) = (f \circ g)(x). \quad (1)$$

□

Corollary 1. *Applying $f \circ g$ a second time yields no further change, as Eq. (1) shows.*

Example 1. Trimming spaces in a string is idempotent: Lemma 1 applies to every already-trimmed string.

Corresponding L^AT_EX code of ./paper.tex

```

841 æ£úÛõ
842 \begin{definition}[Idempotence]
843   An operation  $f$  is \emph{idempotent} if  $f(f(x)) = f(x)$ 
844    $\hookrightarrow$  holds for all inputs  $x$ .
845 \end{definition}
846 \begin{proposition}
847   The identity operation is idempotent.
848 \end{proposition}
849 \begin{lemma}\label{lem:fixed}
850   An idempotent operation fixes every element of its image.
851 \end{lemma}
852 \begin{theorem}\label{thm:idempotent-composition}
853   If two idempotent operations  $f$  and  $g$  commute, their
854    $\hookrightarrow$  composition  $f \circ g$  is idempotent.
855 \end{theorem}
856 \begin{proof}
857   Since  $f$  and  $g$  commute and are idempotent,
858   \begin{equation}
859     (f \circ g)(f \circ g)(x) = f(g(g(x)))
860     \hookrightarrow f(g(x)) = (f \circ g)(x).
861   \end{equation}
862   \label{eq:idempotent-composition}
863   \end{equation}
864   \qed
865 \end{proof}
866 \begin{corollary}
867   Applying  $f \circ g$  a second time yields no further change,
868    $\hookrightarrow$  as \zcref{eq:idempotent-composition} shows.
869 \end{corollary}
870 \begin{example}
871   Trimming spaces in a string is idempotent: \zcref{lem:fixed}
872    $\hookrightarrow$  applies to every already-trimmed string.
873 \end{example}

```

3.9 Figures

Figure 2 shows something interesting.



Fig. 2. Simple Figure. Based on Scharrer [3].

Corresponding L^AT_EX code of ./paper.tex

```

878 æEuÜöÜ
879 \Zcref{fig:label} shows something interesting.
880
881 \begin{figure}
882   \centering
883   \includegraphics[width=.8\linewidth]{example-image-golden}
884   \caption[Simple Figure]{
885     Simple Figure.
886     Based on \citet{mwe}.
887   }
888   \label{fig:label}
889 \end{figure}

```

Photos in JPEG or PNG format are included the same way, as shown in Fig. 3.

Corresponding L^AT_EX code of ./paper.tex

```

894 æEuÜöÜ
895 \begin{figure}
896   \centering
897   \includegraphics[width=.5\linewidth]{figures/ulm-minster.jpg}
898   \caption{Ulm Minster. Photo: wkrauth, CC0, via Wikimedia
899     ↪ Commons.}
900   \label{fig:jpg}
901 \end{figure}

```



Fig. 3. Ulm Minster. Photo: wkrauth, CC0, via Wikimedia Commons.

One can also have pictures floating inside text:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

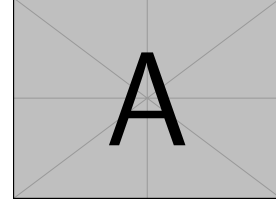


Fig. 4. A floating figure

Corresponding L^AT_EX code of `./paper.tex`

```

906 æÉúŮóŮ
907 \begin{floatingfigure}{.33\linewidth}
908   \includegraphics[width=.29\linewidth]{example-image-a}
909   \caption{A floating figure}
910 \end{floatingfigure}
911 \lipsum[2]

```

3.10 Sub Figures

An example of two sub figures is shown in Fig. 5.

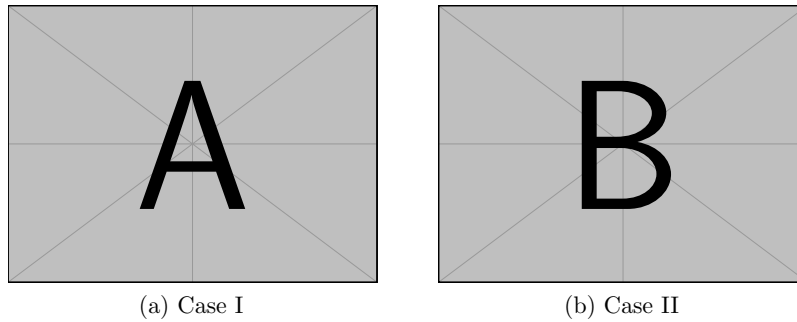


Fig. 5. Example figure with two sub figures.

Corresponding L^AT_EX code of ./paper.tex

```

918 %\begin{figure}
919 \begin{figure}[!b]
920   \centering
921   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{example
    ↪ -image-a}%
922   \label{fig:first_case}}
923   \hfil
924   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{
    ↪ example-image-b}%
925   \label{fig:second_case}}
926   \caption{Example figure with two sub figures.}
927   \label{fig:two_sub_figures}
928 \end{figure}

```

3.11 Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.

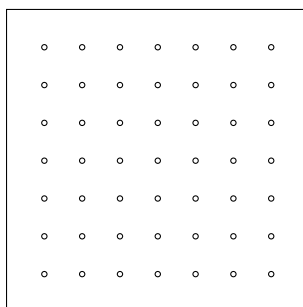


Fig. 6. A regular grid generated easily with two for loops.

Corresponding $\text{\LaTeX}$ code of `./paper.tex`

```

936 æ£üŰŰŰ
937 \begin{figure}[ht]
938   \centering
939   \begin{tikzpicture}
940     \draw(0,0) rectangle (4,4);
941     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
942       \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
943         \draw(\x,\y) circle (1pt);
944   \end{tikzpicture}
945   \caption{A regular grid generated easily with two for loops.}\
     ↪ label{fig:tikz_example}
946 \end{figure}

```

3.12 Plots with pgfplots

The pgfplots package plots functions directly in $\text{\LaTeX}$, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation⁵.

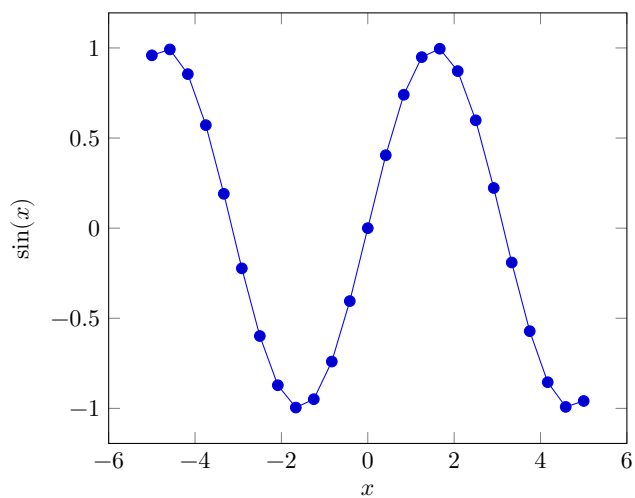


Fig. 7. Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

⁵ <http://texdoc.net/pkg/pgfplots>

Corresponding L^AT_EX code of ./paper.tex

```

954 %\begin{figure}
955 \begin{figure}[ht]
956   \centering
957   \begin{tikzpicture}
958     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
959       \addplot {sin(deg(x))}; % Plot the sine function
960     \end{axis}
961   \end{tikzpicture}
962   \caption{Plot of $\sin(x)$ directly inside the figure
963     ↪ environment with pgfplots.}
963   \label{fig:pgfplots_example}
964 \end{figure}

```

Coordinates can also be given explicitly instead of as a function:

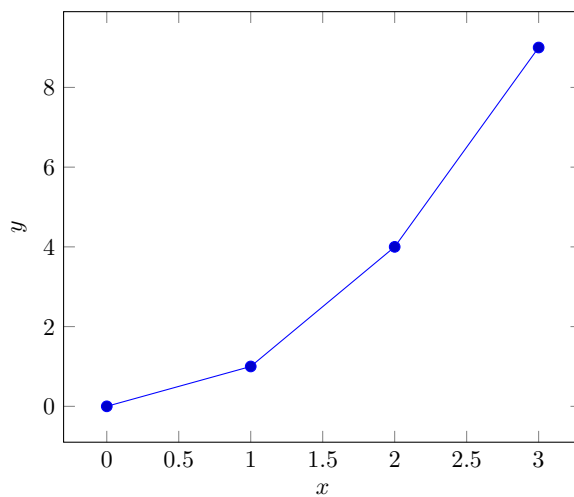


Fig. 8. Explicit coordinates plotted with pgfplots.

Corresponding L^AT_EX code of ./paper.tex

```

968 %EüÜöŦ
969 \begin{figure}[ht]
970   \centering
971   \begin{tikzpicture}
972     \begin{axis}[xlabel=$x$, ylabel=$y$]
973       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)}; % Plot
974       \end{axis}
975     \end{tikzpicture}
976     \caption{Explicit coordinates plotted with pgfplots.}
977     \label{fig:pgfplots_coords}
978 \end{figure}

```

3.13 Tables

Table 2. Simple Table

Heading1	Heading2
One	Two
Three	Four

Corresponding L^AT_EX code of ./paper.tex

```

983 %EüÜöŦ
984 \begin{table}
985   \caption{Simple Table}
986   \label{tab:simple}
987   \centering
988   \begin{tabular}{ll}
989     \toprule
990     Heading1 & Heading2 \\
991     \midrule
992     One      & Two      \\
993     Three   & Four     \\
994     \bottomrule
995   \end{tabular}
996 \end{table}

```

Table 3. Table with diagonal line

Row	Column	
	A	B
1	x	y

Corresponding L^AT_EX code of ./paper.tex

```
999 %\begin{table}
1000 % Adapted from https://tex.stackexchange.com/a/468994/9075
1001 \begin{table}
1002   \caption{Table with diagonal line}
1003   \label{tab:diag}
1004   \begin{center}
1005     \begin{tabular}{|l|c|c|}
1006       \hline
1007       \diagbox{Row}{Column} & A & B \\
1008       \hline
1009       1 & x & y \\
1010       \hline
1011     \end{tabular}
1012   \end{center}
1013 \end{table}
```

3.14 Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (\endhead) and footer (\endfoot) rows are repeated on every page; once enough rows are added, the table spans more than one page on its own.

Table 4: A sample long table.

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
Continued on next page		

Table 4 – continued from previous page

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D

Corresponding L^AT_EX code of ./paper.tex

```

1022 %EüÜöŦ
1023 \begin{longtable}{|l|l|l|}
1024   \caption{A sample long table.}\label{tab:long} \\
1025   \hline
1026   \multicolumn{1}{|c|}{\textbf{First column}} & \multicolumn{1}{|c|}{\textbf{Second column}} & \multicolumn{1}{|c|}{\textbf{Third column}} \\
1027   \endfirsthead
1028
1029   \multicolumn{3}{c}{\bfseries \tablename\ \thetable{} --}
1030   \multicolumn{3}{c}{continued from previous page} \\
1031   \hline
1032   \multicolumn{1}{|c|}{\textbf{First column}} & \multicolumn{1}{|c|}{\textbf{Second column}} & \multicolumn{1}{|c|}{\textbf{Third column}} \\
1033   \endhead
1034   \hline \multicolumn{3}{|r|}{Continued on next page} \\
1035   \hline
1036   \endfoot
1037   \hline\hline
1038   \endlastfoot
1039
1040   A & BC & D \\
1041   A & BC & D \\
1042   A & BC & D \\
1043   A & BC & D \\
1044   A & BC & D \\
1045   A & BC & D \\
1046   A & BC & D \\
1047   A & BC & D \\
1048   A & BC & D \\
1049   A & BC & D \\
1050   A & BC & D \\
1051   A & BC & D \\
1052 \end{longtable}

```

```

1 <listing name="example">
2   Floating
3 </listing>

```

Listing 1.2. Example XML listing – placed as floating figure

3.15 Source Code

Listing 1.1 shows source code written in XML. Line 2 contains a comment.

```

1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>

```

Listing 1.1. Example XML Listing

Corresponding L^AT_EX code of ./paper.tex

```

1057 œŒŮŮŮŮ
1058 \Zcref{lst:XML} shows source code written in XML.
1059 \Zcref{line:comment} contains a comment.
1060
1061 \begin{lstlisting}[
1062   language=XML,
1063   caption={Example XML Listing},
1064   label={lst:XML}]
1065 <listing name="example">
1066   <!-- comment --> (* \label{line:comment} *)
1067   <content>not interesting</content>
1068 </listing>
1069 \end{lstlisting}

```

One can also add `float` as parameter to have the listing floating. Listing 1.2 shows the floating listing.

```

1 {
2   key: "value"
3 }

```

Listing 1.3. Example JSON listing – placed as floating figure

```

1 public class Hello {
2     public static void main (String[] args) {
3         System.out.println("Hello World!");
4     }
5 }

```

Listing 1.4. Example Java listingCorresponding L^AT_EX code of ./paper.tex

```

1075 %\begin{lstlisting}
1076 \begin{lstlisting}[
1077     % one can adjust spacing here if required
1078     % aboveskip=2.5\baselineskip,
1079     % belowskip=-.8\baselineskip,
1080     float,
1081     language=XML,
1082     caption={Example XML listing -- placed as floating figure},
1083     label={lst:flXML}]
1084 <listing name="example">
1085     Floating
1086 </listing>
1087 \end{lstlisting}

```

One can also typeset JSON as shown in List. 1.3.

Corresponding L^AT_EX code of ./paper.tex

```

1092 %\begin{lstlisting}
1093 \begin{lstlisting}[
1094     float,
1095     language=json,
1096     caption={Example JSON listing -- placed as floating figure},
1097     label={lst:json}]
1098 {
1099     key: "value"
1100 }
1101 \end{lstlisting}

```

Java is also possible as shown in List. 1.4.

Corresponding L^AT_EX code of ./paper.tex

```

1106 %\begin{lstlisting}
1107 \begin{lstlisting}[
1108   caption={Example Java listing},
1109   label=lst:java,
1110   language=Java,
1111   float]
1112 public class Hello {
1113     public static void main (String[] args) {
1114         System.out.println("Hello World!");
1115     }
1116 }
1117 \end{lstlisting}

```

3.16 Itemization

One can list items as follows:

- Item One
- Item Two

Corresponding L^AT_EX code of ./paper.tex

```

1124 %\begin{itemize}
1125 \begin{itemize}
1126     \item Item One
1127     \item Item Two
1128 \end{itemize}

```

One can enumerate items as follows:

1. Item One
2. Item Two

Corresponding L^AT_EX code of ./paper.tex

```

1134 %\begin{enumerate}
1135 \begin{enumerate}
1136     \item Item One
1137     \item Item Two
1138 \end{enumerate}

```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:

1. All these items... 2. ...appear in one line 3. This is enabled by the paralist package.

Corresponding L^AT_EX code of ./paper.tex

```

1144 æEuÛöŦ
1145 \begin{inparaenum}
1146   \item All these items...
1147   \item ...appear in one line
1148   \item This is enabled by the paralist package.
1149 \end{inparaenum}

```

3.17 Other Features

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Corresponding L^AT_EX code of ./paper.tex

```

1154 æEuÛöŦ
1155 The words \enquote{workflow} and \enquote{dwarflike} can be
      ↪ copied from the PDF and pasted to a text file.

```

The symbol for powerset is now correct: $\wp$ and not a Weierstrass p ($\wp$).

Corresponding L^AT_EX code of ./paper.tex

```

1158 æEuÛöŦ
1159 The symbol for powerset is now correct:  $\wpowerset$  and not a
      ↪ Weierstrass  $p$  ( $\wp$ ).
1160
1161  $\wpowerset(\{1,2,3\})$ 

```

Brackets work as designed: <test> One can also input backticks in verbatim text: ``test``.

Corresponding L^AT_EX code of ./paper.tex

```

1164 æEuÛöŦ
1165 Brackets work as designed:
1166 <test>
1167 One can also input backticks in verbatim text: \verb|`test`|.

```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism`

only typesets the acronym and does not add it to any list. The macro and the ready-made acronyms (`\OMG`, `\BPEL`, `\BPMN`, `\UML`) are defined in `commands.tex`, where you can add your own.

The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with `REST` or `HTTP`.

Corresponding L^AT_EX code of `./paper.tex`

```

1172 æŒúŮőŰ
1173 The \UML is maintained by the \OMG; related standards include \
      ↪ BPEL and \BPMN.
1174 Any acronym can be set inline with \initialism{REST} or \
      ↪ initialism{HTTP}.
```

4 Conclusion and Outlook

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Acknowledgments Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which comes right before the reference section in your document [4].

References

1. Binz, T., Breiter, G., Leymann, F., Spatzier, T.: Portable Cloud Services Using TOSCA. IEEE Internet Computing **16**(03), 80–85 (May 2012), ISSN 1089-7801, <https://doi.org/10.1109/mic.2012.43>

2. Kopp, O., et al.: Winery – A Modeling Tool for TOSCA-based Cloud Applications. In: Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC'13), LNCS, vol. 8274, pp. 700–704, Springer Berlin Heidelberg (2013), https://doi.org/10.1007/978-3-642-45005-1_64
3. Scharrer, M.: The `mwe` Package (2017), URL <http://texdoc.net/mwe>
4. Veytsman, B.: Latex class for the association for computing machinery – acknowledgment information (Aug 2021), URL <https://github.com/borisveytsman/acmart/blob/1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx#L709>

All links were last followed on October 5, 2020.