

Universität Hamburg

DER FORSCHUNG | DER LEHRE | DER BILDUNG

BACHELORTHESIS

# Titel

vorgelegt von

Kim Sonne

MIN-Fakultät

Fachbereich Informatik

Ggf. Professur/Institut

Studiengang: Wirtschaftsinformatik

Matrikelnummer: 1234567

Ggf. Abgabedatum: XX.XX.20XX

Erstgutachterin: Prof. Dr. Eike Kraft

Zweitgutachter: Dr. Luca Wind

## Kurzfassung

*Write an abstract for your work. Replace each of the points below with one sentence (two if you must) and you have your abstract. Write it when you finished your entire report.*[1]

*Introduction.* In one sentence, what's the topic? Phrase it in a way that your reader will understand. If you're writing a PhD thesis, your readers are the examiners – assume they are familiar with the general field of research, so you need to tell them specifically what topic your thesis addresses. Same advice works for scientific papers – the readers are the peer reviewers, and later others in your field interested in your research, so again they know the background work, but want to know specifically what topic your paper covers.

*State the problem you tackle.* What's the key research question? Again, in one sentence. (Note: For a more general essay, I'd adjust this slightly to state the central question that you want to address) Remember, your first sentence introduced the overall topic, so now you can build on that, and focus on one key question within that topic. If you can't summarize your thesis/paper/essay in one key question, then you don't yet understand what you're trying to write about. Keep working at this step until you have a single, concise (and understandable) question.

*Summarize (in one sentence) why nobody else has adequately answered the research question yet.* For a PhD thesis, you'll have an entire chapter, covering the prior work in the literature. Here you have to boil that down to one sentence. But remember, the trick is not to try and cover all the ways in which people have tried and failed; the trick is to explain that there's this one particular approach that nobody else tried yet (hint: it's the thing that your research does). But here you're phrasing it in such a way that it's clear it's a gap in the literature. So use a phrase such as "previous work has failed to address…". (if you're writing a more general essay, you still need to summarize the source material you're drawing on, so you can pull the same trick – explain in one sentence what the general message in the source material is, but expressed in terms of what's missing)

*Explain, in one sentence, how you tackled the research question.* What's your big new idea? (Again for a more general essay, you might want to adapt this slightly: what's the new perspective you have adopted? or: What's your overall view on the question you introduced in step 2?)

*In one sentence, how did you go about doing the research that follows from your big idea.* Did you run experiments? Build a piece of software? Carry out case studies? This tends to be the longest sentence, above all in a PhD thesis, which covers years of research. But don't overdo it – we're still looking for a sentence that you could read aloud without having to stop for breath. Remember, the word 'abstract' means a summary of the main ideas with most of the detail left out. So feel free to omit detail! (For those of you who got this far and are still insisting on writing an essay rather than signing up for a PhD, this sentence elaborates on sentence 4 – explore the consequences of your new perspective).

*As a single sentence, what's the key impact of your research? Here we're not looking for the outcome of an experiment.* We're looking for a summary of the implications. What's it all mean?

[1] https://www.easterbrook.ca/steve/2010/01/how-to-write-a-scientific-abstract-in-six-easy-steps/

Why should other people care? What can they do with your research. (Essay folks: all the same questions apply: what conclusions did you draw, and why would anyone care about them?)

# Inhaltsverzeichnis

**Abkürzungsverzeichnis** **9**

**1. Introduction** **10**
1.1. Context and Topic (SM1) . . . . . 11
1.2. State of the Art (SM1) . . . . . 11
1.3. Research Question (SM2) . . . . . 12
1.4. Method or Approach (SM3, SM4) . . . . . 13
1.5. Findings (SM5, SM6) . . . . . 13

**2. Background (SM1)** **14**

**3. Problem Exposition (optional)** **15**
3.1. Context/Business Understanding (SM1) . . . . . 15
3.2. Data Understanding (SM1) . . . . . 15
3.3. Detailed Research Questions (SM2) . . . . . 15
3.4. Detailed Method (SM3) . . . . . 15

**4. First Real Chapter addressing first Research Problem** **16**
4.1. First Sub-Problem . . . . . 16
4.2. Second Sub-Problem . . . . . 17

**5. Second Real Chapter** **19**

**6. Evaluation** **20**
6.1. Objective (SM2) . . . . . 20
6.2. Setup (SM3) . . . . . 20
6.3. Execution (SM4) . . . . . 20
6.4. Results (SM5) . . . . . 20
6.5. Discussion (SM6) . . . . . 21
6.6. Threats to Validity . . . . . 21

**7. Schreiben in Markdown** **22**
7.1. Text . . . . . 22
7.2. Listen . . . . . 22
7.3. Tabellen und Verweise . . . . . 23

**8. LaTeX Hinweise** **24**
8.1. Trennung von Absätzen . . . 24
8.2. Notes separated from the text . . . 25
8.3. Umgang mit TODOs . . . 26
8.4. Hyphenation . . . 27
8.5. Typesetting Units . . . 28
8.6. Surrounding Text by Quotes . . . 28
8.7. Zref-clever examples . . . 29
8.8. Formulas and Equations . . . 30
8.9. Abbildungen . . . 31
8.10. Sub Figures . . . 32
8.11. Figures with tikz . . . 33
8.12. Plots with pgfplots . . . 34
8.13. UML diagrams . . . 36
8.14. Tables . . . 39
8.15. Tables spanning multiple pages . . . 42
8.16. Source Code . . . 43
8.17. Itemization . . . 46
8.18. Writing in Markdown . . . 48
8.19. Abkürzungen . . . 49
8.20. Other Features . . . 50
8.21. Zref-vario examples . . . 51
8.22. Citations . . . 51
8.23. Miscellaneous Examples . . . 52
8.23.1. Algorithms . . . 54
8.23.2. Definitions . . . 54
8.23.3. Enumerations . . . 54
8.23.4. The fquote environment . . . 55

**9. Zusammenfassung und Ausblick** **56**

**Literaturverzeichnis** **57**

**Anhang** **58**

**A. My first appendix** **58**

**B. Nutzung von KI-Tools** **59**

# Abbildungsverzeichnis


4.1. A scientific figure that has to be explained in the text . . . . . 17

6.1. Another scientific figure that has to be explained in the text . . . . . 21

8.1. Example figure for zcref demo . . . . . 29
8.2. Bildunterschrift. . . . . 31
8.3. Ulmer Münster. Foto: wkrauth, CC0, via Wikimedia Commons. . . . . 32
8.4. Example figure with two sub figures. . . . . 33
8.5. A regular grid generated easily with two for loops. . . . . 34
8.6. Plot of $\sin(x)$ directly inside the figure environment with pgfplots. . . . . 34
8.7. Explicit coordinates plotted with pgfplots. . . . . 35
8.8. Class diagram drawn with MetaUML . . . . . 36
8.9. Component diagram drawn with MetaUML . . . . . 37
8.10. Sequence diagram drawn with pgf-umlsd . . . . . 38
8.11. Figure . . . . . 52
8.12. Rotated figure . . . . . 53

# Tabellenverzeichnis

7.1. Eine in Markdown geschriebene Tabelle . . . . . 22

8.1. Example table for zcref demo . . . . . 29
8.2. Simple Table . . . . . 39
8.3. Table with colored cells . . . . . 40
8.4. Table with a footnote . . . . . 40
8.5. Wide table scaled to the line width . . . . . 41
8.6. Table with diagonal line . . . . . 41
8.7. A sample long table. . . . . 42
8.8. A table written in Markdown . . . . . 48

# List of Listings

1. Example XML listing using minted . . . . . 43
2. Example JSON listing using minted . . . . . 44
3. Java code rendered using minted . . . . . 45
4. Long Java listing spanning multiple pages . . . . . 46

# Abkürzungsverzeichnis

| Bezeichnung | Beschreibung | Seiten |
|---|---|---|
| DANTE e.V. | Deutschsprachige Anwendervereinigung TEX e.V. | 50 |
| FR | Fehlerrate | 49 |
| G.P. | General Practitioner | 50 |
| RDBMS | Relational Database Management System | 49 |

# 1. Introduction

*Purpose and scope of your entire report*. The purpose of your entire report is to make a *scientific argument using the scientific method*. A scientific argument always has the following steps that all must come in this order.

SM1 *Explicate the assumptions and state of the art* on which you are going to conduct your research to investigate your research problem/test the hypothesis.

SM2 Clearly and precisely *formulate a research problem or hypothesis*.

SM3 *Describe the (research) method* that you followed to investigate the problem / to test the hypothesis in a way that *allows someone else to reproduce your steps*. The method must include steps and criteria for evaluating whether you answered your question successfully or not.

SM4 *Provide execution details* on how you followed the method in the given, specific situation.

SM5 *Report your results* by describing and summarizing your measurements. You must not interpret your results.

SM6 *Now interpret your results* by contextualizing the measurements and drawing conclusion that lead to answering your research problem or defining further follow-up research problems.

This template marks the parts of the structure with SM1-SM6 to recall to you which step of a scientific argument is used and where.

*Purpose and scope of Kapitel 1*. The introduction chapter is a summary of your work and your scientific argument that must be understandable to anyone in your scientific field, e.g., anyone in Data Science. A reader must be able to comprehend the problem, method, relevant execution details, results, and their interpretation by reading the introduction and the introduction alone. Abschnitt 1.1 introduces the general topic of your research. Abschnitt 1.2 discusses the state of the art and identifies a research gap. Abschnitt 1.3 then states the research problem to investigate. Abschnitt 3.4 explains the research method that was followed, possibly with execution details. Abschnitt 1.5 then presents the results and their interpretation. A reader should need to read further only if they are not convinced or need more details to reproduce your study. The individual chapters and sections provide the details for each of the steps in your scientific argument.

Write the introduction chapter *after* you wrote all other chapters, but you should keep on making notes for each of the sections as you write the later chapters.

*Purpose and scope of the introduction paragraph to a chapter*. The paragraph you are reading above is a typical introductory paragraph to a chapter. It is a high-level summary of the chapters' topic (SM1 and SM2). It gives the reader some guidance by breaking down the chapter topic into subtopics that are named (SM3) in the right order with forward references to the corresponding sections (SM4). It may close with announcing the result you obtain (SM6) but the opening paragraph of the introduction is not the place for it.

*Zwei Arten von Lesenden*. Die Arbeit soll sich von vorne bis hinten lesen lassen: Jeder Begriff wird eingeführt, bevor er verwendet wird. Rückverweise sind in Ordnung; Vorwärtsverweise im Fließtext sollten selten sein. Gleichzeitig sollen Lesende, die die Arbeit irgendwo aufschlagen und zehn Minuten Zeit haben, ihren Weg finden: Jedes Kapitel beginnt mit einem einleitenden Absatz wie oben beschrieben, der die folgenden Abschnitte skizziert, auf das zurückverweist, worauf das Kapitel aufbaut, und auf die Stellen vorausverweist, an denen seine Ergebnisse verwendet werden. Das Buch „Student Thesis Projects“ [LLDS26] (Open Access) erklärt ausführlich, wie man eine Abschlussarbeit organisiert, durchführt, schreibt und präsentiert. Vor der Abgabe bitte die Checkliste in `docs/thesis-checklist.md` durchgehen und alle diese Hinweise entfernen.

## 1.1. Context and Topic (SM1)

*Purpose and scope*. You begin with providing the general scientific audience an introduction into the specific topic of your work. The aim of this section is to first introduce the *general subject of study* (“Giraffes are well-known animals and everyone’s favorite”), the *specific topic of societal or scientific interest* to investigate (“Giraffes have blue tongues”) and the *objective of society/science towards* this topic (“it is unknown at the moment how the blue color tone evolved”). It must be understandable by the general scientific public. Every *term* with a specific meaning must be highlighted and introduced in precise language/concepts that only builds on a general scientific background.

At the end of this section, you have explained and established a general goal that society/science universally agrees to be worth achieving (“knowing how everyone’s favorite animal evolved the color of their tongue”).

## 1.2. State of the Art (SM1)

*Purpose and scope*. You provide a more in-depth introduction into the research topic by contrasting the current state of the art in society/science in relation to the research topic you introduced in Abschnitt 1.1. This introduction has to

- present established facts, methods, and results that provide a deeper understanding of the research topic (“prior work on giraffe genomes, relevance of giraffes for societal well-being, giraffes being a model-animal for various other studies, etc.”)

- discuss in which ways prior and recent ideas still fall short of reaching the general goal you explained in Abschnitt 1.1 (“prior work only sequenced the genome of one giraffe and did not consider genes of ancient ancestors”)

You have to provide citations/literature references for each of the statements and claims you are making. This section summarizes the related work discussion in Kapitel 2.

At the end of this section, you have established a *knowledge gap* between the state of the art and the general objective you developed in Abschnitt 1.1. *Stating a (knowledge) gap between a status quo and a desired situation is the* first step *of a writing scientific argument.*

## 1.3. Research Question (SM2)

*Purpose and scope*. In this section you state in which way you will address the knowledge gap you identified at the end of Abschnitt 1.2. One work cannot address and resolve the entire knowledge gap. The purpose of this section is to detail the specific part of the knowledge that you will address. You thereby make all the assumptions explicit that underlie your work (“in this report we focus on genomes of female giraffes who lived in the years 1950–2000 in South Africa”).

Your general research question states

- The starting point/assumptions you are making from which your research starts (“for the given 13 genomes of female giraffes…”), and
- the final objective/solution you want to reach (“…identify the genes involved in color expression of giraffe tongues…”)
- and the evaluation criteria that will determine whether you are successful (“…that are present in at least 75% of the studied giraffes”)

Break your general research question down into sub-research questions. You may do this here. The sub-research questions have to form a chain that take you in smaller steps from the starting point/assumptions of your general research question to your final objective and evaluation.

Number the research questions to reference them by their identifier, such as RQ1:

Forschungsfrage 1 (RQ1): *How can a program detect that another program modified a file it saves?*

Forschungsfrage 2 (RQ2): *How can users resolve conflicting modifications of a file?*

To answer RQ2, RQ1 („How can a program detect that another program modified a file it saves?“) has to be answered first.

## 1.4. Method or Approach (SM3, SM4)

*Purpose and scope*. In this section you outline the method that you applied to answer the research questions, or the new technical approach that you developed to answer it. It is a summary of the steps that someone else has to take in order to reproduce your steps. Mention here the data sets you had to obtain/gather/analyze, interviews with stakeholders you had to make to further develop the research questions, technical artifacts (programs, algorithms, models) you could apply or that you had to develop (and how they work).

The section is most readable if you give each of the steps in your method its own paragraph. In each paragraph you first briefly explain the concept of the step in your method (SM3, “we explored the data through visual analytics”) and then provide details in execution (SM4, “we used tool X, we developed dashboard Y”) include a forward reference to the respective chapter that provides more details.

## 1.5. Findings (SM5, SM6)

*Purpose and scope*. You close the introduction by stating the evaluation setup you designed to evaluate the success of your study regarding the research objective, which comes in two steps. It summarizes your evaluation in Kapitel 6.

### Results (SM5)

You state the evaluation method that is in line with your research question from Abschnitt 1.3 and summarize the measurements you obtained, but you do not interpret them, i.e., you only report the numbers, but you do not include judging statements.

### Interpretation (SM6)

You summarize your interpretation of the results and draw conclusions. State whether, and to which degree, the research question from Abschnitt 1.3 has been answered.

Close by stating how much closer society and science have come in answering the general objective you outlined in Abschnitt 1.1.

*Contribution*. Make your own contribution explicit in one paragraph („The contribution of this thesis is …“): the artifact, method, or insight that did not exist before, and what the reader can do with it.

# 2. Background (SM1)

*Purpose and scope*. The background chapter has multiple roles.

- *Preliminaries.* It has to provide all (and exactly the) information that is necessary to understand the methodological and technical parts of your work in the specific area of study. Assume as starting point another student in your degree who did not study the specific subject you are studying but has the task to understand your work. Which concepts, terms, definitions, etc. does the student have to know? Which formulas, symbols, etc. are standard in this topic? Only introduce definitions if you actually need them in any of the subsequent chapters.
- *Related Work.* It has to provide a comprehensive discussion of all prior work in the area on this subject. Your discussion has to summarize these prior works and has to explain in which way the research question you are solving (Abschnitt 1.3) has not been solved yet because prior work had more limiting assumptions, addressed a different angle, their results are not complete etc. Depending on the subject you are studying, the related work part can be larger and warrant an entire chapter on its own, or be fully concluded within Abschnitt 1.2.

  You can close the related work discussion by clarifying the positioning and formulation of your research question (SM2) in relation to all the prior work, making more explicit whether you address an existing research question under different premises or whether you work on a modified or completely new research question.

# 3. Problem Exposition (optional)

*Purpose and scope*. Introduce the problem context in more detail if Abschnitt 1.1 does not provide all necessary information about the problem to follow the rest of the report. This can include further details on the data you studied, context assumptions and requirements, etc.

If you have to expose the problem in more detail here, then this chapter should also provide a more detailed explanation of research question and the method you are applying, i.e., you can now provide more concrete sub-problems compared to Abschnitt 1.3 more details for the method Abschnitt 1.4 because you now have explained the problem much better. A typical structure can be.

## 3.1. Context/Business Understanding (SM1)

provide details

## 3.2. Data Understanding (SM1)

provide details

## 3.3. Detailed Research Questions (SM2)

provide details based on Abschnitte 3.1 und 3.2

## 3.4. Detailed Method (SM3)

provide details based on Abschnitte 3.1 und 3.2

# 4. First Real Chapter addressing first Research Problem

*Purpose and scope*. After you stated research context (SM1), research problem (SM2), and research method (SM3) in Kapitel 1 and possibly Kapitel 3, the remainder of your entire report addresses execution (SM4), results (SM5), and interpretation (SM6). Do this by addressing the sub-problems through scientific arguments that follow the 6 steps SM1-SM6.

Have a short chapter introduction that recalls and explains the first research problem of your thesis. The problem has to show up in the introduction in Abschnitt 1.3 or in Abschnitt 3.3 already. This provides the background (SM1) for this chapter while the first research problem of the thesis becomes the research question/hypothesis (SM2) for this chapter.

Next, explain in the chapter intro how you solve the research problem in this chapter by breaking it down in further sub-problems. By this, you outline the method (SM3) through which you are going to solve the problem of this chapter. This is necessary to give the reader guidance of what's to come in this chapter and how it fits into the thesis as a whole. Explain that you will address the first sub-problem in Abschnitt 4.1 and the second sub-problem in Abschnitt 4.2, etc. The sections then provide the details for execution and results.

## 4.1. First Sub-Problem

*The first paragraph describes the first sub-problem and develops the requirements a solution has to satisfy (SM2 for this section).* The requirements have to be based on the knowledge and reasoning developing in the preceding chapters and sections. Try to use an example to illustrate the problem and the desired properties of the solution. Check that every term/concept you use here has already been defined already in a previous section. If you cannot describe your problem without defining new terms, you may have to add another section before this one that develops the terms and concepts you need to explain the problem.

*The second paragraph describes the method/approach how you address the problem (SM3 for this section).* Describe the method in a level of detail that allows another student to reproduce your steps. Make use of appendices if certain details take too much space.

**Abbildung 4.1.:** A scientific figure that has to be explained in the text

*The third, fourth, and following paragraph provides details on applying the method or developing a new approach, i.e., execution (SM4) and may explain results (SM5)*, i.e., details on the steps needed to reproduce the results.

Results (SM5) come in different forms, e.g., conceptual diagrams, algorithms, tables, charts, a list of articles from a literature research etc. You must reference them (e.g., "Abbildung 4.1 shows the runtime") and describe the results in text. If you use diagrams, tables, or charts, you cannot expect the reader to know what to you expect them to see in a diagram, table or chart. Describe to them how to read these, explain the meaning of particular elements, point out special observations. Describe the results, but do not interpret them. Make use of appendices if certain details take too much space.

*After describing the results, you may interpret them (SM6).* Here you can infer what a particular observation means (for you), how it can be applied, or what others can do with it. Do not interpret your results before you have described all of them. This is a common mistake done by most beginner writers. Get to the point: the final finding or interpretation. But you forget that your reader does not understand yet what you are interpreting – they do not know yet what you do know. Interpret the results only after describing all of them. The interpretation must be based on the written description only. Then you can be sure that your readers can follow your interpretation and reach the same conclusions as you have.

Ideally, your interpretation leads to the next sub-problem in Abschnitt 4.2.

## 4.2. Second Sub-Problem

You now build on the solution to the first sub-problem of Abschnitt 4.1 (SM1) and recall second sub-problem (SM2, you detailed in the introduction of this chapter) and follow the same pattern as before (SM3-SM6).

Note that not all sections may not include all parts SM1-SM6 in all detail. Some sections need not restate the background (SM1) or the research problem (SM2) if a previous section already defined them. Sometimes, a section is only dedicated to describing the method (SM3) and execution (SM4) and does not contain any results or interpretations. Sometimes results (SM5) and interpretations (SM6) only come in the evaluation chapter.

What is important for you when you are writing a scientific argument is not to slavishly have SM1-SM6 in each section explicitly, but that you are always fully aware of the following:

- Which step of a scientific argument am I currently writing (SM1, SM2, ..., SM6)?
- Does the step that I am writing come in the right order, i.e., if you are writing about execution (SM4, e.g., details of building a model), is there a preceding paragraph or section that describes the method (SM3) and is that one preceded by a clear statement of the (sub-)problem addressed (SM2)?

- Are you really *not* writing interpretation SM6 before SM5, SM4, or SM3?
- Is it clear to the reader which part of the scientific argument you are currently making?

# 5. Second Real Chapter

Have a short chapter introduction that recalls what you already achieved in Kapitel 4 and explain the second research problem of your thesis. The problem has to show up in the introduction in Abschnitt 1.3 or in Abschnitt 3.3 already. Continue likewise for further research problems.

# 6. Evaluation

*Purpose and scope*. The evaluation chapter should be the most formal and rigorously structured chapter of your thesis as the validity of your evaluation argument depends on it.

## 6.1. Objective (SM2)

State what you want to evaluate and what you want to measure. The Goal Question Metric approach [BCR94] derives the measurements from the goal: state the goal, ask the questions that tell whether it is reached, and define a metric that answers each question.

## 6.2. Setup (SM3)

State which data, participants, tools, etc. you chose and why. State how you measure outcomes and how you compare them to baselines, reference groups, etc.

## 6.3. Execution (SM4)

Provide all details on the execution that are necessary to allows another person to reproduce your results at a later point.

## 6.4. Results (SM5)

You only report the measurements. You must present and reference them (e.g., “Abbildung 6.1 shows the runtime”) and describe the results in text. If you use diagrams, tables, or charts, you cannot expect the reader to know what to you expect them to see in a diagram, table or chart. Describe to them how to read these, explain the meaning of particular elements, point out special observations. Describe the results, but do not interpret them. Make use of appendices if certain details take too much space.

**Abbildung 6.1.:** Another scientific figure that has to be explained in the text

## 6.5. Discussion (SM6)

Interpret the results only after describing all of them. The interpretation must be based on the written description in Abschnitt 6.4 only. Then you can be sure that your readers can follow your interpretation and reach the same conclusions as you have.

## 6.6. Threats to Validity

Discuss what limits the validity of your results and how you mitigated it. Typical questions are:

**Construct validity** Do your measurements capture what you intended to evaluate (Abschnitt 6.1)?

**Internal validity** Are the results caused by what you varied, or by other factors?

**External validity** To which other settings, data, or participants do the results generalize?

**Reliability** Would another person obtain the same results and conclusions following Abschnitt 6.3?

Runeson und Höst [RH09] give a checklist for these threats in case studies in software engineering.

# 7. Schreiben in Markdown

Dieses Kapitel ist in reinem Markdown geschrieben, nicht in LaTeX. Die Quelle ist eine Markdown-Datei im Verzeichnis `chapters-de`. Die Hauptdatei bindet sie mit dem Befehl `markdownInput` des markdown-Pakets[2] ein, und LaTeX übernimmt den Satz. Dafür wird LuaLaTeX benötigt.

## 7.1. Text

Text kann *hervorgehoben* oder **fett** sein, und `Code` wird in einer Schrift mit fester Breite gesetzt. Ein Literaturverweis sieht so aus [Sch17], und hier ist eine Fußnote.[3]

> Ein Zitat ist ein Absatz, der mit einem Größer-als-Zeichen beginnt.

## 7.2. Listen

- erster Punkt
- zweiter Punkt
  - Unterpunkt

1. erstens
2. zweitens

| Rechts | Links | Zentriert |
|---:|---|:---:|
| 12 | 12 | 12 |
| 123 | 123 | 123 |

**Tabelle 7.1.:** Eine in Markdown geschriebene Tabelle

## 7.3. Tabellen und Verweise

Tabelle 7.1 zeigt eine Tabelle mit Beschriftung. Überschriften und Tabellen erhalten eine Kennung in geschweiften Klammern, auf die in spitzen Klammern verwiesen wird. Beispielsweise gibt Kapitel 8 Hinweise zum Schreiben in LaTeX.

[2] `https://ctan.org/pkg/markdown`
[3] Das ist eine Fußnote im Text.

# 8. LaTeX Hinweise

Hier sollen allgemeine LaTeX-Hinweise gegeben werden, damit man Minimalbeispiele vorliegen hat, um sofort loszulegen.

## 8.1. Trennung von Absätzen

Pro Satz eine neue Zeile. Das ist wichtig, um sauber versionieren zu können. In LaTeX werden Absätze durch eine Leerzeile getrennt. Analogie zu Word: Bei Word werden neue Absätze durch einmal Eingabetaste herbeigeführt. Dies führt bei LaTeX jedoch nicht zu einem neuen Absatz, da LaTeX direkt aufeinanderfolgende Zeilen zu einer Zeile zusammenfügt. Mächte man nun einen Absatz haben, muss man zweimal die Eingabetaste drücken. Dies führt zu einer leeren Zeile. In Word gibt es die Funktion Großschreibetaste und Eingabetaste gleichzeitig. Wenn man dies drückt, wird einer harter Umbruch erzwungen. Der Text fängt am Anfang der neuen Zeile an. In LaTeX erreicht man dies durch Doppelbackslashes (\\) erzeugt.
Dies verwendet man quasi nie.

Folglich werden neue Absätze insbesondere *nicht* durch Doppelbackslashes erzeugt. Beispielsweise begann der letzte Satz in einem neuen Absatz. Andrew Stacey begründet dies ausführlich im Abschnitt „Line Wrapping“ seines *Document Revision System*[4].

[4] `https://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/`

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
16  Pro Satz eine neue Zeile.
17  Das ist wichtig, um sauber versionieren zu können.
18  In LaTeX werden Absätze durch eine Leerzeile getrennt.
19  Analogie zu Word: Bei Word werden neue Absätze durch einmal Eingabetaste herbeigeführt.
20  Dies führt bei LaTeX jedoch nicht zu einem neuen Absatz, da LaTeX direkt
    ↪ aufeinanderfolgende Zeilen zu einer Zeile zusammenfügt.
21  Möchte man nun einen Absatz haben, muss man zweimal die Eingabetaste drücken.
22  Dies führt zu einer leeren Zeile.
23  In Word gibt es die Funktion Großschreibetaste und Eingabetaste gleichzeitig.
24  Wenn man dies drückt, wird einer harter Umbruch erzwungen.
25  Der Text fängt am Anfang der neuen Zeile an.
26  In LaTeX erreicht man dies durch Doppelbackslashes (\textbackslash\textbackslash) erzeugt.
27  \\
28  Dies verwendet man quasi nie.
29
30  Folglich werden neue Absätze insbesondere \emph{nicht} durch Doppelbackslashes erzeugt.
31  Beispielsweise begann der letzte Satz in einem neuen Absatz.
32  Andrew Stacey begründet dies ausführlich im Abschnitt \enquote{Line Wrapping} seines
    ↪ \href{https://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3}{\emph{Document
    ↪ Revision
    ↪ System}}\footnote{\url{https://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/}}.
```

Ist der Text fertig, können einzelne Absätze nachgebessert werden. Besteht die letzte Zeile eines Absatzes nur aus ein oder zwei Wörtern oder ist sie fast voll, lässt man TeX den Absatz eine Zeile kürzer oder länger setzen: `\looseness=-1` (bzw. `=1`) als Erstes in diesen Absatz schreiben. TeX setzt `\looseness` am Ende jedes Absatzes zurück, sodass nur dieser eine Absatz betroffen ist. Mit LuaLaTeX wird ein einzelnes kurzes Wort als letzte Zeile bereits automatisch vermieden (Paket impnattypo).

Möchte man die Art des Absatzes ändern, so kann man die Dokumentklassenoption `parskip` verwenden. Beispielsweise kann man mit `parskip=off` erreichen, dass statt eines freien Bereichs die erste Zeile des Absatzes eingezogen wird.

## 8.2. Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
48  \begin{mindflow}
49  This is a small note.
50  \end{mindflow}
```

## 8.3. Umgang mit TODOs

Markierter Text.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
56  \textmarker{Markierter Text.}
```

Bei `\textmarker` wird nur die Textfarbe geändert, da dies auch bei einigen Worten gut funktioniert.

Markierter Text.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
62  \textcomment{Markierter Text.}{Kommentar dazu.}
```

In Gelb hervorgehoben. Provided indirectly by pdfcomment.sty (soulpos).

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
66  \hl{In Gelb hervorgehoben.}
67  Provided indirectly by pdfcomment.sty (soulpos).
```

Manuelle Markierung für Text, der seit der letzten Version geändert wurde.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
71  \modified{Manuelle Markierung für Text, der seit der letzten Version geändert wurde.}
```

Das ist ein Text. Geänderter Text.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
75  Das ist ein Text.
76  \change{FL1: Text angepasst}{Geänderter Text}.
```

Hier nur ein Kommentar.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
80  Hier nur ein Kommentar\sidecomment{Kommentar}.
```



TODO!

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
84  \todo{Hier muss noch kräftig Text produziert werden}
```

Mehrere Autoren können ihre Änderungen und Kommentare mit dem Paket phfcc markieren; die Initialen erscheinen einmal pro Seite am Rand. Pro Autor wird in der Präambel ein Befehl definiert (`\phfMakeCommentingCommand`); `\phfDisableCommentingCommands` blendet für die finale Version alles aus.

Die Quantenmechanik entwickelte sich dank der Arbeiten von Schrödinger, Heisenberg und Dirac rasch, die sich von früheren Ideen von Planck und Einstein [Einstein darf hier nicht fehlen.] FA inspirieren ließen. ~~Dieser Satz soll entfernt werden.~~ **!!! Das ist wichtig. !!!**

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
91  Die Quantenmechanik entwickelte sich dank der Arbeiten von Schrödinger, Heisenberg und
    ↪ Dirac rasch,
92  die sich von früheren Ideen von Planck \FA{und Einstein} \FA[Einstein darf hier nicht
    ↪ fehlen.] inspirieren ließen.
93  \FA*{Dieser Satz soll entfernt werden.} \FA!{Das ist wichtig.}
```

## 8.4. Hyphenation

LaTeX automatically hyphenates words. When using microtype, there should be fewer hyphenations than in other settings. You might still need to tweak the hyphenation. Here are some hints:

In case you write „application-specific“, then the word will only be hyphenated at the dash. You can also insert `\allowbreak{}` into the word, as in application-specific, but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For that, write "= instead of -, as in application-specific. This is enabled by an additional configuration of the babel package.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
104 In case you write \enquote{application-specific}, then the word will only be hyphenated at
    ↪ the dash.
105 You can also insert \verb1\allowbreak{}1 into the word, as in
    ↪ applica\allowbreak{}tion-specific, but this is much more effort.
106
107 You can now write words containing hyphens which are hyphenated at other places in the
    ↪ word.
108 For that, write \verb1"=1 instead of \verb1-1, as in application"=specific. % chktex 18
109 This is enabled by an additional configuration of the babel package.
```

## 8.5. Typesetting Units

Numbers can be written plain text (such as 100), by using the siunitx package as follows: 100 $\frac{\mathrm{km}}{\mathrm{h}}$, or by using plain LaTeX (and math mode): $100\frac{km}{h}$.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
115 Numbers can be written plain text (such as 100), by using the
    ↪ \href{https://ctan.org/pkg/siunitx}{siunitx} package as follows:
116 \SI{100}{\km\per\hour},
117 or by using plain \LaTeX{} (and math mode):
118 $100 \frac{\mathit{km}}{h}$.
```

5 % of 10 kg

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
122 \SI{5}{\percent} of \SI{10}{kg}
```

Numbers are automatically grouped: 123 456.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
126 Numbers are automatically grouped: \num{123456}.
```

## 8.6. Surrounding Text by Quotes

Please use the „enquote command“ to quote something. Quoting with „quote“ or “quote” also works.

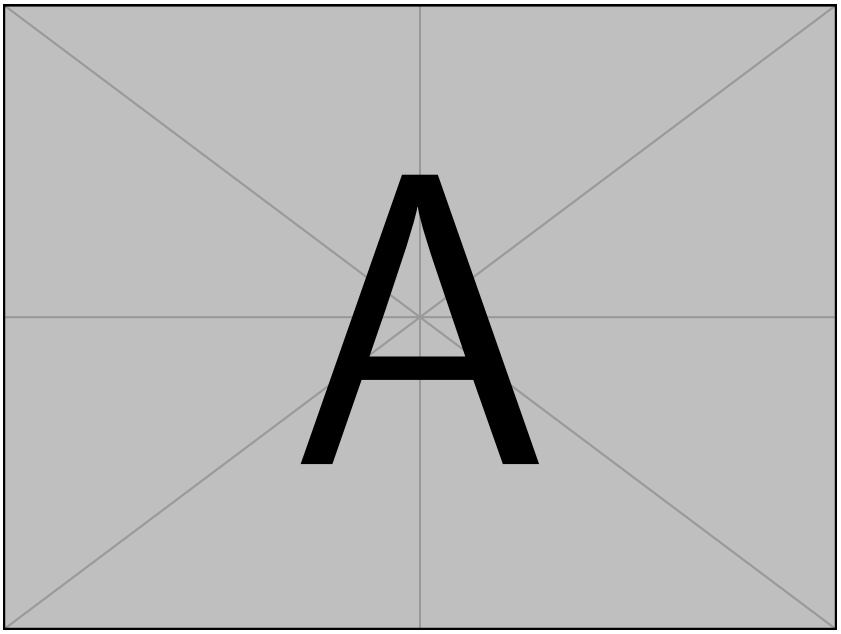



**Abbildung 8.1.:** Example figure for zcref demo

**Tabelle 8.1.:** Example table for zcref demo

| Heading1 | Heading2 |
|---|---|
| One | Two |
| Three | Four |

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
132  Please use the \enquote{enquote command} to quote something.
133  Quoting with "`quote"' or ``quote'' also works. % chktex 18
134
```

## 8.7. Zref-clever examples

Demonstration of zref-clever: Zcref (short for zcref[S]) at the beginning of a sentence, zcref in all other cases.

Abbildung 8.1 shows a simple fact, although Abbildung 8.1 could also show something else.

Tabelle 8.1 shows a simple fact, although Tabelle 8.1 could also show something else.

Abschnitt 8.7 shows a simple fact, although Abschnitt 8.7 could also show something else.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
164 \Zcref{fig:ex:cref} shows a simple fact, although \zcref{fig:ex:cref} could also show
    ↪ something else.
165
166 \Zcref{tab:ex:cref} shows a simple fact, although \zcref{tab:ex:cref} could also show
    ↪ something else.
167
168 \Zcref{sec:ex:cref} shows a simple fact, although \zcref{sec:ex:cref} could also show
    ↪ something else.
```

## 8.8. Formulas and Equations

Equations $f(x) = x$ inside the text can be provided.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
174 Equations $f(x)=x$ inside the text can be provided.
```

A list with all available mathematical symbols is provided at http://texdoc.net/pkg/symbols-a4.

As an example, the set of natural numbers is given by $\mathbb{N}$.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
180 As an example, the set of natural numbers is given by $\mathbb{N}$.
```

For the documentation of editing mathematical formulas, read the package documentation of amsmath[5].

Gleichung (8.1) is numbered and can be referenced in the text:

$$x = y \tag{8.1}$$

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
187 \begin{align}
188   \label{eq:test}
189   x = y
190 \end{align}
```

[5] http://texdoc.net/pkg/amsmath

Füge deine Abbildung hier ein.
**Abbildung 8.2.:** Bildunterschrift.

The following equation is not numbered because of using `\align*` as environment.

$$x = y$$

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
195  \begin{align*}
196    x = y
197  \end{align*}
```

The template offers `\abs` to enable the bars to scale well at the absolute value: $|X|$.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
202  $\abs{X}$.
```

The documentation available at `http://www.ctan.org/tex-archive/help/Catalogue/entries/voss-mathmode.html` provides more details about mathematical environments.

## 8.9. Abbildungen

Abbildung 8.2 zeigt etwas Interessantes

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
210  \Zcref{fig:label} zeigt etwas Interessantes
211
212  \begin{figure}
213    \centering
214    Füge deine Abbildung hier ein.
215    \caption{Bildunterschrift.}
216    \label{fig:label}
217  \end{figure}
```

Fotos im JPEG- oder PNG-Format werden genauso eingebunden, wie Abbildung 8.3 zeigt.




**Abbildung 8.3.:** Ulmer Münster. Foto: wkrauth, CC0, via Wikimedia Commons.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
223 \begin{figure}
224   \centering
225   \includegraphics[width=.5\linewidth]{figures/ulm-minster.jpg}
226   \caption{Ulmer Münster. Foto: wkrauth, CC0, via Wikimedia Commons.}
227   \label{fig:jpg}
228 \end{figure}
```

## 8.10. Sub Figures

An example of two sub figures is shown in Abbildung 8.4.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`


```
236 \begin{figure}[!b]
237   \centering
238   \subfloat[Case I]{\includegraphics[width=.4\linewidth]{example-image-a}%
239     \label{fig:first_case}}
240   \hfil
241   \subfloat[Case II]{\includegraphics[width=.4\linewidth]{example-image-b}%
242     \label{fig:second_case}}
243   \caption{Example figure with two sub figures.}
244   \label{fig:two_sub_figures}
245 \end{figure}
```

## 8.11. Figures with tikz

The tikz package creates graphics programmatically. This package generates grids and other regular structures.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
254 \begin{figure}[ht]
255   \centering
256   \begin{tikzpicture}
257     \draw(0,0) rectangle (4,4);
258     \foreach \x in {0.5,1,1.5,2,2.5,3,3.5}
259     \foreach \y in {0.5,1,1.5,2,2.5,3,3.5}
260     \draw(\x,\y) circle (1pt);
261   \end{tikzpicture}
262   \caption{A regular grid generated easily with two for loops.}\label{fig:tikz_example}
263 \end{figure}
```

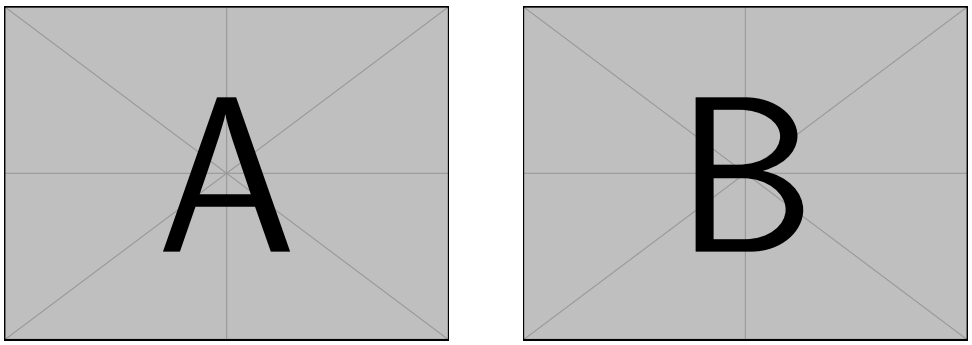


**(a)** Case I **(b)** Case II

**Abbildung 8.4.:** Example figure with two sub figures.




**Abbildung 8.5.:** A regular grid generated easily with two for loops.

## 8.12. Plots with pgfplots

The pgfplots package plots functions directly in LaTeX, similar to MATLAB or gnuplot. Some visual examples are available in the package documentation[6].

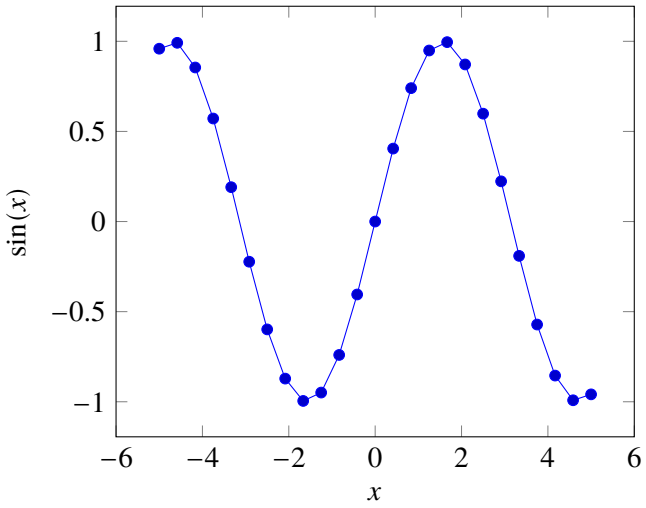



**Abbildung 8.6.:** Plot of $\sin(x)$ directly inside the figure environment with pgfplots.

[6] http://texdoc.net/pkg/pgfplots

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
272 \begin{figure}[ht]
273   \centering
274   \begin{tikzpicture}
275     \begin{axis}[xlabel=$x$, ylabel=$\sin(x)$]
276       \addplot {sin(deg(x))};  % Plot the sine function
277     \end{axis}
278   \end{tikzpicture}
279   \caption{Plot of $\sin(x)$ directly inside the figure environment with pgfplots.}
280   \label{fig:pgfplots_example}
281 \end{figure}
```

Coordinates can also be given explicitly instead of as a function:

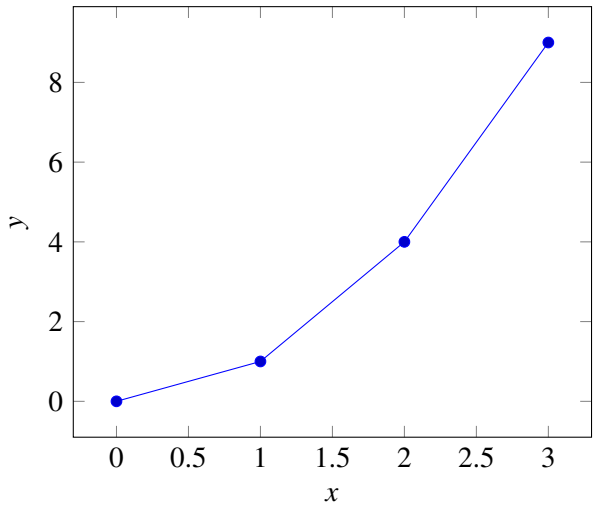



**Abbildung 8.7.:** Explicit coordinates plotted with pgfplots.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
286 \begin{figure}[ht]
287   \centering
288   \begin{tikzpicture}
289     \begin{axis}[xlabel=$x$, ylabel=$y$]
290       \addplot coordinates {(0,0) (1,1) (2,4) (3,9)};  % Plot explicit coordinates
291     \end{axis}
292   \end{tikzpicture}
293   \caption{Explicit coordinates plotted with pgfplots.}
294   \label{fig:pgfplots_coords}
295 \end{figure}
```

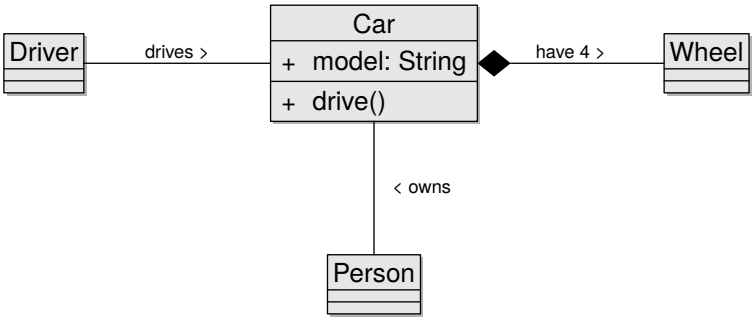



**Abbildung 8.8.:** Class diagram drawn with MetaUML

## 8.13. UML diagrams

UML diagrams can be written as text next to the LaTeX source and are typeset in the fonts of the document. MetaUML draws class, component, and further diagrams. It is MetaPost code, which `lualatex` runs itself via the luamplib package; no further tools are needed. Thus, the MetaUML diagrams are shown only when compiling with `lualatex`. The pgf-umlsd package draws sequence diagrams with TikZ and works with every engine. A comparison of the packages for UML diagrams is given at `https://github.com/latextemplates/gadr-latex-packages/blob/main/uml-diagrams.md`.





**Abbildung 8.9.:** Component diagram drawn with MetaUML

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
309   \begin{figure}
310     \centering
311     \sffamily
312     \begin{mplibcode}
313       input metauml;
314       beginfig(1);
315       Class.Driver("Driver")()();
316       Class.Car("Car")("+model: String")("+drive()");
317       Class.Wheel("Wheel")()();
318       Class.Person("Person")()();
319       % distances between the boxes in PostScript points (1/72 inch)
320       leftToRight(70)(Driver, Car, Wheel);
321       topToBottom(50)(Car, Person);
322       drawObjects(Driver, Car, Wheel, Person);
323       link(association)(Driver.e -- Car.w);
324       item(iAssoc)("drives >")(obj.s = .5[Driver.e, Car.w]);
325       % the diamond is drawn at the end of the path
326       link(composition)(Wheel.w -- Car.e);
327       item(iAssoc)("have 4 >")(obj.s = .5[Car.e, Wheel.w]);
328       link(association)(Car.s -- Person.n);
329       item(iAssoc)("< owns")(obj.w = .5[Car.s, Person.n] + (5, 0));
330       endfig;
331     \end{mplibcode}
332     \caption{Class diagram drawn with MetaUML}
333     \label{fig:uml-class}
334   \end{figure}
```

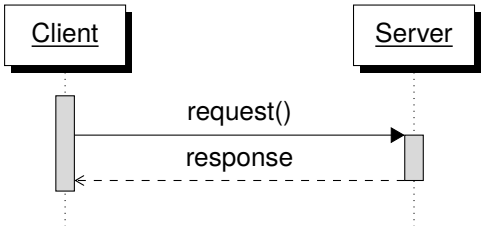



**Abbildung 8.10.:** Sequence diagram drawn with pgf-umlsd

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
338   \begin{figure}
339     \centering
340     \sffamily
341     \begin{mplibcode}
342       input metauml;
343       beginfig(1);
344       Component.Client("Client")();
345       Component.Server("Server")();
346       % MetaUML has no automatic layout: each object is placed relative to another one;
347       % here, the left edge of Server is 140 PostScript points (1/72 inch, about 5 cm)
          ↪  right of the right edge of Client
348       Server.w = Client.e + (140, 0);
349       drawObjects(Client, Server);
350       % the interface: Server provides it (ball), Client requires it (socket)
351       pair iface;
352       iface = .5[Client.e, Server.w];
353       link(providedInterface)(Server.w -- iface);
354       link(requiredInterface)(Client.e -- iface);
355       item(iAssoc)("API")(obj.s = iface + (0, 8));
356       endfig;
357     \end{mplibcode}
358     \caption{Component diagram drawn with MetaUML}
359     \label{fig:uml-component}
360   \end{figure}
```

**Tabelle 8.2.:** Simple Table

| Heading1 | Heading2 |
|---|---|
| One | Two |
| Three | Four |

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
365 \begin{figure}
366   \centering
367   \sffamily
368   \begin{sequencediagram}
369     \newthread{client}{Client}
370     % [3]: horizontal gap (in cm) to the box of the previous instance; the default (0.2)
        ↪ leaves no room for the message labels
371     \newinst[3]{server}{Server}
372     \begin{call}{client}{request()}{server}{response} % chktex 36
373     \end{call}
374   \end{sequencediagram}
375   \caption{Sequence diagram drawn with pgf-umlsd}
376   \label{fig:uml-sequence}
377 \end{figure}
```

## 8.14. Tables

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
383 \begin{table}
384   \caption{Simple Table}
385   \label{tab:simple}
386   \centering
387   \begin{tabular}{ll}
388     \toprule
389     Heading1 & Heading2 \\
390     \midrule
391     One      & Two      \\
392     Three    & Four     \\
393     \bottomrule
394   \end{tabular}
395 \end{table}
```

A table caption goes above the table (`\caption` before the `tabular`), a figure caption below the figure.

Rows and cells can be colored with `\rowcolor` and `\cellcolor` from the colortbl package, which xcolor loads with its option `table`.

**Tabelle 8.3.:** Table with colored cells

| Test | Result |
|---|---|
| A | pass |
| B | fail |

**Tabelle 8.4.:** Table with a footnote

| Heading1 | Heading2[7] |
|---|---|
| One | Two |

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
403  \begin{table}
404    \caption{Table with colored cells}
405    \label{tab:colored}
406    \centering
407    \begin{tabular}{ll}
408      \toprule
409      \rowcolor{gray!20}
410      Test & Result                  \\
411      \midrule
412      A    & \cellcolor{green!20}pass \\
413      B    & \cellcolor{red!20}fail   \\
414      \bottomrule
415    \end{tabular}
416  \end{table}
```

A `\footnote` inside a floating table is lost. Use `\tablefootnote` from the tablefootnote package instead: it is set as a normal footnote at the bottom of the page. If the notes should appear directly below the table instead (common in journals), use the threeparttable package.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
424  \begin{table}
425    \caption{Table with a footnote}
426    \label{tab:footnote}
427    \centering
428    \begin{tabular}{ll}
429      \toprule
430      Heading1 & Heading2\tablefootnote{A footnote inside a table.} \\
431      \midrule
432      One      & Two                                                \\
433      \bottomrule
434    \end{tabular}
435  \end{table}
```

[7] A footnote inside a table.

**Tabelle 8.5.:** Wide table scaled to the line width

| Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1.11 | 2.22 | 3.33 | 4.44 | 5.55 | 6.66 | 7.77 | 8.88 | 9.99 | 10.10 | 11.11 | 12.12 |
| Rain | Snow | Wind | Sun | Fog | Hail | Heat | Storm | Mist | Frost | Sleet | Calm |

**Tabelle 8.6.:** Table with diagonal line

| Column / Row | A | B |
|---|---|---|
| 1 | x | y |

A table wider than the text runs into the margin. `\begin{adjustbox}{max width=\linewidth}` from the adjustbox package scales it down to the line width (the column width in a two-column layout), and only if it is too wide. Scaling shrinks the font, so for a table with long text in its cells, prefer wrapping the text with the column type `X` of the tabularx package, and for a very wide table, a landscape page (see `pdflscape`).

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
443 \begin{table}
444   \caption{Wide table scaled to the line width}
445   \label{tab:wide}
446   \centering
447   \begin{adjustbox}{max width=\linewidth}
448     \begin{tabular}{lllllllllll}
449       \toprule
450       Jan  & Feb  & Mar  & Apr  & May  & Jun  & Jul  & Aug   & Sep  & Oct   & Nov   & Dec
          ↪  \\
451       \midrule
452       1.11 & 2.22 & 3.33 & 4.44 & 5.55 & 6.66 & 7.77 & 8.88  & 9.99 & 10.10 & 11.11 & 12.12
          ↪  \\
453       Rain & Snow & Wind & Sun  & Fog  & Hail & Heat & Storm & Mist & Frost & Sleet & Calm
          ↪  \\
454       \bottomrule
455     \end{tabular}
456   \end{adjustbox}
457 \end{table}
```

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
461  % Adapted from https://tex.stackexchange.com/a/468994/9075
462  \begin{table}
463    \caption{Table with diagonal line}
464    \label{tab:diag}
465    \centering
466    \begin{tabular}{|l|c|c|} % chktex 44
467      \hline % chktex 44
468      \diagbox{Row}{Column} & A & B \\
469      \hline % chktex 44
470      1                     & x & y \\
471      \hline % chktex 44
472    \end{tabular}
473  \end{table}
```

## 8.15. Tables spanning multiple pages

The longtable package typesets tables that automatically break across page boundaries. The header (`\endhead`) and footer (`\endfoot`) rows are repeated on every page; once enough rows are added, the table spans more than one page on its own.

**Tabelle 8.7.:** A sample long table.

| First column | Second column | Third column |
|---|---|---|
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |
| A | BC | D |

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
483  \begin{longtable}{lll}
484    \caption{A sample long table.}\label{tab:long} \\
485    \toprule
486    \textbf{First column} & \textbf{Second column} & \textbf{Third column} \\
487    \midrule
488    \endfirsthead
489
490    \multicolumn{3}{c}{{\bfseries \tablename\ \thetable{} -- continued from previous page}}
       ↪  \\
491    \toprule
492    \textbf{First column} & \textbf{Second column} & \textbf{Third column} \\
493    \midrule
494    \endhead
495
496    \midrule
497    \multicolumn{3}{r}{{Continued on next page}} \\
498    \endfoot
499
500    \bottomrule
501    \endlastfoot
502
503    A & BC & D \\
504    A & BC & D \\
505    A & BC & D \\
506    A & BC & D \\
507    A & BC & D \\
508    A & BC & D \\
509    A & BC & D \\
510    A & BC & D \\
511    A & BC & D \\
512    A & BC & D \\
513    A & BC & D \\
514    A & BC & D \\
515  \end{longtable}
```

## 8.16. Source Code

The minted package highlights listings properly. It uses the pygments library, which in turn requires Python.

Listing 1 shows source code written in XML. Zeile 2 contains a comment.

```
1 <listing name="example">
2   <!-- comment -->
3   <content>not interesting</content>
4 </listing>
```

**List. 1.:** Example XML listing using minted

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise - minted.tex`

```
% After a period, LaTeX sets the wider sentence space by default. The exception: a period
↪ after a capital letter
% is taken for an abbreviation or initial ("T. Scientist", "NASA") and gets the narrow
↪ inter-word space.
% "XML." ends a sentence, so \@ before the period restores the sentence space.
% (The other way round, "e.g.\ details" forces the narrow space after a lowercase
↪ abbreviation; ~ is a
% non-breaking inter-word space, as in "Prof.~Dr.~Eike Kraft".)
% An abbreviation set with \gls{xml} needs no \@: glossaries ends it with a non-letter, so
↪ the period after it
% gets the sentence space. The plain "XML" here is for documents without the glossaries
↪ package.
\Zcref{lst:XML} shows source code written in XML\@.
\Zcref{line:comment} contains a comment.

\begin{listing}[htbp]
  \begin{minted}[linenos=true,escapeinside=||]{xml}
<listing name="example">
  <!-- comment --> |\label{line:comment}|
  <content>not interesting</content>
</listing>
\end{minted}
  \caption{Example XML listing using minted}
  \label{lst:XML}
\end{listing}
```

One can also typeset JSON as shown in Listing 2.

```
{
  key: "value"
}
```

**List. 2.:** Example JSON listing using minted

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise - minted.tex`

```
\begin{listing}[htbp]
  \begin{minted}[linenos=true,escapeinside=||]{json}
{
  key: "value"
}
\end{minted}
  \caption{Example JSON listing using minted}
  \label{lst:flJSON}
\end{listing}
```

Java is also possible as shown in Listing 3.

```java
public class Hello {
    public static void main (String[] args) {
        System.out.println("Hello World!");
    }
}
```

**List. 3.:** Java code rendered using minted

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise - minted.tex`

```
\begin{listing}[htbp]
  \begin{minted}[linenos=true,escapeinside=||]{java}
public class Hello {
    public static void main (String[] args) {
        System.out.println("Hello World!");
    }
}
\end{minted}
  \caption{Java code rendered using minted}
  \label{lst:flJava}
\end{listing}
```

Listings longer than the remaining space continue on the next page if they are *not* floating. A floating listing is always placed on a single page. Thus, use `\captionof{listing}` instead of the `listing` environment. Listing 4 spans multiple pages.

```java
public class Squares {

    /** Returns the square of 1. */
    public int square1() {
        return 1 * 1;
    }

    /** Returns the square of 2. */
    public int square2() {
        return 2 * 2;
    }

    /** Returns the square of 3. */
    public int square3() {
        return 3 * 3;
    }

    /** Returns the square of 4. */
    public int square4() {
        return 4 * 4;
    }

    /** Returns the square of 5. */
    public int square5() {
        return 5 * 5;
    }
```

```
27
28      /** Returns the square of 6. */
29      public int square6() {
30          return 6 * 6;
31      }
32
33      /** Returns the square of 7. */
34      public int square7() {
35          return 7 * 7;
36      }
37
38      /** Returns the square of 8. */
39      public int square8() {
40          return 8 * 8;
41      }
42
43      /** Returns the square of 9. */
44      public int square9() {
45          return 9 * 9;
46      }
47
48      /** Returns the square of 10. */
49      public int square10() {
50          return 10 * 10;
51      }
52
53      /** Returns the square of 11. */
54      public int square11() {
55          return 11 * 11;
56      }
57
58      /** Returns the square of 12. */
59      public int square12() {
60          return 12 * 12;
61      }
62
63      public static void main(String[] args) {
64          System.out.println(new Squares().square12());
65      }
66  }
```

**List. 4.:** Long Java listing spanning multiple pages

## 8.17. Itemization

One can list items as follows:

- Item One
- Item Two

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
530  \begin{itemize}
531    \item Item One
532    \item Item Two
533  \end{itemize}
```

With the package paralist, one can create itemizations with lesser spacing:

- Item One
- Item Two

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
539  \begin{compactitem}
540    \item Item One
541    \item Item Two
542  \end{compactitem}
```

One can enumerate items as follows:

1. Item One
2. Item Two

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
548  \begin{enumerate}
549    \item Item One
550    \item Item Two
551  \end{enumerate}
```

With the package paralist, one can create enumerations with lesser spacing:

1. Item One
2. Item Two

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
557  \begin{compactenum}
558    \item Item One
559    \item Item Two
560  \end{compactenum}
```

With paralist, one can even have all items typeset after each other and have them clean in the TeX document:
1. The first item, 2. the second item, and 3. the third item appear in one line.

| Right | Left | Centered |
|---|---|---|
| 12 | 12 | 12 |
| 123 | 123 | 123 |

**Tabelle 8.8.:** A table written in Markdown

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
566  \begin{inparaenum}
567    \item The first item,
568    \item the second item, and
569    \item the third item appear in one line.
570  \end{inparaenum}
```

## 8.18. Writing in Markdown

If you are new to LaTeX, you can start by writing your text in Markdown using the markdown package. LaTeX then takes care of the typesetting. Markdown and LaTeX can be mixed: Tabelle 8.8 is written in Markdown and referenced from LaTeX. A whole chapter can be written in a separate Markdown file included by `\markdownInput`, as Kapitel 7 shows. The markdown-latex-quickstart shows a complete document written in Markdown.
Text can be *emphasized* or **bold**, and `code` is set in a monospaced font. A citation looks like this [Sch17], and here is a footnote.[8] Referenced footnotes work as well[9].

- first point
- second point
  - sub-point

1. firstly
2. secondly

Tabelle 8.8 shows a table with caption. Its identifier `{#tbl:markdown}` is referenced by `<#tbl:markdown>`.

[8] This is an inline footnote.
[9] This is a footnote defined at a different place in the text.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
584   \begin{markdown}
585 Text can be *emphasized* or **bold**, and `code` is set in a monospaced font.
586 A citation looks like this [@mwe], and here is a footnote.^[This is an inline footnote.]
587 Referenced footnotes work as well[^detail].
588
589 [^detail]: This is a footnote defined at a different place in the text.
590
591 - first point
592 - second point
593   - sub-point
594
595 1) firstly
596 2) secondly
597
598 | Right | Left | Centered |
599 |------:|:-----|:--------:|
600 |    12 | 12   |    12    |
601 |   123 | 123  |   123    |
602
603 : A table written in Markdown {#tbl:markdown}
604
605 <#tbl:markdown> shows a table with caption.
606 Its identifier `{#tbl:markdown}` is referenced by `<#tbl:markdown>`.
607 \end{markdown}
```

## 8.19. Abkürzungen

Mit `\gls{...}` können Abkürzungen eingebaut werden, beim ersten Aufrufen wird die lange Form eingesetzt. Beim wiederholten Verwenden von `\gls{...}` wird automatisch die Kurzform angezeigt. Außerdem wird die Abkürzung automatisch in die Abkürzungsliste eingefügt. Mit `\glspl{...}` wird die Pluralform verwendet. Möchte man, dass bei der ersten Verwendung direkt die Kurzform erscheint, so kann man mit `\glsunset{...}` eine Abkürzung als bereits verwendet markieren. Das Gegenteil erreicht man mit `\glsreset{...}`. Beide ändern nur die Markierung „bereits verwendet“: Die Wirkung zeigt sich beim nächsten `\gls{...}` dieser Abkürzung, die Befehle müssen also davor im Text stehen. `\glsresetall` (z. B. nach der Kurzfassung) lässt alle Abkürzungen wieder in der Langform erscheinen.
Definiert werden Abkürzungen in der Datei `abbreviations.tex` mithilfe von `\newabbreviation{key}{kurz}{lang}` (oder `\newacronym` für ein Akronym, das als Wort gelesen wird).
Mehr Infos unter: `https://ctan.org/pkg/glossaries-extra`.
Beim ersten Durchlauf betrug die Fehlerrate (FR) 5. Beim zweiten Durchlauf war die FR 3. Die Pluralform sieht man hier: FRs. Um zu demonstrieren, wie das Abkürzungsverzeichnis bei längeren Beschreibungstexten aussieht, muss hier noch Relational Database Management Systems (RDBMS) erwähnt werden.

Deutschsprachige Anwendervereinigung TEX e.V. (DANTE e.V.) is a local TEX user group. The German-speaking local TEX user group is DANTE e.V.. A General Practitioner (G.P.) is a medical doctor. I went to my surgery to see the G.P..

Zugehöriger LATEX-Quelltext aus 80 - latex-hinweise.tex

```
630  Beim ersten Durchlauf betrug die \gls{fr} 5.
631  Beim zweiten Durchlauf war die \gls{fr} 3.
632  Die Pluralform sieht man hier: \glspl{fr}.
633  Um zu demonstrieren, wie das Abkürzungsverzeichnis bei längeren Beschreibungstexten
     ↪ aussieht, muss hier noch \glspl{rdbms} erwähnt werden.
634
635  \gls{dante} is a local \TeX\ user group.
636  The German-speaking local \TeX\ user group is \gls{dante}.
637  A \gls{gp} is a medical doctor.
638  I went to my surgery to see the \gls{gp}.
```

## 8.20. Other Features

The words „workflow“ and „dwarflike“ can be copied from the PDF and pasted to a text file.

Zugehöriger LATEX-Quelltext aus 80 - latex-hinweise.tex

```
644  The words \enquote{workflow} and \enquote{dwarflike} can be copied from the PDF and pasted
     ↪ to a text file.
```

The symbol for powerset is now correct: $\powerset$ and not a Weierstrass p ($\wp$).
$\powerset(1,2,3)$

Zugehöriger LATEX-Quelltext aus 80 - latex-hinweise.tex

```
648  The symbol for powerset is now correct: $\powerset$ and not a Weierstrass p ($\wp$).
649
650  $\powerset({1,2,3})$
```

Brackets work as designed: <test> One can also input backticks in verbatim text: `test`.

Zugehöriger LATEX-Quelltext aus 80 - latex-hinweise.tex

```
654  Brackets work as designed:
655  <test>
656  One can also input backticks in verbatim text: \verb|`test`|.
```

Acronyms can be typeset in running text with `\initialism`, which sets them as small caps that blend into the surrounding lowercase text. It is the lightweight alternative to the full acronym and glossary management (`\gls`, with an automatic list of abbreviations) provided by the thesis variants: `\initialism` only typesets the acronym and does not add it to any list. The macro and

the ready-made acronyms (\OMG, \BPEL, \BPMN, \UML) are defined in commands.tex, where you can add your own.
The UML is maintained by the OMG; related standards include BPEL and BPMN. Any acronym can be set inline with REST or HTTP.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
662  The \UML is maintained by the \OMG; related standards include \BPEL and \BPMN.
663  Any acronym can be set inline with \initialism{REST} or \initialism{HTTP}.
```

## 8.21. Zref-vario examples

Demonstration of zref-vario: zvref[S] at the beginning of a sentence, zvref in all other cases.
Abbildung 8.1 auf Seite 29 shows a simple fact, although Abbildung 8.1 auf Seite 29 could also show something else.
Tabelle 8.1 auf Seite 29 shows a simple fact, although Tabelle 8.1 auf Seite 29 could also show something else.
Abschnitt 8.7 auf Seite 29 shows a simple fact, although Abschnitt 8.7 auf Seite 29 could also show something else.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
673  \zvref[S]{fig:ex:cref} shows a simple fact, although \zvref{fig:ex:cref} could also show
     ↪  something else.
674
675  \zvref[S]{tab:ex:cref} shows a simple fact, although \zvref{tab:ex:cref} could also show
     ↪  something else.
676
677  \zvref[S]{sec:ex:cref} shows a simple fact, although \zvref{sec:ex:cref} could also show
     ↪  something else.
```

## 8.22. Citations

When referencing something from the bibliography file, it will automatically appear in the references section. If a reference is not cited, it is not appearing there.
Standard case: Citing indirectly citing something [Sch17]. In case one wants to name the author: Scharrer [Sch17] shows a minimal LaTeX example.

Zugehöriger LaTeX-Quelltext aus 80 - latex-hinweise.tex

```
686  Standard case: Citing indirectly citing something~\cite{mwe}.
687  In case one wants to name the author: \textcite{mwe} shows a minimal \LaTeX{} example.
```

Note that \textcite{mwe} prints both the author and the reference to the bibliography entry.

… missing figure …

**Abbildung 8.11.:** Figure

A thesis is cited like any other work: a master's thesis [Sha40] or a doctoral thesis [Nas50]. The entry types `@MastersThesis` and `@PhdThesis` are labeled in the document language („MA thesis“ or „Masterarbeit“, „PhD thesis“ or „Diss.“). For a Bachelor's thesis, use `@Thesis` with `type = {bathesis}`; for a Diplomarbeit, `type = {Diplomarbeit}` is printed as is.
Remember that you have to call `biber main-german` to generate the bibliography data for `lualatex`. You will need to run `lualatex` twice so that the page numbers are up to date.
In the bibliography, use `\textsuperscript` for „st“, „nd“, …: E.g., „The 2nd conference on examples“. When you use JabRef, you can use the cleanup command to achieve that. See `https://help.jabref.org/en/CleanupEntries` for an overview of the cleanup functionality.

## 8.23. Miscellaneous Examples

Reference test: Abschnitt 8.23, Abbildung 8.11 and Algorithmus 8.1.
Checkmark: ✓. Crossmark: ✗.

Zugehöriger LaTeX-Quelltext aus `80 - latex-hinweise.tex`

```
711  Checkmark: \dingcheck.
712  Crossmark: \dingcross.
```

… missing figure …

**Abbildung 8.12.:** Rotated figure

### 8.23.1. Algorithms

**Algorithmus 8.1** *algo*

1: $a \leftarrow 0$
2: State 2

**Algorithmus 8.2** Algorithm 2

1: $a \leftarrow 0$
2: State 2

Algorithmus 8.1 has already shown an algorithm. Test of line referencing: line 2 (Algorithmus 8.1) and line 2 (Algorithmus 8.2).

### 8.23.2. Definitions

**Definition 8.1 (Title)**
*Definition Text*

Definition 8.1 shows …

### 8.23.3. Enumerations

(a) a

(b) b

(c) c

(d) d

Equivalent to paralist's inparaenum: (a) a (b) b (c) c (d) d

**first** First

**second** Second

**third** Third

`first` First

`second` Second

`third` Third

`first` First

`second` Second

`third` Third

**first label with a long description text breaking over one line. Enabled by the enumitem package** First

**second** Second

**third** Third

**first label with a long description text breaking over one line. Defined in the template**

First

**second**

Second

**third**

Third

- First
- Second
- Third

The optional parameter changes the marker that is prepended. See `http://www.weinelt.de/latex/item.html`.

A First

B Second

C Third

Incorrect use of the optional parameter as follows:

first First

second Second

third Third

Note that, when `enumitem` is loaded, this behaves differently than with `paralist`.

### 8.23.4. The fquote environment

“*The program will be finished by next Friday.*”
*— T. Scientist*

”*The program will be finished by next Friday.*“
*—T. Scientist*

# 9. Zusammenfassung und Ausblick

Your conclusions are more than a factual summary of your work: they position, interpret, and defend your findings against the state of the art that you discussed in Abschnitt 1.2. You specifically outline which concrete findings or methodological contributions advance our knowledge towards the general objective you introduced in Abschnitt 1.1. Objectively discuss which parts you solved and in which parts you failed. State who benefits from your results (developers, architects, testers, researchers, …) and how. Name the lessons you learned, e.g., on the evaluation setup or the literature search, that help someone repeating or extending your study.

You should explicitly discuss limitations and shortcomings of your work and detail what kind of future studies are needed to overcome these limitations. Be specific in the sense that your arguments for future work should be based on concrete findings and insights you obtained in your report.

# Literaturverzeichnis


[BCR94] V. R. Basili, G. Caldiera, H. D. Rombach. „The Goal Question Metric Approach“. In: *Encyclopedia of Software Engineering*. John Wiley & Sons, 1994, S. 528–532 (zitiert auf S. 20).

[LLDS26] H. Lichter, J. Ludewig, M. Deininger, K. Schneider. *Student Thesis Projects: A Guide to Organizing, Conducting, and Presenting Student Thesis Projects Using the Example of Computer Science*. 7. Aufl. Zollikon: vdf Hochschulverlag, 2026. ISBN: 978-3-7281-4241-2. DOI: 10.3218/4241-2. URL: https://vdf.ch/product/student-thesis-projects-en.html (besucht am 23. 09. 2026) (zitiert auf S. 11).

[Nas50] J. F. Nash. „Non-Cooperative Games“. Diss. Princeton University, 1950 (zitiert auf S. 52).

[RH09] P. Runeson, M. Höst. „Guidelines for conducting and reporting case study research in software engineering“. In: *Empirical Software Engineering* 14.2 (2009), S. 131–164. DOI: 10.1007/s10664-008-9102-8 (zitiert auf S. 21).

[Sch17] M. Scharrer. *The* mwe *Package*. 2017. URL: http://texdoc.net/mwe (zitiert auf S. 22, 48, 51).

[Sha40] C. E. Shannon. „A Symbolic Analysis of Relay and Switching Circuits“. Masterarbeit. Massachusetts Institute of Technology, 1940. URL: https://hdl.handle.net/1721.1/11173 (zitiert auf S. 52).


Alle Links wurden zuletzt am 29.03.2021 geprüft.

# A. My first appendix

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

# B. Nutzung von KI-Tools

| KI-Tool | Genutzt für | Genutzt in |
|---|---|---|
| ChatGPT5 | Erstellung von Abbildungen | Abbildungen 8.2 und 8.3 |
| Google AI search | Pseudocode für Algorithmus XYZ | Algorithmus 8.1 |
| DeepL Write | Umformulierung der Einleitung | Kapitel 1 |

## Eidesstattliche Erklärung

Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. $\sin^2(\alpha) + \cos^2(\beta) = 1$. Der Text gibt lediglich den Grauwert der Schrift an $E = mc^2$. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. $\sqrt[n]{a} \cdot \sqrt[n]{b} = \sqrt[n]{ab}$. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. $\frac{\sqrt[n]{a}}{\sqrt[n]{b}} = \sqrt[n]{\frac{a}{b}}$. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. $a\sqrt[n]{b} = \sqrt[n]{a^n b}$. Er muss keinen Sinn ergeben, sollte aber lesbar sein. $\mathrm{d}\Omega = \sin\vartheta \mathrm{d}\vartheta \mathrm{d}\varphi$. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.

Hamburg, den XX.XX.20XX

Vorname Nachname

## Veröffentlichung

Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. $\sin^2(\alpha) + \cos^2(\beta) = 1$. Der Text gibt lediglich den Grauwert der Schrift an $E = mc^2$. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. $\sqrt[n]{a} \cdot \sqrt[n]{b} = \sqrt[n]{ab}$. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. $\frac{\sqrt[n]{a}}{\sqrt[n]{b}} = \sqrt[n]{\frac{a}{b}}$. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. $a\sqrt[n]{b} = \sqrt[n]{a^n b}$. Er muss keinen Sinn ergeben, sollte aber lesbar sein. $\mathrm{d}\Omega = \sin\vartheta \mathrm{d}\vartheta \mathrm{d}\varphi$. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.

Hamburg, den XX.XX.20XX

Vorname Nachname