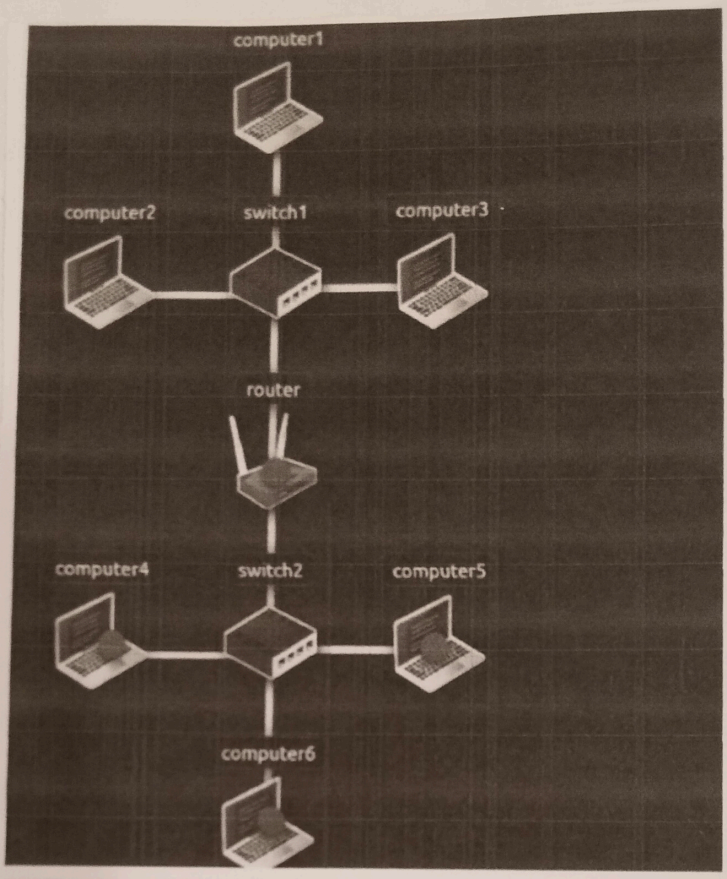


Pentester Terminal

```
pentester@TryHackMe$ sudo nmap -PR -sn 10.10.210.0/24

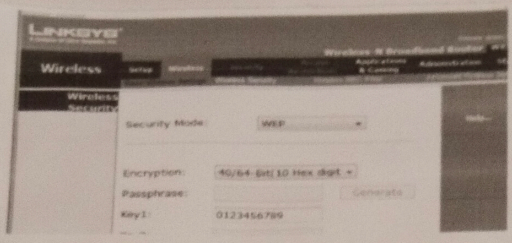
Starting Nmap 7.60 ( https://nmap.org ) at 2021-09-02 07:12 BST
Nmap scan report for ip-10-10-210-71.eu-west-1.compute.internal (10.10.210.71)
Host is up (0.00011s latency).
MAC Address: 02:89:7C:5A:F3:89 (Unknown)
Nmap scan report for ip-10-10-210-100.eu-west-1.compute.internal (10.10.210.100)
Host is up (-0.100s latency).
MAC Address: 02:67:D4:10:2D:CD (Unknown)
Nmap scan report for ip-10-10-210-165.eu-west-1.compute.internal (10.10.210.165)
Host is up (0.00025s latency).
MAC Address: 02:55:79:6F:17:B7 (Unknown)
Nmap scan report for ip-10-10-210-6.eu-west-1.compute.internal (10.10.210.6)
Host is up.
Nmap done: 256 IP addresses (4 hosts up) scanned in 3.12 seconds
```

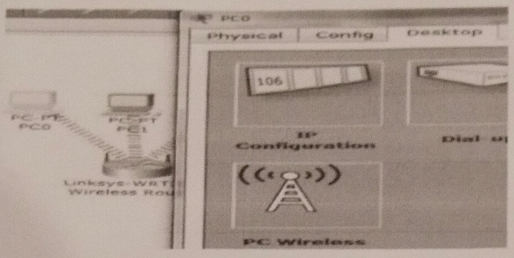
Exp:- 8.
Date: 10/9/26

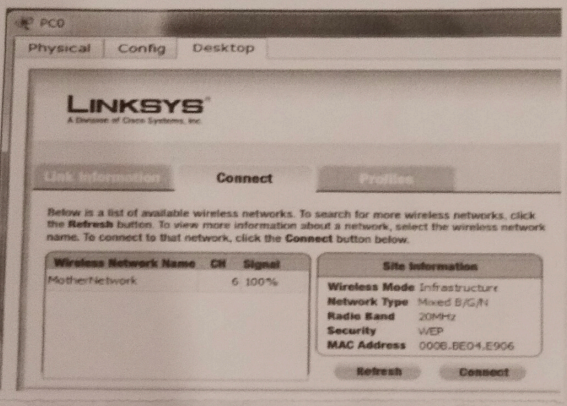
NMAP to Discover live hosts using Nmap Scans.

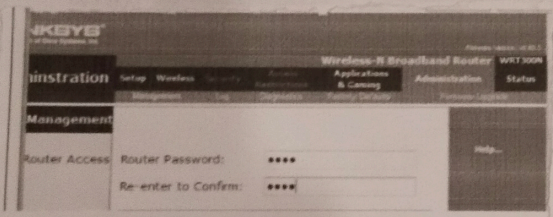
Aim:-
To discover live hosts in a network using NMAP scans such as ARP, ICMP, TCP and UDP on the Pythackme platform.

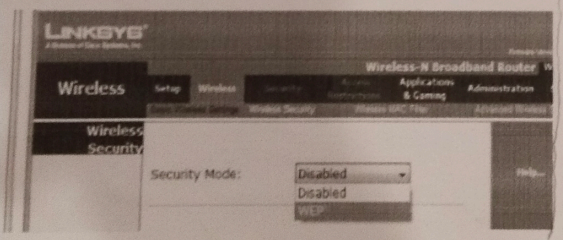
Algorithm:-
1. Open the Pythackme platform and launch the assigned networking lab machine.
2. Start the target machine & identify its IP address or authorized target network.
3. Open the terminal in the provided environment.
4. Perform an ARP scan to identify active hosts on the local network.
5. Perform an ICMP ping scan to discover hosts corresponding to ping requests.
6. Perform TCP-based host discovery to identify hosts responding to TCP probes.
7. Perform UDP-based discovery to check for responses from UDP probes
8. Compare the scan results and record the discovered live hosts.
9. Analyse the output & note the IP addresses of the detected hosts.

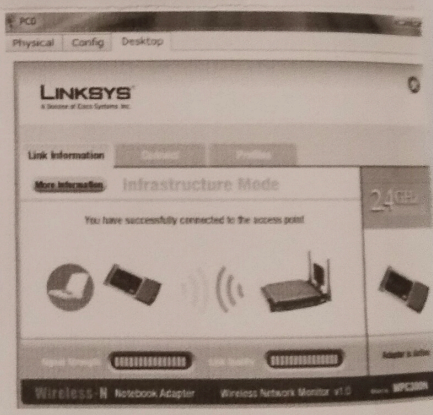

LINKSYS
Wireless
Security Mode:
WEP
Encryption:
40/64-bit(10 Hex digit
Passphrase:
Generate
Key1:
0123456789


PC0
Physical
Config
Desktop
106
IP Configuration
Dial-up
PC Wireless


PC0
Physical
Config
Desktop
LINKSYS
A Division of Cisco Systems, Inc.
Link Information
Connect
Profiles
Below is a list of available wireless networks. To search for more wireless networks, click the Refresh button. To view more information about a network, select the wireless network name. To connect to that network, click the Connect button below.
Wireless Network Name
CH
Signal
MotherNetwork
6
100%
Site Information
Wireless Mode Infrastructure
Network Type Mixed B/G/N
Radio Band 20MHz
Security WEP
MAC Address 0008.BE04.E906
Refresh
Connect


Wireless-N Broadband Router
WRT300N
Administration
Status
Management
Router Access
Router Password:
Re-enter to Confirm:


LINKSYS
Wireless-N Broadband Router
Wireless
Setup
Wireless
Applications & Gaming
Administration
Wireless Security
Security Mode:
Disabled
Disabled
WEP


PC0
Physical
Config
Desktop
LINKSYS
Link Information
More Information
Infrastructure Mode
You have successfully connected to the access point
Wireless-N Notebook Adapter
Wireless Network Monitor v1.0

Result :-

Live hosts were discovered using ARP, ICMP, TCP and UDP-based Nmap scans and their responses were analysed successfully.