SUBSYSTEM 03 / AUTOMATE

Agent system

Expose workspace state, actions and evidence to scripts, agents and paired devices. Keep browser tools and companion products explicit in the topology.

FIG. D / CONTROL + EVIDENCE TOPOLOGY

SCHEMATIC / NOT TO SCALE

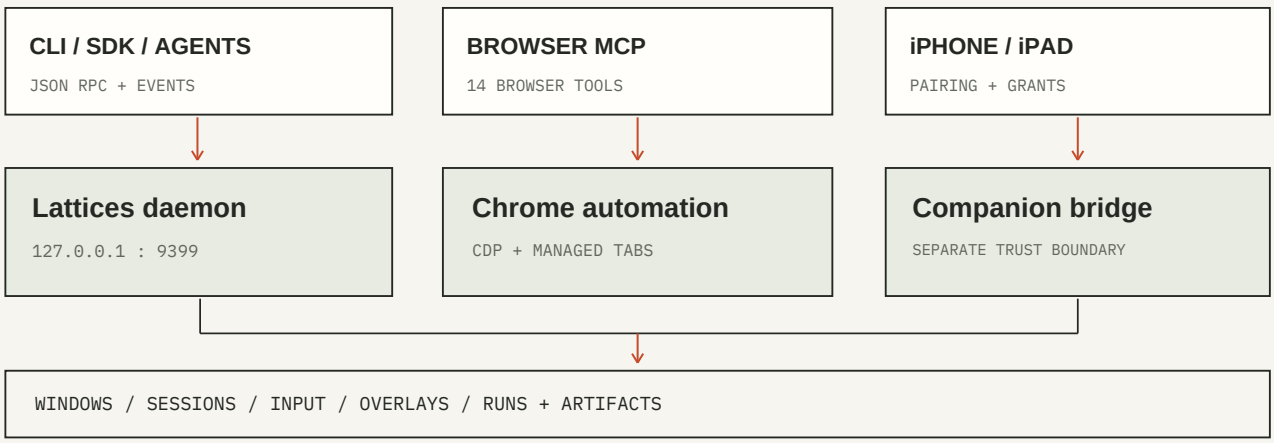

FUNCTIONAL SPECIFICATION

01 Native API & SDK

Local WebSocket RPC, a runtime schema, event subscriptions and TypeScript facades expose workspace, desktop, input and system operations.

02 Observe & inspect

Read windows, Spaces, layers, sessions, terminal output and process trees. Resolve targets; inspect AX elements, OCR and screenshots.

03 Computer actions

Launch, focus, click, type, set values, press keys, scroll and drag. Stage actions, inspect receipts, verify outcomes and undo eligible placements.

04 Capture & runs

Capture windows, regions or displays; record a target or command. Save runs, steps, logs and artifacts; crop/zoom images and apply verification.

05 Browser interface

Browser MCP controls isolated Chrome identities: navigate, inspect, click, fill, resize, capture and read console logs. Native browser RPC is separate.

06 Assistant & overlays

Workspace chat selects an available agent backend. Publish transient overlays, interactive actors and web HUDs; move them or control visibility.

07 Paired mobile control

A separate bridge pairs iPhone/iPad devices with grants and revocation. Deck controls, desktop previews, keyboard and trackpad are capability-gated.

08 Product extensions

Separate apps: Action for computer use; Blink for notes and offline mobile reading; Voice for speech queues, voice selection and playback controls.

INTERFACE CONTRACT

The native daemon is loopback-only with no auth by design. Browser MCP is a distinct toolset. Companion access requires pairing; voice input is hosted on :9398.

DRAWING
LAT-FS-03

ISSUE / BASIS
A / Working source

SOURCE SNAPSHOT
02 Oct 2026

SHEET / SERIES
04 / 04