


New version of Model

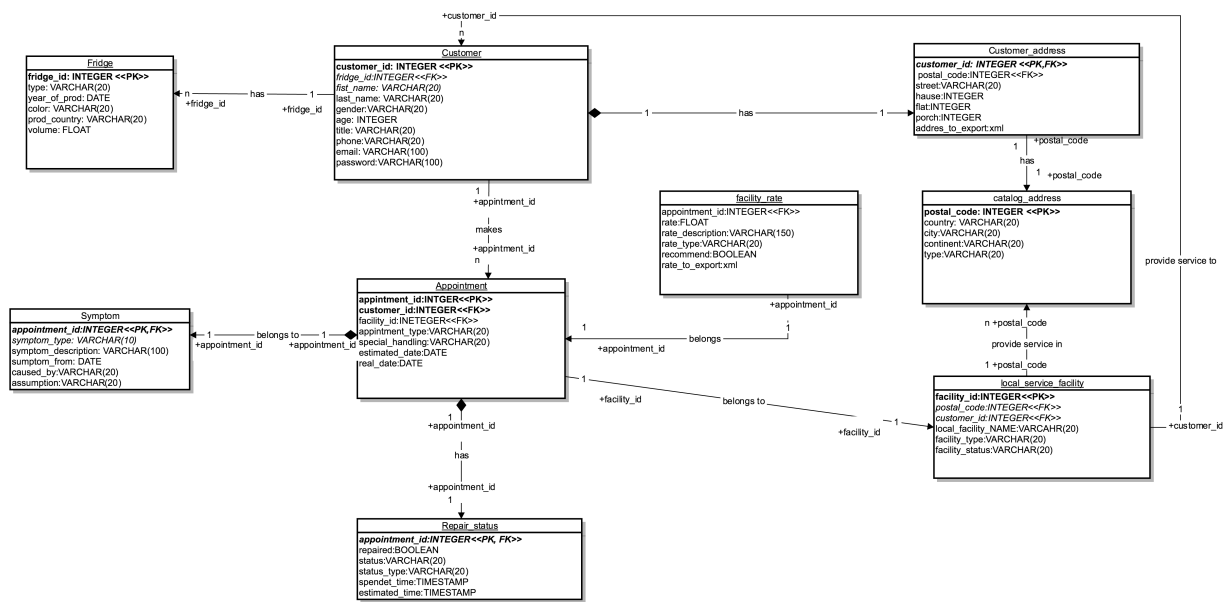

how to create database from php script:

1. **Create database fridge_service**
2. php -f create_tables.php
3. php -f insert_data_to_database.php
4. php -f insert_xml.php

how to restore database:

1. Preconditions: Have user "postgres" with empty password ""
2. Login to psql console and execute CREATE DATABASE fridge_service;
3. Restore database: pg_restore -d fridge_service dump.sql

ALL IN ONE SCRENSHOT

```

MacBook-Pro-Andre:inter andrefedorenko$ psql
psql (9.6.2, server 9.5.3)
Type "help" for help.

andrefedorenko=# DROP DATABASE fridge_service;
DROP DATABASE
andrefedorenko=# CREATE DATABASE fridge_service;
CREATE DATABASE
andrefedorenko=# \q
MacBook-Pro-Andre:inter andrefedorenko$ php -f create_tables.php
MacBook-Pro-Andre:inter andrefedorenko$ php -f insert_data_to_database.php
MacBook-Pro-Andre:inter andrefedorenko$ php -f insert_xml.php
MacBook-Pro-Andre:inter andrefedorenko$ pg_dump --format=c fridge_service > dump.sql
MacBook-Pro-Andre:inter andrefedorenko$ psql
psql (9.6.2, server 9.5.3)
Type "help" for help.

andrefedorenko=# DROP DATABASE fridge_service;
DROP DATABASE
andrefedorenko=# CREATE DATABASE fridge_service;
CREATE DATABASE
andrefedorenko=# \q
MacBook-Pro-Andre:inter andrefedorenko$ pg_restore -d fridge_service dump.sql

```