

**Aim:** To Understand Continuous monitoring and Installation and configuration of Nagios Core, Nagios Plugins and NRPE (Nagios Remote Plugin Executor) on Linux Machine.

**Theory:**

**What is Nagios?**

Nagios is an open-source software for continuous monitoring of systems, networks, and infrastructures. It runs plugins stored on a server that is connected with a host or another server on your network or the Internet. In case of any failure, Nagios alerts about the issues so that the technical team can perform the recovery process immediately.

Nagios is used for continuous monitoring of systems, applications, service and business processes in a DevOps culture.

**Why We Need Nagios tool?**

Here are the important reasons to use Nagios monitoring tool:

- Detects all types of network or server issues
- Helps you to find the root cause of the problem which allows you to get the permanent solution to the problem
- Active monitoring of your entire infrastructure and business processes
- Allows you to monitor and troubleshoot server performance issues
- Helps you to plan for infrastructure upgrades before outdated systems create failures
- You can maintain the security and availability of the service
- Automatically fix problems in a panic situation

**Features of Nagios**


Following are the important features of Nagios monitoring tool:

- Relatively scalable, Manageable, and Secure
- Good log and database system
- Informative and attractive web interfaces
- Automatically send alerts if condition changes
- If the services are running fine, then there is no need to do check that host is an alive
- Helps you to detect network errors or server crashes
- You can troubleshoot the performance issues of the server.
- The issues, if any, can be fixed automatically as they are identified during the monitoring process
- You can monitor the entire business process and IT infrastructure with a single pass
- The product's architecture is easy to write new plugins in the language of your choice
- Nagios allows you to read its configuration from an entire directory which helps you to decide how to define individual files

- Utilizes topology to determine dependencies
- Monitor network services like HTTP, SMTP, HTTP, SNMP, FTP, SSH, POP, etc.
- Helps you to define network host hierarchy using parent hosts
- Ability to define event handlers that runs during service or host events for proactive problem resolution
- Support for implementing redundant monitoring hosts

## Nagios Architecture

Nagios is a client-server architecture. Usually, on a network, a Nagios server is running on a host, and plugins are running on all the remote hosts which should be monitored.

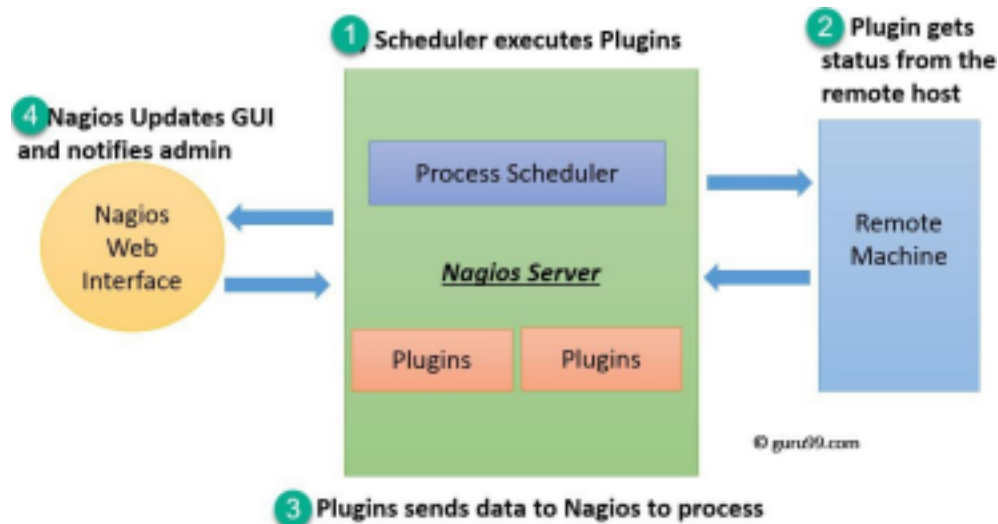

1. The scheduler is a component of the server part of Nagios. It sends a signal to execute the plugins at the remote host.

2. The plugin gets the status from the remote host

3. The plugin sends the data to the process scheduler


4. The process scheduler updates the GUI and notifications are sent to admins.

## Installation of Nagios


**Prerequisites:** AWS Free Tier

Steps:

1. Create an Amazon Linux EC2 Instance in AWS and name it - nagios-host

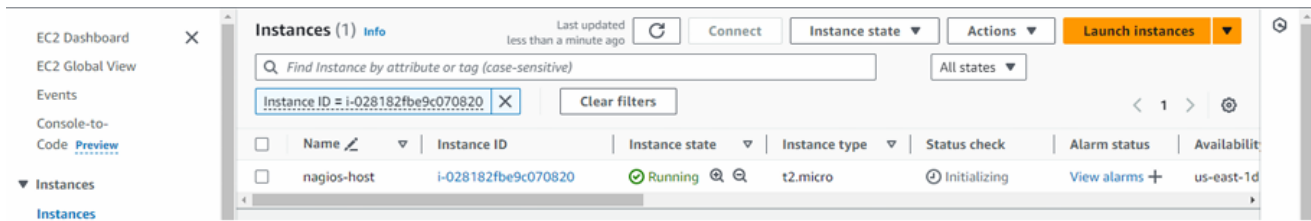

2. Under Security Group, make sure HTTP, HTTPS, SSH, ICMP are open from everywhere. You have to edit the inbound rules of the specified Security Group for this.

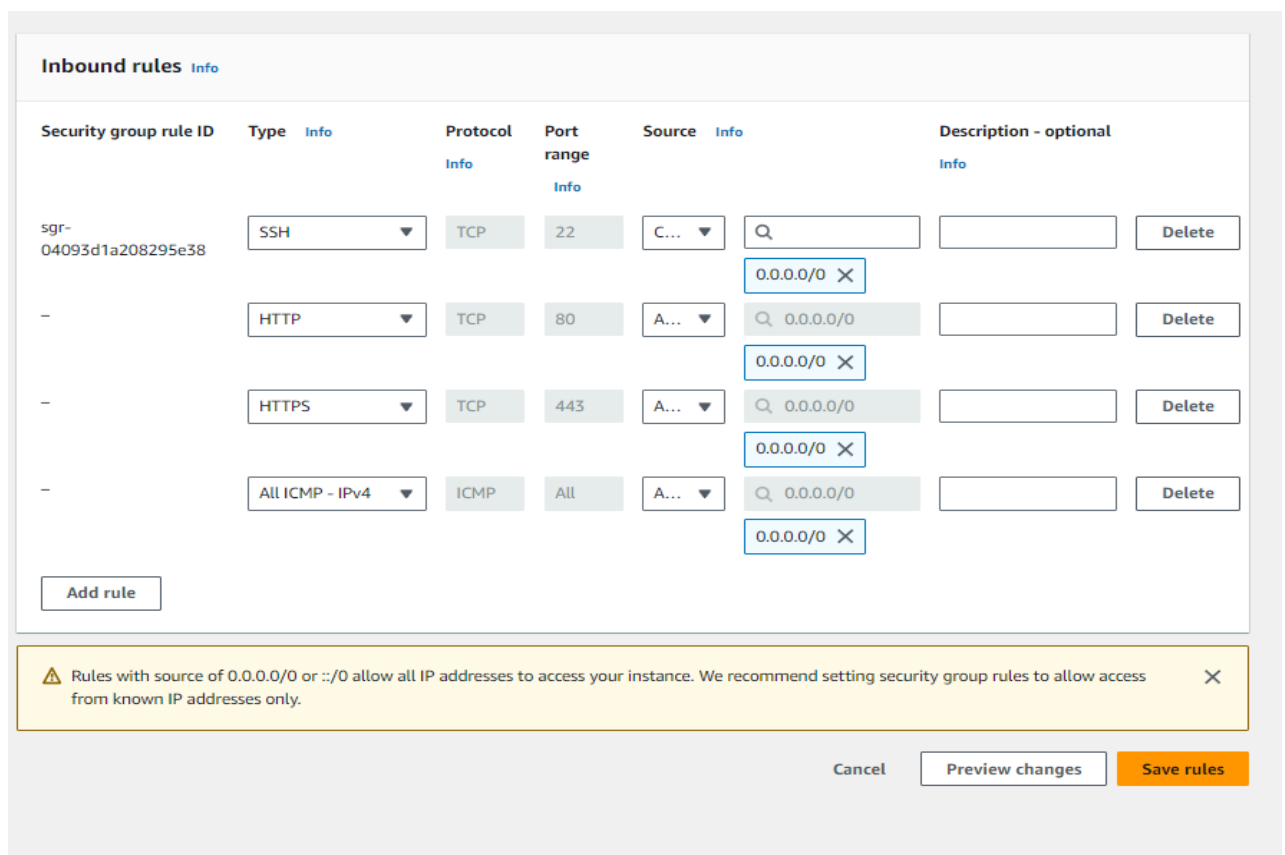

3. SSH into Your EC2 instance or simply use EC2 Instance Connect from the browser.

```

[ec2-user@ip-172-31-34-233 ~]$ ssh -i /home/laulik/.ssh/instance-connection-key.pem ec2-user@ip-172-31-34-233
https://aws.amazon.com/amazon-linux-2/
[ec2-user@ip-172-31-34-233 ~]$

```

#### 4. Update the package indices and install the following packages using yum

```
sudo yum update
```

```
sudo yum install httpd php
```

```
sudo yum install gcc glibc-common
```

```
sudo yum install gd gd-devel
```

```
yum install: error: unrecognized arguments: -Oy
[ec2-user@ip-172-31-38-150 ~]$ sudo yum install gd gd-devel -y
Last metadata expiration check: 0:05:12 ago on Sun Oct  6 11:15:04 2024.
Dependencies resolved.
```

Package	Architecture	Version	Repository	Size
Installing:				
gd	x86_64	2.3.3-5.amzn2023.0.3	amazonlinux	139
gd-devel	x86_64	2.3.3-5.amzn2023.0.3	amazonlinux	38
Installing dependencies:				
brotli	x86_64	1.0.9-4.amzn2023.0.2	amazonlinux	314
brotli-devel	x86_64	1.0.9-4.amzn2023.0.2	amazonlinux	31
bzip2-devel	x86_64	1.0.8-6.amzn2023.0.2	amazonlinux	214
cairo	x86_64	1.17.6-2.amzn2023.0.1	amazonlinux	684
cmake-filesystem	x86_64	3.22.2-1.amzn2023.0.4	amazonlinux	16
fontconfig	x86_64	2.13.94-2.amzn2023.0.2	amazonlinux	273
fontconfig-devel	x86_64	2.13.94-2.amzn2023.0.2	amazonlinux	128
fonts-filesystem	noarch	1:2.0.5-12.amzn2023.0.2	amazonlinux	9.5
freetype	x86_64	2.13.2-5.amzn2023.0.1	amazonlinux	423
freetype-devel	x86_64	2.13.2-5.amzn2023.0.1	amazonlinux	912
glib2-devel	x86_64	2.74.7-689.amzn2023.0.2	amazonlinux	486
google-noto-fonts-common	noarch	20201206-2.amzn2023.0.2	amazonlinux	15
google-noto-sans-vf-fonts	noarch	20201206-2.amzn2023.0.2	amazonlinux	492
graphite2	x86_64	1.3.14-7.amzn2023.0.2	amazonlinux	97
graphite2-devel	x86_64	1.3.14-7.amzn2023.0.2	amazonlinux	21
harfbuzz	x86_64	7.0.0-2.amzn2023.0.1	amazonlinux	868
harfbuzz-devel	x86_64	7.0.0-2.amzn2023.0.1	amazonlinux	404
harfbuzz-icu	x86_64	7.0.0-2.amzn2023.0.1	amazonlinux	18
jbigkit-libs	x86_64	2.1-21.amzn2023.0.2	amazonlinux	54
langpacks-core-font-en	noarch	3.0-21.amzn2023.0.4	amazonlinux	10
libICE	x86_64	1.0.10-6.amzn2023.0.2	amazonlinux	71
libSM	x86_64	1.2.3-8.amzn2023.0.2	amazonlinux	42

#### 5. Create a new Nagios User with its password. You'll have to enter the password twice for confirmation.

```
sudo adduser -m nagios
```

```
sudo passwd nagios
```

```
Complete!
[ec2-user@ip-172-31-38-150 ~]$ sudo adduser -m nagios
[ec2-user@ip-172-31-38-150 ~]$ sudo passwd nagios
Changing password for user nagios.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
[ec2-user@ip-172-31-38-150 ~]$ █
```

#### 6. Create a new user group

```
sudo groupadd nagcmd
```

#### 7. Use these commands so that you don't have to use sudo for Apache and Nagios

```
sudo usermod -a -G nagcmd nagios
```

```
sudo usermod -a -G nagcmd apache
```

## 8. Create a new directory for Nagios downloads

```
mkdir ~/downloads
cd ~/downloads
passwd: all authentication tokens updated successfully.
[ec2-user@ip-172-31-38-150 ~]$ sudo groupadd nagcmd
[ec2-user@ip-172-31-38-150 ~]$ sudo usermod -a -G nagcmd nagios
[ec2-user@ip-172-31-38-150 ~]$ sudo usermod -a -G nagcmd apache
[ec2-user@ip-172-31-38-150 ~]$ mkdir ~/downloads
[ec2-user@ip-172-31-38-150 ~]$ cd ~/downloads
[ec2-user@ip-172-31-38-150 downloads]$ wget https://go.nagios.org/2024-09-17/6kqcx
```

## 9. Use wget to download the source zip files.

```
wget https://go.nagios.org/1/975333/2024-09-17/6kqcx
```

```
wget https://nagios-plugins.org/download/nagios-plugins-2.4.11.tar.gz
```

```
[ec2-user@ip-172-31-38-150 downloads]$ wget https://go.nagios.org/1/975333/2024-09-17/6kqcx
--2024-10-06 11:23:50-- https://go.nagios.org/1/975333/2024-09-17/6kqcx
Resolving go.nagios.org (go.nagios.org)... 3.92.127.219, ...
Connecting to go.nagios.org (go.nagios.org)|3.92.127.219|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: http://assets.nagios.com/downloads/nagioscore/releases/nagios-4.5.5.tar.gz?utm_source=Nagios.org&utm_content=Download+Form&utm_campaign=Core+4.5.5+Download+&pi_content=1e9662c93afb2ed6bd2e3f3cc38771a7f01125e969f2a75b0e2254439d4a81d8 [following]
```

## 10. Use tar to unzip and change to that directory.


```
tar zxvf nagios-4.5.5.tar.gz
cd nagios-4.5.5
24-09-17/6kqcx
--2024-10-06 11:23:50-- https://go.nagios.org/1/975333/2024-09-17/6kqcx
Resolving go.nagios.org (go.nagios.org)... 3.92.120.28, 52.54.96.194, 3.215.72.219, ...
Connecting to go.nagios.org (go.nagios.org)|3.92.120.28|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: http://assets.nagios.com/downloads/nagioscore/releases/nagios-4.5.5.tar.gz?utm_source=Nagios.org&utm_content=Download+Form&utm_campaign=Core+4.5.5+Download+&pi_content=1e9662c93afb2ed6bd2e3f3cc38771a7f01125e969f2a75b0e2254439d4a81d8 [following]
--2024-10-06 11:23:50-- http://assets.nagios.com/downloads/nagioscore/releases/nagios-4.5.5.tar.gz?utm_source=Nagios.org&utm_content=Download+Form&utm_campaign=Core+4.5.5+Download+&pi_content=1e9662c93afb2ed6bd2e3f3cc38771a7f01125e969f2a75b0e2254439d4a81d8
Resolving assets.nagios.com (assets.nagios.com)... 45.79.49.120, 2600:3c00:03c:92ff:fef7:45ce
Connecting to assets.nagios.com (assets.nagios.com)|45.79.49.120|:80... con
```

11. Run the configuration script with the same group name you previously created.

```
./configure --with-command-group=nagcmd
```

12. Compile the source code.

```
make all
```

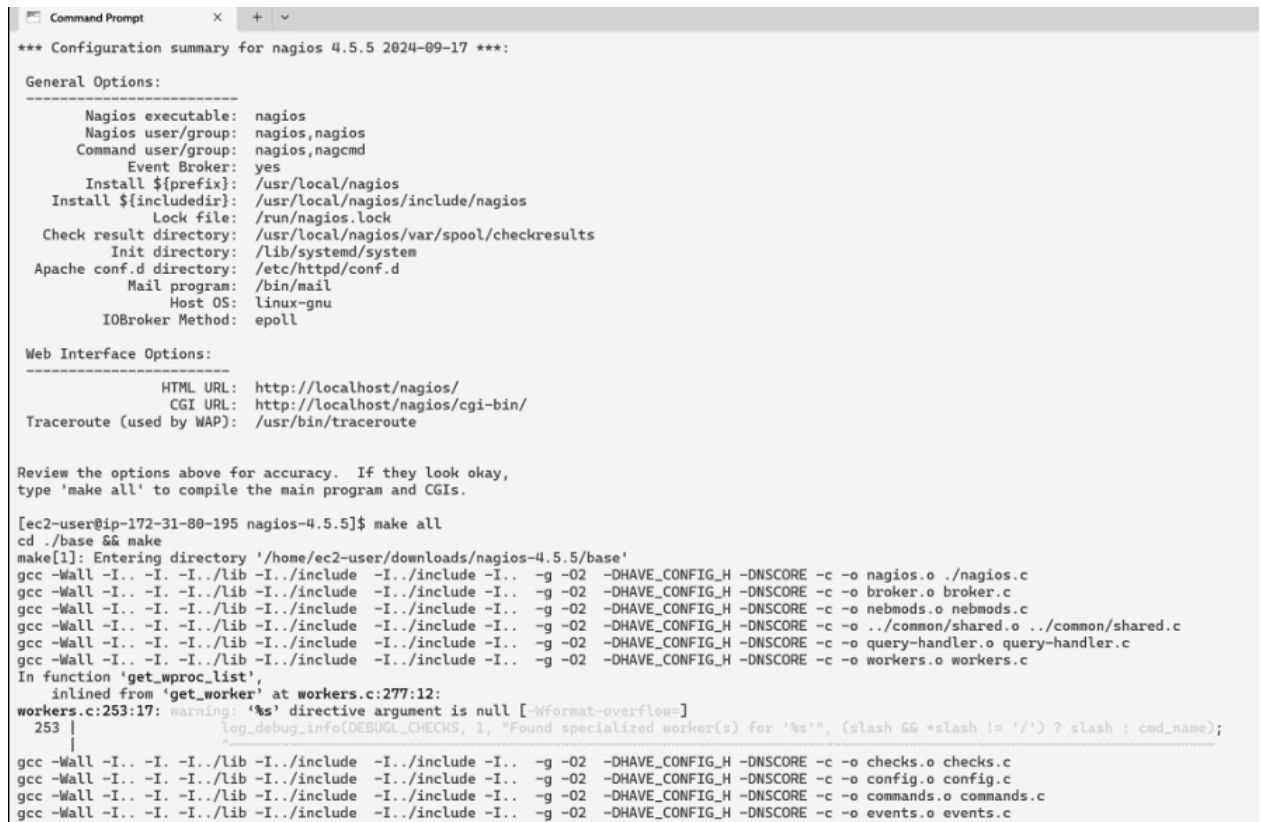

```

*** Configuration summary for nagios 4.5.5 2024-09-17 ***:

General Options:
-----
Nagios executable: nagios
Nagios user/group: nagios,nagios
Command user/group: nagios,nagcmd
Event Broker: yes
Install ${prefix}: /usr/local/nagios
Install ${includedir}: /usr/local/nagios/include/nagios
Lock file: /run/nagios.lock
Check result directory: /usr/local/nagios/var/spool/checkresults
Init directory: /lib/systemd/system
Apache conf.d directory: /etc/httpd/conf.d
Mail program: /bin/mail
Host OS: linux-gnu
IOBroker Method: epoll

Web Interface Options:
-----
HTML URL: http://localhost/nagios/
CGI URL: http://localhost/nagios/cgi-bin/
Traceroute (used by WAP): /usr/bin/traceroute

Review the options above for accuracy. If they look okay,
type 'make all' to compile the main program and CGIs.

[ec2-user@ip-172-31-80-195 nagios-4.5.5]$ make all
cd ./base && make
make[1]: Entering directory '/home/ec2-user/downloads/nagios-4.5.5/base'
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o nagios.o ./nagios.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o broker.o broker.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o nebmods.o nebmods.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o ../common/shared.o ../common/shared.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o query-handler.o query-handler.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o workers.o workers.c
In function 'get_wproc_list',
inlined from 'get_worker' at workers.c:277:12:
workers.c:253:17: warning: '%s' directive argument is null [-Wformat-overflow]
253 |         log_debug_info(DEBUGL_CHECKS, 1, "Found specialized worker(s) for '%s'", (slash && *slash != '/') ? slash : cmd_name);
    |         ~~~~~^~~~~~
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o checks.o checks.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o config.o config.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o commands.o commands.c
gcc -Wall -I.. -I.. -I../lib -I../include -I../include -I.. -g -O2 -DHAVE_CONFIG_H -DNSCORE -c -o events.o events.c

```

13. Install binaries, init script and sample config files. Lastly, set permissions on the external command directory.

```
sudo make install
```

```
sudo make install-init
```

```
sudo make install-config
```

```
sudo make install-commandmode
```

```
[ec2-user@ip-172-31-38-150 nagios-4.4.6]$ sudo make install-webconf
/usr/bin/install -c -m 644 sample-config/httpd.conf /etc/httpd/conf.d/nagios.conf
if [ 0 -eq 1 ]; then \
    ln -s /etc/httpd/conf.d/nagios.conf /etc/apache2/sites-enabled/nagios.conf; \
fi

*** Nagios/Apache conf file installed ***

[ec2-user@ip-172-31-38-150 nagios-4.4.6]$
```

```
sudo nano /usr/local/nagios/etc/objects/contacts.cfg
configure. WARNING: unrecognized options: --with-command-group
[ec2-user@ip-172-31-38-150 nagios-plugins-2.4.11]$ sudo yum install openssl
Last metadata expiration check: 0:13:31 ago on Sun Oct  6 11:15:04 2024.
Dependencies resolved.
=====
Package                               Architecture Size Version
Repository
=====
Installing:
openssl-devel                         x86_64     3.0 M    1:3.0.8-1.amzn2023.0.14
amazonlinux
Transaction Summary
```

14. Configure the web interface.  
sudo make install-webconf

```
[ec2-user@ip-172-31-38-150 nagios-4.4.6]$ sudo make install-webconf
/usr/bin/install -c -m 644 sample-config/httpd.conf /etc/httpd/conf.d/nagios.conf
if [ 0 -eq 1 ]; then \
    ln -s /etc/httpd/conf.d/nagios.conf /etc/apache2/sites-enabled/nagios.conf; \
fi

*** Nagios/Apache conf file installed ***

[ec2-user@ip-172-31-38-150 nagios-4.4.6]$
```

15. Create a nagiosadmin account for nagios login along with password. You'll have to specify the password twice.

```
sudo htpasswd -c /usr/local/nagios/etc/htpasswd.users nagiosadmin
```

```
[ec2-user@ip-172-31-38-150 nagios-4.4.6]$ sudo htpasswd -c /usr/local/nagios
s/etc/htpasswd.users nagiosadmin
s/etc/htpasswd.users nagiosadmin
New password:
Re-type new password:
Adding password for user nagiosadmin
[ec2-user@ip-172-31-38-150 nagios-4.4.6]$
```

## 16. Restart Apache

```
sudo service httpd restart
```

```
[ec2-user@ip-172-31-38-150 nagios-4.4.6]$ sudo service httpd restart
Redirecting to /bin/systemctl restart httpd.service
[ec2-user@ip-172-31-38-150 nagios-4.4.6]$
```

## 17. Go back to the downloads folder and unzip the plugins zip file.

```
cd ~/downloads
tar zxvf nagios-plugins-2.4.11.tar.gz
[ec2-user@ip-172-31-38-150 downloads]$ tar zxvf nagios-plugins-2.4.11.tar.gz
nagios-plugins-2.4.11/
nagios-plugins-2.4.11/build-aux/
nagios-plugins-2.4.11/build-aux/compile
nagios-plugins-2.4.11/build-aux/config.guess
nagios-plugins-2.4.11/build-aux/config.rpath
nagios-plugins-2.4.11/build-aux/config.sub
nagios-plugins-2.4.11/build-aux/install-sh
nagios-plugins-2.4.11/build-aux/ltmain.sh
nagios-plugins-2.4.11/build-aux/missing
nagios-plugins-2.4.11/build-aux/mkinstalldirs
```

## 18. Compile and install plugins

```
cd nagios-plugins-2.4.11
./configure --with-nagios-user=nagios --with-nagios-group=nagios
make
sudo make install
[ec2-user@ip-172-31-38-150 downloads]$ cd nagios-plugins-2.4.11
[ec2-user@ip-172-31-38-150 nagios-plugins-2.4.11]$ ./configure --with-nagios-user=nagios
--with-nagios-group=nagios
--with-nagios-group=nagios
checking for a BSD-compatible install... /usr/bin/install -c
checking whether build environment is sane... yes
checking for a thread-safe mkdir -p... /usr/bin/mkdir -p
checking for gawk... gawk
checking whether make sets $(MAKE)... yes
checking whether make supports nested variables... yes
checking whether to enable maintainer-specific portions of Makefiles... yes
```




## 19. Start Nagios

Add Nagios to the list of system services

```
sudo chkconfig --add nagios
```


```
sudo chkconfig nagios on
```

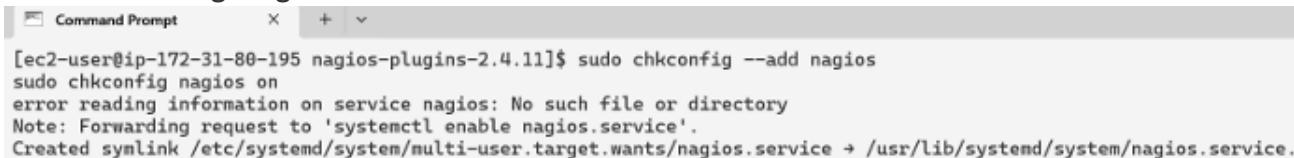

```
Command Prompt
[ec2-user@ip-172-31-88-195 nagios-plugins-2.4.11]$ sudo chkconfig --add nagios
sudo chkconfig nagios on
error reading information on service nagios: No such file or directory
Note: Forwarding request to 'systemctl enable nagios.service'.
Created symlink /etc/systemd/system/multi-user.target.wants/nagios.service → /usr/lib/systemd/system/nagios.service.
```

Verify the sample configuration files

```
sudo /usr/local/nagios/bin/nagios -v /usr/local/nagios/etc/nagios.cfg
```

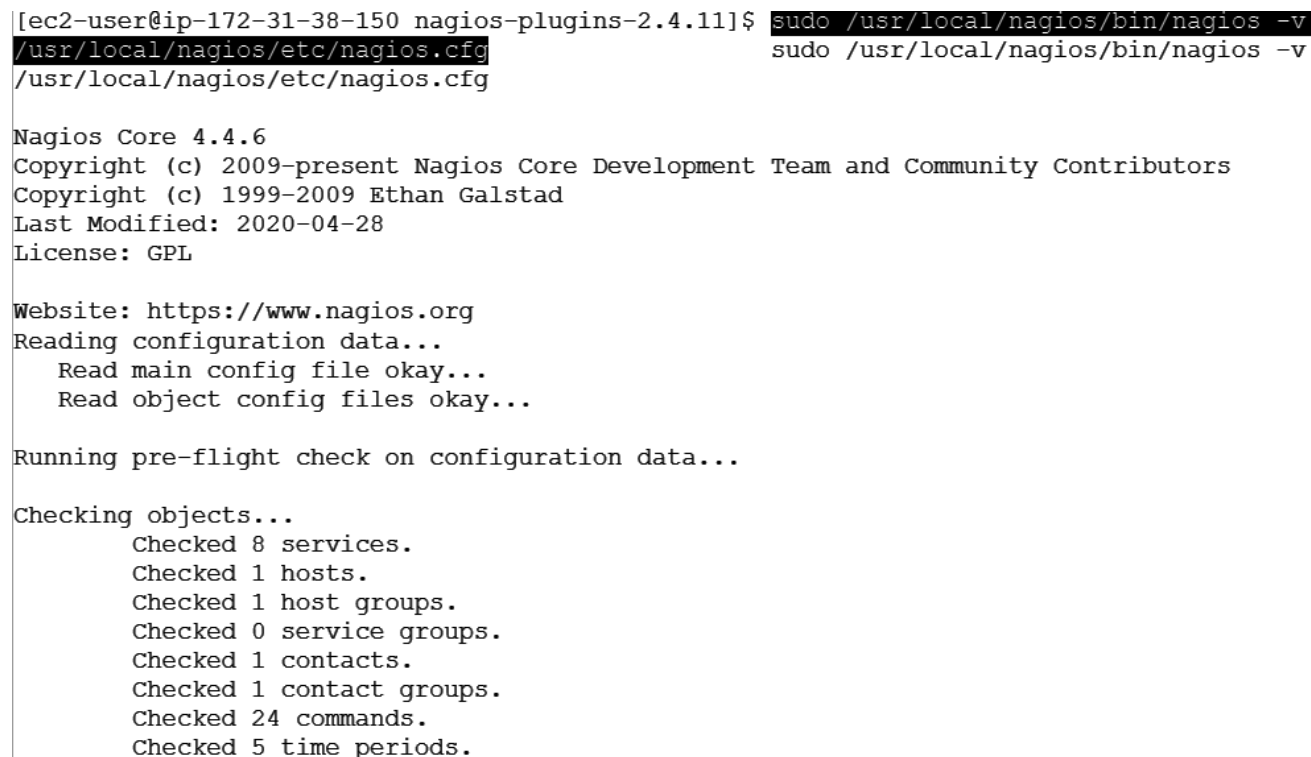

```
[ec2-user@ip-172-31-38-150 nagios-plugins-2.4.11]$ sudo /usr/local/nagios/bin/nagios -v /usr/local/nagios/etc/nagios.cfg
/usr/local/nagios/etc/nagios.cfg
/usr/local/nagios/etc/nagios.cfg

Nagios Core 4.4.6
Copyright (c) 2009-present Nagios Core Development Team and Community Contributors
Copyright (c) 1999-2009 Ethan Galstad
Last Modified: 2020-04-28
License: GPL

Website: https://www.nagios.org
Reading configuration data...
  Read main config file okay...
  Read object config files okay...

Running pre-flight check on configuration data...

Checking objects...
  Checked 8 services.
  Checked 1 hosts.
  Checked 1 host groups.
  Checked 0 service groups.
  Checked 1 contacts.
  Checked 1 contact groups.
  Checked 24 commands.
  Checked 5 time periods.
```

If there are no errors, you can go ahead and start Nagios.

```
sudo service nagios start
```

```
Things look okay - No serious problems were detected during the pre-flight check
[ec2-user@ip-172-31-38-150 nagios-plugins-2.4.11]$ sudo service nagios start
Redirecting to /bin/systemctl start nagios.service
[ec2-user@ip-172-31-38-150 nagios-plugins-2.4.11]$
```


## 20. Check the status of Nagios

```
sudo systemctl status nagios
Redirecting to /bin/systemctl start nagios.service
[ec2-user@ip-172-31-38-150 nagios-plugins-2.4.11]$ sudo systemctl status nagios
● nagios.service - Nagios Core 4.4.6
   Loaded: loaded (/usr/lib/systemd/system/nagios.service; enabled; preset: disabled)
   Active: active (running) since Sun 2024-10-06 11:51:46 UTC; 1min 33s ago
     Docs: https://www.nagios.org/documentation
    Main PID: 89956 (nagios)
      Tasks: 6 (limit: 1112)
     Memory: 2.4M
        CPU: 36ms
    CGroup: /system.slice/nagios.service
            └─89956 /usr/local/nagios/bin/nagios -d /usr/local/nagios/etc/nagios.cfg
            └─89957 /usr/local/nagios/bin/nagios --worker /usr/local/nagios/var/rw/nagios.qh
os.qh      └─89958 /usr/local/nagios/bin/nagios --worker /usr/local/nagios/var/rw/nagios.qh
os.qh      └─89959 /usr/local/nagios/bin/nagios --worker /usr/local/nagios/var/rw/nagios.qh
os.qh      └─89960 /usr/local/nagios/bin/nagios --worker /usr/local/nagios/var/rw/nagios.qh
os.qh      └─89961 /usr/local/nagios/bin/nagios -d /usr/local/nagios/etc/nagios.cfg

Oct 06 11:51:46 ip-172-31-38-150.ec2.internal nagios[89956]: qh: Socket '/usr/local/nagios/var/rw/nagios.qh' successfully
Oct 06 11:51:46 ip-172-31-38-150.ec2.internal nagios[89956]: qh: core proxy handler r
```

21. Go back to EC2 Console and copy the Public IP address of this instance

22. Open up your browser and look for **http://<your\_public\_ip\_address>/nagios**

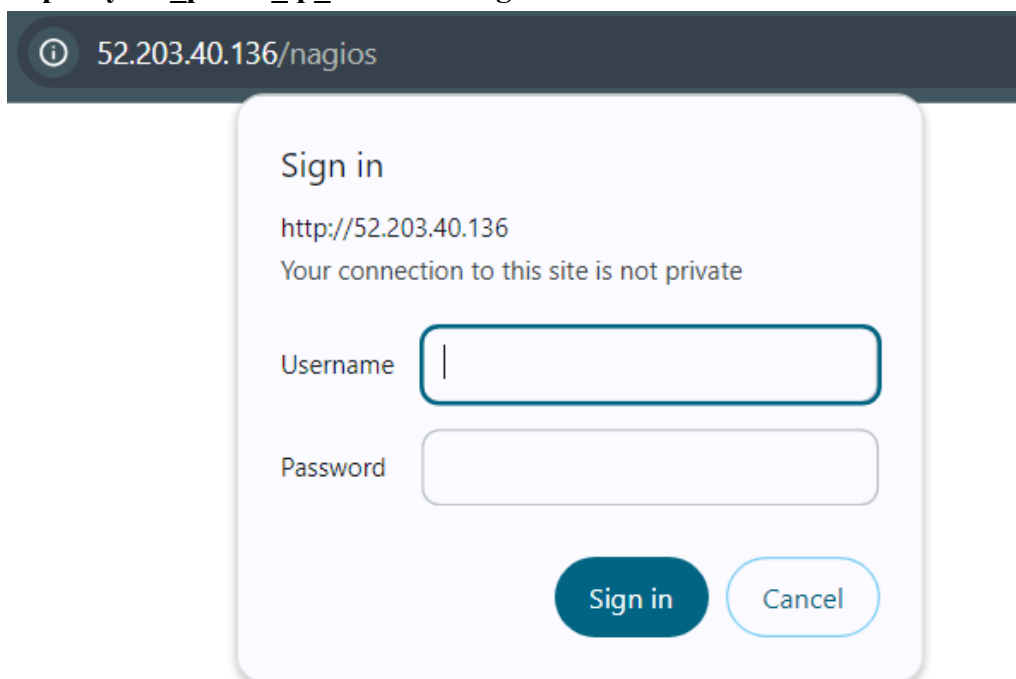

Enter username as nagiosadmin and password which you set in Step 16.

23. After entering the correct credentials, you will see this page.

The screenshot displays the Nagios Core 4.4.6 web interface. On the left is a sidebar with a 'General' section containing links to 'Home' and 'Documentation'. Below this is a 'Current Status' section with links to 'Tactical Overview', 'Map (Legacy)', 'Hosts', 'Services', 'Host Groups' (with sub-links for 'Summary' and 'Grid'), 'Service Groups' (with sub-links for 'Summary' and 'Grid'), and 'Problems' (with sub-links for 'Services (Unhandled)', 'Hosts (Unhandled)', and 'Network Outages'). A 'Quick Search' input field is also present. The 'Reports' section at the bottom of the sidebar includes links to 'Availability', 'Trends (Legacy)', 'Alerts' (with sub-links for 'History', 'Summary', and 'Histogram (Legacy)'), 'Notifications', and 'Event Log'.

The main content area features the Nagios Core logo and the text 'Daemon running with PID 89956'. Below this, it states 'Nagios® Core™ Version 4.4.6' and 'April 28, 2020', with a link to 'Check for updates'. A prominent blue box announces: 'A new version of Nagios Core is available! Visit [nagios.org](https://nagios.org) to download Nagios 4.5.5.'

At the bottom, there are three boxes: 'Get Started' with links to 'Start monitoring your infrastructure', 'Change the look and feel of Nagios', 'Extend Nagios with hundreds of addons', 'Get support', 'Get training', and 'Get certified'; 'Quick Links' with links to 'Nagios Library (tutorials and docs)', 'Nagios Labs (development blog)', 'Nagios Exchange (plugins and addons)', 'Nagios Support (tech support)', 'Nagios.com (company)', and 'Nagios.org (project)'; and 'Latest News' and 'Don't Miss...' sections.

This means that Nagios was correctly installed and configured with its plugins so far.

**Conclusion:** We have successfully installed and configured Nagios Core, Nagios Plugins, and NRPE on a Linux machine. This enables us to effectively manage system performance and proactively address potential issues.