


/home/runner/work/cpp  
-sdk/c/cpp-sdks/libs/common  
/include/launchdarkly/bindings  
/c/config/logging\_builder.h

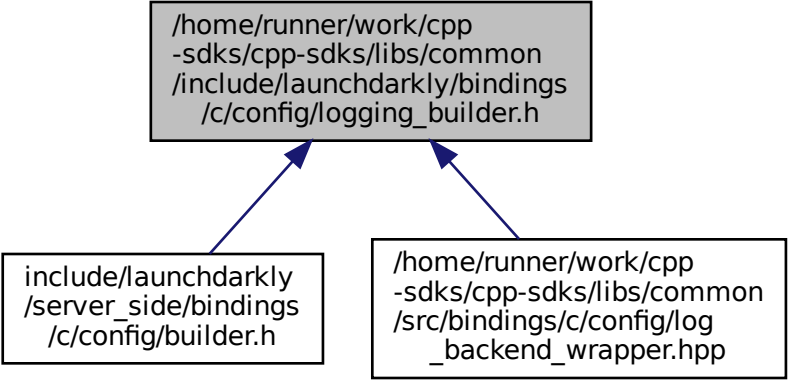

```
graph BT; A["include/launchdarkly/server_side/bindings/c/config/builder.h"] --> C["/home/runner/work/cpp-sdks/c/cpp-sdks/libs/common/include/launchdarkly/bindings/c/config/logging_builder.h"]; B["/home/runner/work/cpp-sdks/c/cpp-sdks/libs/common/src/bindings/c/config/log_backend_wrapper.hpp"] --> C; style C fill:#ccc
```

include/launchdarkly  
/server\_side/bindings  
/c/config/builder.h

/home/runner/work/cpp  
-sdk/c/cpp-sdks/libs/common  
/src/bindings/c/config/log  
\_backend\_wrapper.hpp