


launchdarkly::data
_sources::IDataSource

std::enable_shared
_from_this< StreamingDataSource >

launchdarkly::server
_side::data_sources::
StreamingDataSource

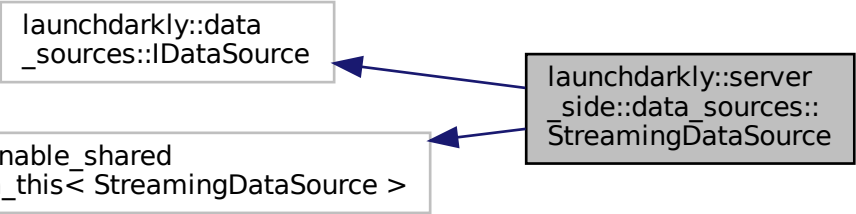

```
graph LR; A[launchdarkly::server_side::data_sources::StreamingDataSource] --> B[launchdarkly::data_sources::IDataSource]; A --> C[std::enable_shared_from_this< StreamingDataSource >];
```

The diagram illustrates the relationship between three classes. A central class, `launchdarkly::server_side::data_sources::StreamingDataSource`, is shown in a grey box on the right. Two arrows point from this class to two other classes on the left. The top class is `launchdarkly::data_sources::IDataSource`, and the bottom class is `std::enable_shared_from_this< StreamingDataSource >`. Both target classes are in white boxes.