


launchdarkly::data
_sources::IDataSource

std::enable_shared
_from_this< StreamingDataSource >

launchdarkly::server
_side::data_sources::
StreamingDataSource

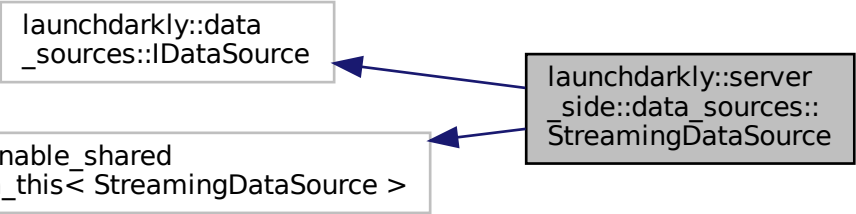

```
graph LR; A[launchdarkly::server_side::data_sources::StreamingDataSource] --> B[launchdarkly::data_sources::IDataSource]; A --> C[std::enable_shared_from_this< StreamingDataSource >];
```

The diagram illustrates the class hierarchy for the `StreamingDataSource` class. It consists of three rectangular boxes. The box on the right, labeled `launchdarkly::server_side::data_sources::StreamingDataSource`, is shaded gray and has a black border. Two blue arrows originate from its left side. One arrow points to the top-left box, labeled `launchdarkly::data_sources::IDataSource`, which is white with a gray border. The other arrow points to the bottom-left box, labeled `std::enable_shared_from_this< StreamingDataSource >`, which is also white with a gray border.