

Assignment 5: Data Visualization

Laura Piccirillo

Fall 2025

OVERVIEW

This exercise accompanies the lessons in Environmental Data Analytics on Data Visualization

Directions

1. Rename this file `<FirstLast>_A05_DataVisualization.Rmd` (replacing `<FirstLast>` with your first and last name).
2. Change “Student Name” on line 3 (above) with your name.
3. Work through the steps, **creating code and output** that fulfill each instruction.
4. Be sure your code is tidy; use line breaks to ensure your code fits in the knitted output.
5. Be sure to **answer the questions** in this assignment document.
6. When you have completed the assignment, **Knit** the text and code into a single PDF file.

Set up your session

1. Set up your session. Load the tidyverse, here & cowplot packages, and verify your home directory. Read in the NTL-LTER processed data files for nutrients and chemistry/physics for Peter and Paul Lakes (use the tidy NTL-LTER_Lake_Chemistry_Nutrients_PeterPaul_Processed.csv version in the Processed_KEY folder) and the processed data file for the Niwot Ridge litter dataset (use the NEON_NIWO_Litter_mass_trap_Processed.csv version, again from the Processed_KEY folder).
2. Make sure R is reading dates as date format; if not change the format to date.

```
#1 installing and loading packages, checking working directory, loading data
#install.packages("tidyverse")
#install.packages("here")
#install.packages("cowplot")
```

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v dplyr      1.1.4      v readr      2.1.5
## v forcats    1.0.0      v stringr    1.5.1
## v ggplot2    3.5.1      v tibble     3.2.1
## v lubridate  1.9.4      v tidyr      1.3.1
## v purrr      1.0.2
```

```
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag() masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(here)
```

```
## here() starts at /home/guest/ENV 872
```

```
library(cowplot)
```

```
##
## Attaching package: 'cowplot'
##
## The following object is masked from 'package:lubridate':
##
## stamp
```

```
getwd()
```

```
## [1] "/home/guest/ENV 872"
```

```
here()
```

```
## [1] "/home/guest/ENV 872"
```

```
PeterPaul <- read.csv(
  here("Data/Processed_KEY/NTL-LTER_Lake_Chemistry_Nutrients_PeterPaul_Processed.csv"),
  stringsAsFactors = TRUE)
```

```
litter <- read.csv(
  here("Data/Processed_KEY/NEON_NIWO_Litter_mass_trap_Processed.csv"),
  stringsAsFactors = TRUE)
```

```
#2 checking date classes for datasets
class(PeterPaul$sampdate)
```

```
## [1] "factor"
```

```
class(litter$collectDate)
```

```
## [1] "factor"
```

```
PeterPaul$sampdate <- ymd(PeterPaul$sampdate)
litter$collectDate <- ymd(litter$collectDate)
```

Define your theme

3. Build a theme and set it as your default theme. Customize the look of at least two of the following:

- Plot background
- Plot title
- Axis labels
- Axis ticks/gridlines
- Legend

```
#3 defining a theme for plots
plot_theme <-
  theme_bw() + theme(axis.text = element_text(color = "black"),
                     legend.position = "top")
```

Create graphs

For numbers 4-7, create ggplot graphs and adjust aesthetics to follow best practices for data visualization. Ensure your theme, color palettes, axes, and additional aesthetics are edited accordingly.


4. [NTL-LTER] Plot total phosphorus (tp_ug) by phosphate (po4), with separate aesthetics for Peter and Paul lakes. Add line(s) of best fit using the `lm` method. Adjust your axes to hide extreme values (hint: change the limits using `xlim()` and/or `ylim()`).

```
#4 lake phosphorus and phosphate plotting
ggplot(PeterPaul, aes(po4, tp_ug, color = lakename)) + geom_point() +
  geom_smooth(method = lm) + xlim(0, 45) + plot_theme +
  xlab("Phosphate (mg/L)") + ylab("Total Phosphorus (mg/L)") +
  labs(color = "Lake Name") + scale_color_brewer(palette = "Dark2")
```

```
## 'geom_smooth()' using formula = 'y ~ x'
```

```
## Warning: Removed 21947 rows containing non-finite outside the scale range
## ('stat_smooth()').
```

```
## Warning: Removed 21947 rows containing missing values or values outside the scale range
## ('geom_point()').
```

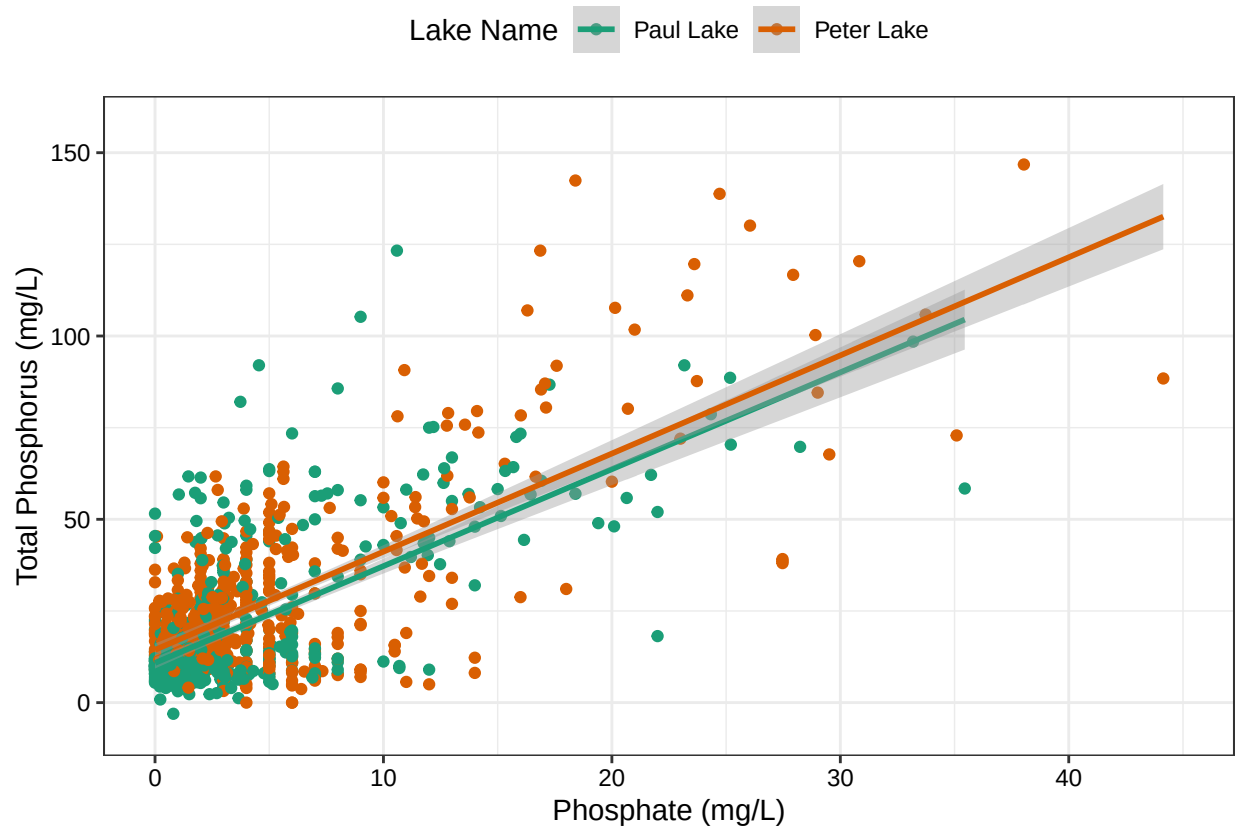

5. [NTL-LTER] Make three separate boxplots of (a) temperature, (b) TP, and (c) TN, with month as the x axis and lake as a color aesthetic. Then, create a cowplot that combines the three graphs. Make sure that only one legend is present and that graph axes are aligned.

Tips: * Recall the discussion on factors in the lab section as it may be helpful here. * Setting an axis title in your theme to `element_blank()` removes the axis title (useful when multiple, aligned plots use the same axis values) * Setting a legend's position to "none" will remove the legend from a plot. * Individual plots can have different sizes when combined using `cowplot`.

#5 separate boxplots combined with cowplot function

```
temp_plot <- ggplot(PeterPaul, aes(x=factor(month, levels=1:12,
                                           labels=month.abb),
                                   y = temperature_C,
                                   colour = lakename)) + geom_boxplot() +
  scale_x_discrete(name='Month', drop=FALSE) + plot_theme +
  ylab("Temperature (celsius)") + labs(color = "Lake Name") +
  scale_color_brewer(palette = "Dark2") + theme(axis.title.x = element_blank(),
                                                axis.text.x = element_blank())

TP_plot <- ggplot(PeterPaul, aes(x=factor(month, levels=1:12,
                                           labels=month.abb),
                                   y = tp_ug,
                                   colour = lakename)) + geom_boxplot() +
  scale_x_discrete(name='Month', drop=FALSE) + plot_theme +
```

```

ylab("Total Phosphorus (mg/L)") + labs(color = "Lake Name") +
scale_color_brewer(palette = "Dark2") + theme(axis.title.x = element_blank(),
                                              legend.position = "none",
                                              axis.text.x = element_blank())

TN_plot <- ggplot(PeterPaul, aes(x=factor(month, levels=1:12,
                                          labels=month.abb),
                                y = tn_ug,
                                colour = lakename)) + geom_boxplot() +
scale_x_discrete(name='Month', drop=FALSE) + plot_theme +
ylab("Total Nitrogen (mg/L)") + labs(color = "Lake Name") +
scale_color_brewer(palette = "Dark2") + theme(legend.position = "none")

plot_grid(temp_plot, TP_plot, TN_plot, ncol = 1, align = "v")

```

```

## Warning: Removed 3566 rows containing non-finite outside the scale range
## ('stat_boxplot()').

```

```


## Warning: Removed 20729 rows containing non-finite outside the scale range
## ('stat_boxplot()').

```

```

## Warning: Removed 21583 rows containing non-finite outside the scale range
## ('stat_boxplot()').

```

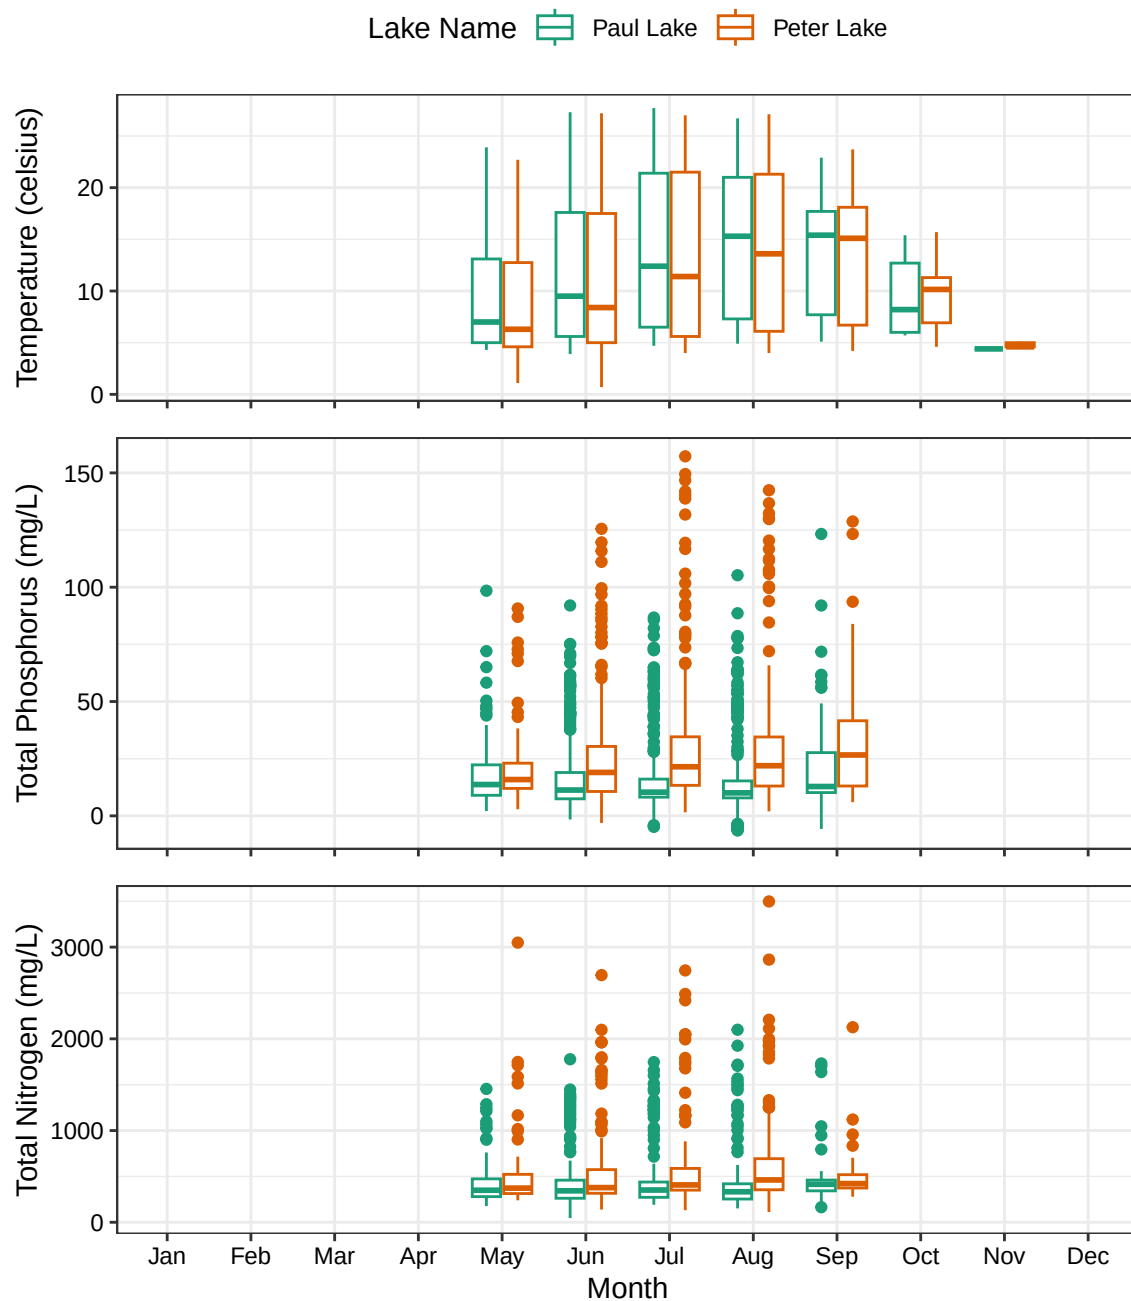


Question: What do you observe about the variables of interest over seasons and between lakes?

Answer: Temperature is pretty consistent between the 2 lakes over the seasonal swings. On average, both total nitrogen and total phosphorus are a bit higher in Peter Lake over Paul Lake. Total nitrogen and phosphorus also both show a slight increasing trend through May - Aug in Peter Lake, while Paul Lake does not.


6. [Niwot Ridge] Plot a subset of the litter dataset by displaying only the “Needles” functional group. Plot the dry mass of needle litter by date and separate by NLCD class with a color aesthetic. (no need to adjust the name of each land use)

7. [Niwot Ridge] Now, plot the same plot but with NLCD classes separated into three facets rather than separated by color.

```
#6 dry mass by date for needles group only
ggplot(subset(litter, functionalGroup == "Needles"), aes(collectDate, dryMass,
  color = nlcdClass)) + geom_point(size = 2.5) + plot_theme +
  ylab("Dry Mass of Needles (g)") + labs(color = "NLCD Class") + xlab("Collection Date") +
  scale_color_brewer(palette = "Dark2") +
  scale_x_date(date_breaks = "6 months", date_labels = "%b %Y")
```

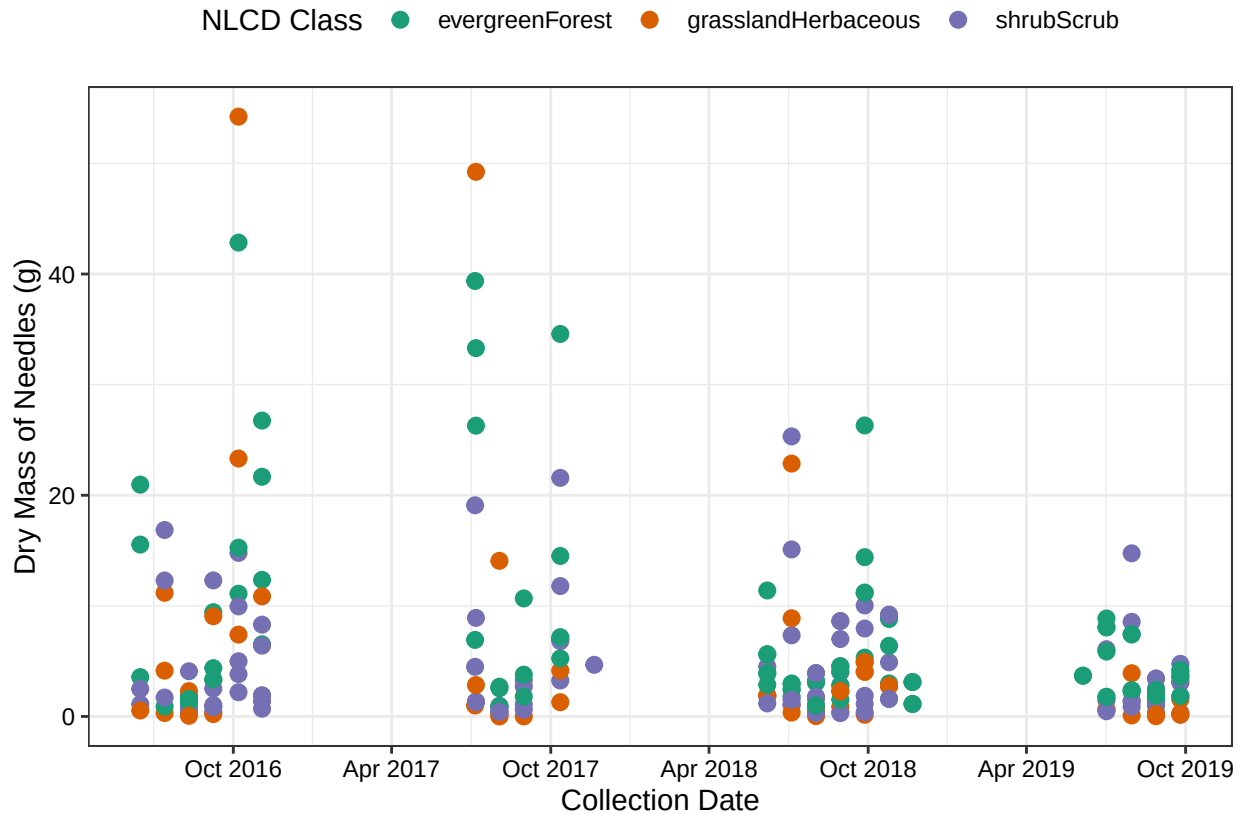

```
#7 faceted by NLCD class
ggplot(subset(litter, functionalGroup == "Needles"),
  aes(collectDate, dryMass)) + geom_point(size = 2.5) +
  facet_wrap(vars(nlcdClass), nrow = 3) + plot_theme +
  ylab("Dry Mass of Needles (g)") + xlab("Collection Date") +
  scale_color_brewer(palette = "Dark2") +
  scale_x_date(date_breaks = "6 months", date_labels = "%b %Y")
```

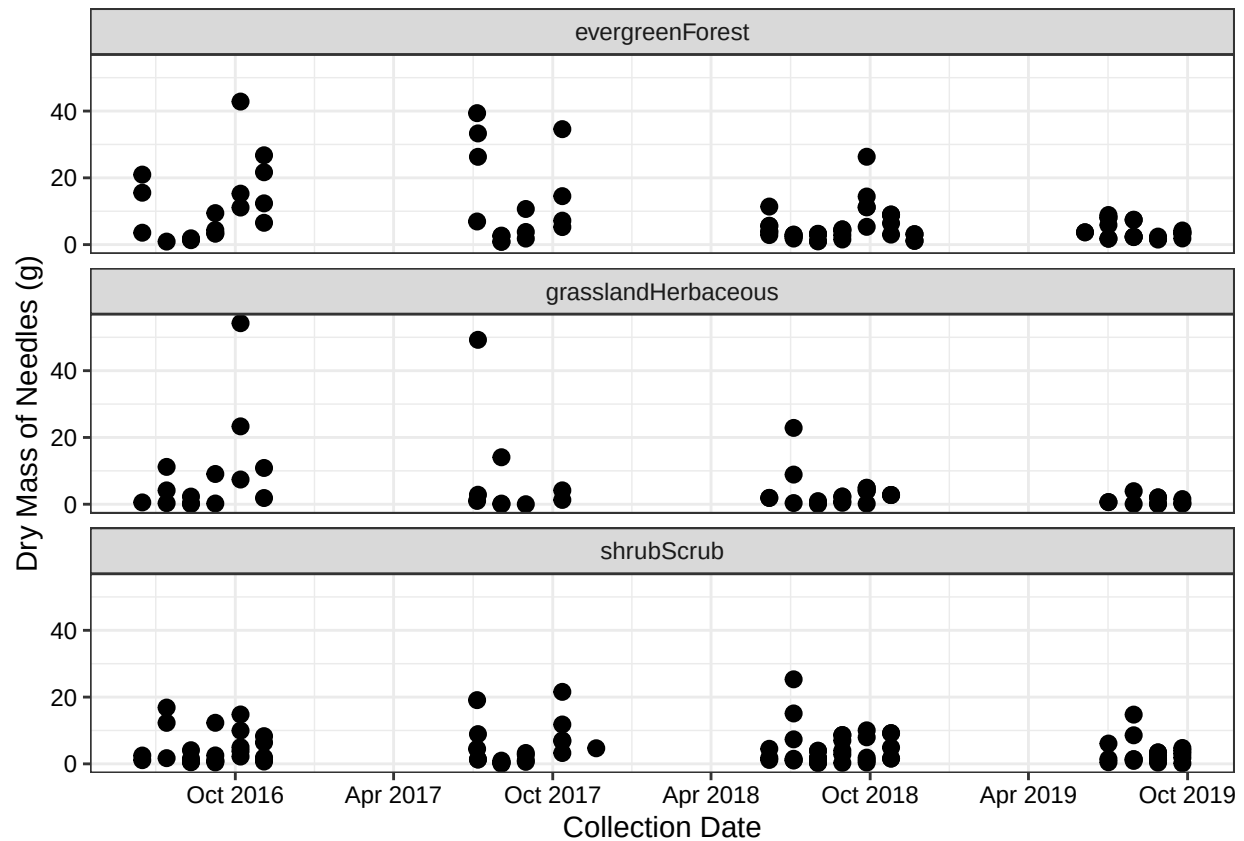

Question: Which of these plots (6 vs. 7) do you think is more effective, and why?

Answer: Plot 6 is more effective to me because seeing the different NLCD class data plotted on top of each other, but differentiated by color, is easier to interpret than trying to compare the faceted graphs with all the data separated. Comparisons between classes for the faceted graph are difficult to see.