

# D3I: A software tool for digital data donation

8 February 2023

## Summary

*A summary describing the high-level functionality and purpose of the software for a diverse, non-specialist audience.*

Recently, a new workflow was introduced that allows research participants to donate their digital trace data for research (Boeschoten, Ausloos, et al. 2022). In this workflow, the digital traces of participants are processed locally on their own devices in such a way that only those features are shared that are of interest to the researcher.

This *data donation workflow* consists of the following steps: First the participant requests a digital copy of their personal data at the platform of interest. Second, they download it onto their personal device. Third, by means of *local processing*, only the features of interest to the researcher are extracted from that DDP. Fourth, the participant inspects the extracted features after which they can consent to donate. Only after providing this consent, the donated data is sent to a server which can be accessed by the researcher for further analyses.

In this paper, we introduce PORT. PORT is a software tool that allows researchers to configure the local processing step of the data donation workflow, allowing the researcher to collect exactly the digital traces needed to answer their research question. When using PORT, a researcher can decide:

- Which digital platforms are investigated?
- Which digital traces are collected?
- How are the extracted digital traces visualized?
- What is communicated to the participant?

## Statement of need

*A Statement of need section that clearly illustrates the research purpose of the software and places it in the context of related work.*

In our everyday lives, we leave more and more digital traces behind. Whether we like a post on Instagram, or send a message on WhatsApp. Even when we check-in at public transportation, or when we do a bank transaction we leave behind a digital trace. The promise of digital humanities and computational social science has been that researchers can utilize these digital traces to study human behavior and interaction at an unprecedented level of detail (King 2011).

However, while the amount of digital trace data increases, most are closed off in proprietary archives of commercial corporations, with only a subset being available to a small set of elite researchers at a platform's discretion, through initiatives such as Social Science One (King and Persily 2020)), or through increasingly restricted and opaque APIs (Bruns 2019; Freelon 2018; Perriam, Birkbak, and Freeman 2020).

An alternative approach to gain access to digital traces is enabled thanks to the European Union's General Data Protection Regulations (GDPR) right to data access and data portability (Ausloos et al. 2019). Thanks to this legislation, all data processing entities are required to provide citizens a digital copy of their personal data upon request, which typically come in the form of .zip files to which we refer as *Data Download Packages* (DDPs).

This allows researchers to invite participants to share their DDPs. A major challenge is however that DDPs potentially contain very sensitive data, and often not all data is needed to answer the specific research question under investigation. To circumvent these challenges, Boeschoten, Ausloos, et al. (2022) developed an alternative workflow: First, the research participant requests their personal DDP at the platform of interest. Second, they download it onto their own personal device. Third, by means of local processing, only the features of interest to the researcher are extracted from that DDP. Fourth, the participant inspects the extracted features after which they can consent (or decline) to donate. Only after providing this consent, the donated data is sent to a server which can be accessed by the researcher for further analyses. See Figure 1 for an overview of these steps.

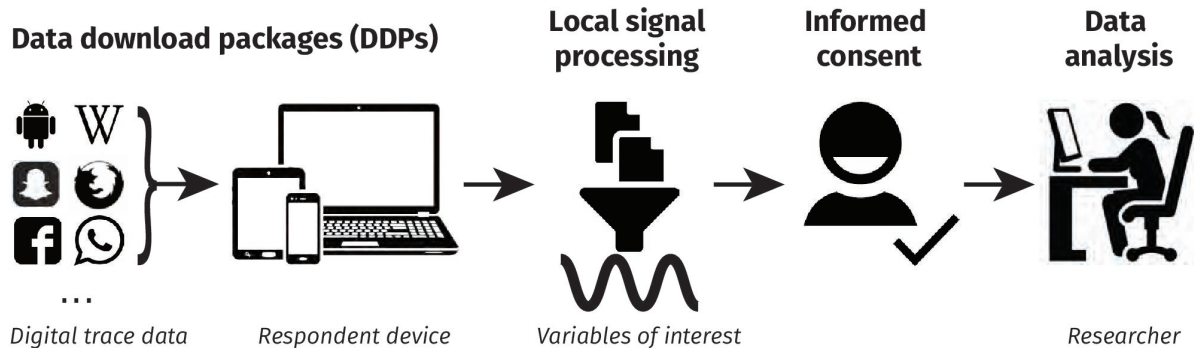


Figure 1: Figure 1: An overview of the participant’s data donation flow as presented by Boeschoten, Ausloos, et al. (2022).

In the last years, researchers have used multiple approaches to deal with the privacy issues related to donation of DDPs. For example, Driel et al. (2022) requested participants to share their complete Instagram DDPs, which were immediately de-identified prior to further analyses (Boeschoten et al. 2021). Kmetty and Németh (2022) requested participants to visit a research site, where they downloaded their DDPs which were then de-identified under the participant’s supervision. Araujo et al. (2022) developed software that allows for the participants to decide per data instance within a DDP whether they want to delete it prior to donation. Boeschoten, Mendrik, et al. (2022) introduced a proof-of-concept of the software PORT, allowing for local processing of DDPs which results in aggregated, de-identified data.

In this paper, we introduce a new version of PORT. It is open-source and allows for researchers to fully configure their own data donation study. It creates a website that guides participants through the data donation steps. Researchers can tailor this website to the DDP of their platform of interest and process these in their desired ways. In addition to local processing, key features from OSD2F are also integrated, allowing participants to decide per data instance whether they want to exclude it from being donated.

## Which digital platforms are investigated?

PORT itself is a platform agnostic tool, so DDPs from any platform can be processed using PORT. However, the procedure for requesting and downloading a DDP is not always straightforward. Therefore, we recommend researchers to carefully investigate this prior to setting up a data donation study, as these steps will be part of the participant’s data donation flow.

Furthermore, considering the participant burden, we recommend to minimize the number of digital platforms investigated. Having that said, PORT does support donation from multiple platforms. There are two approaches to prepare a data donation flow for multiple platforms.

The first option is to prepare multiple separate instances of PORT, each tailored to a specific platform. These result in multiple data donation weblinks that can be presented in the study invitation. The alternative option is to prepare multiple data donation steps in a single instance of PORT. The researcher then decides

in which order the platforms are presented, and a skip button can be placed to allow participants to fully skip a platform which they for example do not use or which they do not wish to donate.

## Which digital traces are collected?

PORT consists of two distinct elements, which are both fully controlled by a Python script that runs locally in the browser of the participant. This Python script is specifically tailored for each data donation study. The first element is the data donation study flow. This goal of this part of the Python script is to provide explanations or instructions to the participant at various steps of the flow. The second element is the data extraction process. The goal of this part is to make sure that only the digital traces that are of interest to the researcher are extracted from the DDPs.

To run a custom Python script, PORT makes use of Pyodide (The Pyodide development team 2021). Pyodide is a Python distribution for the browser based on WebAssembly (WebAssembly 2021).

Running the custom Python script using Pyodide in the browser of a participant works as follows:

- The Python script starts and begins to run synchronously, until:
  1. The script reaches a Python class resembling a UI element that should be shown on screen, a React component (React 2022).
  2. The script yields and communicates with the app which UI should be rendered on screen.
  3. The participant interacts with the UI element.
  4. The outcome of the interaction is passed back to the Python script and can be handled accordingly.
- Steps 1 through 4 are repeated until the end of the Python script.

In practice, a Python script for a data donation study typically follows the following steps:

- The starting screen for the data donation process is shown.
- The participant is asked to submit their DDP.
- The input is validated.
- The digital traces of interest to the researcher are extracted from the DDP.
- The extracted digital traces are placed in a table.
- The table is rendered on screen.
- The participant clicks the ‘donate’ button.
- The closing screen is shown.

The benefit of having a python script running inside the browser is that the researcher has familiar tools to design the extraction process in such a way that the privacy of the participants is preserved as much as possible. For this purpose, the researcher can make use of two important features. First, besides extracting digital traces from the DDP, it is also possible to further process these to better match the research question. Figure 2 shows an example where raw Google Semantic Location History (GSLH) data is locally processed in such a way that only the duration and distance of the various activities tracked by GSLH per month are extracted.

Second, a local interaction between the participant and the DDP can be created, as such that the participant can give more meaning to the data. Figure 3 shows an example using a DDP of a WhatsApp group chat. Here, the Python script works in such a way that the names of all people in the chat are extracted first. These are then presented to the research participant as such that they can select their own name. This functionality has for example been used to identify the place of the participant within their WhatsApp network, or to allow to only extract the written messages from the research participant and discard the messages from all other in this group chat. In both examples, this functionality allows to preserve the privacy of the people in the group chat other than the research participant.

## Raw Data

Data from the Google Semantic Location History (GSLH) package

```
"placeVisit": {
  "location": {
    "latitudeE7": 520901527,
    "longitudeE7": 51226018,
    "placeId": "ChIJiW8TVFBvxkcRNlvU-qGhNNc",
    "address": "Heidelberglaan 8\n3584 CS Utrecht\nNederland",
    "name": "Utrecht University",
    "sourceInfo": {
      "deviceTag": 1769097206
    },
    "locationConfidence": 80.83825,
    "calibratedProbability": 60.68323,
    "isCurrentLocation": true
  },
  "duration": {
    "startTimestamp": "2020-01-20T09:35:39.464Z",
    "endTimestamp": "2020-01-20T15:49:03.090Z"
  }
}
```

## Aggregated Data

Processed to extract the distance travelled and duration per activity

### Cycling

		Duration (hours)	Distance (km)
Year	Month		
2016	11	5.32	91.49
	12	12.98	199.51
2017	1	8.60	121.26
	2	13.40	308.93
	3	12.43	198.12

Figure 2: The left side shows an example of a location visit in the Google Semantic Location History (GSLH) Data Download Package (DDP). The right side shows how this DDP was processed into a frequency table presenting the distance and duration per activity type per month.

## How are the extracted digital traces visualized?

After data extraction and potential further processing, the data is shown on screen for the participants to review, prior to the actual donation taking place. The data is shown to provide participants insight into what they share exactly, in order for them to provide a 'true' informed consent when deciding to donate this data to the researcher. This visualization step also provides the participant with more autonomy over what is shared exactly, as they can select specific data instances and delete them prior to donation (see Figure 3 for an example). providing participants with this option is particularly interesting when working with sensitive types of data, such as raw text messages. Here, custom user interface elements can be defined to allow for other types of interactions, or to present the data in other formats, such as in histograms, if suitable.

## What is communicated to the participant?

When a researcher invites participants for a data donation study, there are various they should communicate. For example, they should inform their participants about the study and its purpose in a formal consent form, they should provide a privacy policy and probably also want to provide instructions on how to request and download the DDP of interest. To communicate all this information in such a way that it is tailor to a specific data donation study, all text that is prompted on screen can be adjusted. In addition, two languages are currently supported (this can be extended), and there is room to link to external documents, which we have used in multiple studies to refer to the privacy policy and data request and download instructions. At last, PORT allows for researchers to collect paradata on their site visitors, which can be used to monitor if the information is clearly provided.

## Raw Data

Data from WhatsApp chat export

```
File Edit Format View Help
[21/01/2022, 17:55:56] You created group "WhatsApp project"
[21/01/2022, 17:55:56] WhatsApp project: Messages and calls are end-to-en
[21/01/2022, 18:02:32] Research Colleague 1: Hi!
[21/01/2022, 18:02:53] Laura: 🤖
[21/01/2022, 18:03:18] Laura: Hi all
[21/01/2022, 18:03:34] Research Colleague 1: How are you?
[21/01/2022, 18:03:46] Laura: I'm good! How are you?
[21/01/2022, 18:15:12] Research Colleague 1: 🤖
[21/01/2022, 19:56:11] Research Colleague 2: Joined using your invite
[21/01/2022, 21:47:27] Research Colleague 1: Welcome!
[22/01/2022, 13:10:31] Research Colleague 2: Thanks! Is this the group wh
[22/01/2022, 13:26:17] Research Colleague 1: 👉
[22/01/2022, 13:24:29] Research Colleague 1: You can of course!
[22/01/2022, 13:51:43] Laura: You are also allowed to talk about other th
[22/01/2022, 13:51:09] Laura: Image omitted
[22/01/2022, 19:38:02] Research Colleague 2: That looks really good!
[17/02/2022, 13:25:15] Research Colleague 2 added Research Engineer 2
[16/03/2022, 15:16:30] Research Engineer 2 : Hi Laura, I am not the admi
[16/03/2022, 15:17:11] Research Engineer 2 : I will share with you her pl
[16/03/2022, 15:17:32] Laura: I made you admin
[16/03/2022, 15:17:45] Research Engineer 2 : Great, thanks 🤖
[16/03/2022, 15:18:27] Research Engineer 2 added Research Engineer 1
[16/03/2022, 15:20:25] Laura: Hi shival!
[16/03/2022, 15:25:39] Research Engineer 1 : Hi 🤖
```

## Local interaction

The names in chat are locally extracted and presented. The participant selects their own name

### Execute

#### Select username

Please indicate which username is yours. Note that names and phone numbers are not stored, but only used to extract relevant information from the chat file.

- ☐ Laura
- ☐ Research Engineer 1
- ☐ Research Engineer 2
- ☐ Research Colleague 1
- ☐ Research Colleague 2
- ☐ Mijn naam of telefoonnummer staat er niet tussen

## Extracted Data

Now only the participant is identified in the extracted data

### Inspect

Below you'll find the data that was extracted from your file and that is valuable for research. Inspect the data carefully and decide whether you would like to donate it. This can be done at the bottom of the page. Thanks a lot in advance!

#### Dit bent u

Omschrijving	Gegevens
0 Aantal woorden	131
1 Aantal berichten	31
2 Datum eerste bericht	2022-01-21 18:02:00
3 Datum laatste bericht	2022-03-24 21:03:00
4 Aantal websites	3
5 Aantal foto's en bestanden	1
6 Aantal locaties	2
7 Wie reageert het meest op deze deelnemer?	Deelnemer 1
8 Op wie reageert deze deelnemer het meest?	Deelnemer 1

Figure 3: The left image shows an example of a WhatsApp chat Data Download Package (DDP). The middle image shows how first only the usernames of the members in this chat were locally extracted. The participant can select their own username from this list. The right side shows how this DDP was processed into a frequency table presenting among other things how often the members react to each other. Here, the participant is identified, the others receive anonymous labels. Note that the output is presented in Dutch

Port

### Youtube

Determine whether you would like to donate the data below. Carefully check the data and adjust when required. With your donation you contribute to the previously described research. Thank you in advance.

#### Zip file contents

Filename	compressed size	size	Type
Saveas\Youtube en YouTube Photo\documenten\documenten.csv	922	937	
Saveas\Youtube en YouTube Photo\documenten\documenten.html	2408	14421	
Saveas\Youtube en YouTube Photo\documenten\documenten.html	2408	20776	
Saveas\Youtube en YouTube Photo\documenten\documenten.html	4074	10005	

☐ Adjust No adjustments

#### Download

- Check the email that you received from Google Takeout
- Click on the download link and store the file
- Choose the stored file and continue
- Click [here](#) for more extensive instructions

Do you want to donate the above data?

[Privacy](#) [Support](#) [Skip](#)

Port

### Youtube

Determine whether you would like to donate the data below. Carefully check the data and adjust when required. With your donation you contribute to the previously described research. Thank you in advance.

#### Zip file contents

Filename	compressed size	size	Type
Saveas\Youtube en YouTube Photo\documenten\documenten.csv	922	937	
Saveas\Youtube en YouTube Photo\documenten\documenten.html	2408	14421	
Saveas\Youtube en YouTube Photo\documenten\documenten.html	2408	20776	
Saveas\Youtube en YouTube Photo\documenten\documenten.html	4074	10005	

☒ Adjust Delete selected No adjustments

#### Download

- Check the email that you received from Google Takeout
- Click on the download link and store the file
- Choose the stored file and continue
- Click [here](#) for more extensive instructions

Do you want to donate the above data?

[Privacy](#) [Support](#) [Skip](#)

Figure 4: The left image shows an example of data that is extracted from a YouTube DDP, and is presented to a participant prior to providing consent. The participant can click on the 'adjust' button, after which rows can be selected for deletion (see right image).

## Acknowledgements

This project is funded by PDI-SSH.

## References

- Araujo, Theo, Jef Ausloos, Wouter van Atteveldt, Felicia Loecherbach, Judith Moeller, Jakob Ohme, Damian Trilling, Bob van de Velde, Claes De Vreese, and Kasper Welbers. 2022. “OSD2F: An Open-Source Data Donation Framework.” *Computational Communication Research* 4 (2): 372–87.
- Ausloos, Jef et al. 2019. “GDPR Transparency as a Research Method.” *SSRN Electronic Journal*, May, 1–23.
- Boeschoten, Laura, Jef Ausloos, Judith E Möller, Theo Araujo, and Daniel L Oberski. 2022. “A Framework for Privacy Preserving Digital Trace Data Collection Through Data Donation.” *Computational Communication Research* 4 (2): 388–423.
- Boeschoten, Laura, Adriënné Mendrik, Emiel van der Veen, Jeroen Vloothuis, Haili Hu, Roos Voorvaart, and Daniel L Oberski. 2022. “Privacy-Preserving Local Analysis of Digital Trace Data: A Proof-of-Concept.” *Patterns* 3 (3): 100444.
- Boeschoten, Laura, Roos Voorvaart, Ruben Van Den Goorbergh, Casper Kaandorp, and Martine De Vos. 2021. “Automatic de-Identification of Data Download Packages.” *Data Science* 4 (2): 101–20.
- Bruns, Axel. 2019. “After the ‘APIcalypse’: Social Media Platforms and Their Fight Against Critical Scholarly Research.” *Information, Communication & Society* 22 (11): 1544–66.
- Driel, Irene I van, Anastasia Giachanou, J Loes Pouwels, Laura Boeschoten, Ine Beyens, and Patti M Valkenburg. 2022. “Promises and Pitfalls of Social Media Data Donations.” *Communication Methods and Measures* 16 (4): 266–82.
- Freelon, Deen. 2018. “Computational Research in the Post-API Age.” *Political Communication* 35 (4): 665–68.
- King, Gary. 2011. “Ensuring the Data-Rich Future of the Social Sciences.” *Science* 331 (6018): 719–21.
- King, Gary, and Nathaniel Persily. 2020. “A New Model for Industry–Academic Partnerships.” *PS: Political Science & Politics* 53 (4): 703–9.
- Kmetty, Zoltán, and Renáta Németh. 2022. “Which Is Your Favorite Music Genre? A Validity Comparison of Facebook Data and Survey Data.” *Bulletin of Sociological Methodology/Bulletin de Méthodologie Sociologique* 154 (1): 82–104.
- Perriam, Jessamy, Andreas Birkbak, and Andy Freeman. 2020. “Digital Methods in a Post-API Environment.” *International Journal of Social Research Methodology* 23 (3): 277–90.
- React. 2022. “React.” *React*. <https://react.dev/>.
- The Pyodide development team. 2021. *Pyodide/Pyodide* (version 0.23.0). Zenodo. <https://doi.org/10.5281/zenodo.5156931>.
- WebAssembly. 2021. “WebAssembly.” *WebAssembly*. <https://webassembly.org/>.