

Coast Guard Detainee No. + Initial Genericizing of IDs

Overview

The Coast Guard has detailed the requirement to utilize a pseudo-ID for detainees that is between 11 to 15 alphanumeric characters. This pseud-ID is to be associated with the patient encounter, and allow the patient to be searched for (via the Coast Guard Detainee ID) and seeded at other locations.

Because this is likely to be the first of many similar requirements (for example capturing NATO IDs, host nation passport or identity card IDs etc), the intention is to design and implement this capability in a modular way that allows current and future user-enterable ID types to be added as "configuration changes" vs full blown development efforts.

Detailed Design

Identity "Types"

The following table displays the key data elements for patient ID types. Note that not all ID types are supported by all applications.


ID TYPE	Human Readable Text	Comment / Description	Validation RegEx	OID	HL7	Enterable? (via UI)	Queryable (data seeding)?	Supported Systems
TAC	N/A	Internal TAC patient ID		2.16.840.1.113883.3.42.10 033.100001.13	PID-4	No	No	CDP, OMDS
BATDOK	N/A	Internal BATDOK patient ID		2.16.840.1.113883.3.42.10 032.100001.13	PID-4	No	No	BATDOK-J, OMDS
IPI	N/A	Internal MHSG-T patient ID		2.16.840.1.113883.3.42.10 001.100001.228	PID-3	No	Yes	MHSG-T, OMDS, MHSG-G
EDIPI	DoD ID	DoDID / EDIPI	^d{10}\$ This is probably what it should be, not sure what it is	2.16.840.1.113883.3.42.10 001.100001.12	PID-3	Yes	Yes	CDP, BATDOK, MHSG-T OMDS, MEDHUB
CGDET	USCG Detainee No.	USCG Detainee Number	^[A-Za-z0-9]{11,15}\$	2.16.840.1.113883.3.42.10 032.100001.339	PID-4	Yes	Yes	CDP, BATDOK, OMDS, MEDHUB

Note: PID-3 and PID-4 are "repeatable" fields, up to three IDs will fit.

Changes required in the user interface of CDP and Batdok for Capturing the CG Detainee ID

- Ability to choose a type of ID (e.g., drop down) to enter
 - Only types that are marked "Enterable Via UI = Yes" above should display
 - DoD ID should be the default value
- Ability to enter the ID in the UI
- Ability to validate input based on the chosen type

For example:

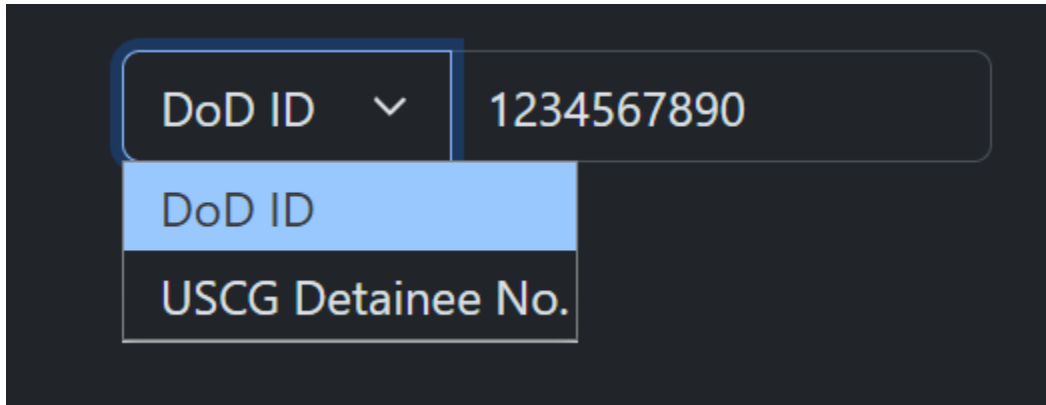

The above is for illustration purposes only, whatever makes the most sense in terms of the UI in question, and the normal workflow, and fulfills the intent of allowing a user to choose from a list of IDs that might get quite long over time.

Changes required in the messages that CDP and Batdok send to OMDS

- Based on the type of ID the user selects, encode the data into PID-3, or PID-4, as appropriate

Example of Encoding a CGDET in PID-4 in CDP

```
PID|1||ff921ae9-89f5-447e-821e-967142c1f390^^^2.16.840.1.113883.3.42.10032.100001.13^TAC~AB1234567890^^^2.16.840.1.113883.3.42.10032.100001.339^CGDET|Testlast^Testfirst||19941015|M|||||||387498fe-718d-40c2-8825-21ea6d57990f|||||||AD-AF
```

Example of Encoding a EDIPI in PID-3 for CDP

```
PID|1||2003253185^^^2.16.840.1.113883.3.42.10001.100001.12^EDIPI|ff921ae9-89f5-447e-821e-967142c1f390^^^2.16.840.1.113883.3.42.10032.100001.13^TAC|Testlast^Testfirst||19941015|M|||||||387498fe-718d-40c2-8825-21ea6d57990f|||||||AD-AF
```

Changes required in the messages that CDP and Batdok send via QR Code

Changes required:

- When CDP or BATDOK collects a CGDET identifier in the encounter, and a QR code is created to transfer the data between systems, embed the CGDET identifier in the QR code data in the PID-4.

Changes required in the messages that CDP and Batdok receive via QR Code

Changes required:

- When CDP or BATDOK receives a CGDET identifier in an encounter transferred between systems via QR code, extract the CGDET identifier from the QR code data from the PID-4.

Changes required in the HL7 message ingestion for OMDS

Changes required:

- OMDS shall add the ability to recognize and consume the new "CGDET" identifier (OID: **TBD**) in PID-4, and store it similar to other identifiers
- This works exactly the same as other seeding parameters that control which value the requesting system is seeking to query (TAC, BATDOK, EDIPI etc)

Changes required in the data seeding interface for OMDS

Changes required:

- OMDS shall add the ability to query the existing endpoint utilizing a new "CGDET" data seeding parameter that extends the current functionality described in the Intra Theater Sync ICD
- This works exactly the same as other seeding parameters that control which value the requesting system is seeking to query on (TAC, BATDOK, EDIPI etc)

Changes required in the user interface of CDP and Batdok for Seeding CG Detainee ID Patients

Validated Assumption: In order to pull back a CGDET patient, whoever is doing the pulling needs to be in possession of the CGDET via out of band communications (transfer paperwork, phone call, printed medical record etc)

Changes required:

- Ability to choose a type of ID (e.g., drop down) to query on
 - Only types that are marked "Enterable Via UI = Yes" above should display
 - DoD ID should be the default value
- Ability to enter the ID in the UI
 - or IDs, if the UI supports multiple entry of IDs to seed)
- Ability to validate input based on the chosen type

Impact on MHSG-G

Changes required:

- No impact as EHR data without EDIPIs is already prevented from being sent to MHSG-G

Impact on MedHub

Changes required:

- Ability to search on the CGDET
- Ability to display the CGDET on the encounter

Impact on EIDS

Changes required:

- New ID type should show up in extract

Requirements Traceability

 **MOD-10173** - Patient Pseudo-Identifier (Non-EDIPI) Capability DESIGN

Jira Story Traceability

Team	Stories
OMDS	
CDP	 TAC-5168 - EDIPI for USCG - PI10 BACKLOG
BATDOK-J	https://jte.dhms.health.mil/jira/browse/BATDO-4139 https://jte.dhms.health.mil/jira/browse/BATDO-4147
MedHub	 MCP-9384 - Display Pseudo-Identifiers in MedHub TO DO

Out of Scope

- Logic that attempts to create a CGDET based on an algorithm
- Logic that attempts to pull back a list of CGDETs entered at another location
- MHSG-T for now