

Aspera HSTS Containers

2026/10/07

Contents

1	Prerequisites	2
2	Architecture	3
2.1	Containers	3
2.2	Volumes	3
2.3	Logging	4
3	Quickstart	5
4	Rake tasks	6
5	Environment variables	7
6	License	8

 Important

Experimental as a sample, not for production.

Build and run IBM Aspera High-Speed Transfer Server (HSTS) with Docker Compose: one HSTS container (Node API + SSH/FASP transfers) and one Redis container.


Chapter 1

Prerequisites

- Docker $\geq$ 24 with Compose v2
- Ruby $\geq$ 3.0 with `rake`, and the `rpm` command (macOS: `brew install rpm`) — used to read the RPM version and architecture
- An Aspera HSTS RPM placed in `private/` (exactly one)
- An Aspera license: license file or ALEE entitlement (see [License](#))

Chapter 2

Architecture

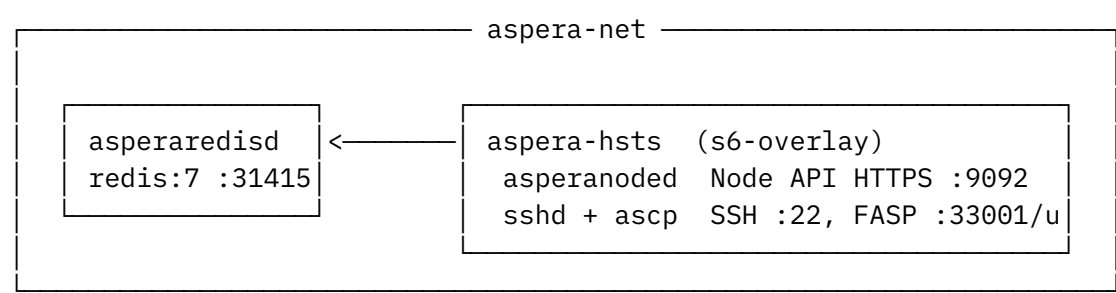

2.1 Containers

Container	Process(es)	Port(s)	Description
<code>asperaredisd</code>	<code>redis-server</code> (stock <code>redis:7-alpine</code>)	31415/tcp (internal)	Node API database
<code>aspera-hsts</code>	<code>asperanoded</code> , <code>sshd</code> (+ <code>ascp</code> per transfer)	9092/tcp, 22/tcp, 33001/udp	Node API (HTTPS), SSH/FASP transfers

Inside `aspera-hsts`, `s6-overlay` runs these services (`rootfs/etc/s6-overlay/s6-rc.d`):

Service	Type	Role
<code>syslog-bridge</code>	longrun	Copies syslog messages from <code>/dev/log</code> to the container's stdout
<code>init-aspera-hsts</code>	oneshot	Prepares volumes and configuration (see below); the container stops if it fails
<code>asperanoded</code>	longrun	Node API, as <code>asperadaemon</code>
<code>sshd</code>	longrun	SSH for <code>ascp</code> , key authentication only, user <code>xfer</code> with <code>aspshe11</code>

At each start, `init-aspera-hsts`:

- populates empty volumes from the image defaults and removes stale PID files
- points `asperanoded` to the Redis container (`db_host`, `db_port`)
- generates, on first start, the Node API TLS key pair and the SSH host keys (stored in the `etc` volume)
- writes `XFER_AUTHORIZED_KEYS` to `xfer`'s `authorized_keys` and sets `xfer`'s docroot
- installs the license (if provided)
- creates or updates the Node API user `NODE_USER`, mapped to `xfer`

2.2 Volumes

Volume	Mounted in	Content
aspera-etc	aspera-hsts: /opt/aspera/etc	aspera.conf, license, TLS key pair, SSH host keys
aspera-var	aspera-hsts: /opt/aspera/var	Runtime state, logs, token keys
redis-data	asperaredisd: /data	Redis database (Node API users, transfer history)

Transferred files are stored in XFER_D0CR00T (default /home/xfer), which is not a volume.

2.3 Logging

Aspera processes log via syslog. The syslog-bridge service listens on /dev/log and writes one line per message to stdout, so logs are available with docker compose logs or any log driver (Loki, CloudWatch, Splunk...).

Chapter 3

Quickstart

```
# 1. Create the configuration
cp .env.example .env
# Edit .env: NODE_PASS, XFER_AUTHORIZED_KEYS, license...

# 2. Build the image
rake build

# 3. Start
docker compose up -d

# 4. Check
docker compose ps
docker compose logs -f
curl -k -u "nodeuser:<NODE_PASS>" https://localhost:9092/info
```

Chapter 4

Rake tasks

```
rake build          # Build the aspera-hsts image (default task), for the RPM's architecture
rake push           # Push the image to REGISTRY
rake compose:up     # docker compose up -d
rake compose:down   # docker compose down
rake compose:logs   # docker compose logs -f
rake pdf            # Generate README.pdf from README.md
```

`rake pdf` uses `gfm2pdf-toolchain`: set `GFM2PDF_DIR` to its folder (default: `../gfm2pdf-toolchain`, next to this repository), and `GFM2PDF_ENGINE` to select the PDF engine (`latex` or `typst`).

Chapter 5

Environment variables

See `.env.example`.

Variable	Default	Description
REGISTRY	localhost	Docker registry
TAG	RPM version (rake), latest (compose)	Image tag
NODE_USER	nodeuser	Node API user
NODE_PASS	(required)	Node API password: 16-92 ASCII characters, at least 2 lowercase, 2 uppercase, 2 digits
NODE_PORT	9092	Node API HTTPS port (host)
ASCP_SSH_PORT	33001	SSH port (host)
FASP_UDP_PORT	33001	FASP UDP port (host)
XFER_AUTHORIZED_KEYS	(empty)	SSH public key(s) for xfer
XFER_DOCROOT	/home/xfer	Docroot of xfer
ASPERA_LICENSE	(empty)	Content of a license file
ASPERA_CUSTOMER_ID, ASPERA_ENTITLEMENT_ID	(empty)	ALEE entitlement, registered with alee-admin

Chapter 6

License

Without a license, `asperanoded` answers every request (including `/ping`, so the healthcheck fails) with `Invalid server configuration: License issue`, and transfers are refused. Provide one of:

- `ASPERA_LICENSE`: content of the license file, written to `/opt/aspera/etc/aspera-license` at each start
- `ASPERA_CUSTOMER_ID` and `ASPERA_ENTITLEMENT_ID`: registered with `alee-admin register` at each start
- or copy a license file into the `etc` volume: `docker compose cp aspera-license aspera-hsts:/opt/aspera/etc/aspera-license`

End of document