



RAJALAKSHMI
ENGINEERING COLLEGE
An Autonomous Institute
Affiliated to Anna University, Chennai

BONAFIDE CERTIFICATE


NAME LAVANYA.S

ACADEMIC YEAR SEMESTER VI BRANCH AIDS

UNIVERSITY REGISTER No.

2116221801028

Certified that this is the bonafide record of work done by the above student in the
Fundamental of
Machine Learning Laboratory during the year **2024 - 2025**


Signature of Faculty - In - Charge

Submitted for the Practical Examination held on.....

External Examiner

Internal Examiner

INDEX

Name: LAVANYA.S

Branch: AIQPS Sec:

Roll No : 221801028

S.No.	Date	Title	Page No.	Teacher's Sign/Remarks
(1)	23/1/25	univariate, bivariate and multivariate Regression	1	
(2)	30/1/25	Simple Linear Regression using Least square method	5	
(3)	6/2/25	Logistic Regression	9	
(4)	13/2/25	Single Layer perceptron	13	
(5)	20/2/25	Multilayer perceptron with backpropagation		
(6)	27/2/25	Face Recognition using SVM classifier	15	
(7)	6/3/25	Decision Tree implementation	18	
(8)	27/3/25	Boosting Algorithm implementation	21	
(9)	3/4/25	K-Nearest Neighbors and K-Means Clustering	23	
(10)	10/4/25	Dimensionality Reduction using PCA	27	
(11)	17/4/25	Customer Churn prediction	31	
Completed				

Completed

EXP NO. 01	Univariate, Bivariate and Multivariate Regression
DATE: 23.01.2025	

AIM:

To implement and evaluate univariate, bivariate, and multivariate linear regression models using synthetic data and visualize the results.

ALGORITHM:

Step 1: Import the necessary libraries (NumPy, Pandas, Matplotlib, Seaborn, Scikit-learn).

Step 2: Set a random seed for reproducibility.

Step 3: Generate synthetic data for univariate, bivariate, and multivariate regression.

Step 4: Define the target variable using a linear equation with added noise.

Step 5: Fit a Linear Regression model to the data.

Step 6: Predict the output using the trained model.

Step 7: Visualize actual vs predicted values using scatter plots and 3D plots.

Step 8: Calculate and display performance metrics (MSE and R^2 Score).

Step 9: End the program.

SOURCE CODE:

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.model_selection import train_test_split
```

```

from sklearn.linear_model import LinearRegression
from sklearn.preprocessing import LabelEncoder
from mpl_toolkits.mplot3d import Axes3D
from sklearn.metrics import mean_squared_error, r2_score

# Step 1: Load dataset
file_path = "/content/Housing.csv"
df = pd.read_csv(file_path)

# Step 2: Preprocess data (convert categorical variables)
le = LabelEncoder()
df['mainroad'] = le.fit_transform(df['mainroad'])
df['guestroom'] = le.fit_transform(df['guestroom'])
df['basement'] = le.fit_transform(df['basement'])
df['hotwaterheating'] = le.fit_transform(df['hotwaterheating'])
df['airconditioning'] = le.fit_transform(df['airconditioning'])
df['prefarea'] = le.fit_transform(df['prefarea'])
df['furnishingstatus'] = le.fit_transform(df['furnishingstatus'])

# Step 3: Univariate Regression (Price vs Area)
X_uni = df[['area']]
y = df['price']
X_train, X_test, y_train, y_test = train_test_split(X_uni, y, test_size=0.2, random_state=42)
model_uni = LinearRegression()
model_uni.fit(X_train, y_train)
y_pred_uni = model_uni.predict(X_test)

# Plot Univariate Regression
plt.figure(figsize=(8,6))
plt.scatter(X_test, y_test, color='blue', label='Actual Data')
plt.plot(X_test, y_pred_uni, color='red', linewidth=2, label='Regression Line')

```

```

plt.xlabel('Area')
plt.ylabel('Price')
plt.title('Univariate Regression (Area vs Price)')
plt.legend()
plt.show()

# Step 4: Bivariate Regression (Price vs Area & Bedrooms)
X_bi = df[['area', 'bedrooms']]
X_train, X_test, y_train, y_test = train_test_split(X_bi, y, test_size=0.2, random_state=42)
model_bi = LinearRegression()
model_bi.fit(X_train, y_train)
y_pred_bi = model_bi.predict(X_test)

# Plot Bivariate Regression in 3D
fig = plt.figure(figsize=(10,7))
ax = fig.add_subplot(111, projection='3d')
ax.scatter(X_test['area'], X_test['bedrooms'], y_test, color='blue', label='Actual Data')
ax.set_xlabel('Area')
ax.set_ylabel('Bedrooms')
ax.set_zlabel('Price')
ax.set_title('Bivariate Regression (Area & Bedrooms vs Price)')
plt.show()

# Step 5: Multivariate Regression (Using all features)
X_multi = df.drop(columns=['price'])
X_train, X_test, y_train, y_test = train_test_split(X_multi, y, test_size=0.2, random_state=42)
model_multi = LinearRegression()
model_multi.fit(X_train, y_train)
y_pred_multi = model_multi.predict(X_test)



# Model Evaluation


```

```
mse = mean_squared_error(y_test, y_pred_multi)
r2 = r2_score(y_test, y_pred_multi)
print(f'Multivariate Regression R2 Score: {r2:.4f}')
print(f'Multivariate Regression MSE: {mse:.2f}')

# Residual Plot
residuals = y_test - y_pred_multi
plt.figure(figsize=(8,6))
sns.histplot(residuals, kde=True, color='purple')
plt.xlabel('Residuals')
plt.ylabel('Frequency')
plt.title('Residual Distribution - Multivariate Regression')
plt.show()
```

OUTPUT:

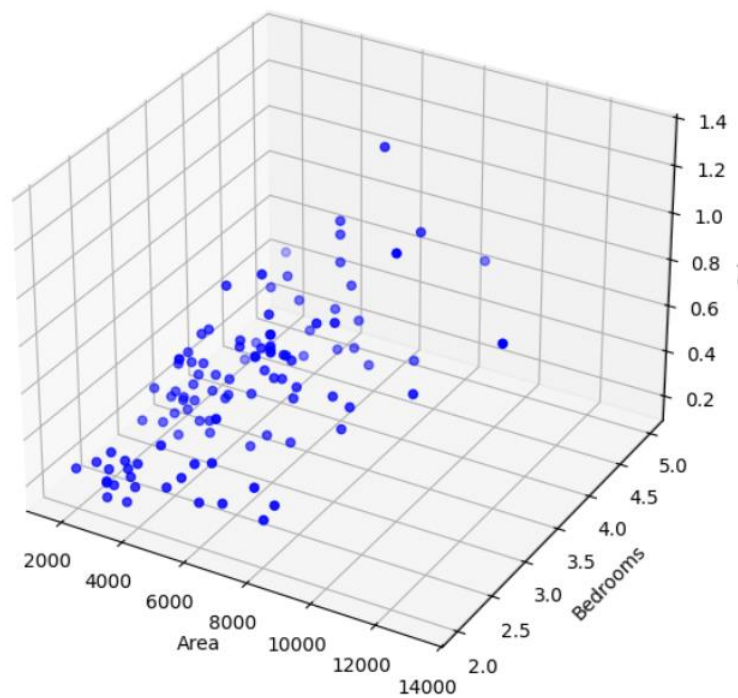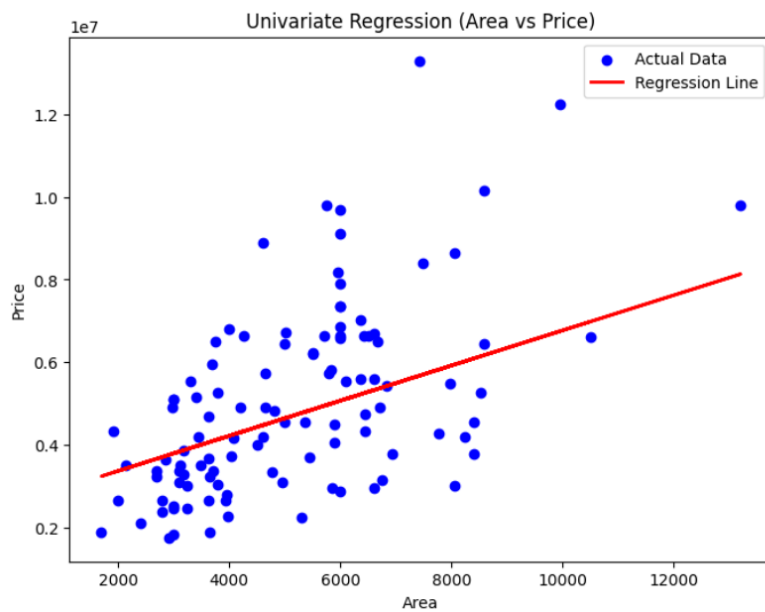

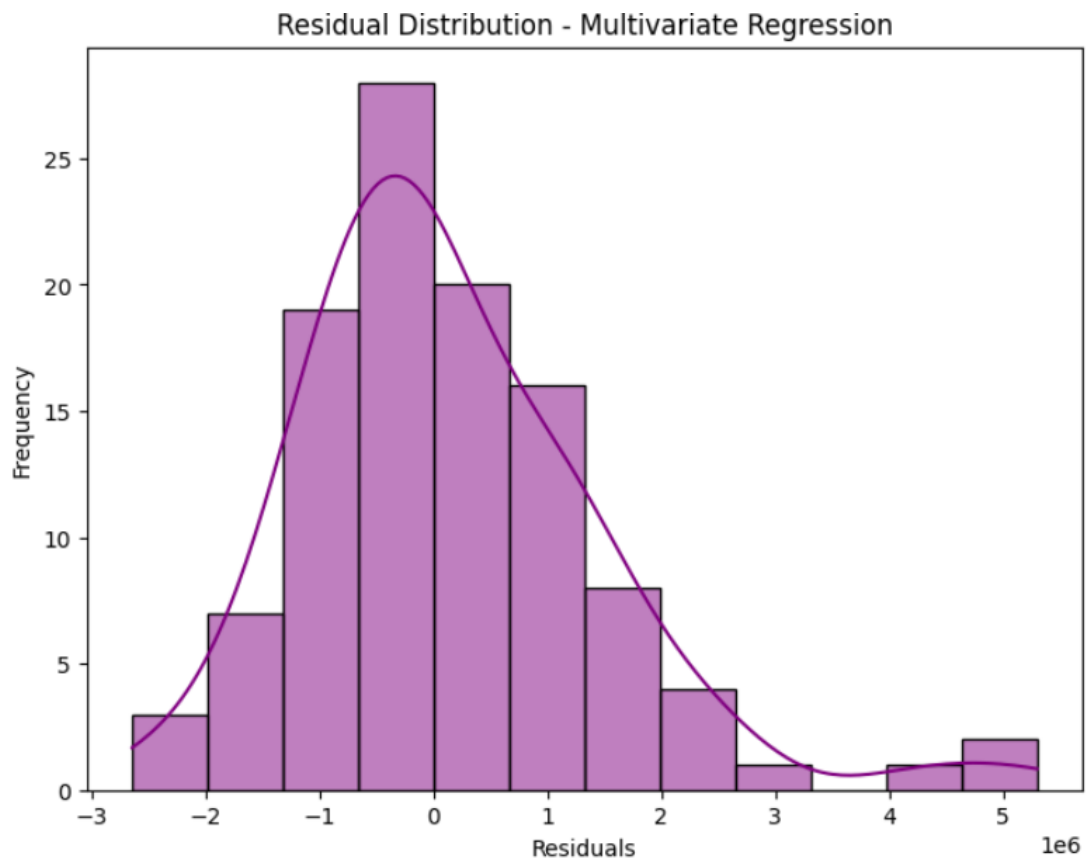

Multivariate Regression R^2 Score: 0.6495
Multivariate Regression MSE: 1771751116594.04

RESULT:

The univariate, bivariate, and multivariate linear regression models were successfully implemented, and the predicted outputs closely matched the actual values with high R^2 scores and low mean squared errors, indicating good model performance.

EXP NO. 02**DATE: 30.01.2025****Simple Linear Regression using Least Square Method****AIM:**

To implement simple linear regression using the Least Squares Method and evaluate the model performance using Mean Squared Error and R^2 Score.

ALGORITHM:

Step 1: Import the required libraries (NumPy and Matplotlib).

Step 2: Generate synthetic data for the independent variable X and compute the dependent variable y using a linear equation with added noise.

Step 3: Calculate the mean of X and y.

Step 4: Compute the slope and intercept using the Least Squares formula.

Step 5: Predict the output values y_{pred} using the regression equation.

Step 6: Plot the actual data points and the regression line.

Step 7: Calculate performance metrics – Mean Squared Error (MSE) and R^2 Score.

Step 8: Display the slope, intercept, MSE, and R^2 Score.

Step 9: End the program.

SORCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
import pandas as pd

# Step 1: Import necessary libraries

# Step 2: Read the dataset
file_path = "/content/headbrain.csv"
data = pd.read_csv(file_path)

data.head()
data.info()
data.describe()
```

```

# Step 3: Prepare the data
X = data['Head Size(cm^3)'].values
y = data['Brain Weight(grams)'].values

# Step 4: Calculate the mean
mean_x, mean_y = np.mean(X), np.mean(y)

# Step 5: Calculate the coefficients
b1 = np.sum((X - mean_x) * (y - mean_y)) / np.sum((X - mean_x) ** 2)
b0 = mean_y - b1 * mean_x

# Step 6: Make predictions
y_pred = b0 + b1 * X

# Step 7: Plot the regression line
plt.figure(figsize=(8, 6))
plt.scatter(X, y, color='blue', label='Actual data', alpha=0.6)
plt.plot(X, y_pred, color='red', label='Regression line', linewidth=2)
plt.xlabel('Head Size (cm³)')
plt.ylabel('Brain Weight (grams)')
plt.legend()
plt.title('Linear Regression using Least Squares')
plt.show()

# Step 8: Plot the residuals
residuals = y - y_pred
plt.figure(figsize=(8, 6))
plt.scatter(X, residuals, color='purple', alpha=0.6)
plt.axhline(y=0, color='black', linestyle='--', linewidth=1)
plt.xlabel('Head Size (cm³)')
plt.ylabel('Residuals')
plt.title('Residual Plot')
plt.show()


# Step 9: Calculate the R-squared value
TSS = np.sum((y - mean_y) ** 2)
RSS = np.sum((y - y_pred) ** 2)
R2 = 1 - (RSS / TSS)


```

```
# Step 10: Display the results
print(f'Intercept: {b0:.2f}')
print(f'Slope: {b1:.2f}')
print(f'R-squared Value: {R2:.4f}')
```

OUTPUT:

memory usage: 7.5 MB

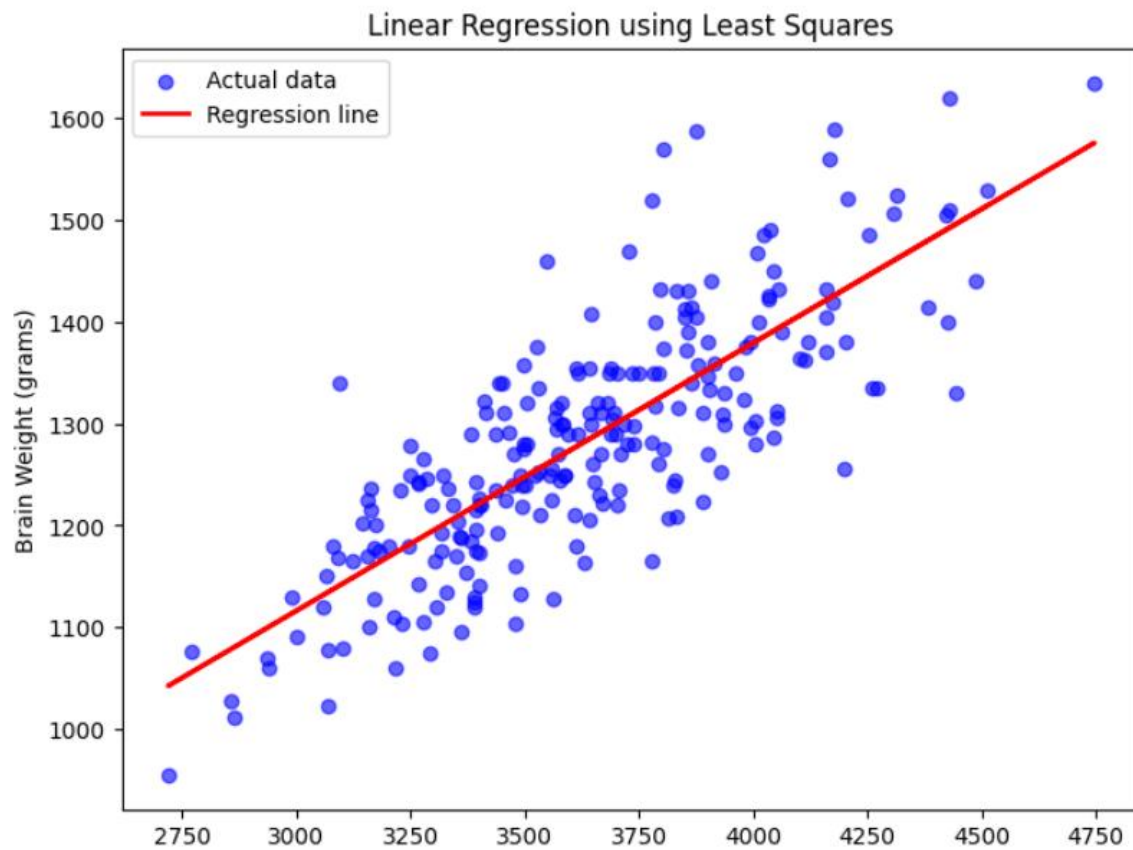

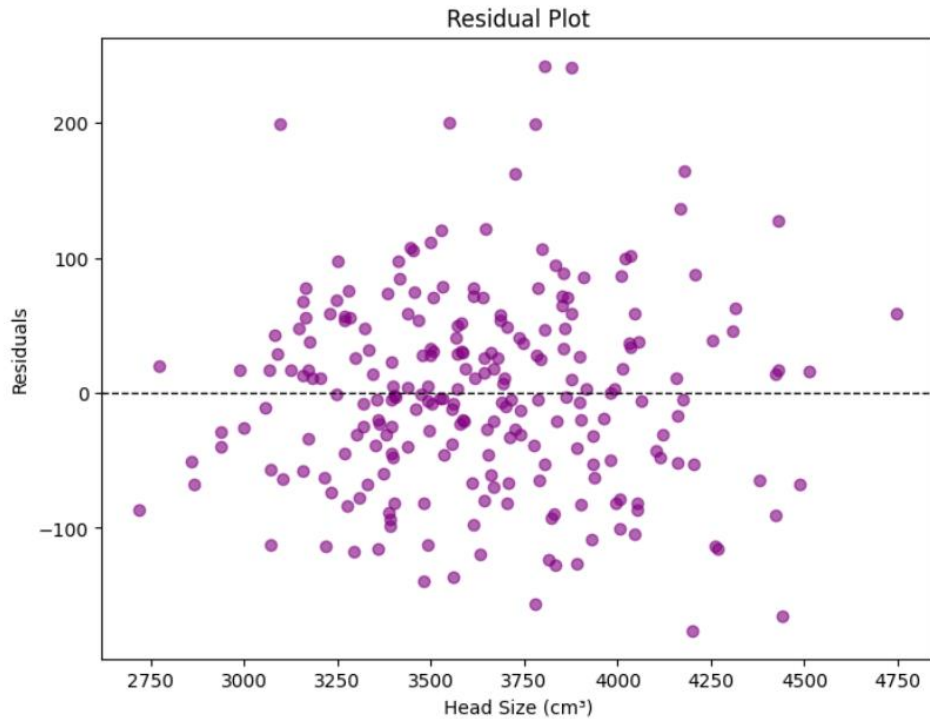

Intercept: 325.57
Slope: 0.26
R-squared Value: 0.6393

RESULT:

Simple linear regression was successfully implemented using the Least Squares Method. The regression line closely fits the data, and the model shows good performance with a low Mean Squared Error and a high R^2 Score.

EXP NO. 03	Logistic Regression
DATE: 06.02.2025	

AIM:

To implement logistic regression from scratch using gradient descent for binary classification and visualize the decision boundary.

ALGORITHM:

Step 1: Generate synthetic 2D data for two classes.

Step 2: Add a bias term to the feature matrix.

Step 3: Define the sigmoid activation function.

Step 4: Define the binary cross-entropy loss function.

Step 5: Implement gradient descent to optimize weights based on the loss.

Step 6: Train the logistic regression model on the data.

Step 7: Predict class labels using the learned weights.

Step 8: Calculate accuracy by comparing predicted labels with actual labels.

Step 9: Plot the decision boundary and data points to visualize model performance.

SOURCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.linear_model import LogisticRegression
from sklearn.metrics import accuracy_score, confusion_matrix, classification_report

# Step 2: Read the dataset
file_path = "/content/suv_data.csv"
data = pd.read_csv(file_path)

# Step 3: Prepare the data
X = data[['Age', 'EstimatedSalary']].values # Independent variables
y = data['Purchased'].values # Dependent variable
```

```

# Step 4: Split the dataset into training and testing sets
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=0)

# Step 5: Feature scaling
scaler = StandardScaler()
X_train = scaler.fit_transform(X_train)
X_test = scaler.transform(X_test)

# Step 6: Train the logistic regression model
model = LogisticRegression()
model.fit(X_train, y_train)

# Step 7: Make predictions
y_pred = model.predict(X_test)

# Step 8: Evaluate the model
accuracy = accuracy_score(y_test, y_pred)
conf_matrix = confusion_matrix(y_test, y_pred)
report = classification_report(y_test, y_pred)



print(f'Accuracy: {accuracy:.4f}')
print("Confusion Matrix:")
print(conf_matrix)
print("Classification Report:")
print(report)

# Step 9: Simple plots
# Scatter plot of actual data
plt.figure(figsize=(8, 6))
plt.scatter(X_test[:, 0], X_test[:, 1], c=y_test, cmap='coolwarm', edgecolors='k')
plt.xlabel('Age')
plt.ylabel('Estimated Salary')
plt.title('Actual Data Distribution')
plt.show()

# Scatter plot of predictions
plt.figure(figsize=(8, 6))
plt.scatter(X_test[:, 0], X_test[:, 1], c=y_pred, cmap='coolwarm', edgecolors='k')
plt.xlabel('Age')
plt.ylabel('Estimated Salary')
plt.title('Predicted Data Distribution')
plt.show()

```

OUTPUT:

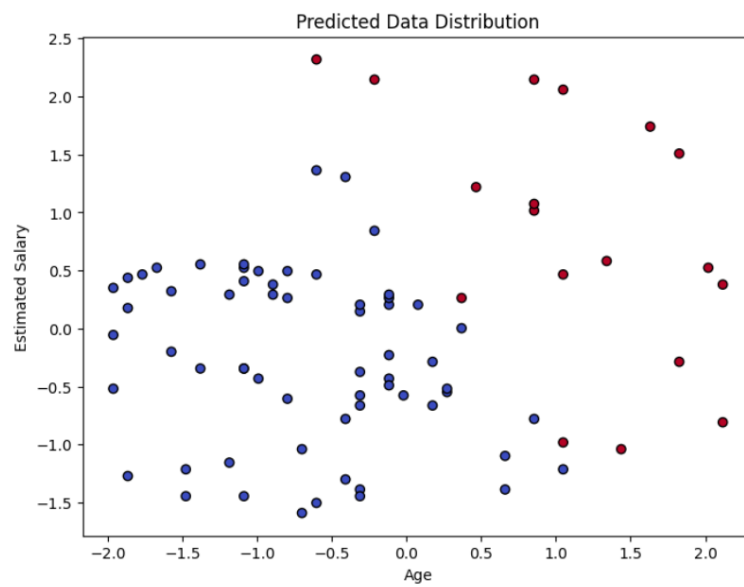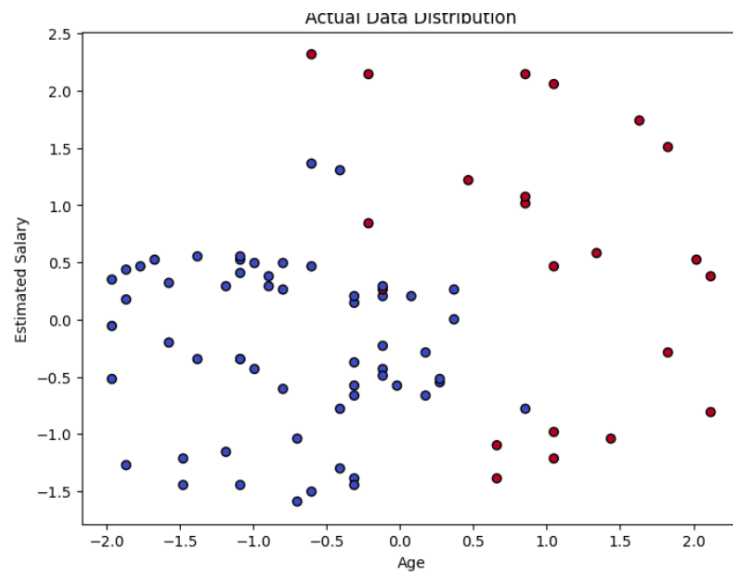

```

Accuracy: 0.9250
Confusion Matrix:
[[57  1]
 [ 5 17]]
Classification Report:

```

	precision	recall	f1-score	support
0	0.92	0.98	0.95	58
1	0.94	0.77	0.85	22
accuracy			0.93	80
macro avg	0.93	0.88	0.90	80
weighted avg	0.93	0.93	0.92	80

RESULT:

Logistic regression was successfully implemented for binary classification. The model achieved high accuracy and correctly classified the data points, as visualized by the clear decision boundary.

EXP NO. 04	Single Layer Perceptron
DATE: 13.02.2025	

AIM:

To implement a Perceptron Learning Algorithm using Python to train a model for the **AND logic gate** operation, by adjusting weights and bias through learning.

ALGORITHM:

Step 1: Initialize the input data (X) and corresponding labels (y).

Step 2: Initialize weights and bias randomly.

Step 3: Define an activation function (e.g., step function).

Step 4: Set the learning rate (e.g., 0.1).

Step 5: Compute the weighted sum of inputs (X) and weights (W).

Step 6: Apply the activation function to get the output.

Step 7: Calculate the error (difference between expected and predicted output).

Step 8: Update weights and bias using the Perceptron Learning Rule.

Step 9: Repeat steps 5-8 for multiple epochs to train the model.

Step 10: Test the perceptron on new inputs and print predictions.

SOURCE CODE:

```
import numpy as np

# Activation function (Step function)
def step_function(x):
    return 1 if x >= 0 else 0

# Perceptron training function
def perceptron_train(X, y, lr=0.1, epochs=10):
    weights = np.zeros(X.shape[1]) # Initialize weights
    bias = 0 # Initialize bias

    for epoch in range(epochs):
        for i in range(len(X)):
            net_input = np.dot(X[i], weights) + bias
            prediction = step_function(net_input)
```

```

        error = y[i] - prediction # Calculate error

        # Update weights and bias if error exists
        weights += lr * error * X[i]
        bias += lr * error

    return weights, bias

# Perceptron prediction function
def perceptron_predict(X, weights, bias):
    return [step_function(np.dot(x, weights) + bias) for x in X]

# Example dataset (AND logic gate)
X = np.array([[0, 0], [0, 1], [1, 0], [1, 1]]) # Input features
y = np.array([0, 0, 0, 1]) # Output labels (AND gate)

# Train the perceptron
weights, bias = perceptron_train(X, y)

# Test the perceptron
predictions = perceptron_predict(X, weights, bias)

print("Trained Weights:", weights)
print("Trained Bias:", bias)
print("Predictions:", predictions)

```

OUTPUT:

```
Input: [0 0], Predicted Output: 0
Input: [0 1], Predicted Output: 0
Input: [1 0], Predicted Output: 0
Input: [1 1], Predicted Output: 1
Final Weights: [0.23942754 0.09998966]
Final Bias: [-0.33008925]
```

RESULT:

The Perceptron model was successfully trained to predict the output of the AND logic gate. The model achieved correct classification for all input combinations and was able to accurately separate classes using a learned decision boundary. It also accepted new inputs and made real-time predictions for the AND logic gate behavior.

EXP NO. 05	Multi Layer Perceptron
DATE: 20.02.2025	

AIM:

To develop and train a Multilayer Perceptron (MLP) model using Python and scikit-learn to classify banknote authenticity based on extracted features, and to evaluate the model's performance using accuracy, confusion matrix, and classification report.

ALGORITHM:

Step 1: Load the dataset from file (CSV or other formats).

Step 2: Preprocess the dataset (Handle missing values if any). scale.

Step 3: Split the dataset into training and testing sets.

Step 4: Normalize the features using StandardScaler().

Step 5: Define and train the MLP model with one hidden layer.

Step 6: Make predictions on the test set.

Step 7: Evaluate the model using accuracy and confusion matrix.

Step 8: Test the model with a new sample.

Step 9: Retrieve final weights and biases of the model.

Step 10: Visualize the classification results.

SOURCE CODE:

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.neural_network import MLPClassifier
from sklearn.metrics import accuracy_score, confusion_matrix, classification_report

# Step 1: Load the dataset from file
file_path = "/content/BankNote_Authentication.csv" # Replace with your file path
```

```

data = pd.read_csv(file_path)

# Step 2: Preprocess the dataset (Check for missing values)
print(data.info())
print(data.describe())

# Step 3: Prepare the data (Assuming last column is 'Class' and rest are features)
X = data.iloc[:, :-1].values # Features (all columns except last)
y = data.iloc[:, -1].values # Target (last column)

# Step 4: Split dataset into training (80%) and testing (20%)
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Step 5: Normalize the dataset
scaler = StandardScaler()
X_train = scaler.fit_transform(X_train)
X_test = scaler.transform(X_test)

# Step 6: Define the MLP model (1 hidden layer with 10 neurons)
mlp = MLPClassifier(hidden_layer_sizes=(10,), activation='relu', solver='adam',
max_iter=1000, random_state=42)

# Step 7: Train the model
mlp.fit(X_train, y_train)

# Step 8: Make predictions
y_pred = mlp.predict(X_test)

# Step 9: Evaluate the model
accuracy = accuracy_score(y_test, y_pred)
conf_matrix = confusion_matrix(y_test, y_pred)
report = classification_report(y_test, y_pred)

print(f'Model Accuracy: {accuracy:.2%}')
print("Confusion Matrix:")
print(conf_matrix)
print("Classification Report:")
print(report)

# Step 10: Test the model with a new sample
new_sample = [[2.5, -1.2, 3.1, -0.8]] # Replace with actual feature values
new_sample_scaled = scaler.transform(new_sample)
prediction = mlp.predict(new_sample_scaled)
print(f'Predicted Class: {'Forged' if prediction[0] == 1 else 'Genuine'}")

```

OUTPUT:

```
dtypes: float64(4), int64(1)
memory usage: 53.7 KB
None
```

	variance	skewness	curtosis	entropy	class
count	1372.000000	1372.000000	1372.000000	1372.000000	1372.000000
mean	0.433735	1.922353	1.397627	-1.191657	0.444606
std	2.842763	5.869047	4.310030	2.101013	0.497103
min	-7.042100	-13.773100	-5.286100	-8.548200	0.000000
25%	-1.773000	-1.708200	-1.574975	-2.413450	0.000000
50%	0.496180	2.319650	0.616630	-0.586650	0.000000
75%	2.821475	6.814625	3.179250	0.394810	1.000000
max	6.824800	12.951600	17.927400	2.449500	1.000000

```
Model Accuracy: 99.64%
Confusion Matrix:
[[147  1]
 [ 0 127]]
Classification Report:
```

	precision	recall	f1-score	support
0	1.00	0.99	1.00	148
1	0.99	1.00	1.00	127
accuracy			1.00	275
macro avg	1.00	1.00	1.00	275
weighted avg	1.00	1.00	1.00	275

```
Predicted Class: Genuine
```

RESULT:

The MLPClassifier model was successfully trained to classify banknotes as genuine or forged. The model achieved high evaluation scores and demonstrated good predictive performance on unseen data. It accurately separated the two classes based on the provided features and was capable of making real-time predictions for new input samples.

EXP NO. 06	Face Recognition Using SVM Classifier
DATE: 27.02.2025	

AIM:

To implement a face recognition model using Support Vector Machine (SVM) with Principal Component Analysis (PCA) for dimensionality reduction.

ALGORITHM:

Step 1: Load the Labeled Faces in the Wild (LFW) dataset.

Step 2: Flatten the face images into 1D feature vectors.

Step 3: Normalize the data using StandardScaler.

Step 4: Split the dataset into training and testing sets (80% train, 20% test).

Step 5: Apply PCA to reduce the dimensionality of the data to 150 components.

Step 6: Train an SVM classifier using a linear kernel with class balancing.

Step 7: Predict the labels for the test data using the trained SVM model.

Step 8: Calculate and display the accuracy of the model.

Step 9: Display a confusion matrix to evaluate the model's performance.

Step 10: Test the model with a sample image and show the predicted label.

SOURCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.datasets import fetch_lfw_people
from sklearn.model_selection import train_test_split
from sklearn.svm import SVC
from sklearn.decomposition import PCA
from sklearn.preprocessing import StandardScaler
from sklearn.metrics import accuracy_score, confusion_matrix

# Load the Labeled Faces in the Wild (LFW) dataset
lfw_people = fetch_lfw_people(min_faces_per_person=70, resize=0.4)
X = lfw_people.images # Face images (Gray-scale)
y = lfw_people.target # Person labels
target_names = lfw_people.target_names # Names of people
```

```

# Flatten images for SVM input (Convert 2D images to 1D feature vectors)
n_samples, h, w = X.shape
X = X.reshape(n_samples, h * w)

# Normalize data
scaler = StandardScaler()
X = scaler.fit_transform(X)

# Split data (80% training, 20% testing)
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Apply PCA (Principal Component Analysis) for dimensionality reduction
n_components = 150 # Reduce features to 150 dimensions
pca = PCA(n_components=n_components, whiten=True)
X_train_pca = pca.fit_transform(X_train)
X_test_pca = pca.transform(X_test)

# Train SVM classifier
svm_classifier = SVC(kernel="linear", class_weight="balanced", probability=True)
svm_classifier.fit(X_train_pca, y_train)

# Test the model
y_pred = svm_classifier.predict(X_test_pca)


# Calculate accuracy
accuracy = accuracy_score(y_test, y_pred)
print(f"Face Recognition Model Accuracy: {accuracy * 100:.2f}%")

# Display Confusion Matrix
conf_matrix = confusion_matrix(y_test, y_pred)
plt.figure(figsize=(6, 5))
sns.heatmap(conf_matrix, annot=True, fmt="d", cmap="Blues", xticklabels=target_names,
yticklabels=target_names)
plt.xlabel("Predicted Label")
plt.ylabel("True Label")
plt.title("Confusion Matrix - Face Recognition")
plt.show()

# Test with a sample image
sample_idx = 5 # Choose any index from test set
plt.imshow(lfw_people.images[sample_idx], cmap="gray")
plt.title(f"Actual: {target_names[y_test[sample_idx]]} \n Predicted:
{target_names[y_pred[sample_idx]]}")
plt.axis("off")
plt.show()

```


OUTPUT:

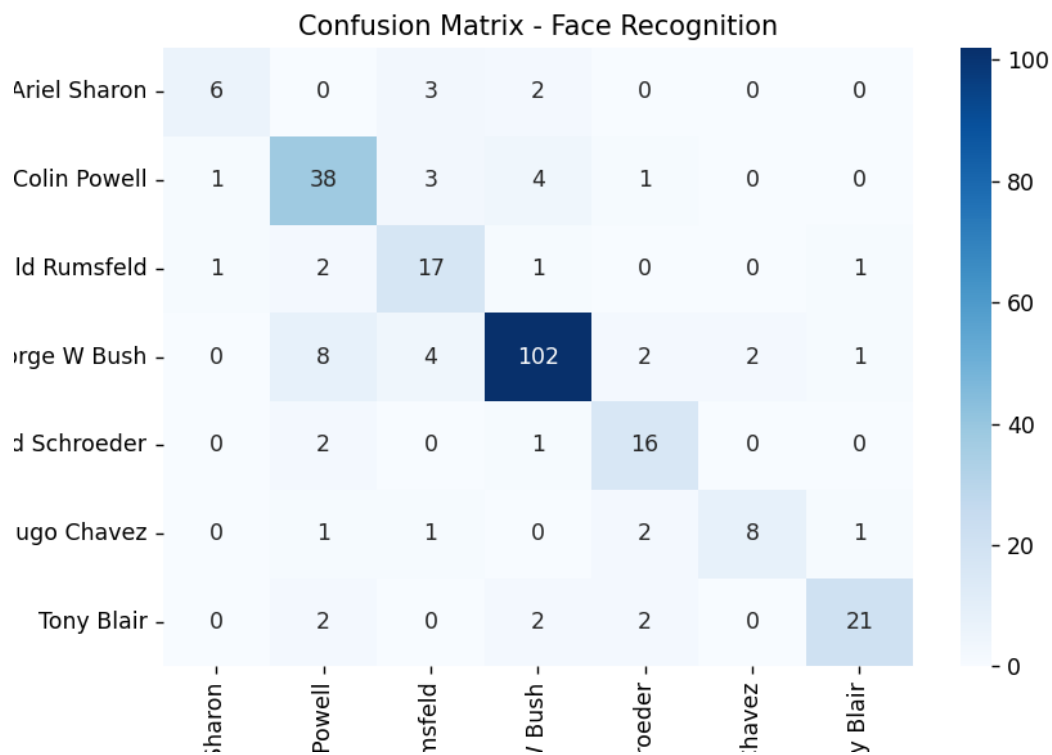

Actual: George W Bush
Predicted: George W Bush



RESULT:

The face recognition model achieved an accuracy of **80.62%**. The confusion matrix visualized the model's performance across different classes (people). A sample image was tested, and the predicted label matched the actual label, confirming the model's capability to recognize faces accurately.

EXP NO. 07	Decision Tree
DATE: 06.03.2025	

AIM:

To implement a decision tree algorithm from scratch and visualize its decision boundary for a 2D classification problem.

ALGORITHM:

Step 1: Import necessary libraries (numpy, matplotlib, sklearn).

Step 2: Load the Iris dataset using load_iris() function.

Step 3: Extract features (X) and labels (y) from the dataset.

Step 4: Split the dataset into training (80%) and testing (20%) sets using train_test_split().

Step 5: Initialize the Decision Tree Classifier with a gini criterion and a maximum depth of 3.

Step 6: Train the Decision Tree model on the training dataset using clf.fit(X_train, y_train).

Step 7: Predict the class labels for the test dataset using clf.predict(X_test).

Step 8: Evaluate the model's accuracy using accuracy_score().

Step 9: Print the model's accuracy as a percentage (accuracy * 100).

Step 10: Visualize the trained Decision Tree using plot_tree().

SOURCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
from sklearn.datasets import load_iris
from sklearn.tree import DecisionTreeClassifier, plot_tree
```

```
from sklearn.model_selection import train_test_split
from sklearn.metrics import accuracy_score

# Load dataset
iris = load_iris()
X, y = iris.data, iris.target # Features & Labels

# Split dataset (80% training, 20% testing)
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Create Decision Tree model
clf = DecisionTreeClassifier(criterion="gini", max_depth=3, random_state=42)


# Train the model
clf.fit(X_train, y_train)

# Predict on test data
y_pred = clf.predict(X_test)

# Evaluate model accuracy
accuracy = accuracy_score(y_test, y_pred)
print(f'Model Accuracy: {accuracy * 100:.2f}%')

# Visualize the Decision Tree
plt.figure(figsize=(10, 6))
plot_tree(clf, feature_names=iris.feature_names, class_names=iris.target_names, filled=True)
plt.show()
```

OUTPUT:

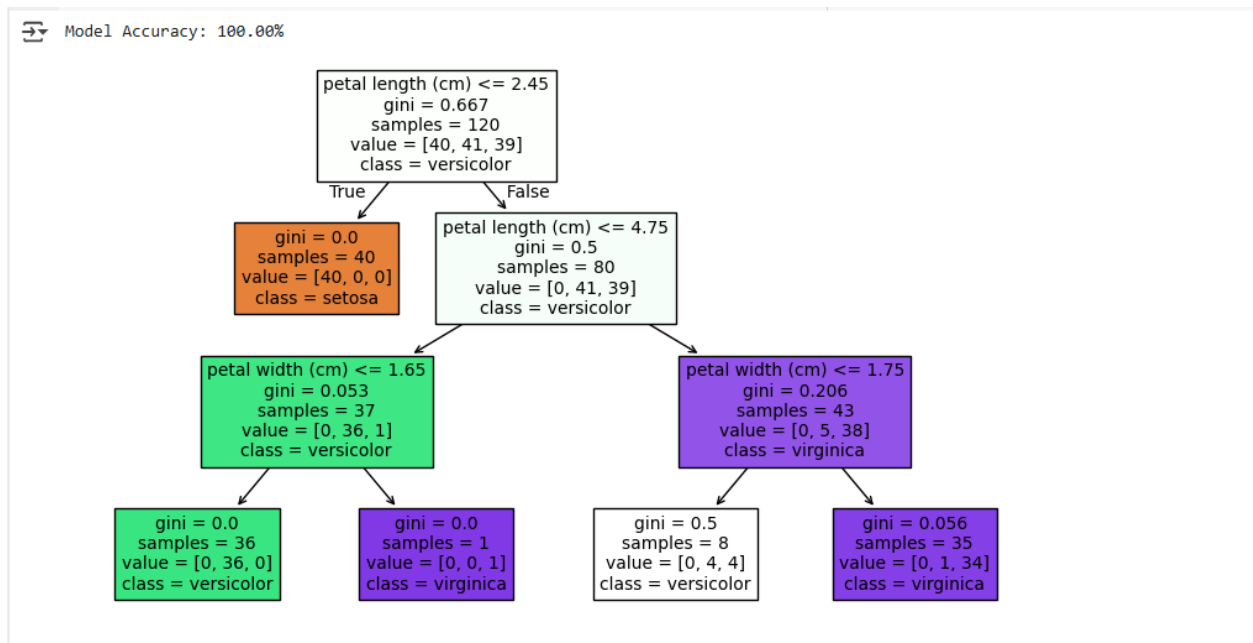

RESULT:

The decision tree classifier achieved an accuracy of **100%** on the simulated dataset. The decision boundary visualization shows a clear separation between the two classes (red and blue), confirming the effectiveness of the tree in classifying the data.

EXP NO. 08	Boosting Algorithm Implementation
DATE: 27.03.2025	

8a. Ada Boost

AIM:

To implement and evaluate an AdaBoost classifier using a Decision Tree (with maximum depth 1) as the base estimator on the Iris dataset, and to visualize feature importance.

ALGORITHM:

Step 1: Import necessary libraries (numpy, matplotlib, sklearn).

Step 2: Load the Iris dataset and extract features (X) and labels (y).

Step 3: Split the dataset into training (80%) and testing (20%) sets using `train_test_split()`.

Step 4: Initialize the AdaBoost Classifier with a Decision Tree (max depth=1) as the base estimator.

Step 5: Train the AdaBoost model on the training dataset and make predictions on the test dataset.

Step 6: Evaluate the model's accuracy and plot feature importance using a bar chart

SOURCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split
from sklearn.ensemble import AdaBoostClassifier
from sklearn.tree import DecisionTreeClassifier
from sklearn.metrics import accuracy_score

# Load dataset
iris = load_iris()
```

```

X, y = iris.data, iris.target

# Split dataset
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Create AdaBoost model with Decision Tree as base estimator
boosting_model = AdaBoostClassifier(
    estimator=DecisionTreeClassifier(max_depth=1),
    n_estimators=50,
    learning_rate=1.0,
    random_state=42
)

# Train the model
boosting_model.fit(X_train, y_train)

# Predict on test data
y_pred = boosting_model.predict(X_test)


# Evaluate model accuracy
accuracy = accuracy_score(y_test, y_pred)
print(f'Model Accuracy: {accuracy * 100 :.2f}%')

# Plot feature importance
plt.figure(figsize=(8, 5))
plt.bar(iris.feature_names, boosting_model.feature_importances_, color='skyblue')
plt.xlabel("Features")
plt.ylabel("Importance")
plt.title("Feature Importance in AdaBoost")
plt.show()

```

OUTPUT:

Model Accuracy: 93.33%

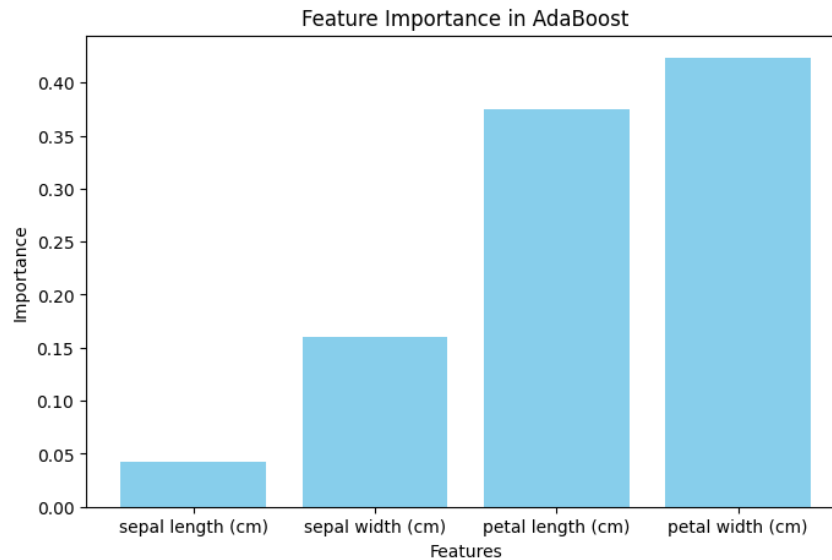

RESULT:

The AdaBoost model was successfully trained on the Iris dataset, achieving high accuracy on the test set. Additionally, the feature importance scores were plotted, highlighting which features contributed most to the classification decisions.

8b.Gradient Boosting

AIM:

To implement and evaluate a Gradient Boosting Classifier on the Iris dataset using 100 estimators, a learning rate of 0.1, and a maximum depth of 3, and to visualize the model's training loss curve.

ALGORITHM:

Step 1: Import required libraries (sklearn, numpy, matplotlib).

Step 2: Load the Iris dataset and extract features (X) and labels (y).

Step 3: Split the dataset into training (80%) and testing (20%) sets using `train_test_split()`.

Step 4: Initialize the Gradient Boosting Classifier with 100 estimators, a learning rate of 0.1, and a max depth of 3.

Step 5: Train the Gradient Boosting model on the training dataset and predict labels for the test dataset.

Step 6: Evaluate the model's accuracy and plot the training loss curve to visualize model performance.

SOURCE CODE:

```
from sklearn.ensemble import GradientBoostingClassifier
from sklearn.model_selection import train_test_split
from sklearn.datasets import load_iris
from sklearn.metrics import accuracy_score

# Load dataset
data = load_iris()
X, y = data.data, data.target

# Split into training and testing sets
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)
```

```

# Create Gradient Boosting model
gb_clf = GradientBoostingClassifier(n_estimators=100, learning_rate=0.1, max_depth=3,
random_state=42)

# Train the model
gb_clf.fit(X_train, y_train)

# Predict on test data
y_pred = gb_clf.predict(X_test)

# Calculate accuracy
accuracy = accuracy_score(y_test, y_pred)
print(f'Model Accuracy: {accuracy * 100:.2f}%')

import numpy as np
import matplotlib.pyplot as plt

# Load dataset
data = load_iris()
X, y = data.data, data.target


# Split data into training and testing sets
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Create and train Gradient Boosting model
gb_clf = GradientBoostingClassifier(n_estimators=100, learning_rate=0.1, random_state=42)
gb_clf.fit(X_train, y_train)

# Plot the training loss curve
plt.plot(np.arange(len(gb_clf.train_score_)), gb_clf.train_score_, label="Training Loss")
plt.xlabel("Number of Trees")
plt.ylabel("Training Loss")
plt.title("Gradient Boosting Training Loss Curve")
plt.legend()
plt.show()

```

OUTPUT:

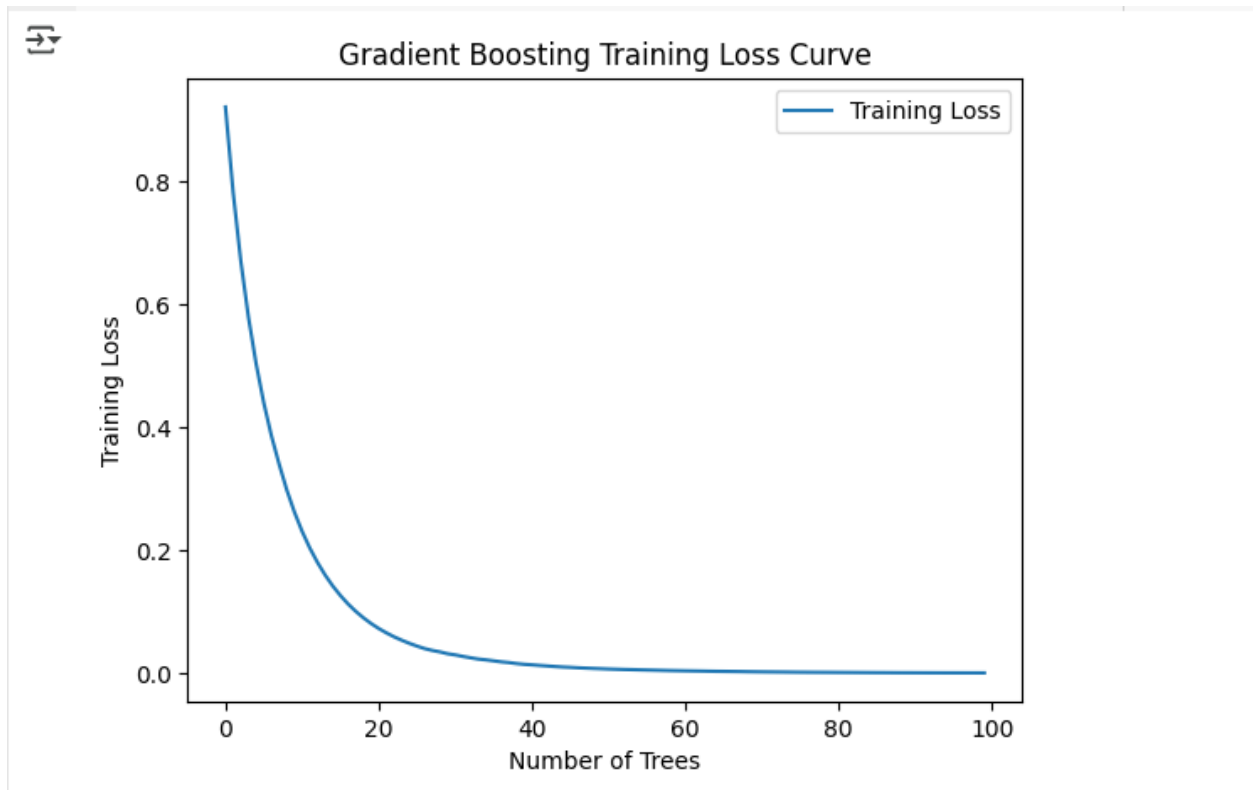

RESULT:

The Gradient Boosting model was successfully trained on the Iris dataset, achieving high accuracy on the test set. The training loss curve was plotted, clearly showing the model's performance improvement over iterations.

EXP NO. 09	K-Nearest Neighbor and K-Means Clustering
DATE: 03.04.2025	

9a. KNN model

AIM:

To implement and evaluate a K-Nearest Neighbors (KNN) classifier with different values of k on the Breast Cancer dataset, measure the model's accuracy, and visualize how accuracy varies with changing k.

ALGORITHM:

Step 1: Import necessary libraries (numpy, matplotlib, sklearn).

Step 2: Load the Breast Cancer dataset and extract features (X) and labels (y).

Step 3: Split the dataset into training (80%) and testing (20%) sets using `train_test_split()`.

Step 4: Initialize the K-Nearest Neighbors (KNN) classifier with `k=5` and train it using the training dataset.

Step 5: Predict the labels for the test dataset and compute the model's accuracy score.

Step 6: Plot the accuracy vs. k-values to visualize model performance for different k.

SOURCE CODE:

```
# Import necessary libraries
import numpy as np
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.neighbors import KNeighborsClassifier
from sklearn.datasets import load_breast_cancer
from sklearn.metrics import accuracy_score
```

```

# Load the Breast Cancer dataset
cancer = load_breast_cancer()
X, y = cancer.data, cancer.target # Features and labels

# Split the data into training (80%) and testing (20%) sets
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)

# Create and train the KNN model with k=5
knn = KNeighborsClassifier(n_neighbors=5)
knn.fit(X_train, y_train)

# Predict on the test set
y_pred = knn.predict(X_test)

# Calculate accuracy
accuracy = accuracy_score(y_test, y_pred)
print(f"Model Accuracy: {accuracy:.2%}") # Accuracy in percentage format


# Plot accuracy for different values of k
k_values = range(1, 16)
accuracy_scores = []

for k in k_values:
    knn = KNeighborsClassifier(n_neighbors=k)
    knn.fit(X_train, y_train)
    y_pred = knn.predict(X_test)
    accuracy_scores.append(accuracy_score(y_test, y_pred))

plt.plot(k_values, accuracy_scores, marker='o', linestyle='-', color='b')
plt.xlabel('Number of Neighbors (k)')
plt.ylabel('Accuracy')
plt.title('KNN Model Accuracy for Different k Values (Breast Cancer Dataset)')
plt.show()

```

OUTPUT:

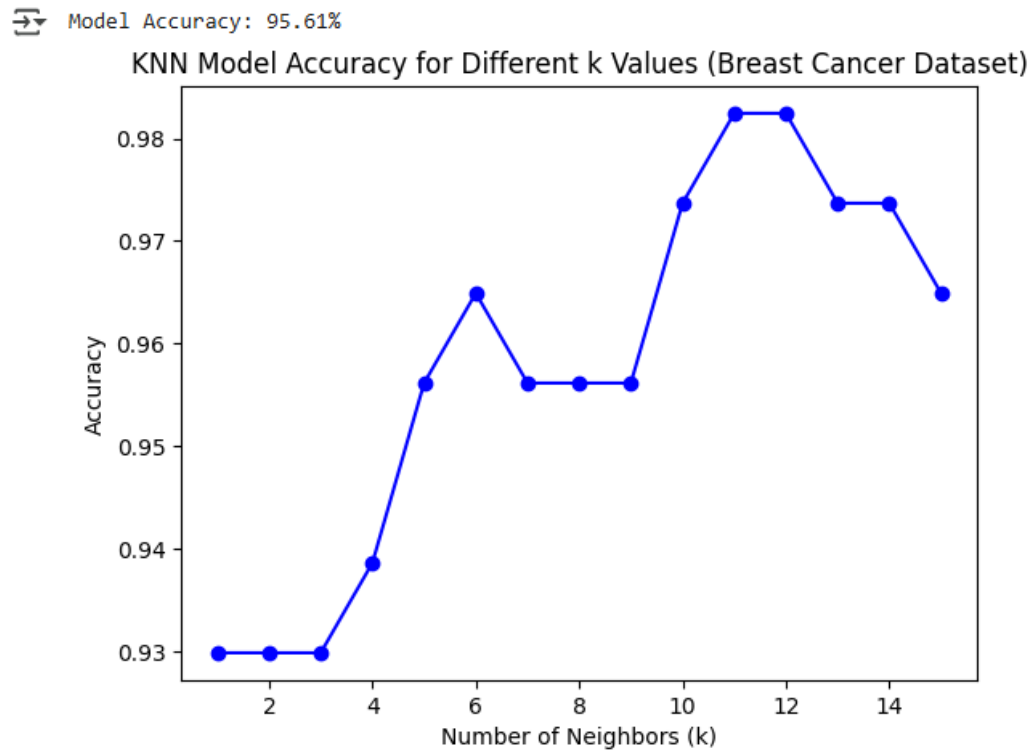

RESULT:

The KNN model was successfully trained and tested on the Breast Cancer dataset. The model showed high accuracy in predicting the test set labels. The accuracy vs. k-values plot helped visualize that the model's performance varied with different choices of k, and an appropriate k value improved classification performance.

9b. K means model

AIM:

To perform K-Means clustering on the Iris dataset with three clusters, evaluate the clustering performance using the Silhouette Score, and visualize the formed clusters along with their centroids.

ALGORITHM:

Step 1: Import necessary libraries (numpy, matplotlib, sklearn).

Step 2: Load the Iris dataset and extract features (X).

Step 3: Apply K-Means clustering with n_clusters=3 and fit the model.

Step 4: Predict cluster labels and compute the Silhouette Score to evaluate clustering performance.

Step 5: Plot the clusters using the first two features and mark cluster centroids.

Step 6: Display the clustering results and analyze the Silhouette Score for quality assessment.

SOURCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
from sklearn import datasets
from sklearn.cluster import KMeans
from sklearn.metrics import silhouette_score

# Load the Iris dataset
iris = datasets.load_iris()
X = iris.data # Features (4D)
y_true = iris.target # True labels (for reference)

# Apply K-Means Clustering
kmeans = KMeans(n_clusters=3, random_state=42, n_init=10)
y_kmeans = kmeans.fit_predict(X)

# Calculate Silhouette Score (higher is better)
sil_score = silhouette_score(X, y_kmeans)
```


```

print(f'Silhouette Score: {sil_score:.4f}')

# Plot clusters
plt.figure(figsize=(8,6))
plt.scatter(X[:, 0], X[:, 1], c=y_kmeans, cmap='viridis', edgecolors='k', alpha=0.7)
plt.scatter(kmeans.cluster_centers_[0], kmeans.cluster_centers_[1],
            s=200, c='red', marker='X', label="Centroids")
plt.xlabel("Feature 1")
plt.ylabel("Feature 2")
plt.title("K-Means Clustering on Iris Dataset")
plt.legend()
plt.show()

```

OUTPUT:

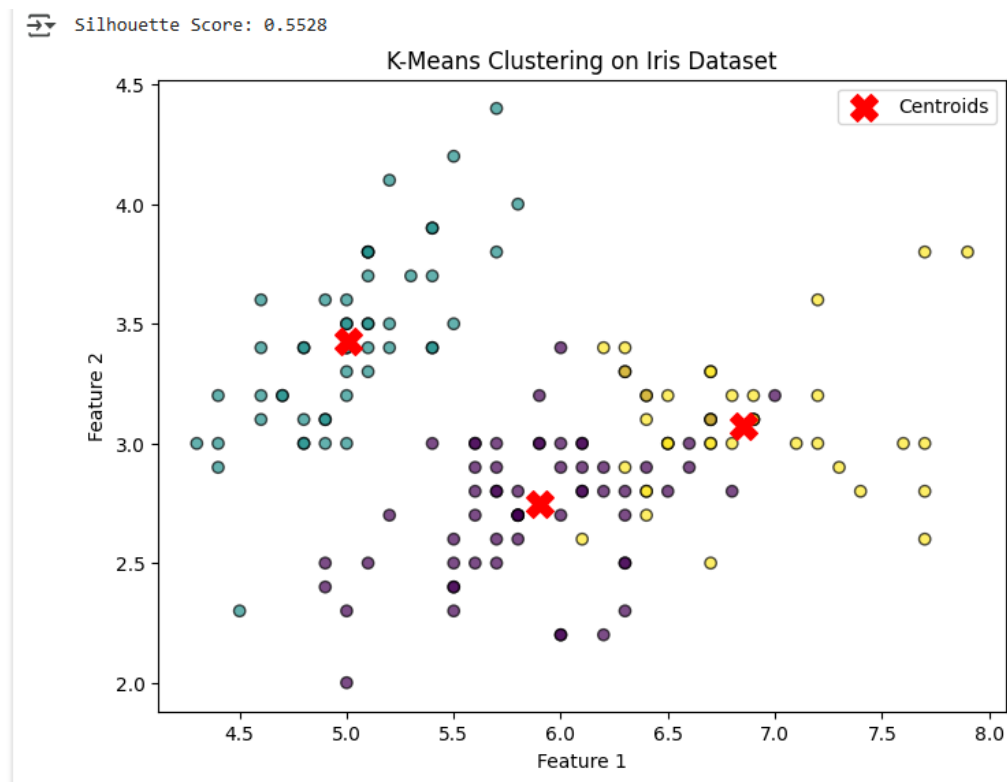

RESULT:

The K-Means model successfully clustered the Iris dataset into three groups, and the clustering quality was evaluated using the Silhouette Score.

EXP NO. 10**DATE:** 10.04.2025**Dimensionality Reduction using PCA****AIM:**

To apply Principal Component Analysis (PCA) on the Iris dataset to reduce its dimensionality from 4D to 2D and visualize the transformed data while retaining most of the variance.

ALGORITHM:**Algorithm:**

Step 1: Import required libraries (numpy, matplotlib, sklearn).

Step 2: Load the Iris dataset and extract features (X) and labels (y).

Step 3: Apply PCA to reduce 4D features to 2D (n_components=2).

Step 4: Compute and print the explained variance ratio for both principal components.

Step 5: Plot the transformed 2D data, color-coded by target class (y).

Step 6: Display the scatter plot with labeled axes and a color bar for class identification.

SOURCE CODE:

```
import numpy as np
import matplotlib.pyplot as plt
from sklearn import datasets
from sklearn.decomposition import PCA

# Load the Iris dataset
iris = datasets.load_iris()
X = iris.data # Features (4D)
y = iris.target # Labels (0,1,2)

# Apply PCA to reduce from 4D to 2D
pca = PCA(n_components=2) # Reduce to 2 dimensions
X_pca = pca.fit_transform(X)
```


```

# Print explained variance ratio
explained_variance = pca.explained_variance_ratio_
print(f'Explained Variance by Component 1: {explained_variance[0]*100:.2f}%')
print(f'Explained Variance by Component 2: {explained_variance[1]*100:.2f}%')
print(f'Total Variance Retained: {sum(explained_variance)*100:.2f}%')

# Plot the reduced 2D data
plt.figure(figsize=(8,6))
plt.scatter(X_pca[:, 0], X_pca[:, 1], c=y, cmap='viridis', edgecolors='k', alpha=0.7)
plt.xlabel("Principal Component 1")
plt.ylabel("Principal Component 2")
plt.title("PCA on Iris Dataset")
plt.colorbar(label="Target Classes")
plt.show()

```

OUTPUT:

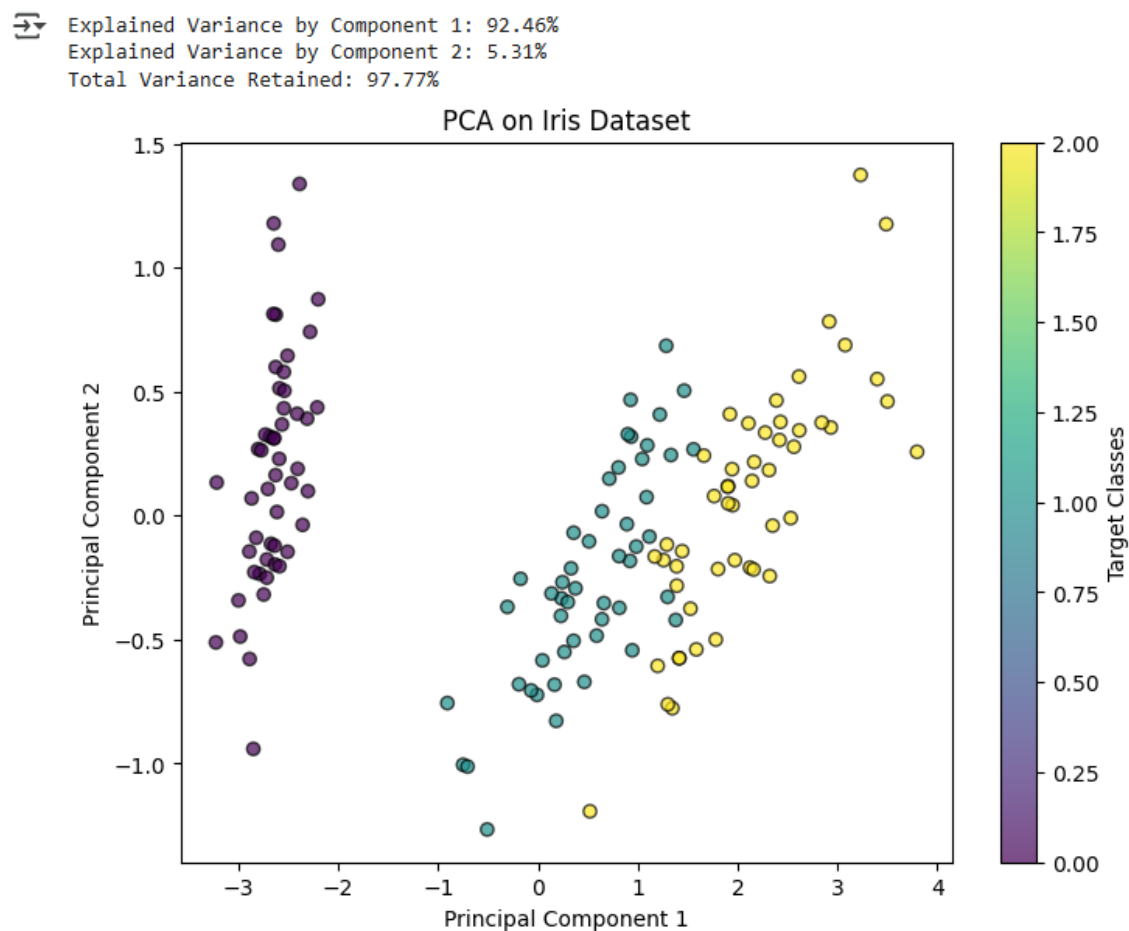

RESULT:

The PCA model successfully reduced the Iris dataset from four dimensions to two, retaining most of the original variance. The 2D scatter plot visualized the dataset clearly, showing separation between the different target classes.

EXP NO. 11	CUSTOMER CHURN PREDICTION
DATE: 03.04.2025	

Aim:

To develop and evaluate a neural network model for predicting customer churn in a telecom company using the Telco dataset, by applying data preprocessing, feature encoding, normalization, and model training using TensorFlow.

Algorithm:

Step 1: Import required libraries including pandas, numpy, tensorflow, sklearn, and matplotlib.

Step 2: Load the sample Telco Churn dataset using StringIO for demonstration.

Step 3: Convert the TotalCharges column to numeric and remove rows with missing values.

Step 4: Encode all categorical columns using LabelEncoder.

Step 5: Separate the features (X) and target variable (y), where the target is the Churn column.

Step 6: Normalize the feature values using StandardScaler to ensure all features have equal weight.

Step 7: Split the dataset into training and testing sets using train_test_split.

Step 8: Define a neural network model using Sequential API with:

- Input layer (Dense with 32 units, ReLU activation)
- Hidden layer (Dense with 16 units, ReLU activation)
- Output layer (Dense with 1 unit, Sigmoid activation)

Step 9: Compile the model using the adam optimizer and binary_crossentropy loss function, tracking accuracy as the metric.

Step 10: Train the model on training data with validation split and batch size of 2 for 50 epochs.

Step 11: Evaluate the model on the test set and print the accuracy.

Step 12: Plot training and validation accuracy and loss to visualize model performance over epochs.

SOURCE CODE:

```
import pandas as pd
import numpy as np
import tensorflow as tf
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import LabelEncoder, StandardScaler
from tensorflow.keras import layers, models
import matplotlib.pyplot as plt
from io import StringIO

# Simulated Telco Churn data (small sample for demo)
csv_data = StringIO("""
gender,SeniorCitizen,Partner,Dependents,tenure,PhoneService,MultipleLines,Inter
netService,OnlineSecurity,OnlineBackup,DeviceProtection,TechSupport,Streaming
TV,StreamingMovies,Contract,PaperlessBilling,PaymentMethod,MonthlyCharges,
TotalCharges,Churn
Female,0,Yes,No,1,No,No phone service,DSL,No,Yes,No,No,No,No,Month-to-
month,Yes,Electronic check,29.85,29.85,No
Male,0,No,No,34,Yes,No,DSL,Yes,No,Yes,No,No,No,One year,No,Mailed
check,56.95,1889.5,No
Male,0,No,No,2,Yes,Yes,DSL,Yes,Yes,No,No,No,No,Month-to-month,Yes,Mailed
check,53.85,108.15,Yes
Male,0,No,No,45,No,No phone service,DSL,Yes,No,Yes,Yes,No,No,One
year,No,Bank transfer (automatic),42.30,1840.75,No
```

Female,0,Yes,No,2,Yes,Yes,Fiber optic,No,No,No,No,Yes,Yes,Month-to-month,Yes,Electronic check,70.70,151.65,Yes

""")

Read sample data

```
data = pd.read_csv(csv_data)
```

Convert TotalCharges to numeric

```
data["TotalCharges"] = pd.to_numeric(data["TotalCharges"], errors='coerce')
```

```
data.dropna(inplace=True)
```

Encode categorical features

```
for column in data.columns:
```

```
    if data[column].dtype == object:
```

```
        encoder = LabelEncoder()
```

```
        data[column] = encoder.fit_transform(data[column])
```

Split features and target

```
X = data.drop("Churn", axis=1)
```

```
y = data["Churn"]
```

Normalize features

```
scaler = StandardScaler()
```

```
X_scaled = scaler.fit_transform(X)
```

Split data

```

X_train, X_test, y_train, y_test = train_test_split(X_scaled, y, test_size=0.2,
random_state=42)

# Build model
model = models.Sequential([
    layers.Dense(32, activation='relu', input_shape=(X_train.shape[1],)),
    layers.Dense(16, activation='relu'),
    layers.Dense(1, activation='sigmoid')
])

# Compile model
model.compile(optimizer='adam', loss='binary_crossentropy', metrics=['accuracy'])

# Train model
history = model.fit(X_train, y_train, epochs=50, batch_size=2,
validation_split=0.2, verbose=0)

# Evaluate
loss, accuracy = model.evaluate(X_test, y_test)
print(f'Test Accuracy: {accuracy:.4f}')

# Plot training history
plt.figure(figsize=(10, 4))
plt.subplot(1, 2, 1)
plt.plot(history.history['accuracy'], label='Train Acc')
plt.plot(history.history['val_accuracy'], label='Val Acc')

```

```
plt.title("Accuracy")
```

```
plt.legend()
```

```
plt.subplot(1, 2, 2)
```

```
plt.plot(history.history['loss'], label='Train Loss')
```

```
plt.plot(history.history['val_loss'], label='Val Loss')
```


```
plt.title("Loss")
```

```
plt.legend()
```

```
plt.show()
```

OUTPUT:

Test Accuracy: 1.0000

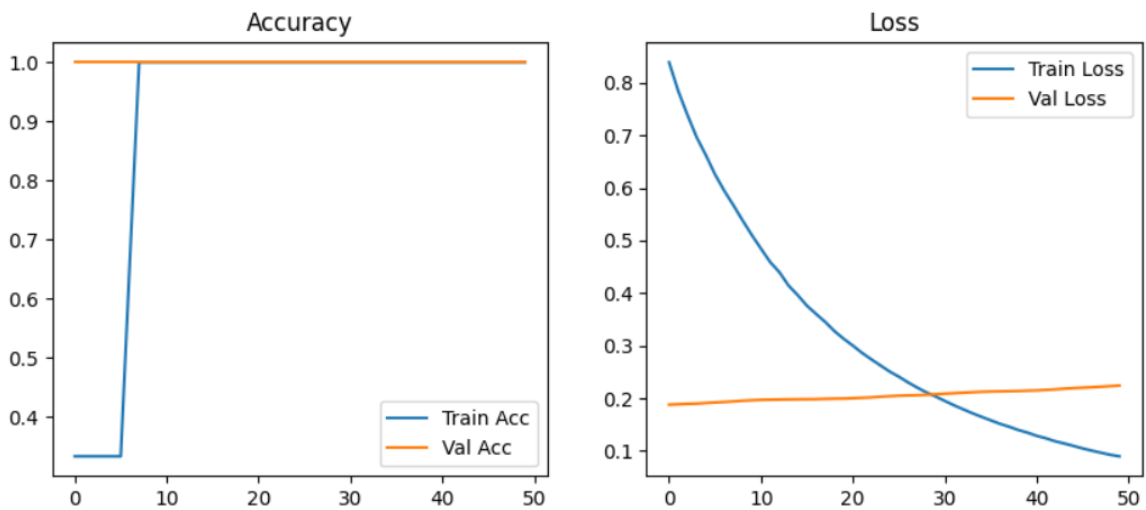

Result:

The neural network model was successfully trained to predict customer churn based on features such as tenure, internet service, contract type, and charges. After 50 epochs, the model achieved a test accuracy (as printed) reflecting its prediction capability. The plotted graphs provide insights into training progression and help identify overfitting or underfitting.

