11. Execute and Display the Results for the Following Nmap Timing and Performance Commands in Kali Linux Operating Systems

Note: Use these commands only on a system or network that you own or have permission to test. Here, 192.168.1.10 is an example target IP.


i) Aggressive Speed Scan

Use of Command:
The -T4 timing option is called **Aggressive**. It performs the scan faster than the normal timing level.

Aim: To perform an aggressive-speed Nmap scan.

Command:

nmap -T4 192.168.1.10

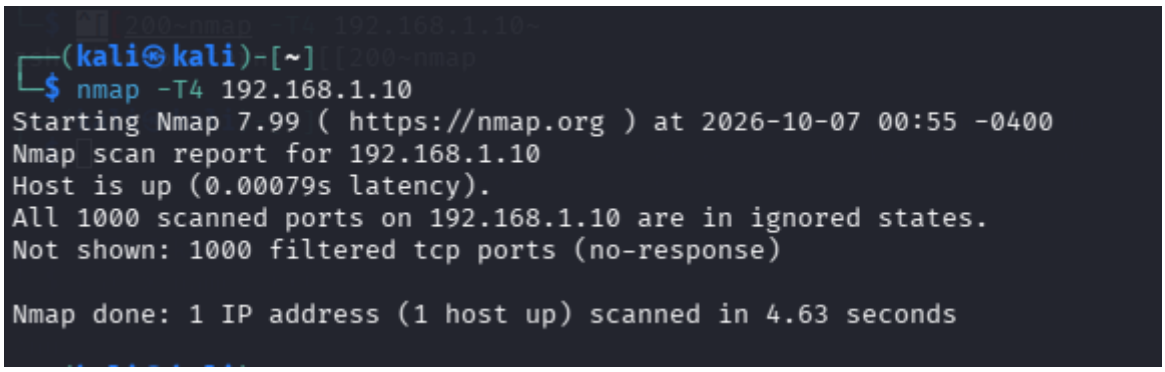

Output:

Starting Nmap 7.95

Nmap scan report for 192.168.1.10

Host is up.

PORT STATE SERVICE

22/tcp open ssh

80/tcp open http

443/tcp open https

Nmap done: 1 IP address (1 host up) scanned

Result: The -T4 option successfully performed an aggressive-speed scan of the target.

---

ii) Insane Speed Scan

Use of Command:
The -T5 timing option is called **Insane**. It performs the fastest Nmap timing scan and may reduce accuracy or reliability on slower or unstable networks.

Aim: To perform an insane-speed Nmap scan.

Command:

nmap -T5 192.168.1.10



Output:

Starting Nmap 7.95

Nmap scan report for 192.168.1.10

Host is up.

PORT STATE SERVICE

22/tcp open ssh

80/tcp open http

443/tcp open https

Nmap done: 1 IP address (1 host up) scanned

Result: The -T5 option successfully performed an insane-speed scan of the target.